OIPE JC16
FEB 07 2005
PATENT & TRADEMARK OFFICE

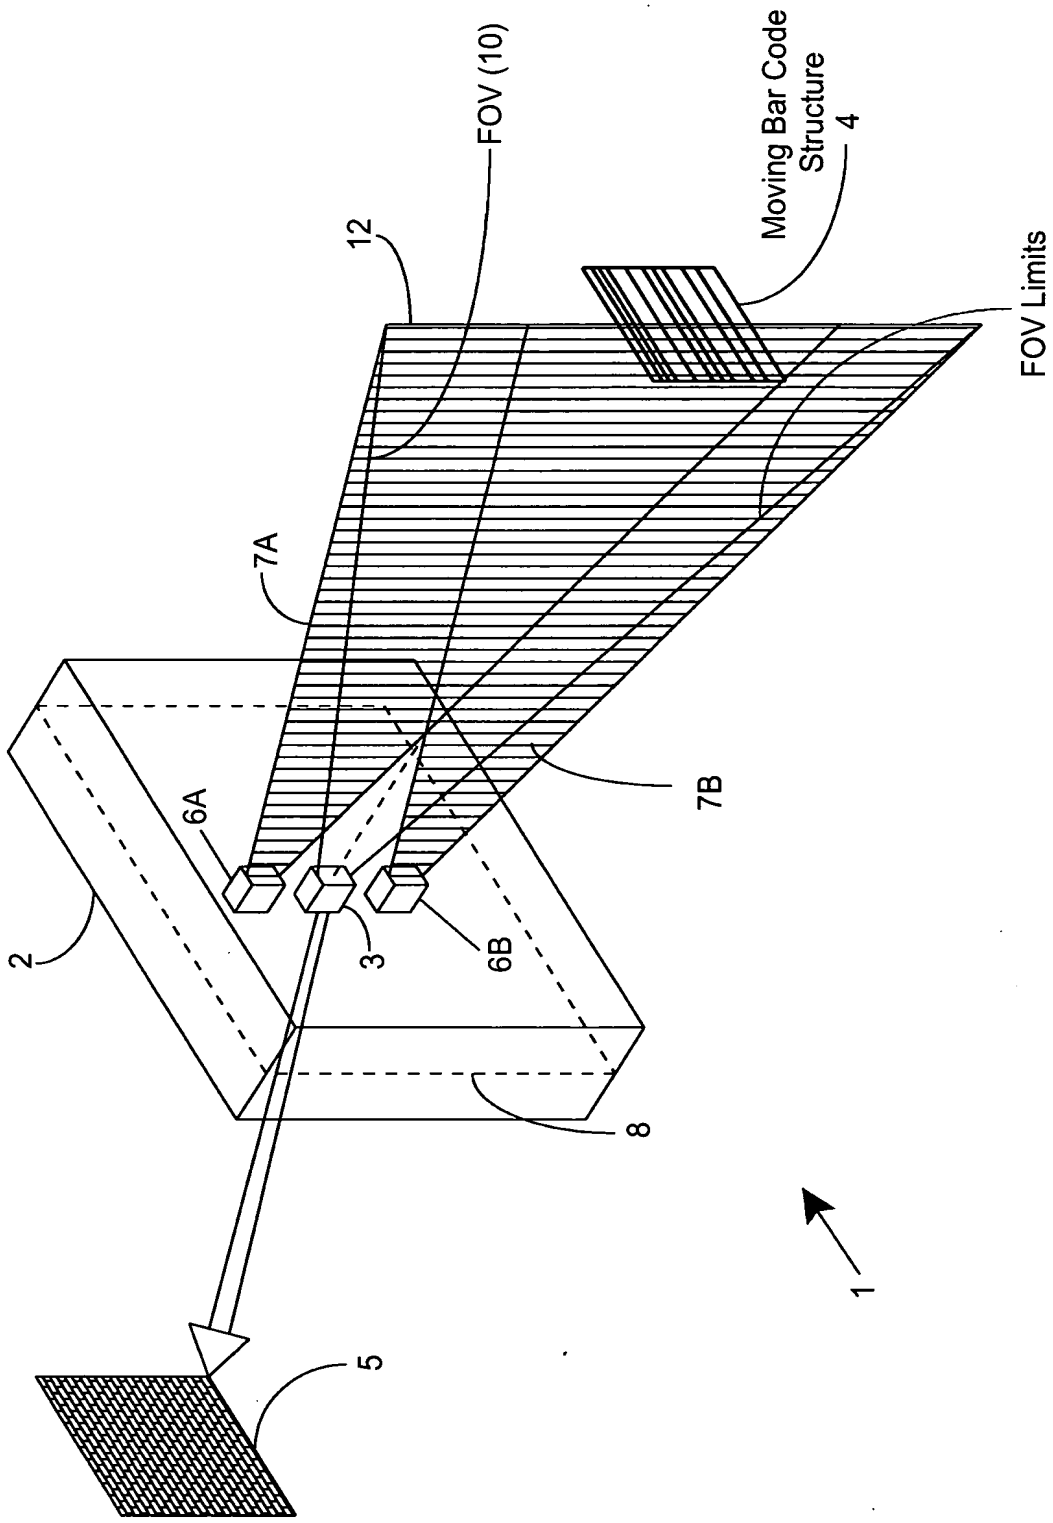

FIG. 1A

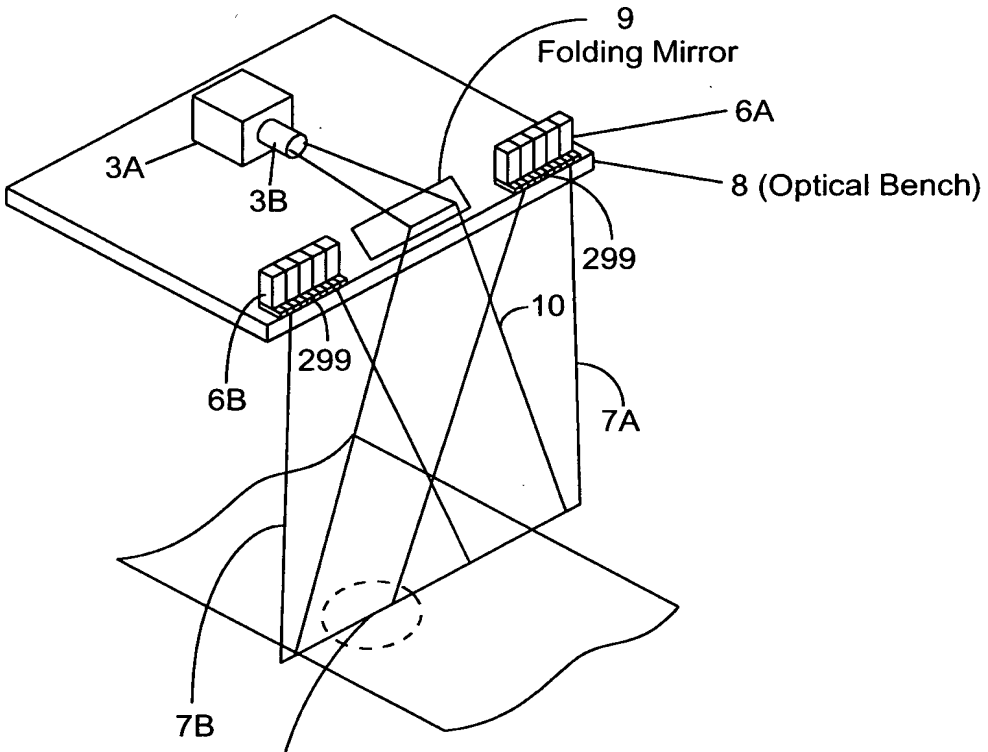

FIG. 1B1

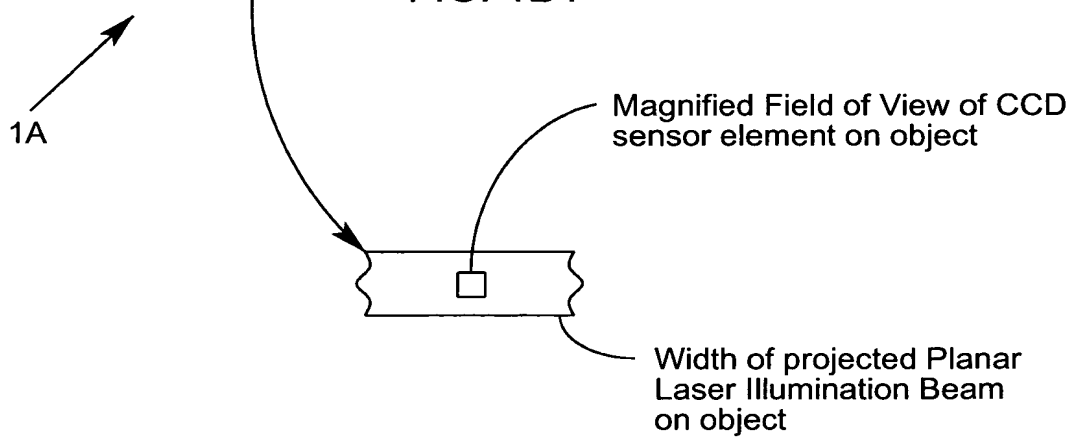

FIG. 1B3

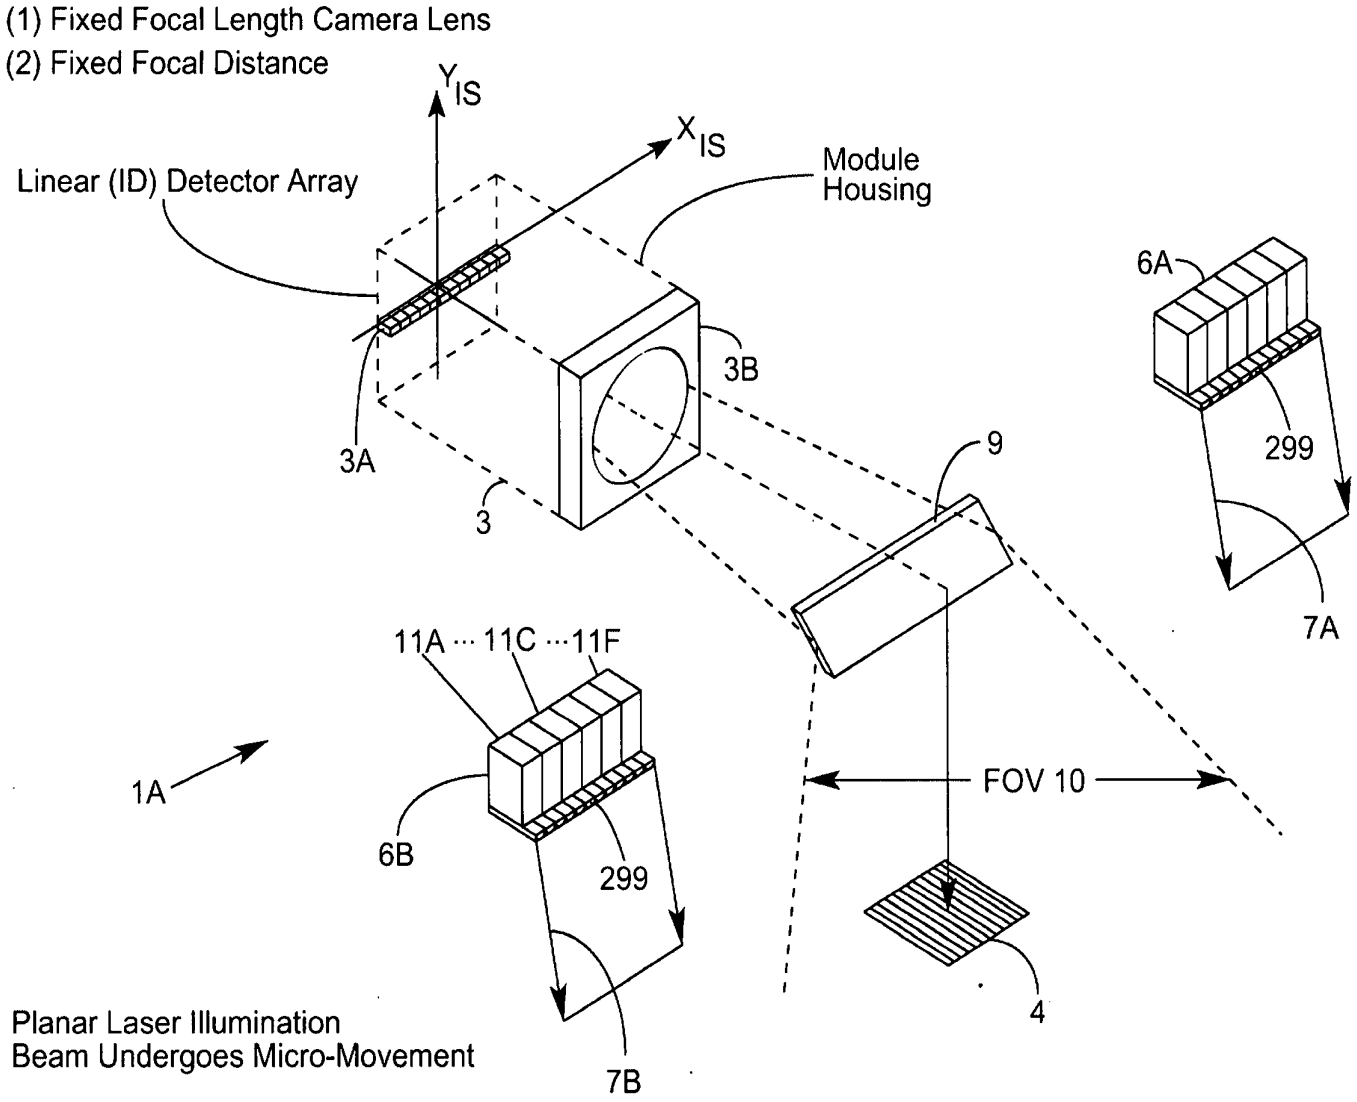
(1) Fixed Focal Length Camera Lens
(2) Fixed Focal Distance
Y IS
X IS
Linear (ID) Detector Array
Module Housing
3B
3A
3
9
6A
299
7A
11A ··· 11C ···11F
1A
6B
299
FOV 10
4
Planar Laser Illumination Beam Undergoes Micro-Movement
7B

FIG. 1B2

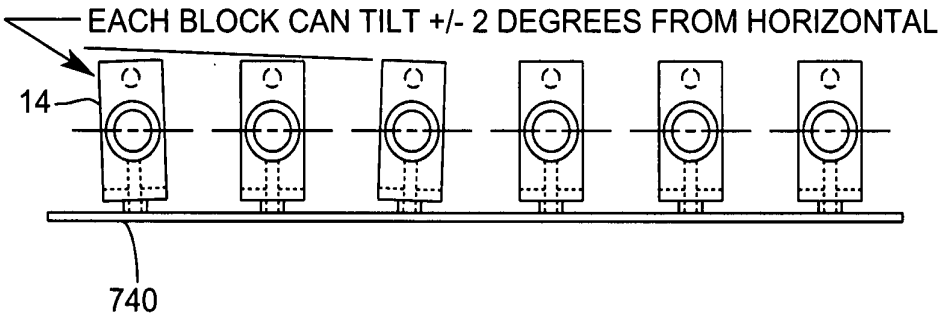

FIG. 1B4

VLD BLOCK CAN PITCH FORWARD FOR ALIGNMENT WITH OTHER VLD BEAMS



FIG. 1B5

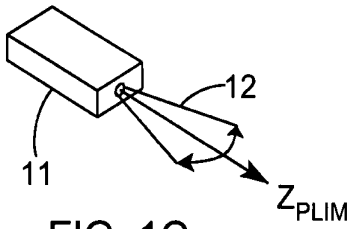

FIG. 1C

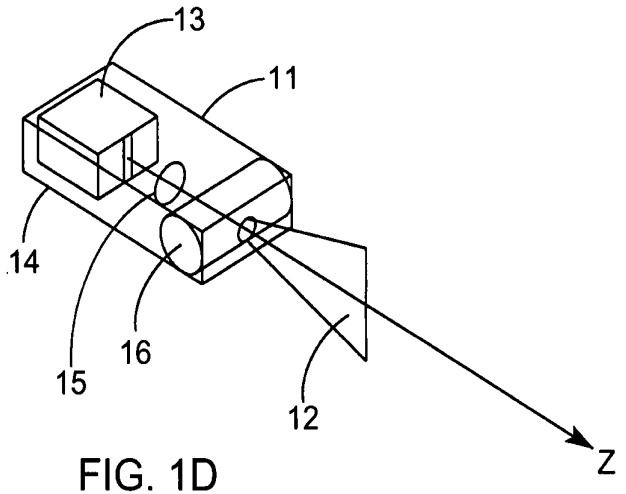

FIG. 1D

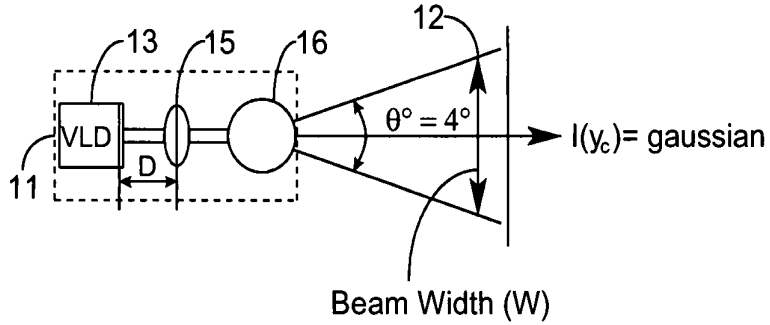

FIG. 1E1

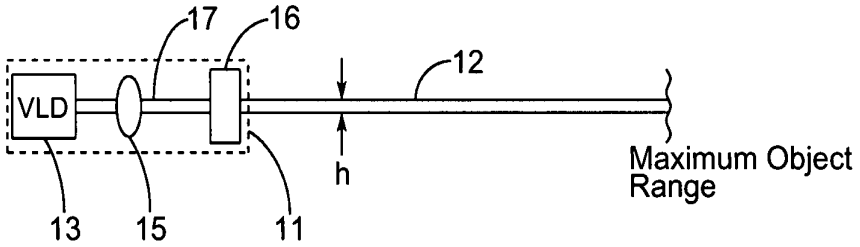

FIG. 1E2

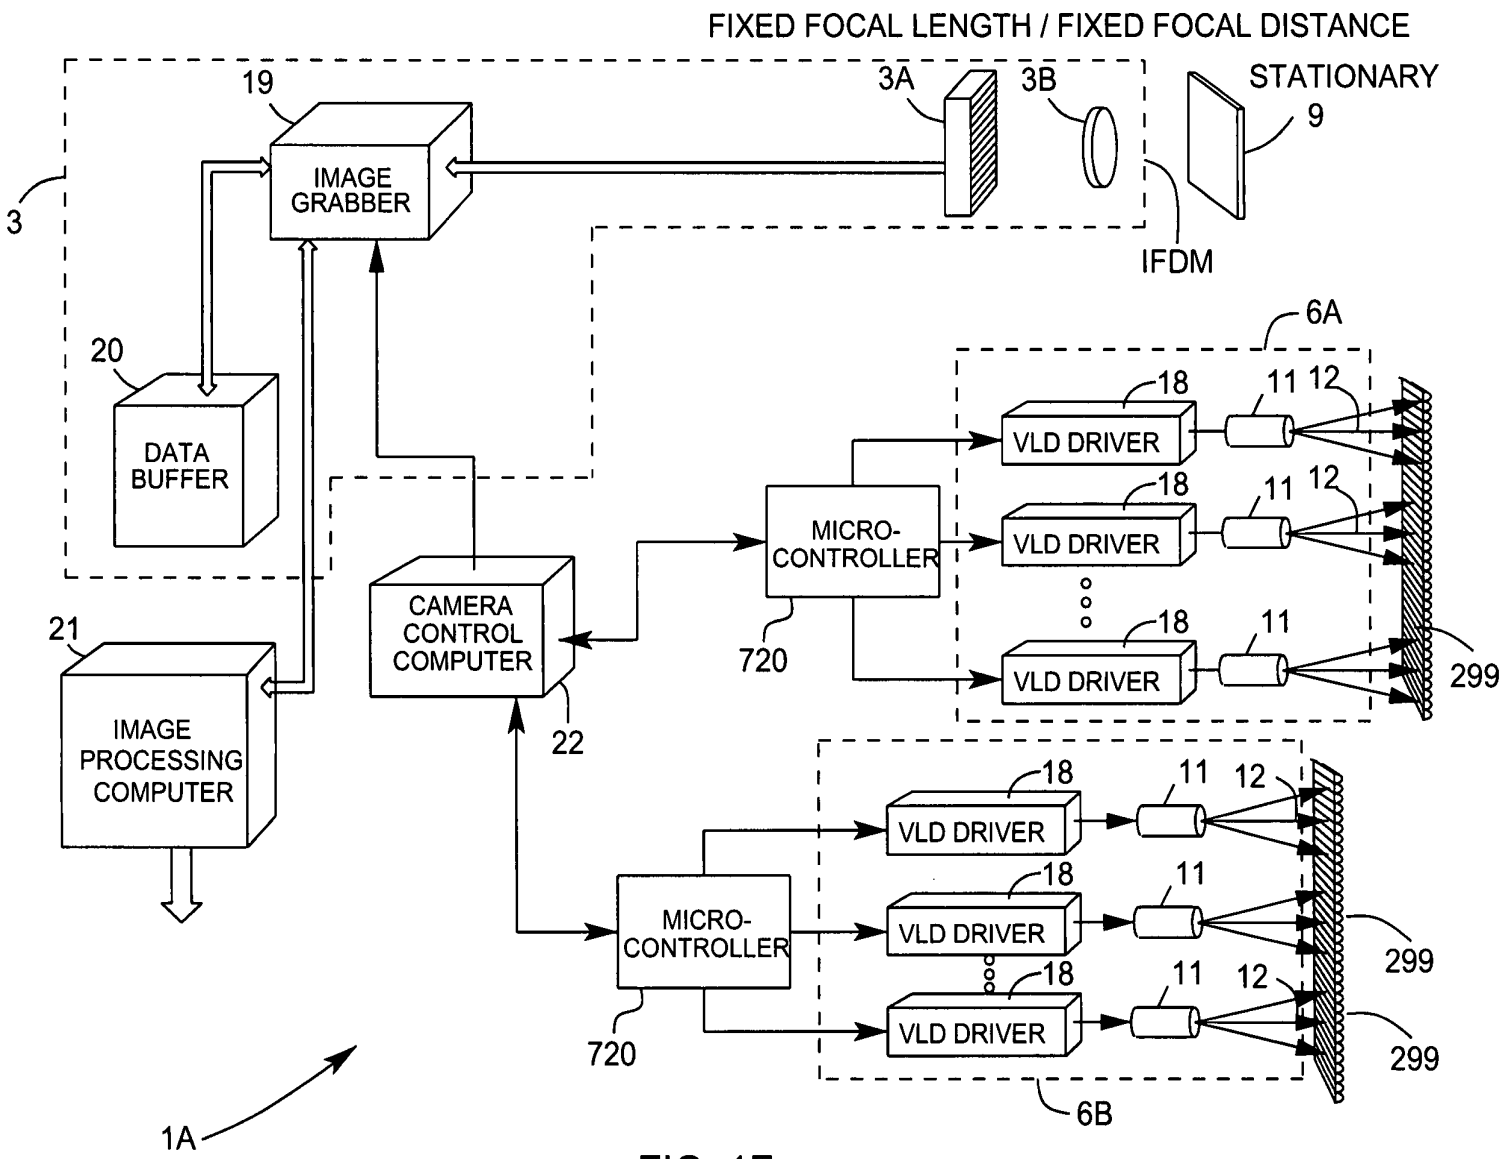
FIXED FOCAL LENGTH / FIXED FOCAL DISTANCE
STATIONARY
9
3A
3B
19
IMAGE GRABBER
3
IFDM
6A
20
DATA BUFFER
18
11
12
VLD DRIVER
MICRO-CONTROLLER
720
CAMERA CONTROL COMPUTER
22
21
IMAGE PROCESSING COMPUTER
299
6B
1A

FIG. 1F

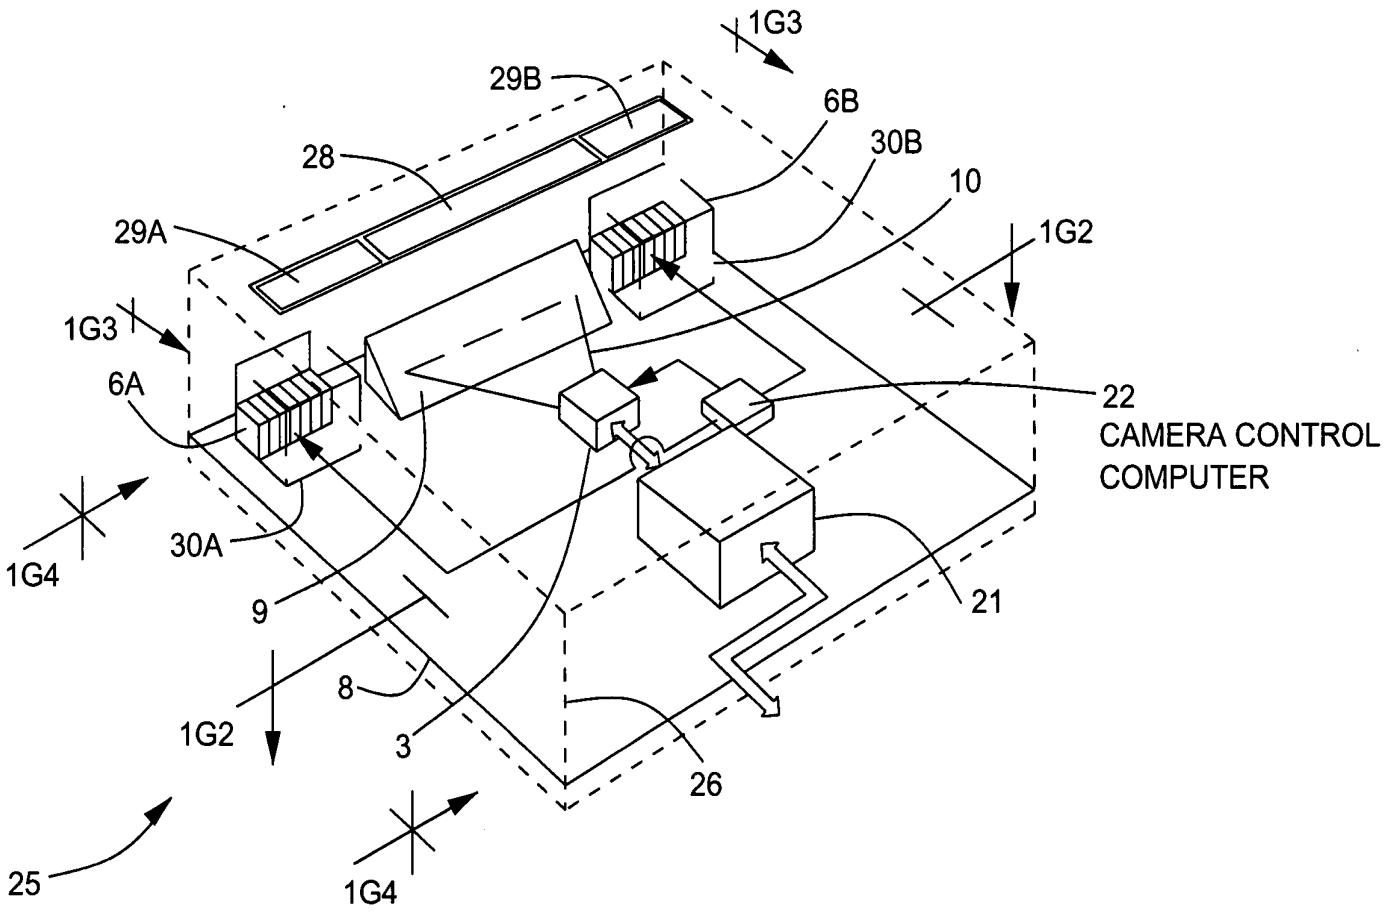
1G3
29B
6B
28
30B
10
29A
1G2
1G3
6A
22
CAMERA CONTROL
COMPUTER
1G4
30A
9
21
8
1G2
3
26
25
1G4

FIG. 1G1

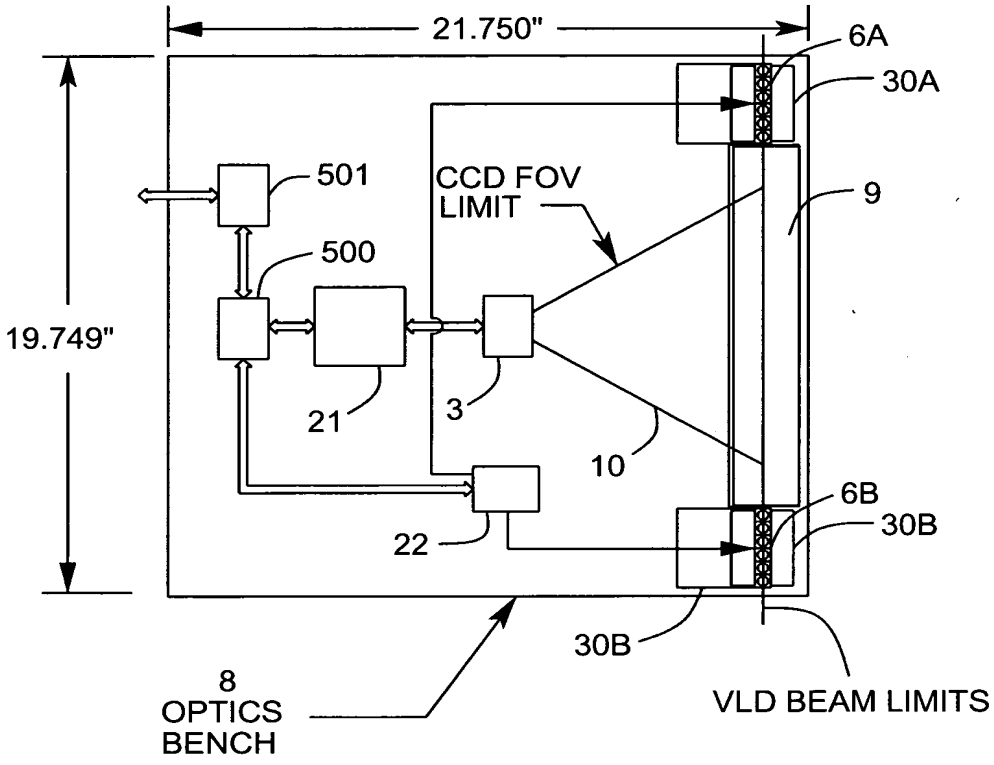
21.750"
19.749"
6A
30A
501
CCD FOV
LIMIT
9
500
21
3
10
6B
30B
22
30B
8
OPTICS
BENCH
VLD BEAM LIMITS

FIG. 1G2

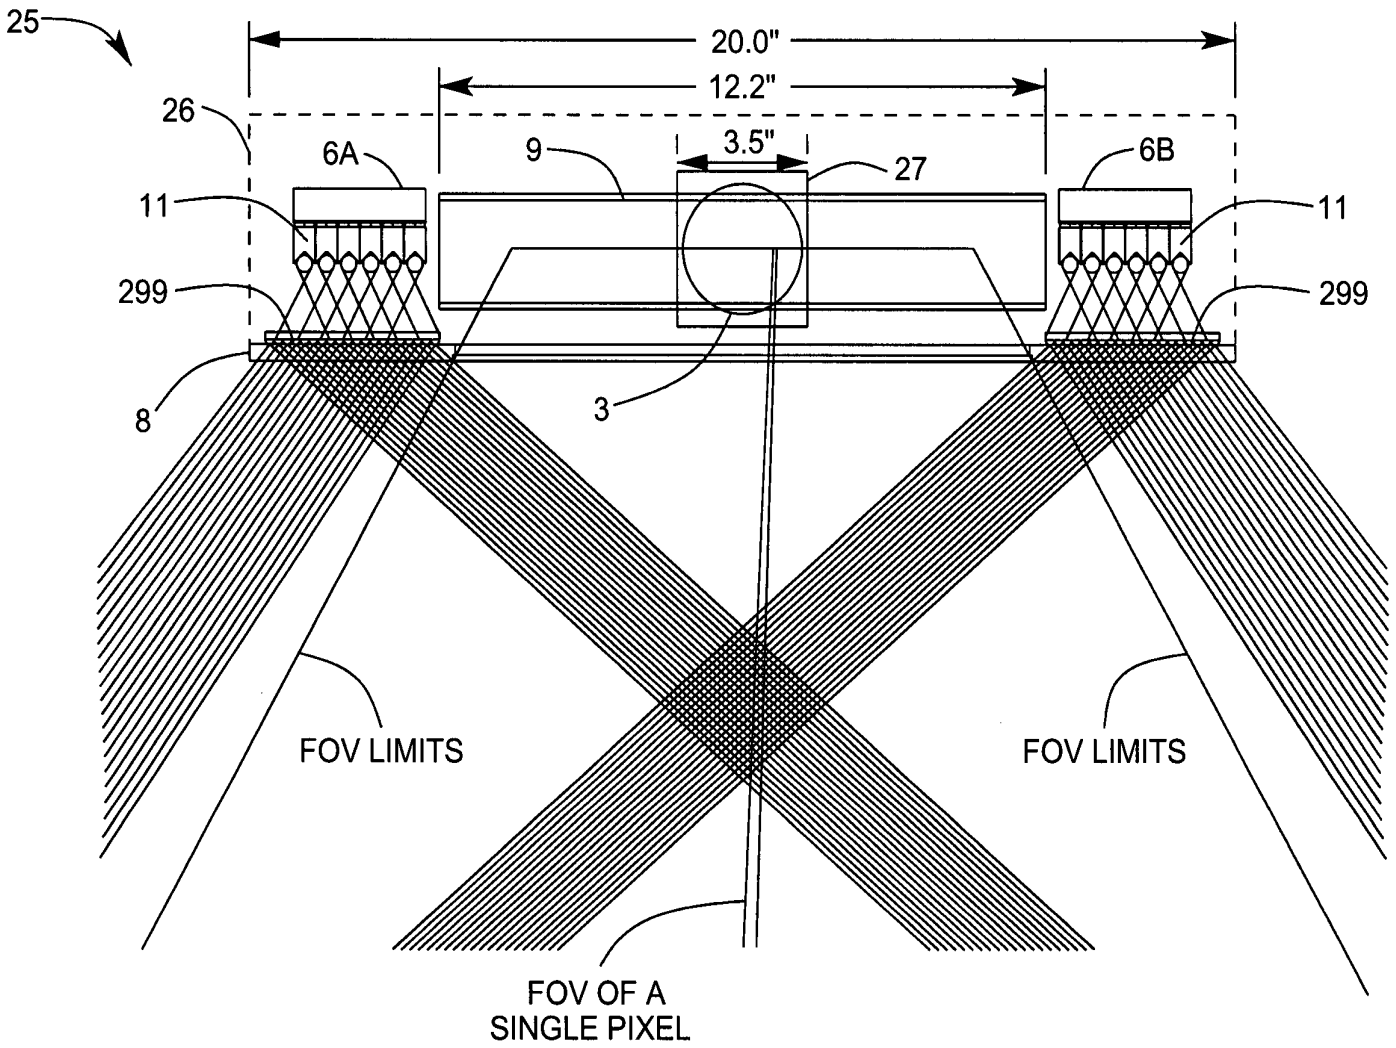
25
20.0"
12.2"
26
6A
9
3.5"
27
6B
11
11
299
299
8
3
FOV LIMITS
FOV LIMITS
FOV OF A
SINGLE PIXEL

FIG. 1G3

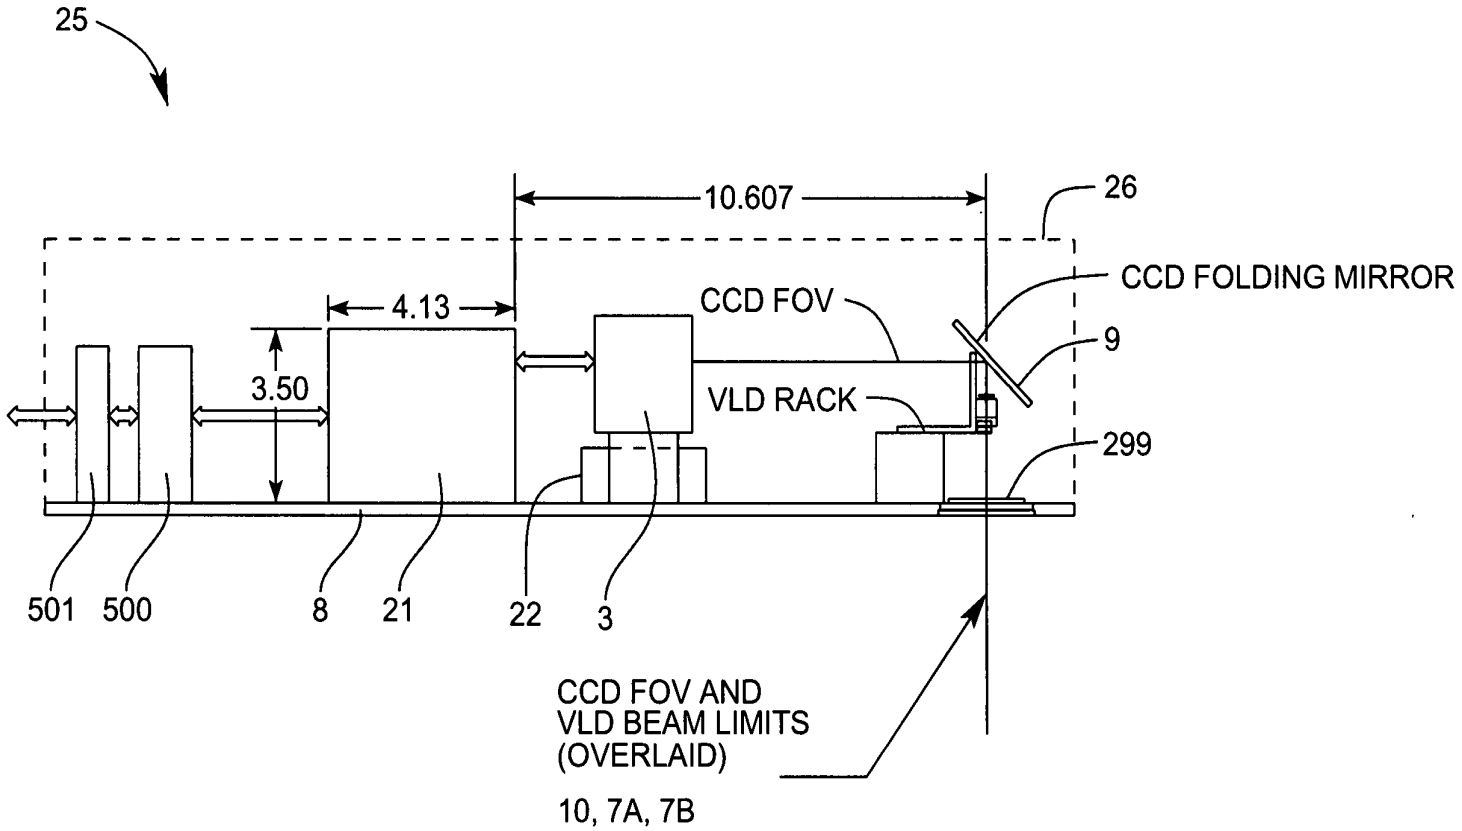
25
10.607
26
CCD FOLDING MIRROR
4.13
CCD FOV
9
3.50
VLD RACK
299
501
500
8
21
22
3
CCD FOV AND
VLD BEAM LIMITS
(OVERLAID)
10, 7A, 7B

FIG. 1G4

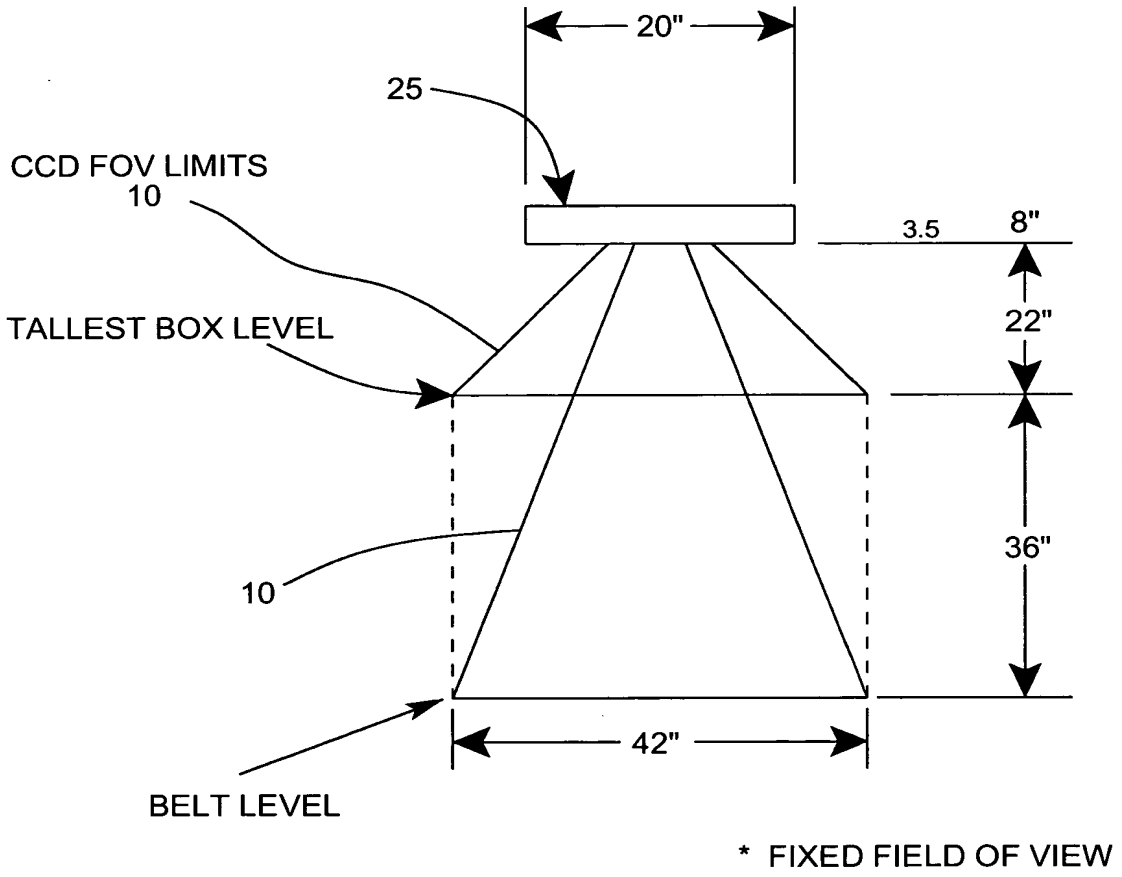
20"
25
CCD FOV LIMITS
10
3.5
8"
TALLEST BOX LEVEL
22"
36"
10
42"
BELT LEVEL
* FIXED FIELD OF VIEW

FIG. 1G5

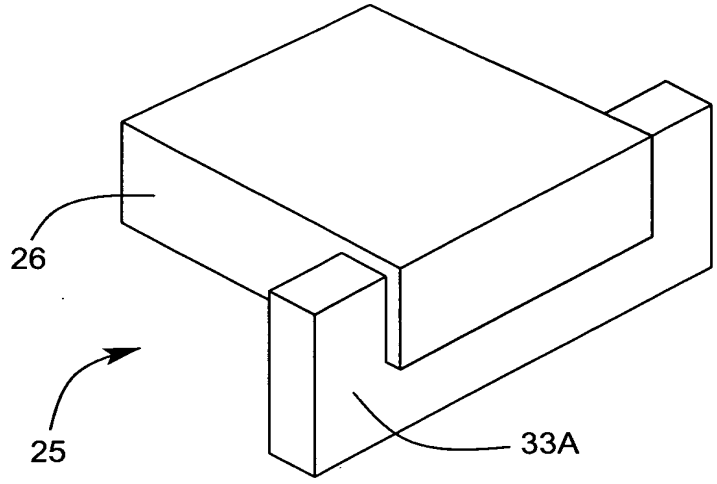

FIG. 1G6

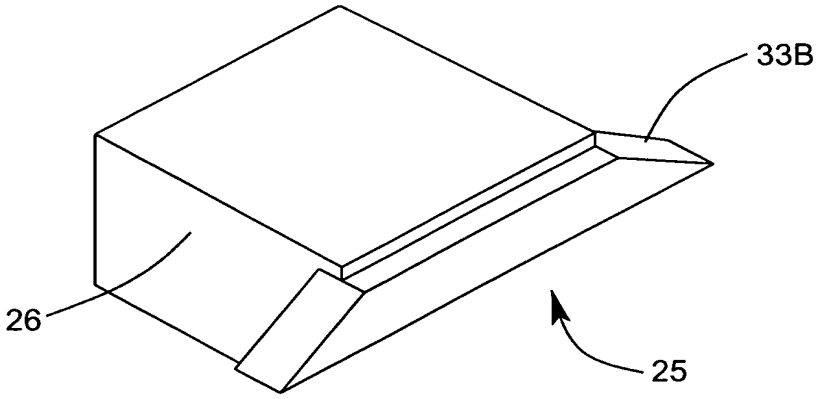

FIG. 1G7

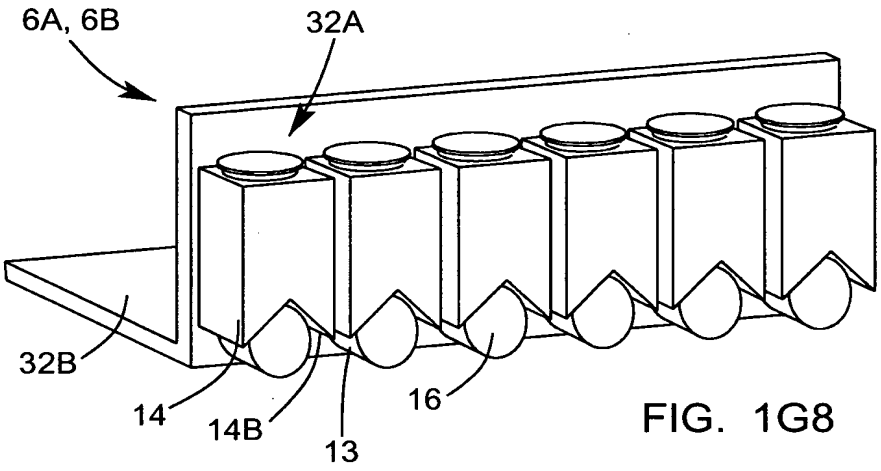

FIG. 1G8

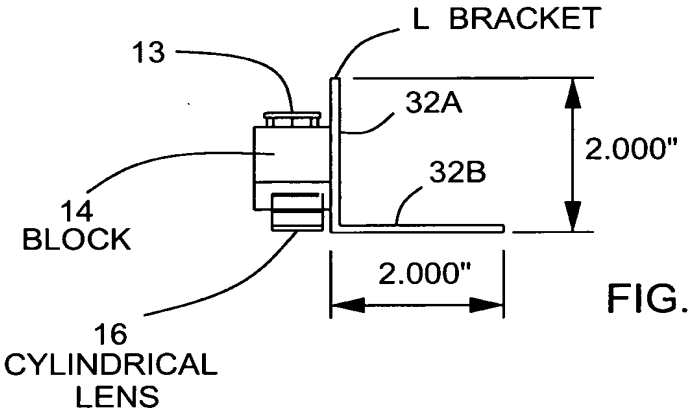

FIG. 1G9

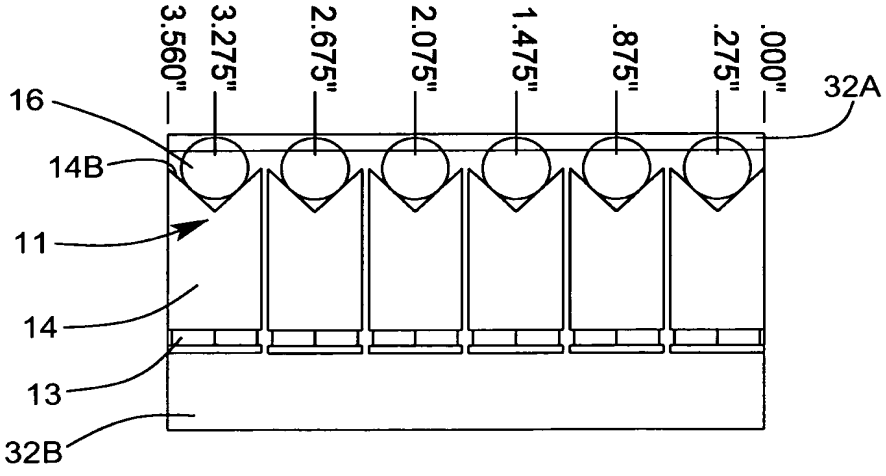

FIG. 1G10

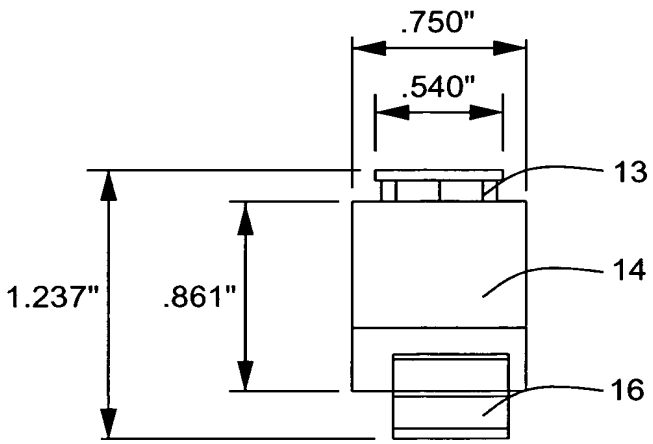

FIG. 1G11

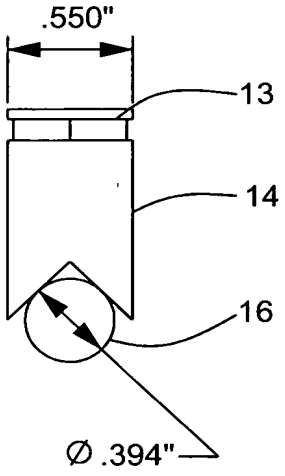

FIG. 1G12

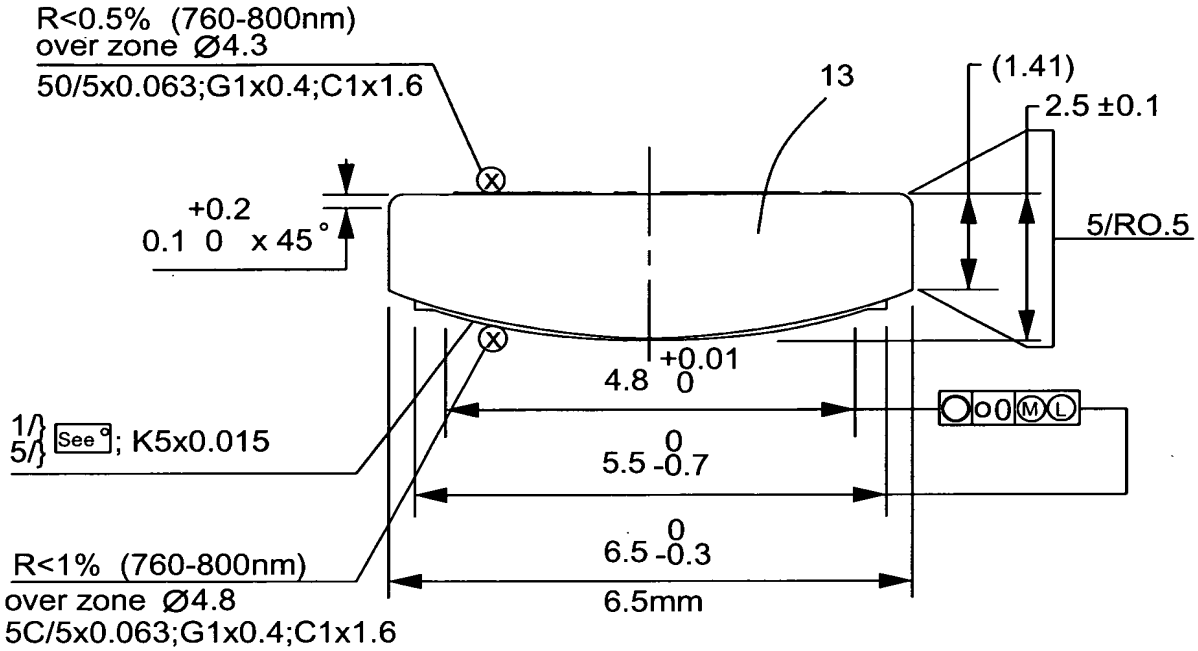

FIG. 1G13

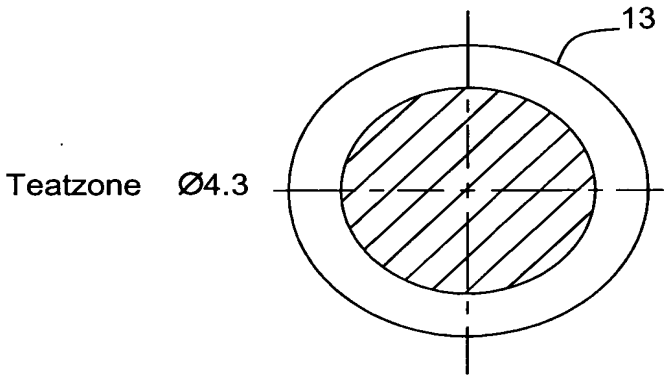

FIG. 1G14

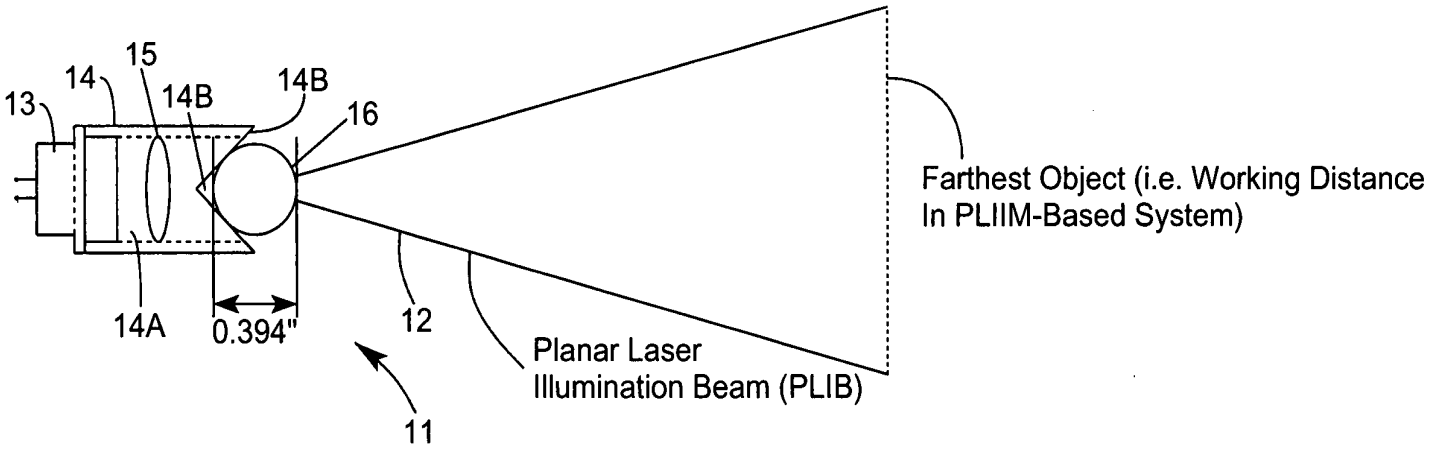

FIG. 1G15A

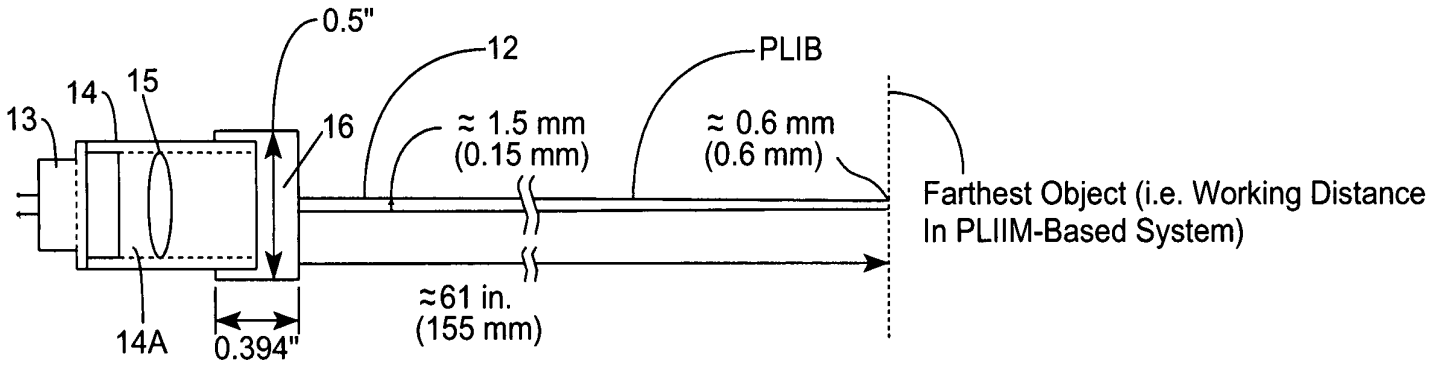

FIG. 1G15B

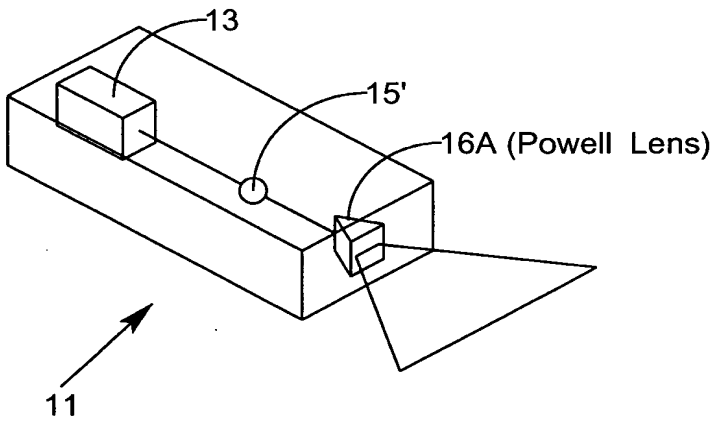

FIG. 1G16A

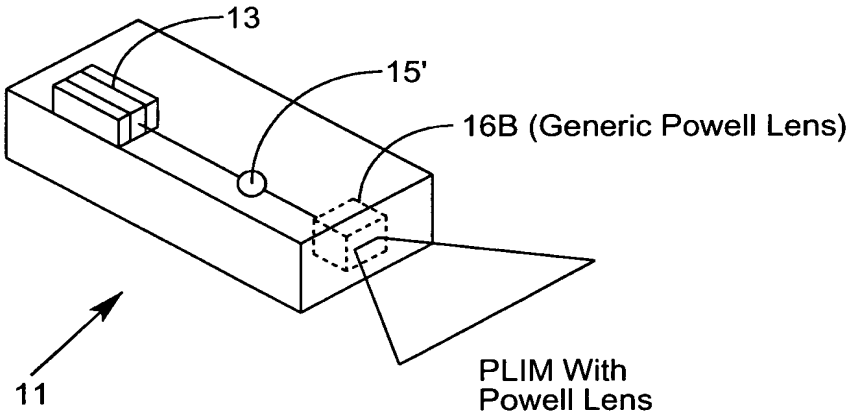

FIG. 1G16B

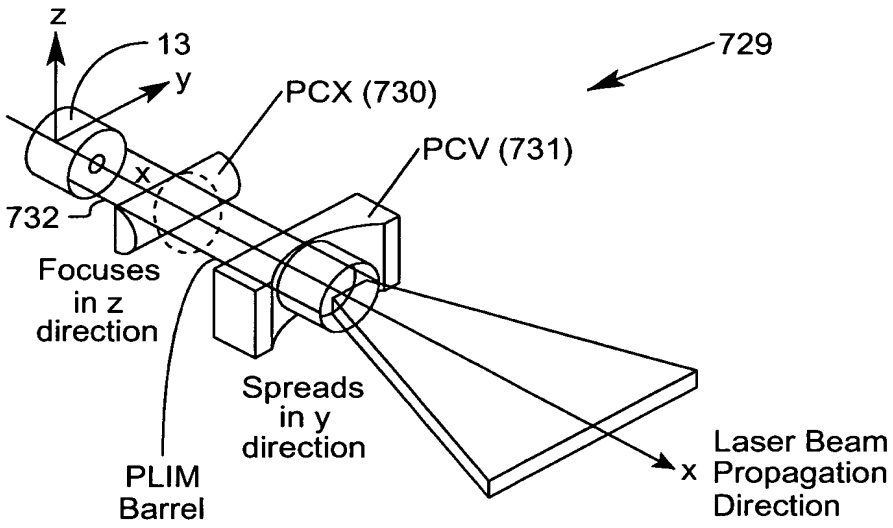

FIG. 1G17A

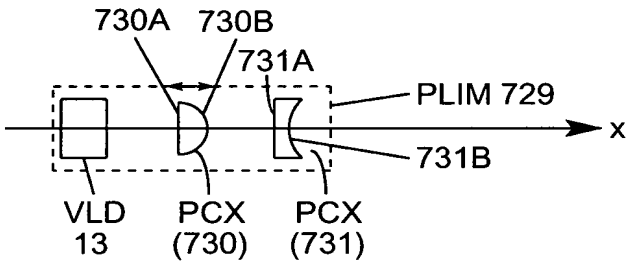

FIG. 1G17B



FIG. 1G17C



FIG. 1G17D



FIG. 1G17E



FIG. 1G17F

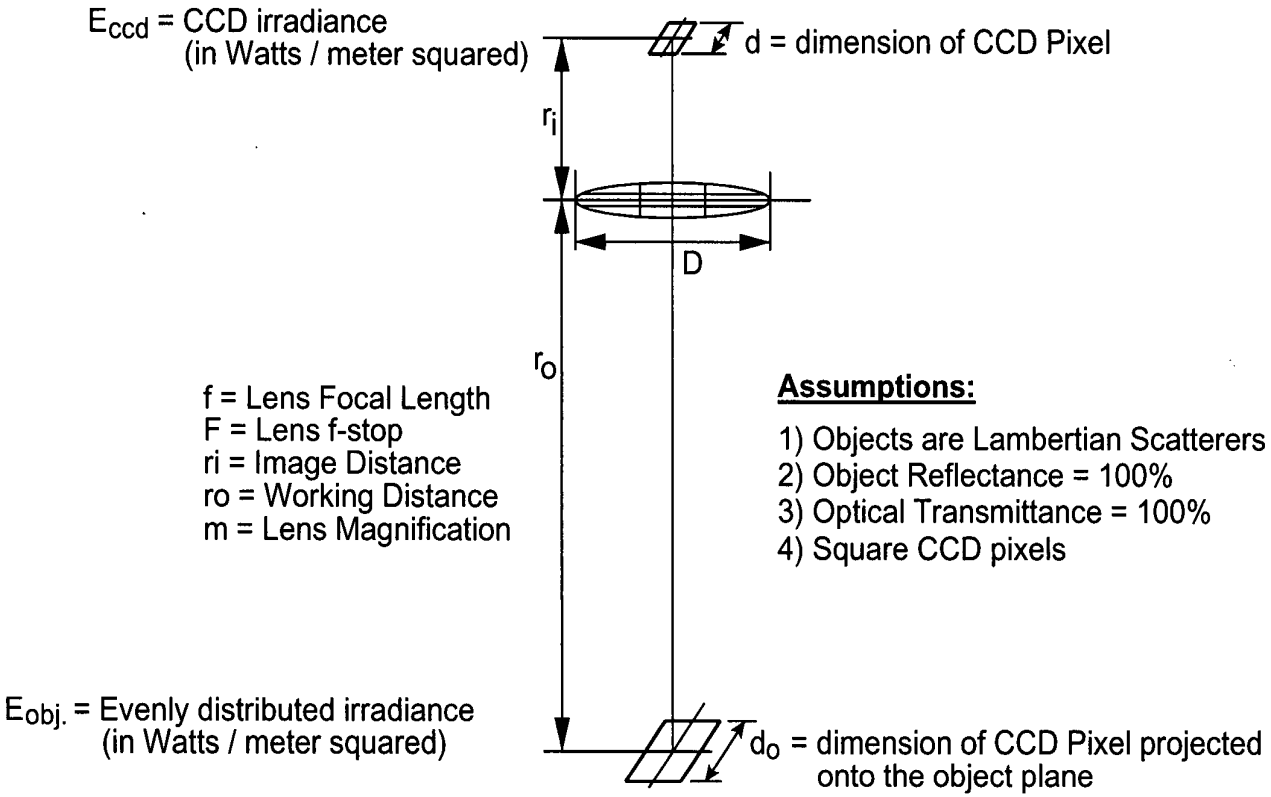
E_{ccd} = CCD irradiance
(in Watts / meter squared)
d = dimension of CCD Pixel
r_i
D
r_o
f = Lens Focal Length
F = Lens f-stop
ri = Image Distance
ro = Working Distance
m = Lens Magnification
Assumptions:
1) Objects are Lambertian Scatterers
2) Object Reflectance = 100%
3) Optical Transmittance = 100%
4) Square CCD pixels
$E_{obj.}$ = Evenly distributed irradiance
(in Watts / meter squared)
d_o = dimension of CCD Pixel projected
onto the object plane
CCD-Based Scanner

FIG. 1H6

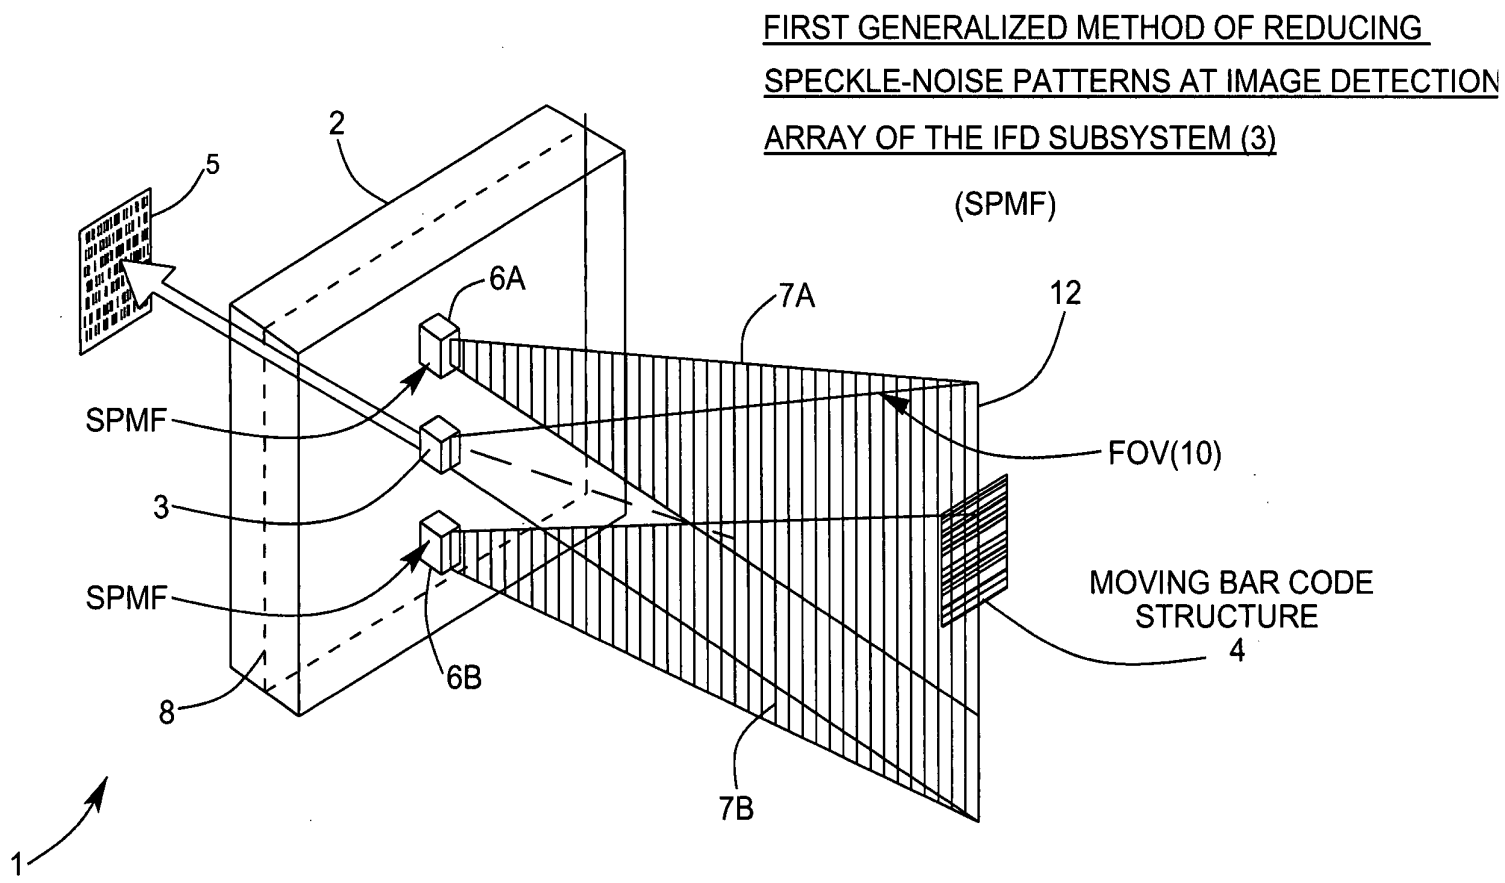
FIRST GENERALIZED METHOD OF REDUCING
SPECKLE-NOISE PATTERNS AT IMAGE DETECTION
ARRAY OF THE IFD SUBSYSTEM (3)
(SPMF)
2
5
6A
7A
12
SPMF
FOV(10)
3
SPMF
MOVING BAR CODE
STRUCTURE
4
6B
8
7B
1

FIG. 1I1

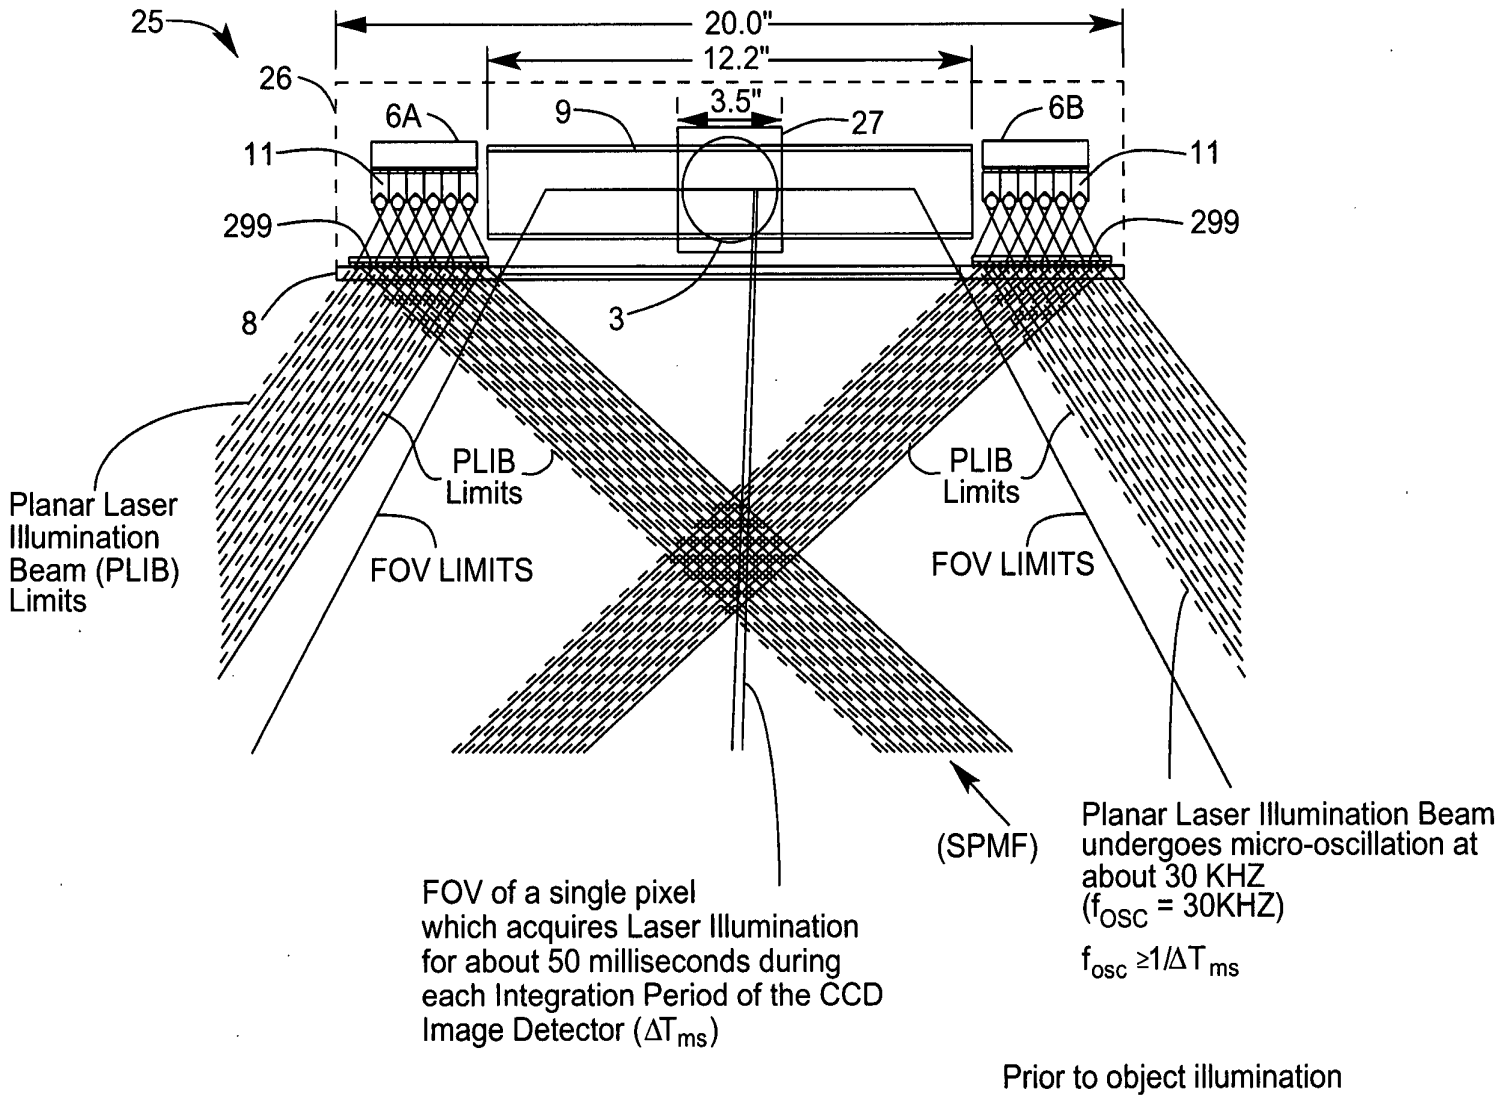
25
20.0"
12.2"
26
3.5"
6A
9
27
6B
11
11
299
299
8
3
PLIB Limits
PLIB Limits
Planar Laser Illumination Beam (PLIB) Limits
FOV LIMITS
FOV LIMITS
(SPMF)
Planar Laser Illumination Beam undergoes micro-oscillation at about 30 KHZ (f_{OSC} = 30KHZ)
$f_{osc} \geq 1/\Delta T_{ms}$
FOV of a single pixel which acquires Laser Illumination for about 50 milliseconds during each Integration Period of the CCD Image Detector (ΔT_{ms})
Prior to object illumination

FIG. 1I2A

THE FIRST GENERALIZED SPECKLE-NOISE PATTERN REDUCTION METHOD OF THE PRESENT INVENTION

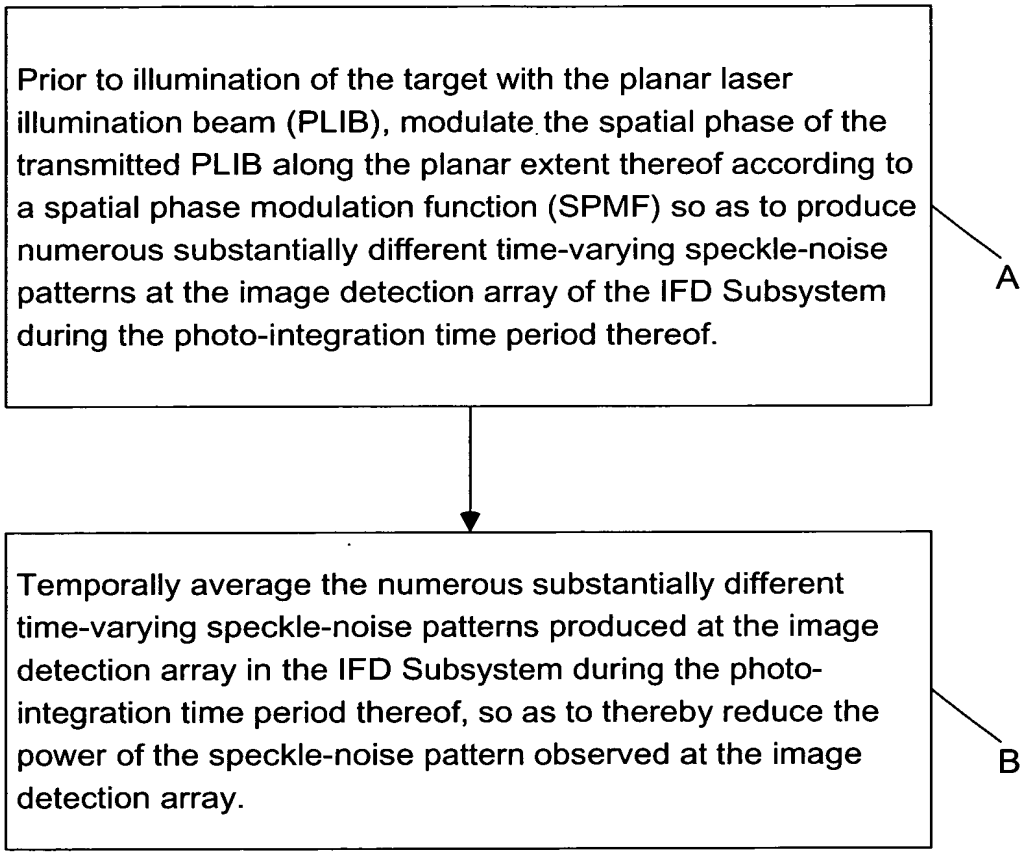

FIG. 1I2B

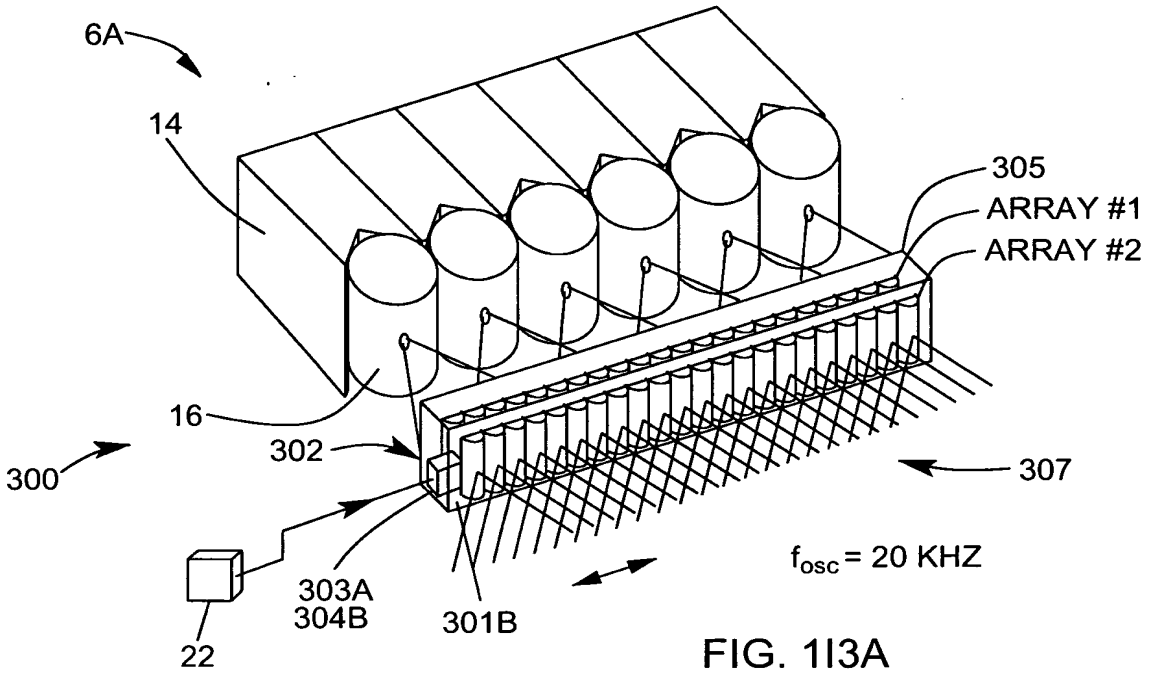

FIG. 1I3A

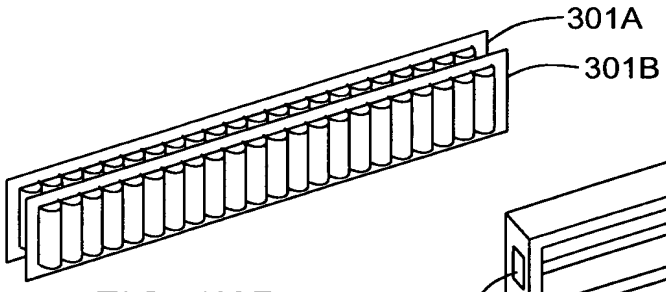

FIG. 1I3B

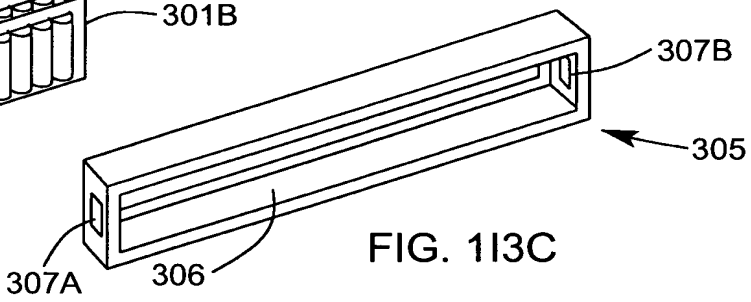

FIG. 1I3C

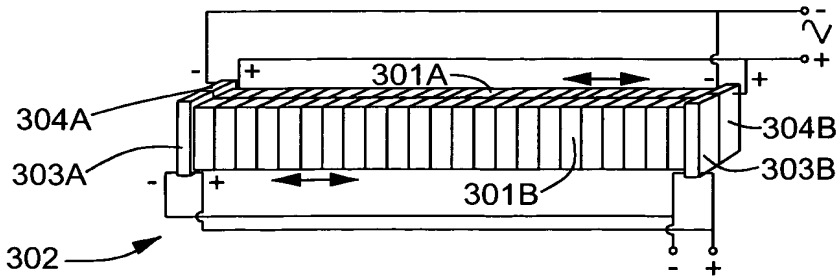

FIG. 1I3D

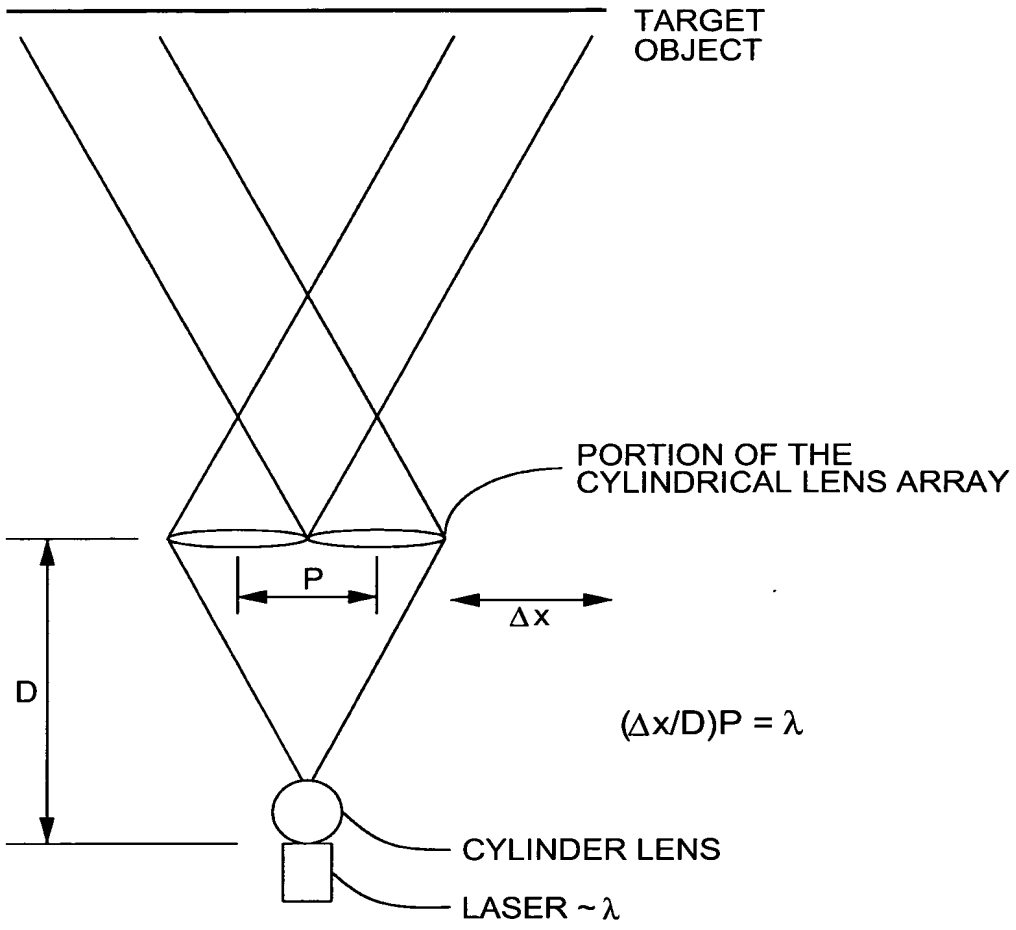

$$\Delta x \geq \frac{\lambda \cdot D}{P}$$

FIG. 1I3E

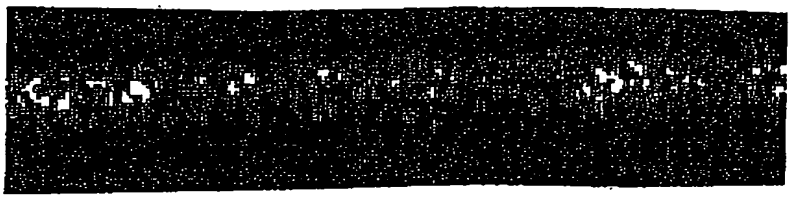

FIG. 113F

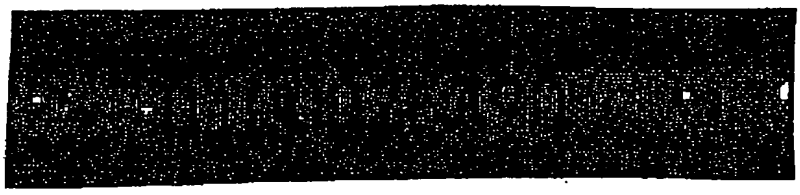

FIG. 113G

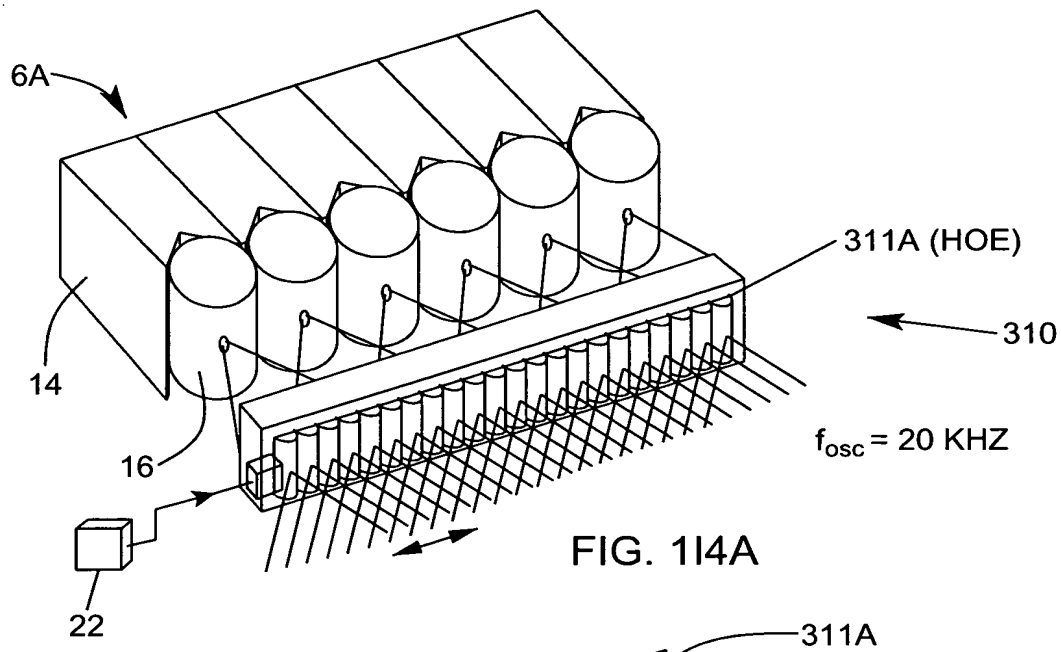

FIG. 1I4A

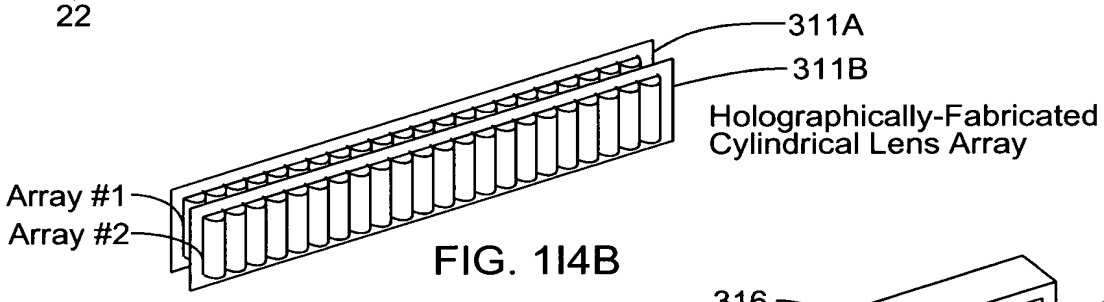

FIG. 1I4B

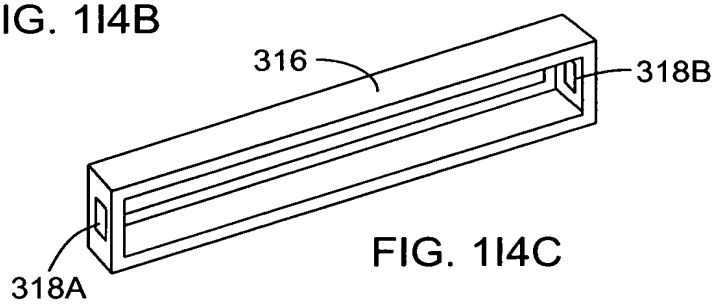

FIG. 1I4C

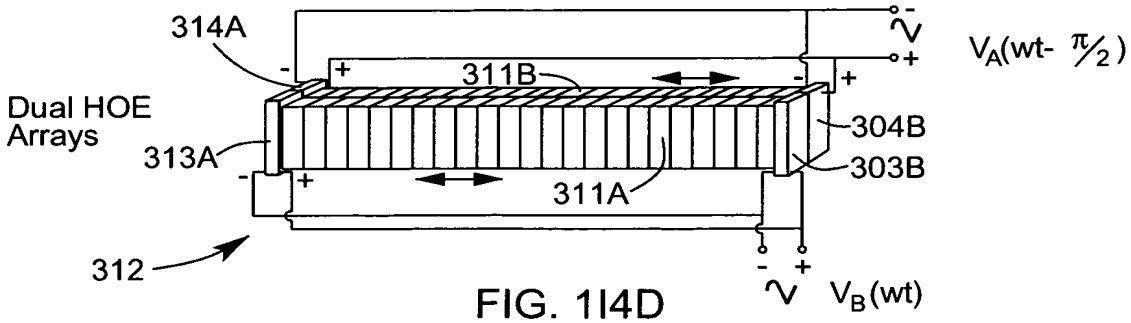

FIG. 1I4D

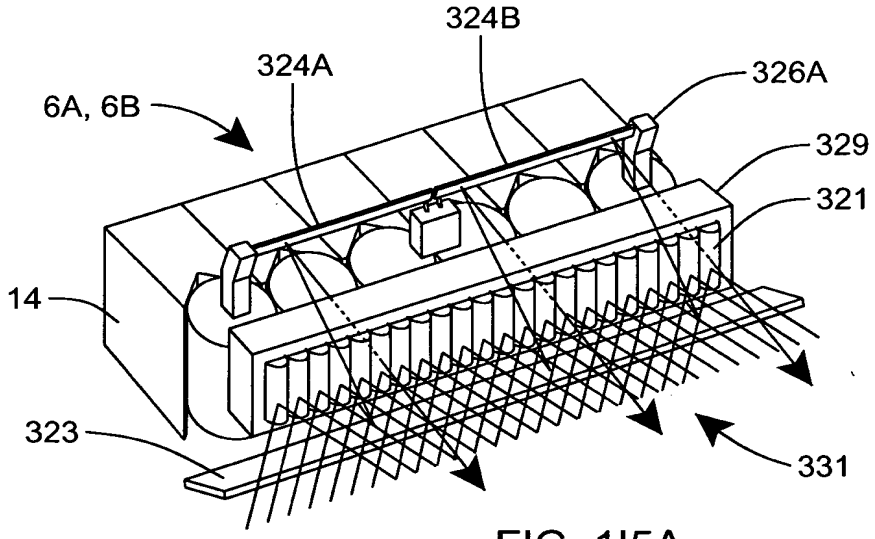

FIG. 1I5A

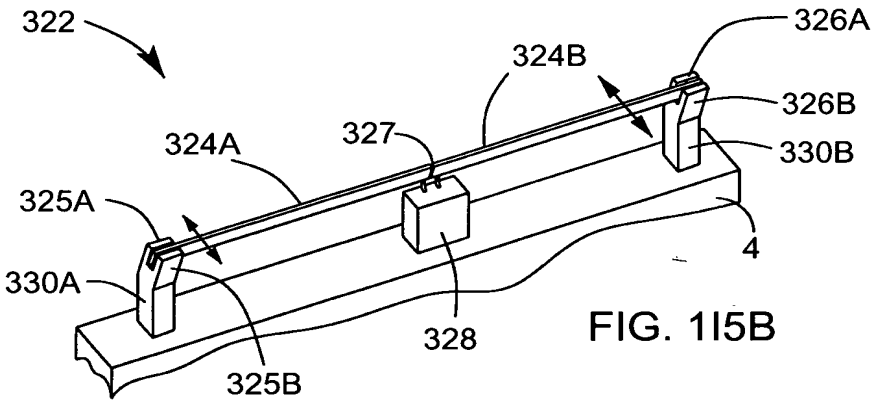

FIG. 1I5B

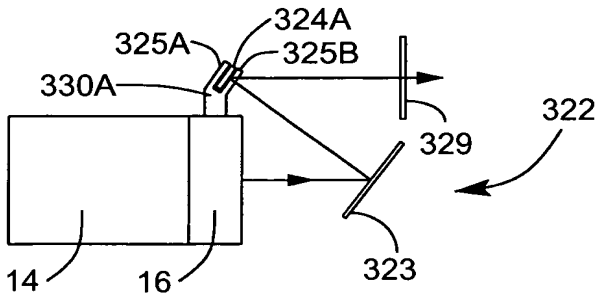

FIG. 1I5C

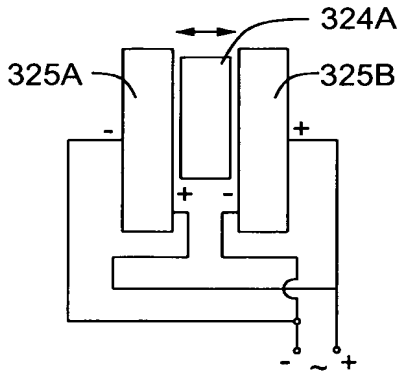

FIG. 1I5D

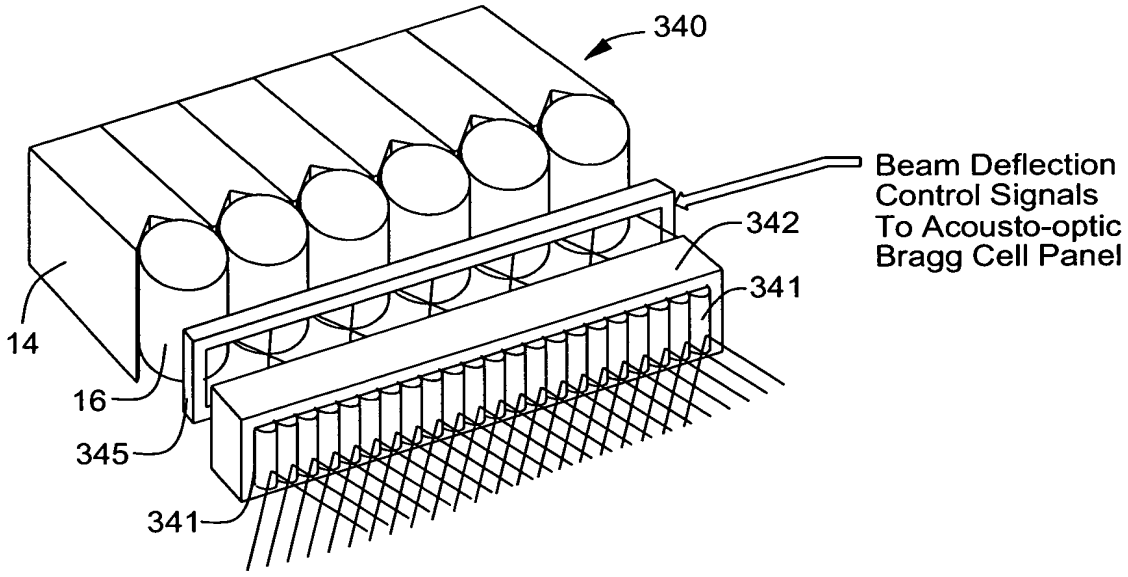

FIG. 1I6A

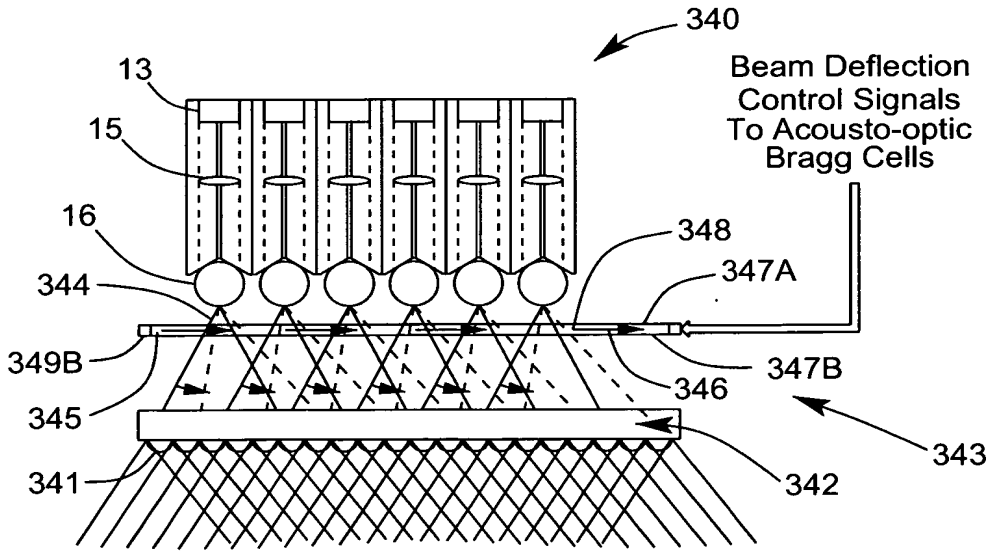

FIG. 1I6B

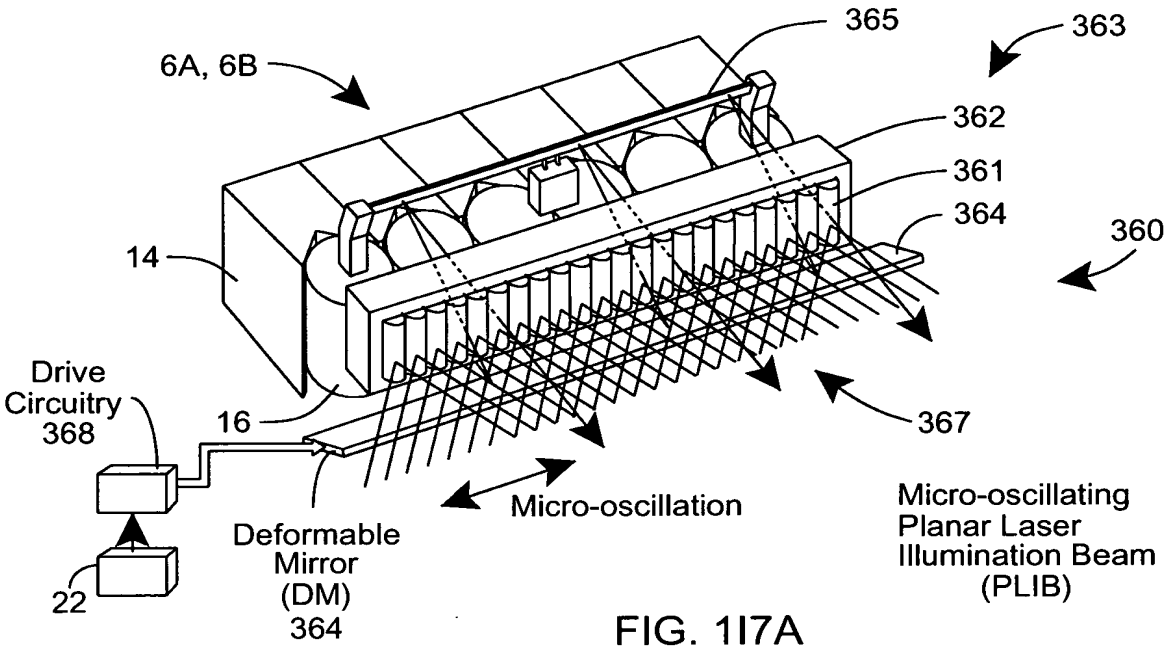

FIG. 1I7A

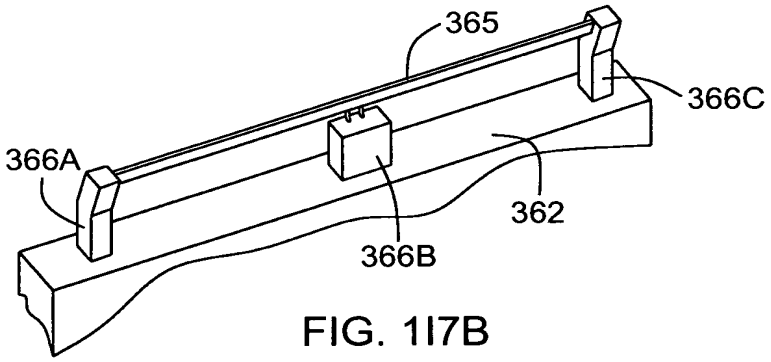

FIG. 1I7B

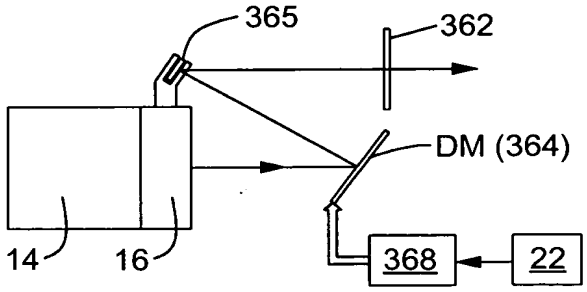

FIG. 1I7C

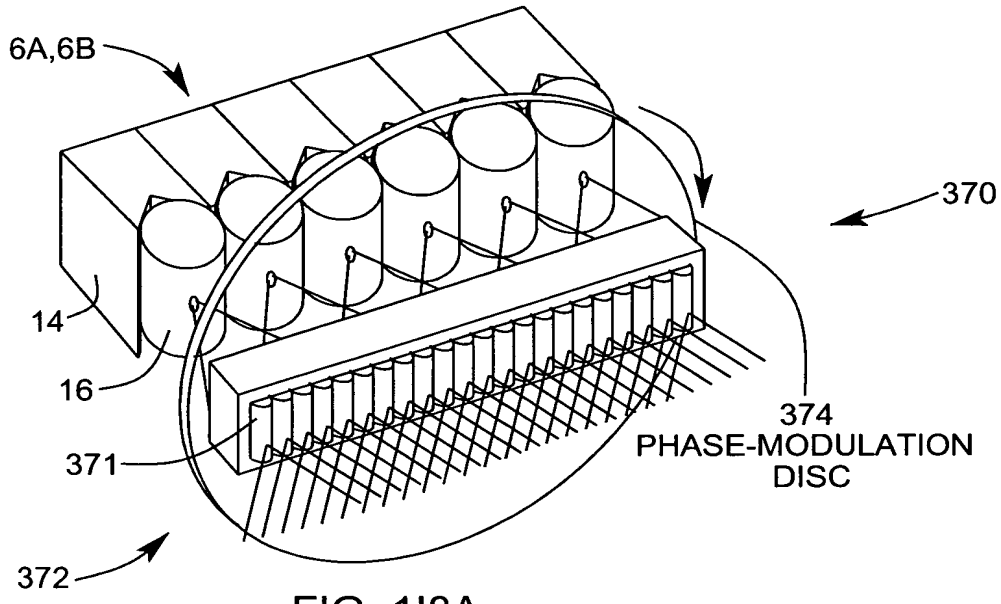

FIG. 1I8A

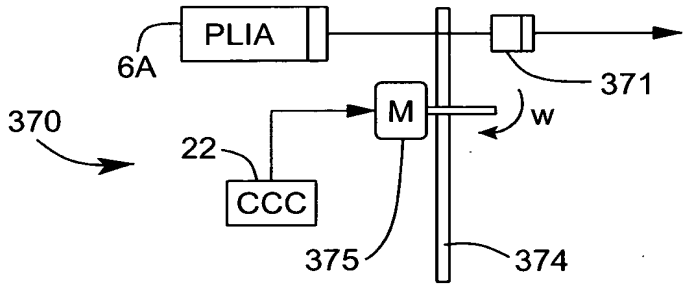

FIG. 1I8B

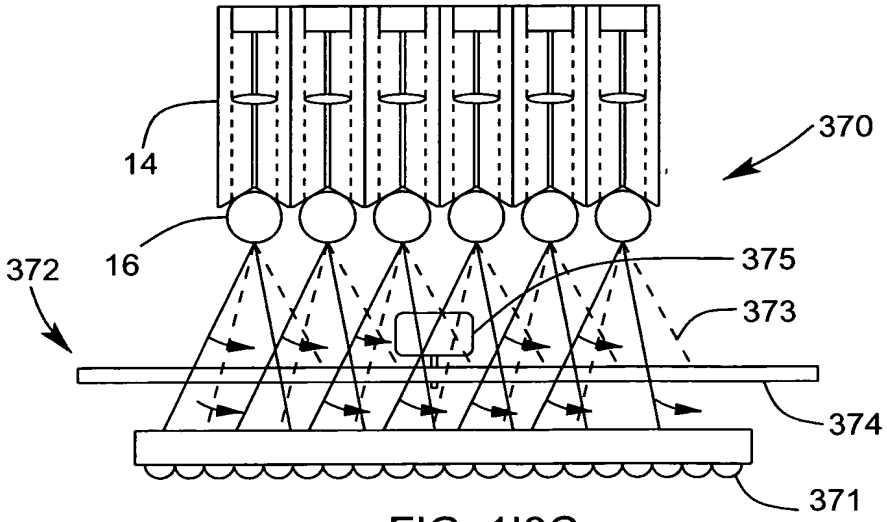

FIG. 1I8C

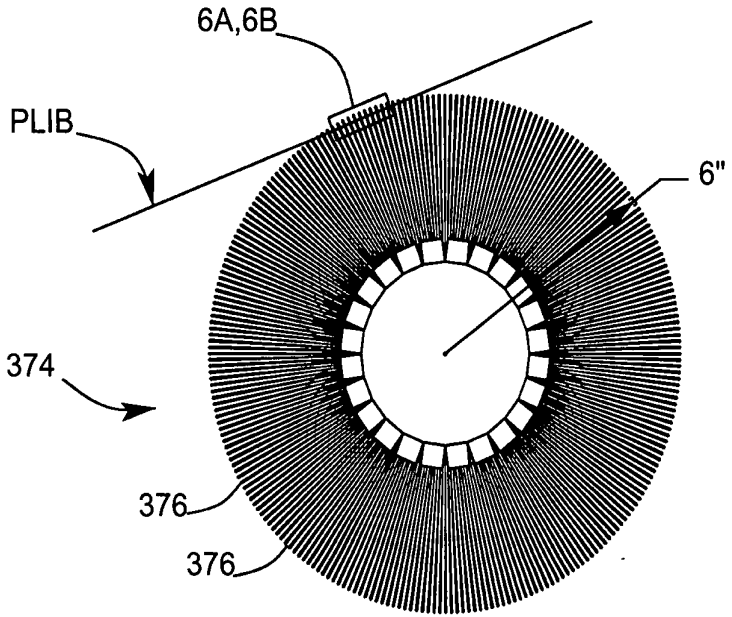

FIG. 1I8D

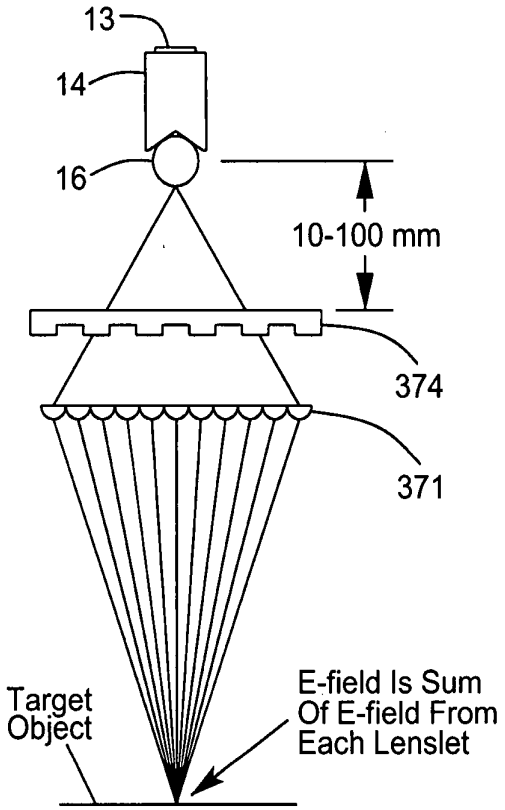

FIG. 1I8E

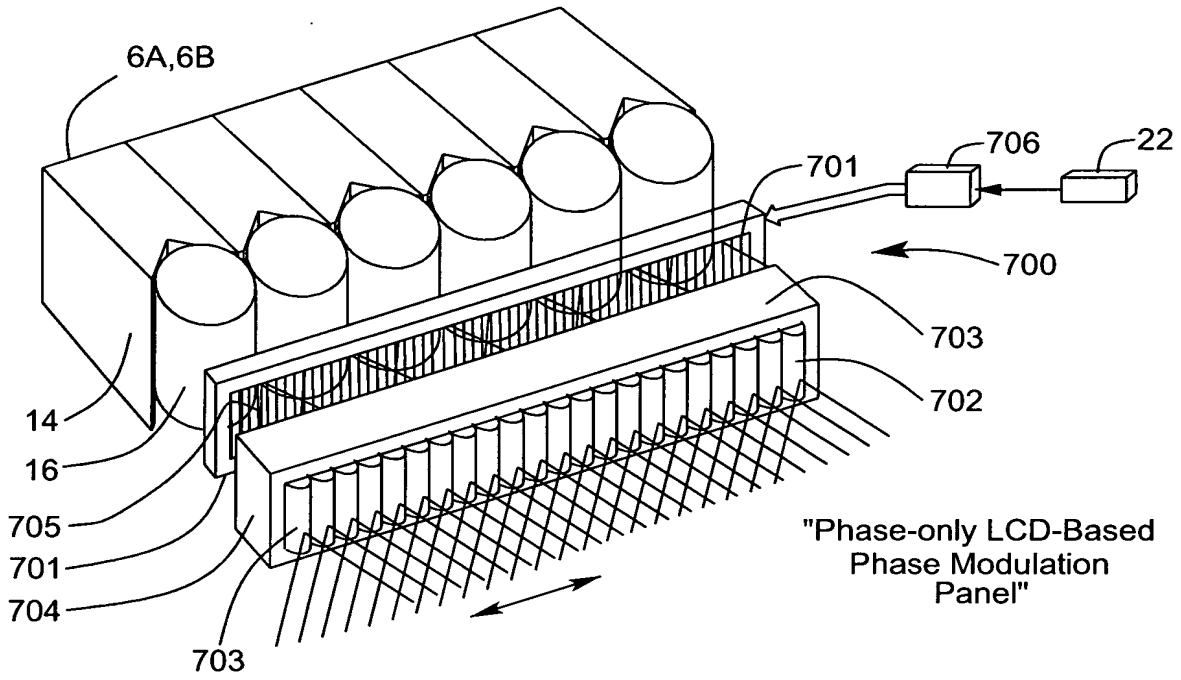

FIG. 1I8F

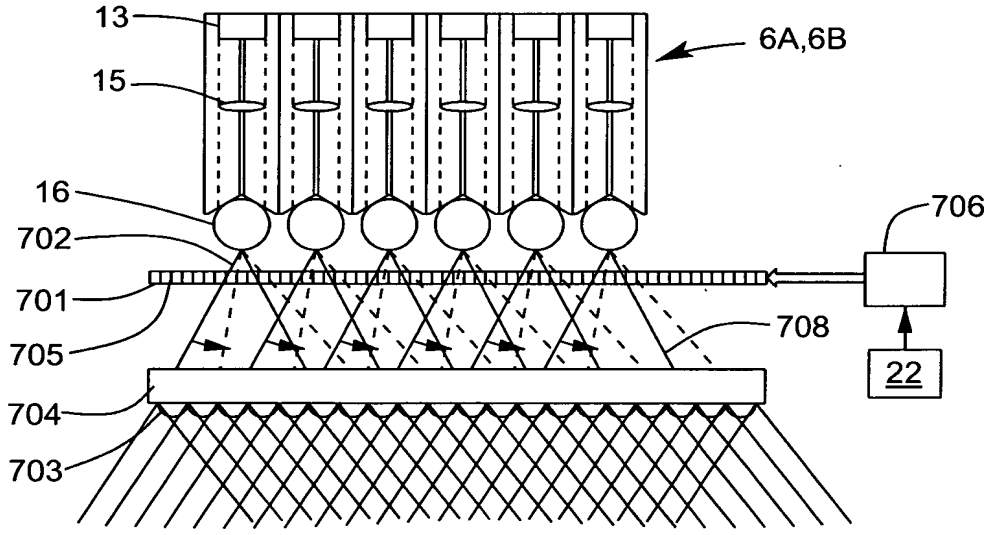

FIG. 1I8G

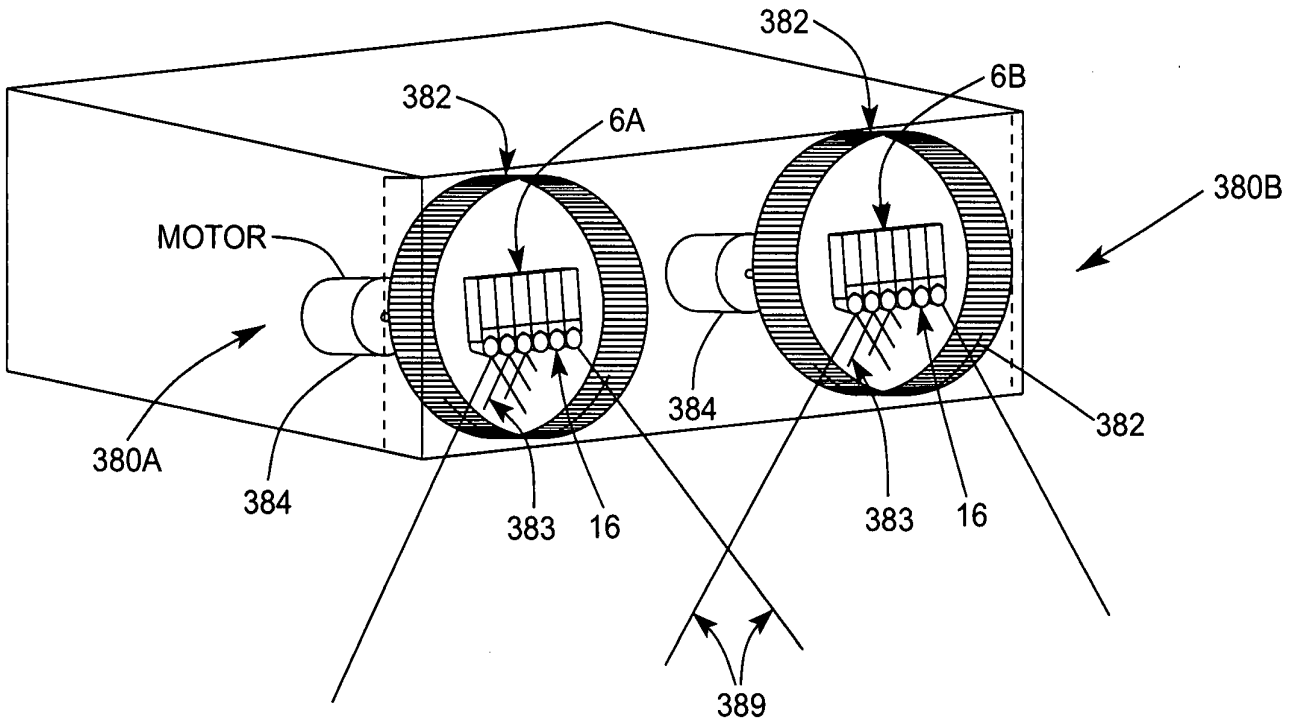

FIG. 1I9A

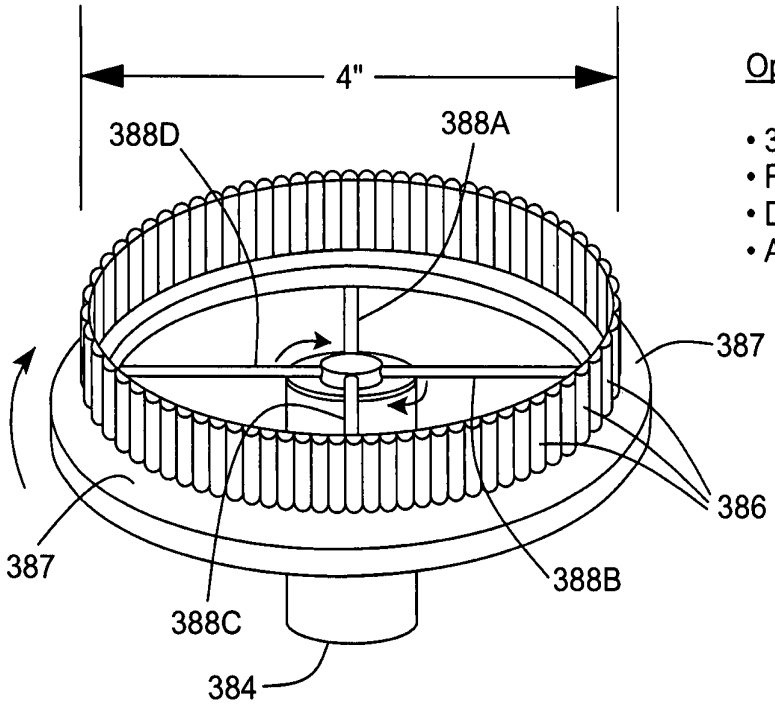

Optical Specifications:

- 30 Cylindrical Lens (Lines) Per Linear Inch
- Focal Length ≈ 20 Millimeters
- Diameter Of Lenticular Carousel ≈ 4 Inches
- Acrylic Material

FIG. 1I9B

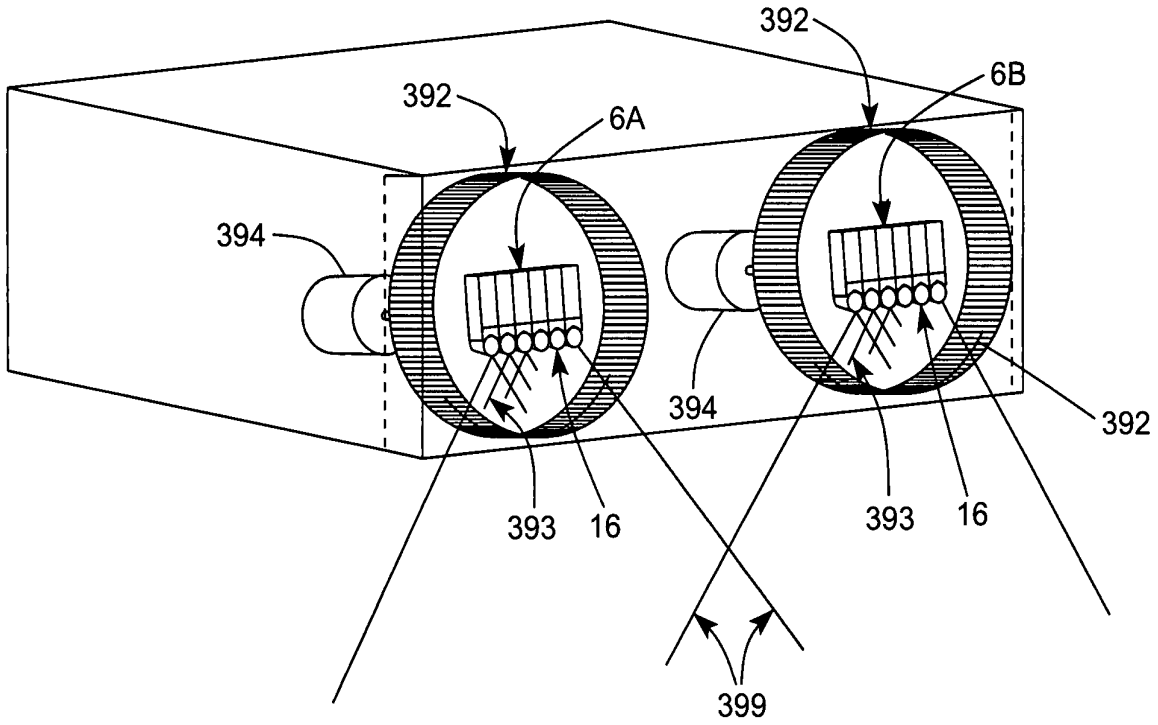

FIG. 1I10A

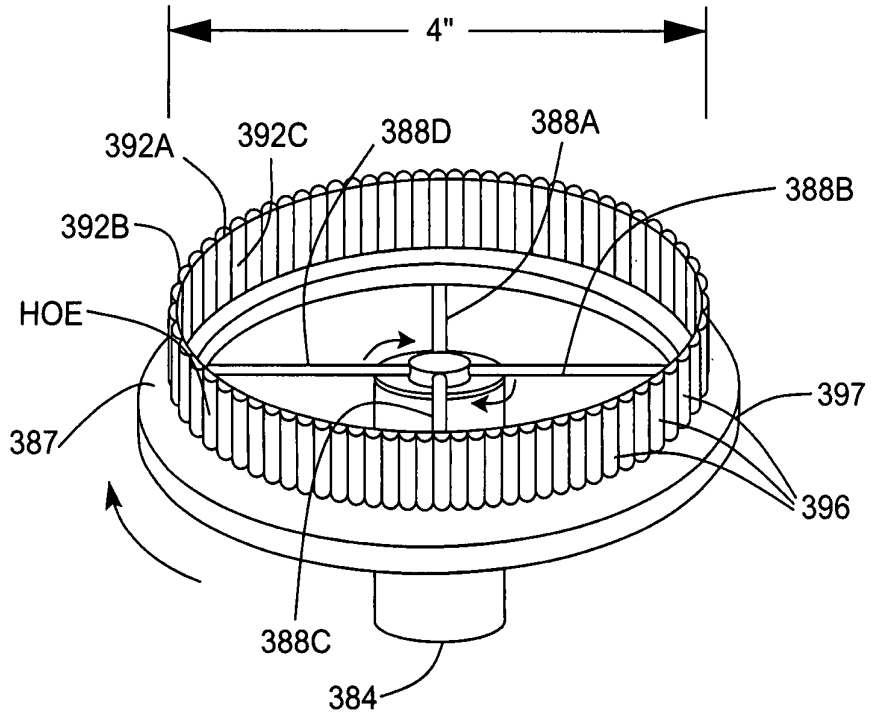

Optical Specifications:

- 30 Cylindrical Lens (Lines) Per Linear Inch
- Focal Length ≈ 20 Millimeters
- Diameter Of Lenticular Carousel ≈ 4 Inches

FIG. 1I10B

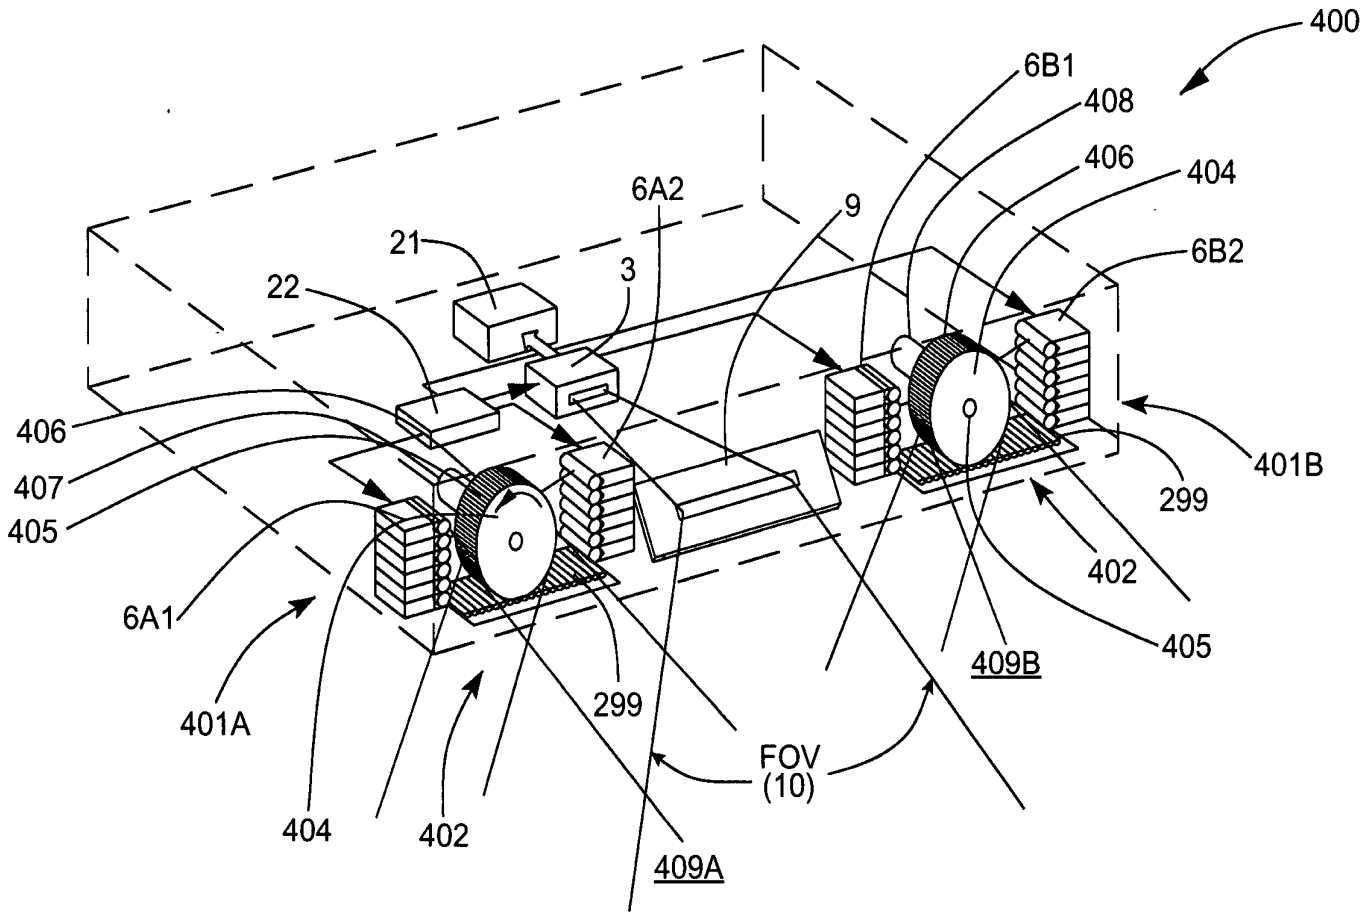
400
6B1
408
406
404
6B2
6A2
9
21
22
3
406
407
405
6A1
401A
404
402
299
409A
FOV
(10)
409B
405
402
299
401B

FIG. 1I11A

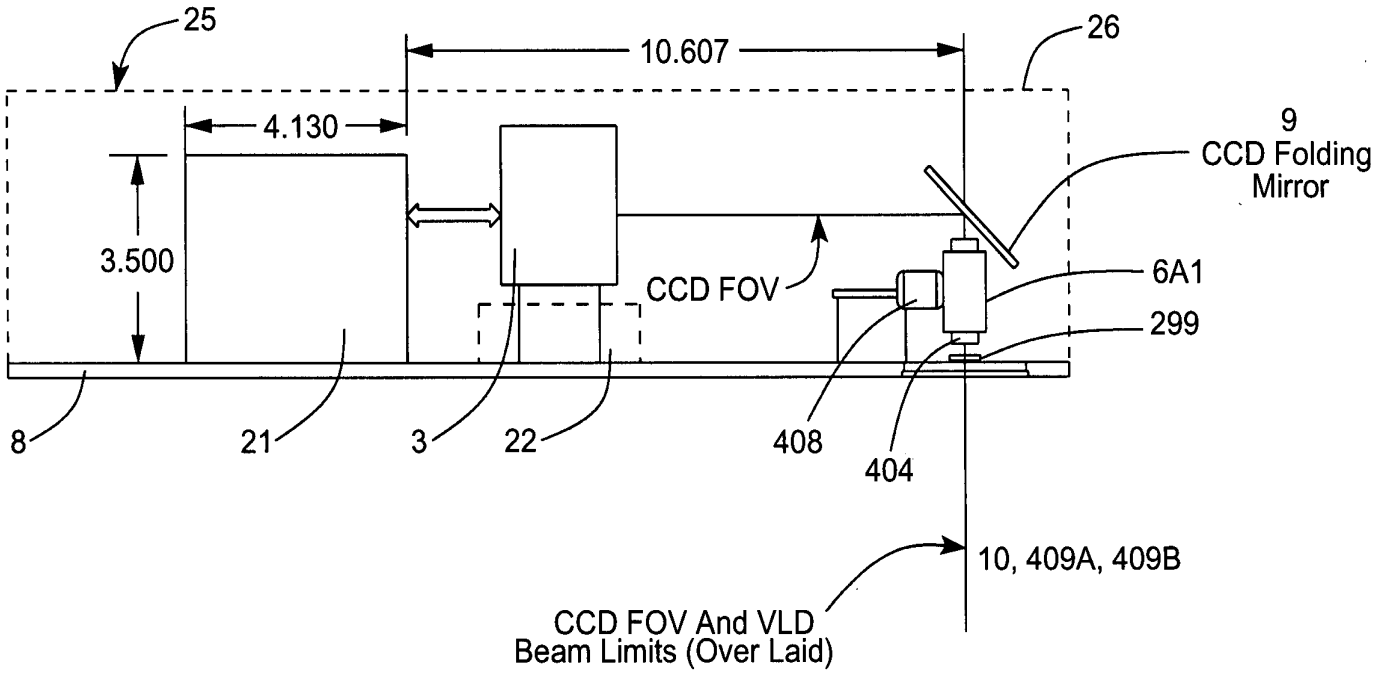
25
10.607
26
4.130
9
CCD Folding
Mirror
3.500
CCD FOV
6A1
299
8
21
3
22
408
404
10, 409A, 409B
CCD FOV And VLD
Beam Limits (Over Laid)

FIG. 1I11B

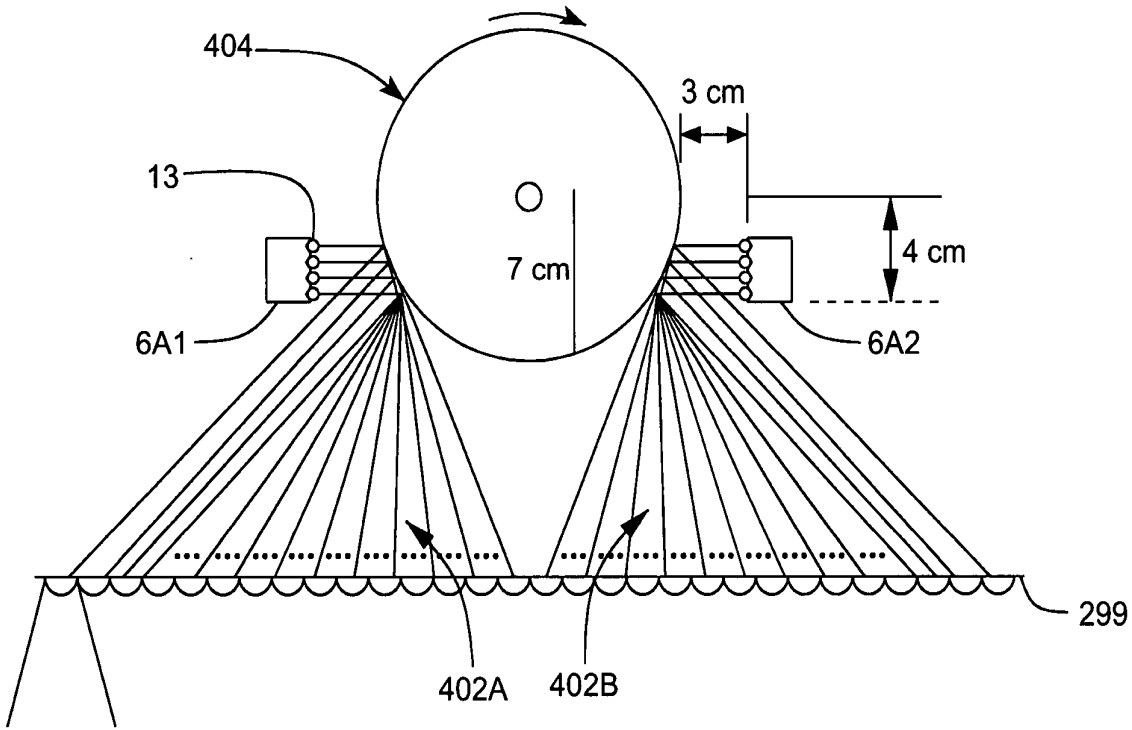

FIG. 1I11C

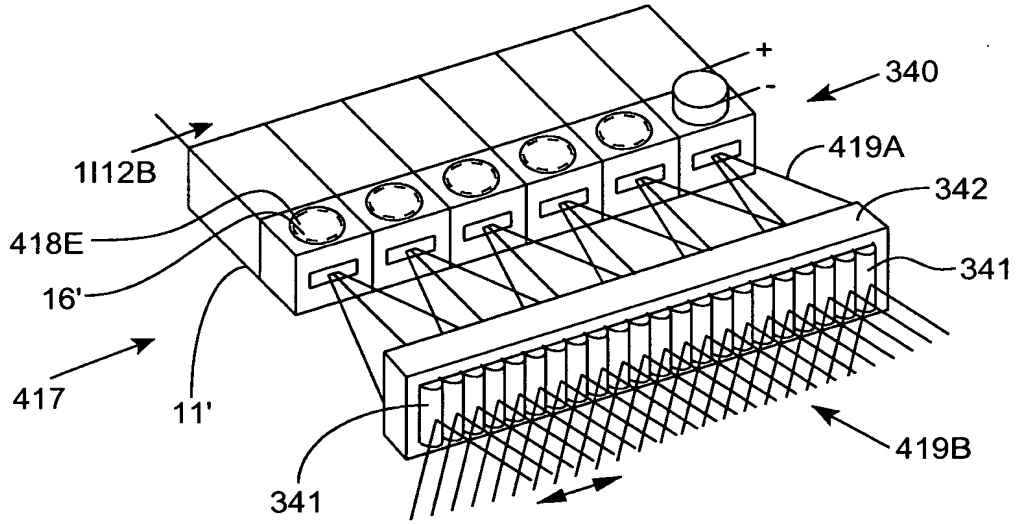

FIG. 1I12A

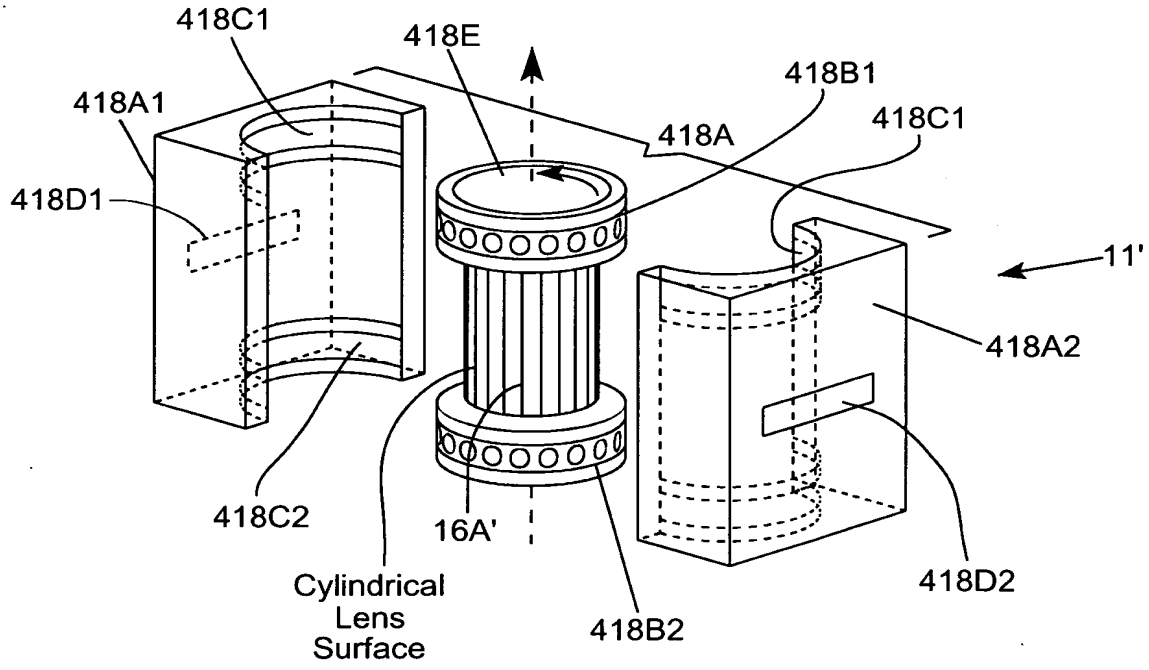

FIG. 1I12B

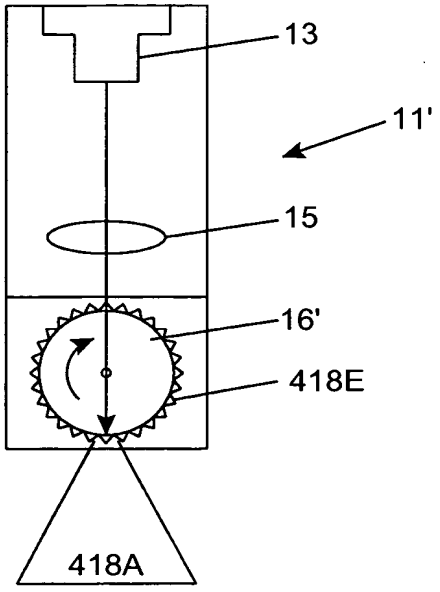

FIG. 1I12C

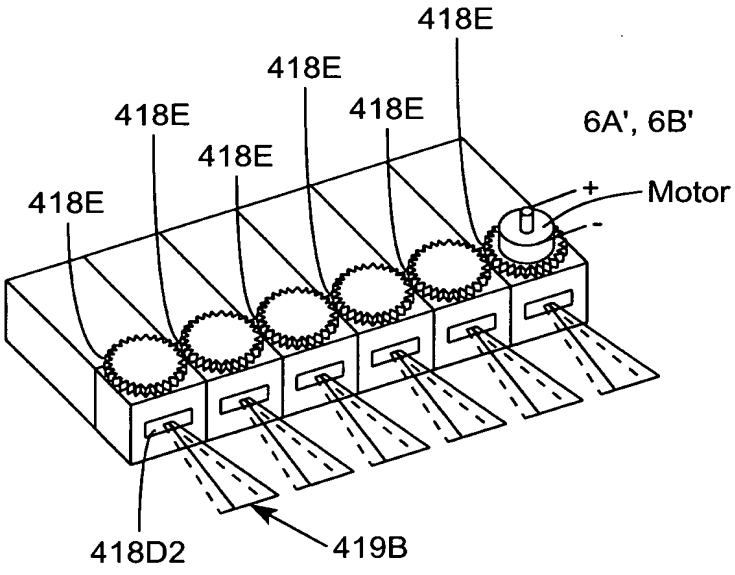

FIG. 1I12D

Second Generalized Method Of
Reducing Speckle-Noise Patterns
At Image Detection Array
Of The IFD Subsystem (3)

(TIMF)

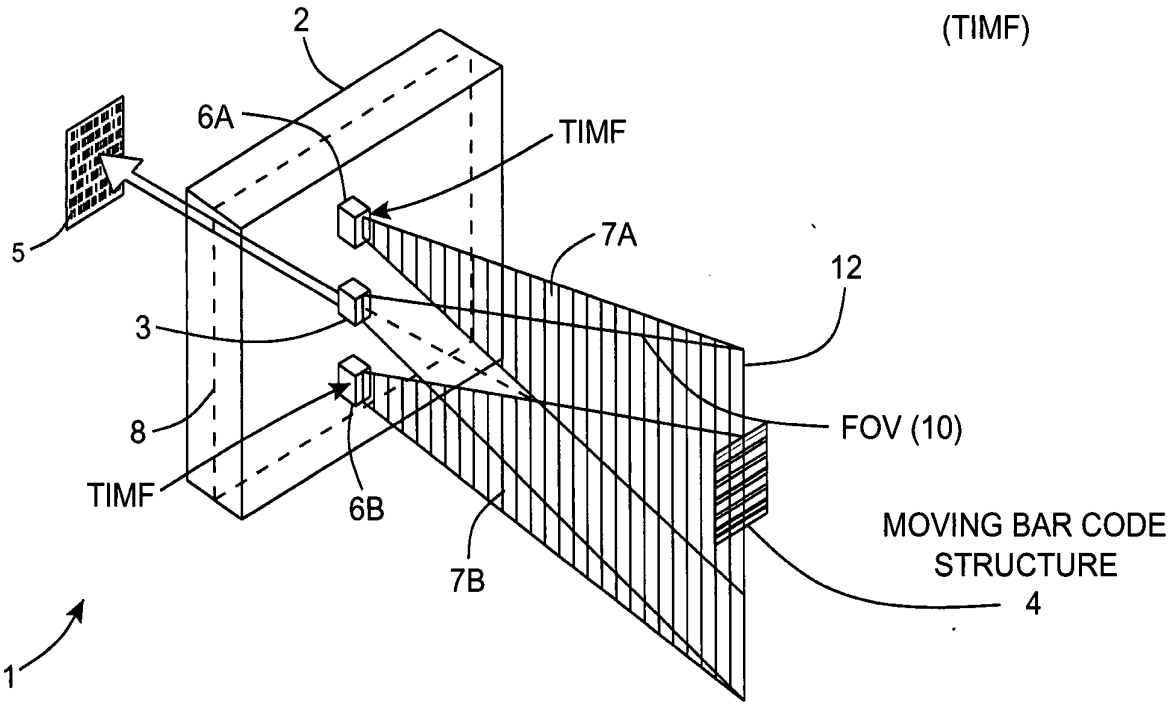

FIG. 1I13

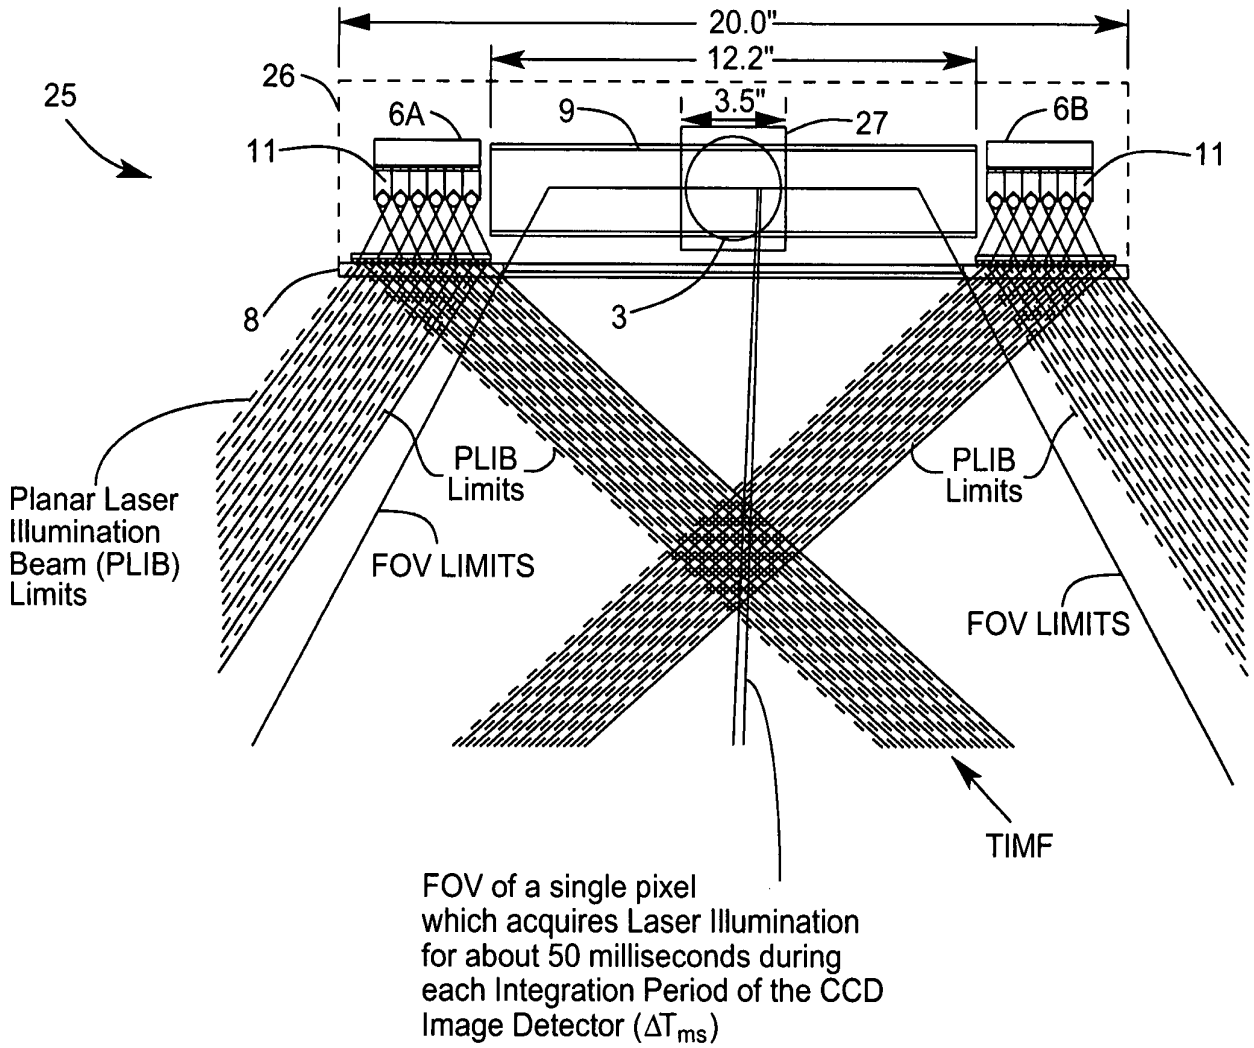
20.0"
12.2"
3.5"
25
26
6A
9
27
6B
11
11
8
3
PLIB
Limits
PLIB
Limits
Planar Laser
Illumination
Beam (PLIB)
Limits
FOV LIMITS
FOV LIMITS
TIMF
FOV of a single pixel
which acquires Laser Illumination
for about 50 milliseconds during
each Integration Period of the CCD
Image Detector (ΔT_{ms})

FIG. 1I13A

THE SECOND GENERALIZED SPECKLE-NOISE PATTERN REDUCTION METHOD OF THE PRESENT INVENTION

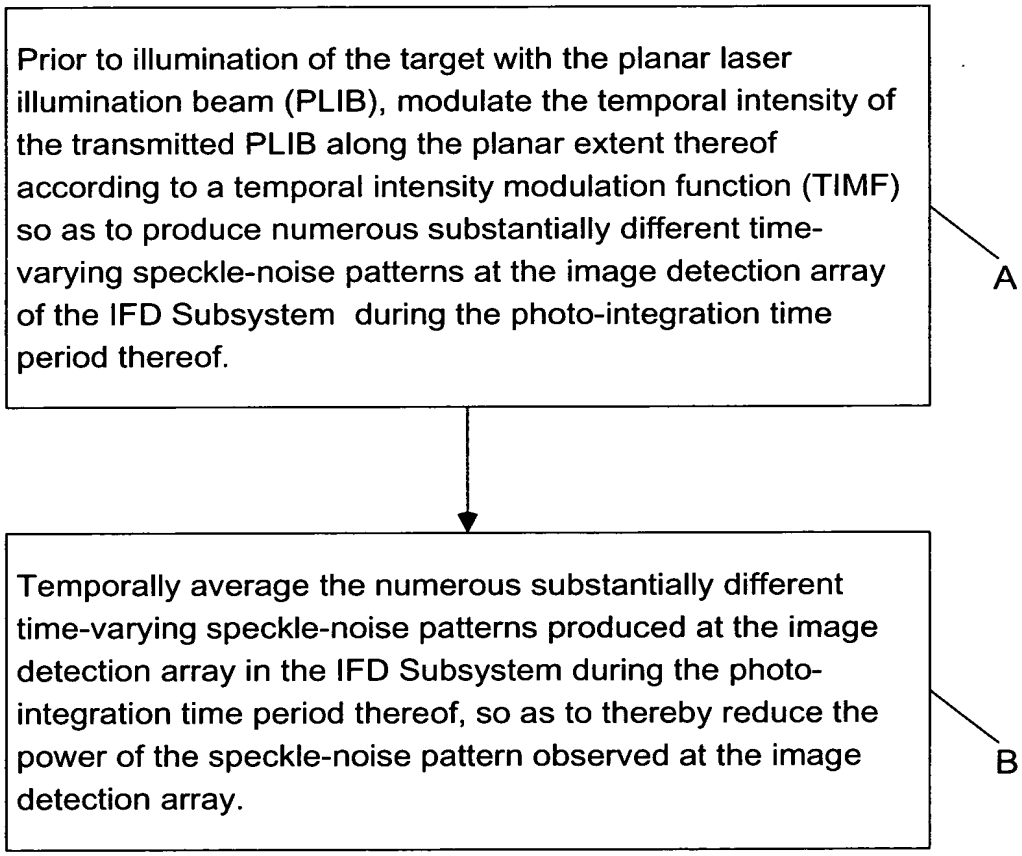

FIG. 1I13B

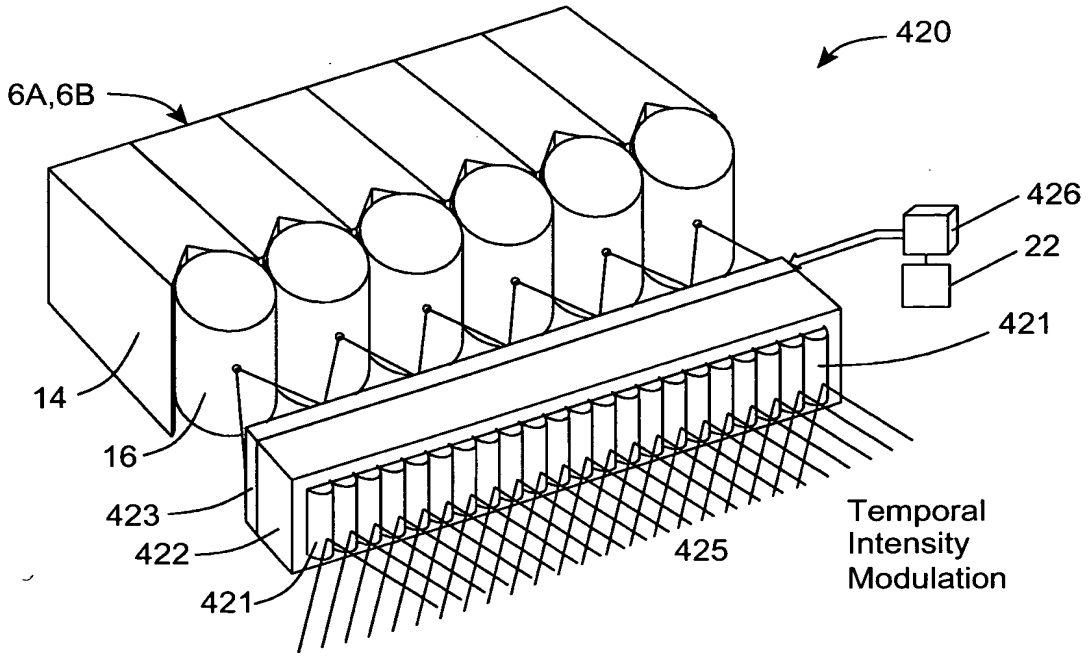

FIG. 1I14A

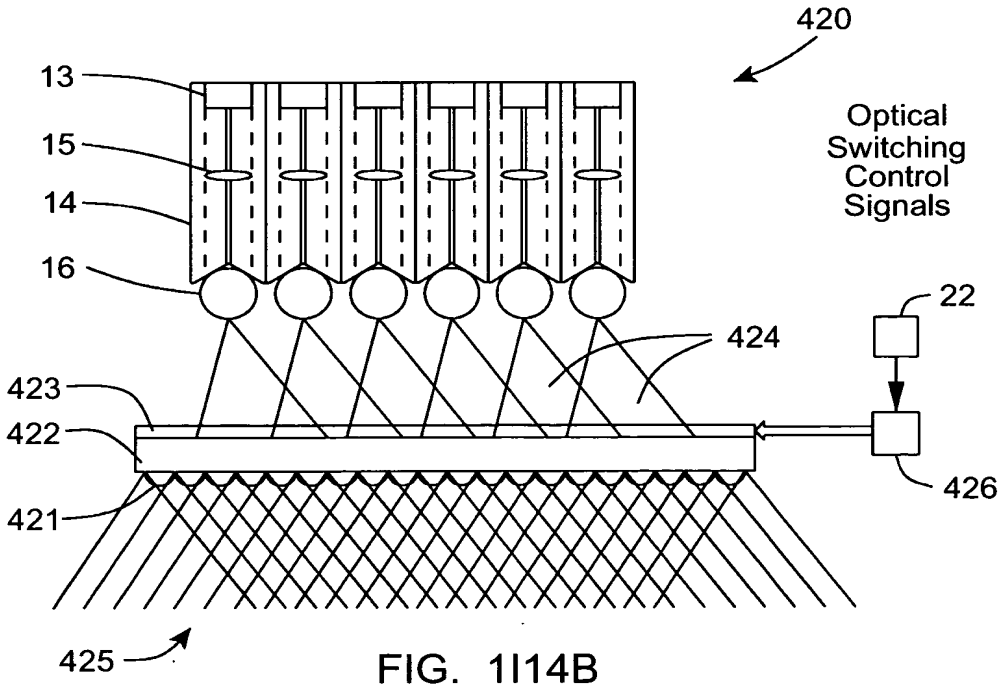

FIG. 1I14B

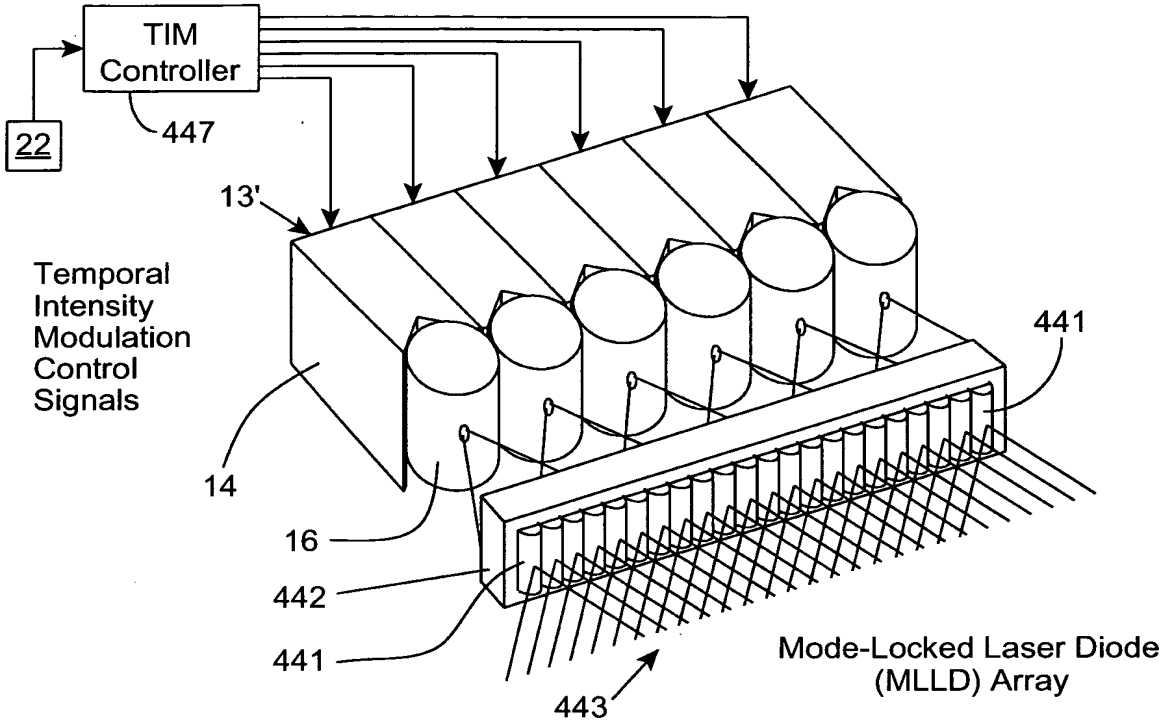

FIG. 1I15A

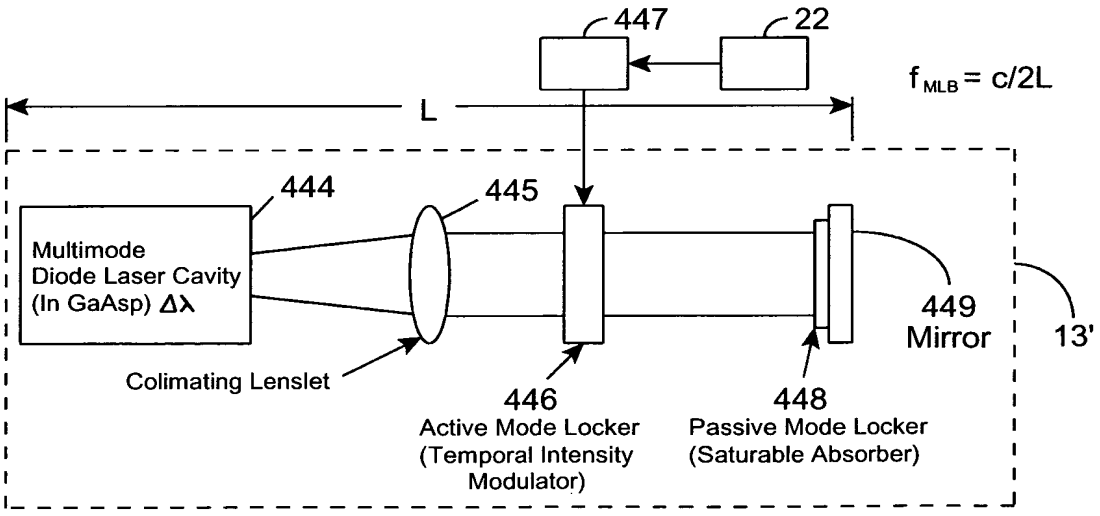

FIG. 1I15B

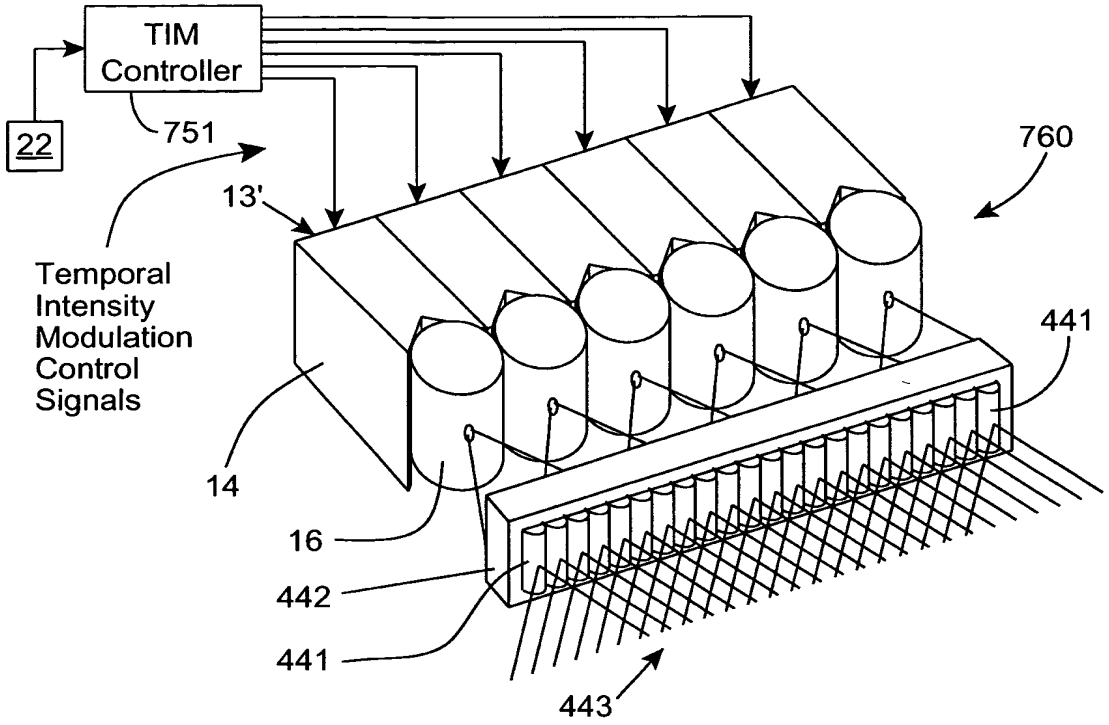

FIG. 1I15C

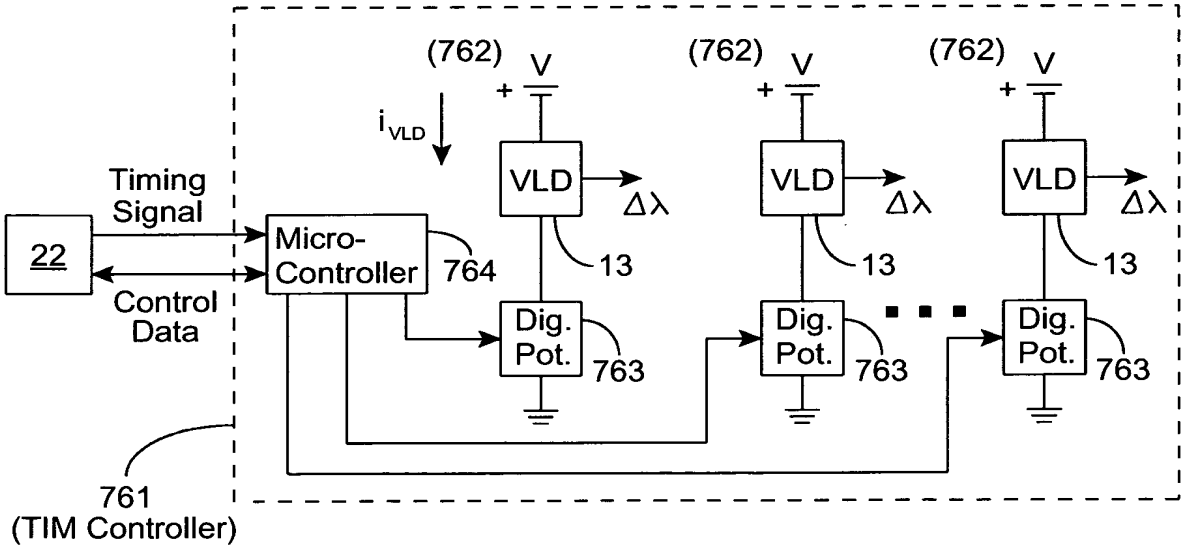

FIG. 1I15D

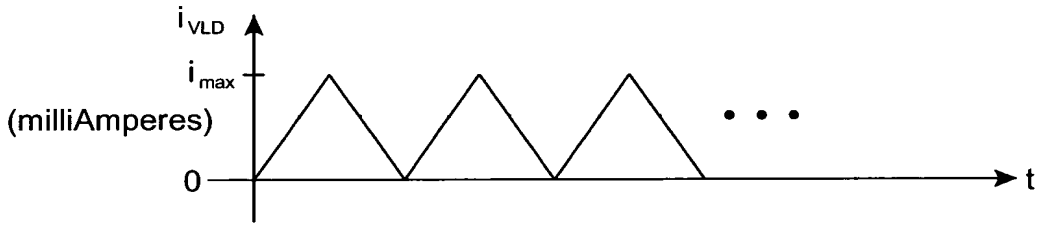

FIG. 1I15E

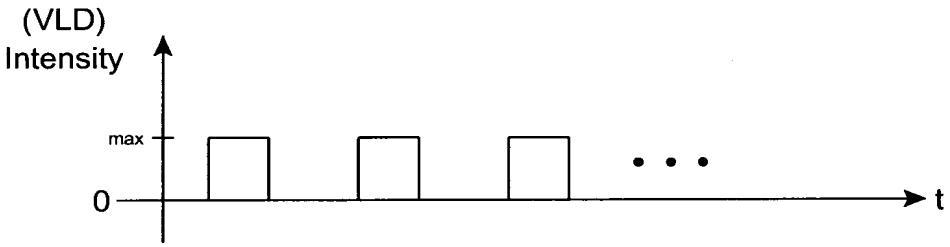

FIG. 1I15F

Third Generalized Method Of
Reducing Speckle-Noise Patterns
At Image Detection Array
Of The IFD Subsystem (3)

(TIMF)

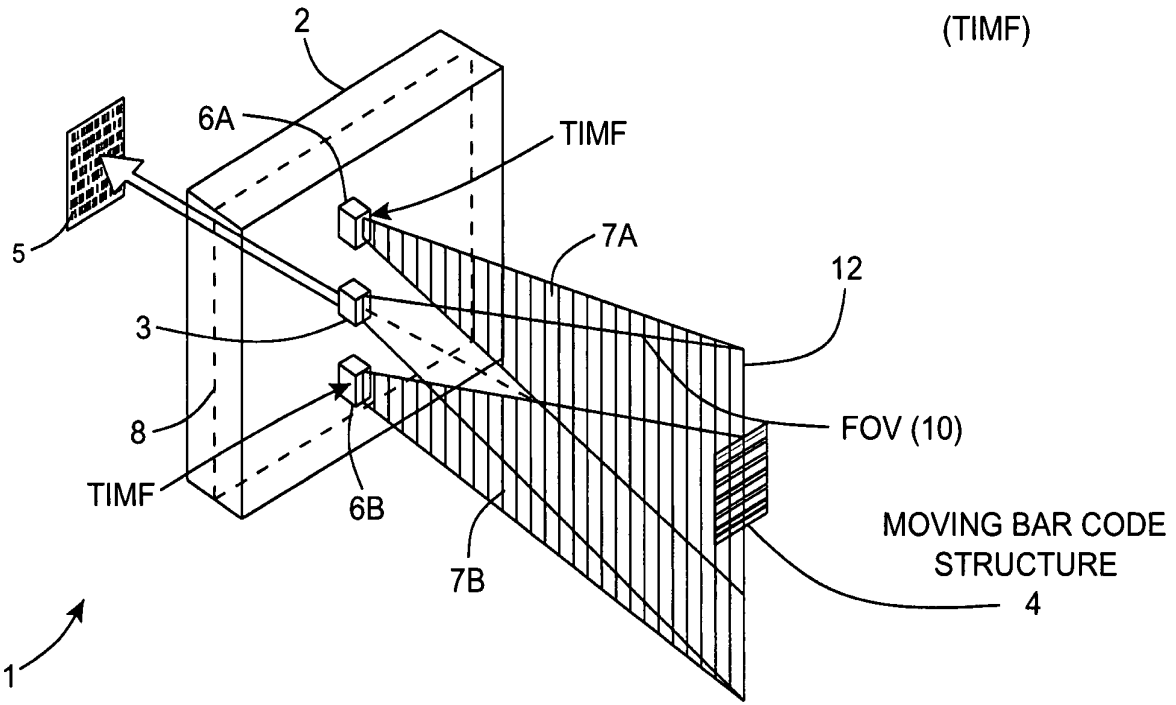

FIG. 1I16

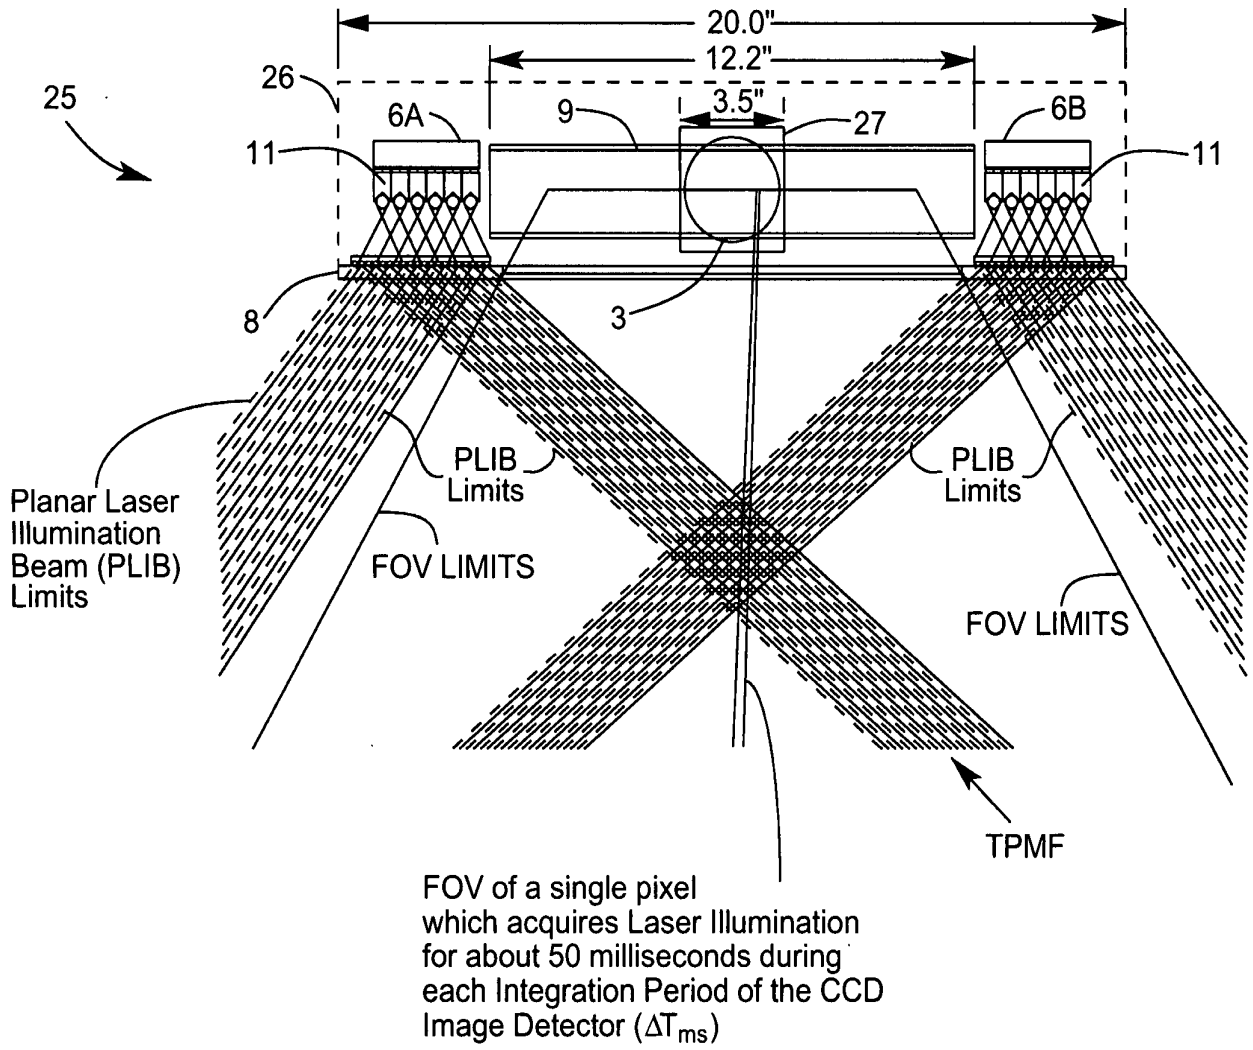
20.0"
12.2"
3.5"
25
26
6A
9
27
6B
11
11
8
3
Planar Laser Illumination Beam (PLIB) Limits
PLIB Limits
PLIB Limits
FOV LIMITS
FOV LIMITS
TPMF
FOV of a single pixel which acquires Laser Illumination for about 50 milliseconds during each Integration Period of the CCD Image Detector (ΔT_{ms})

FIG. 1I16A

THE THIRD GENERALIZED SPECKLE-NOISE PATTERN REDUCTION METHOD OF THE PRESENT INVENTION

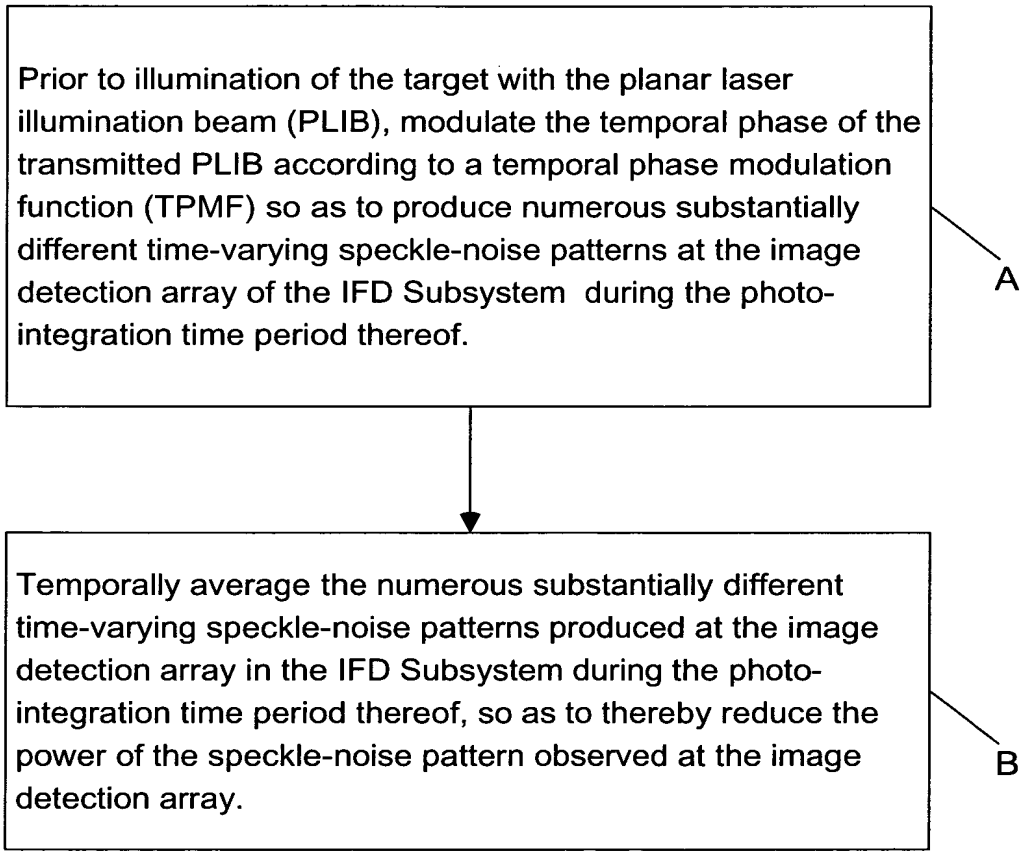

FIG. 1I16B

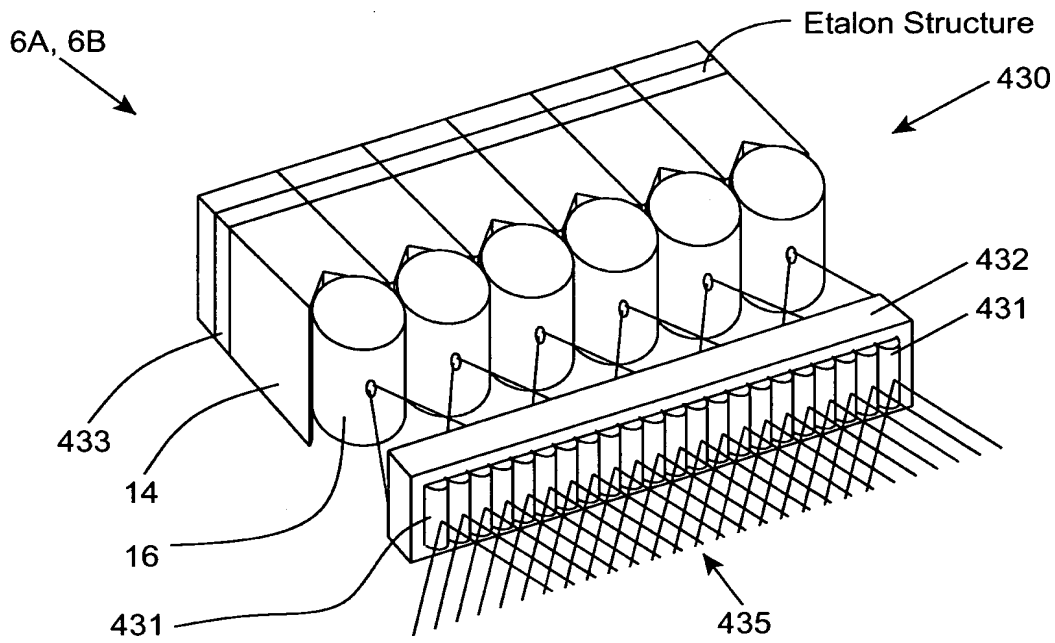

FIG. 1I17A

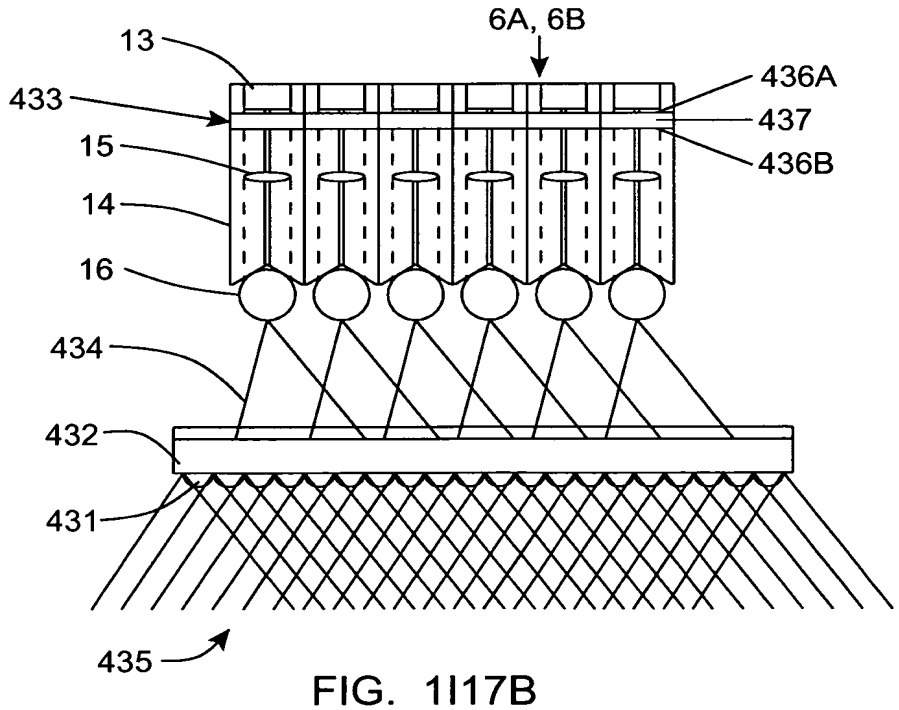

FIG. 1I17B

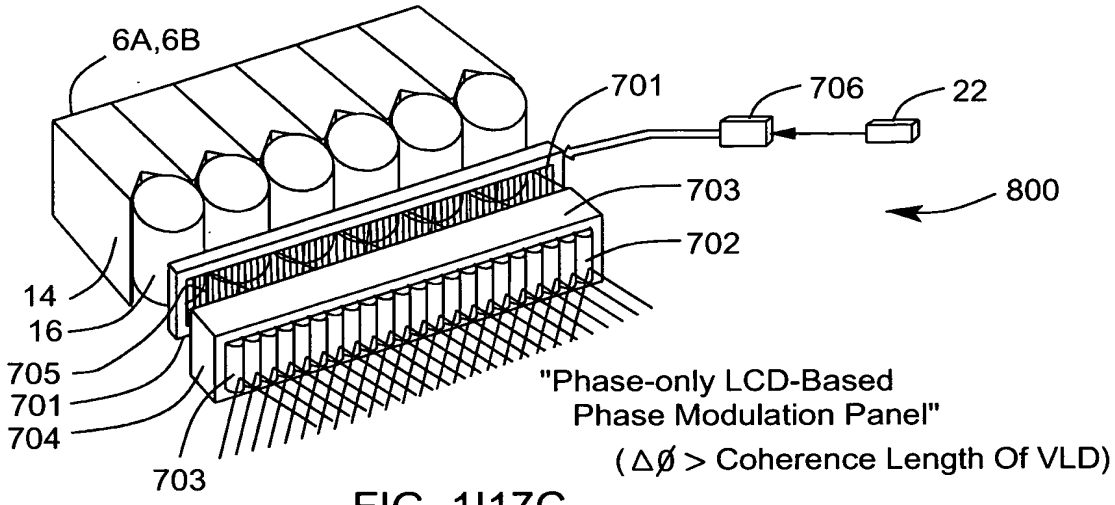

FIG. 1I17C

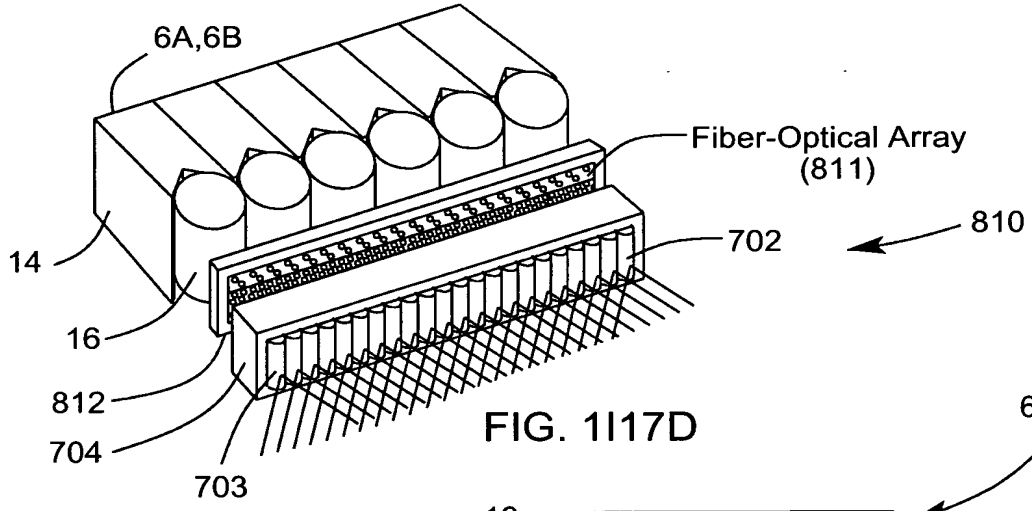

FIG. 1I17D

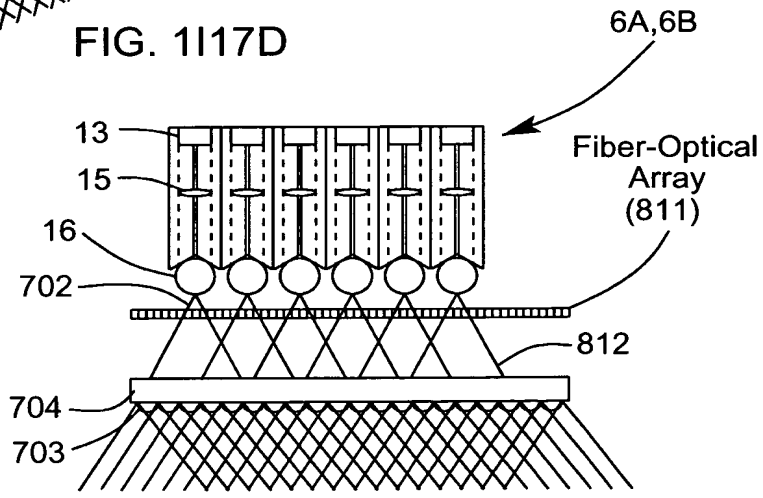

FIG. 1I17E

Fourth Generalized Method Of
Reducing Speckle-Noise Patterns
At Image Detection Array
Of The IFD Subsystem (3)

(TFMF)

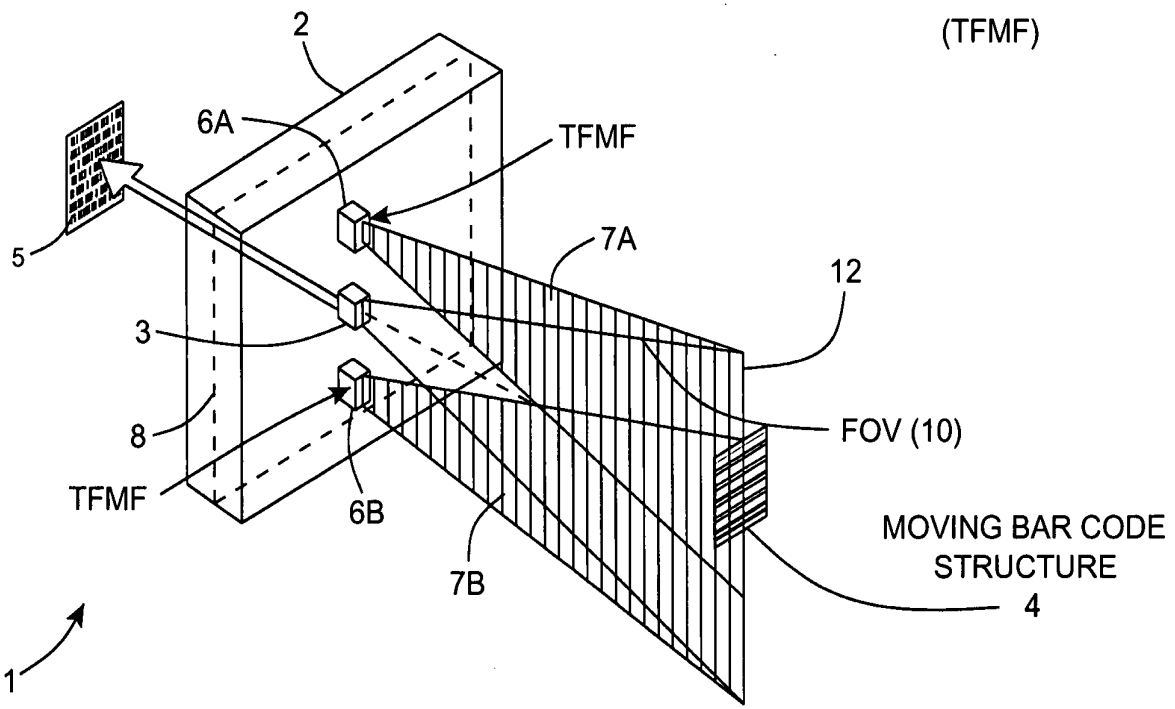

FIG. 1I18

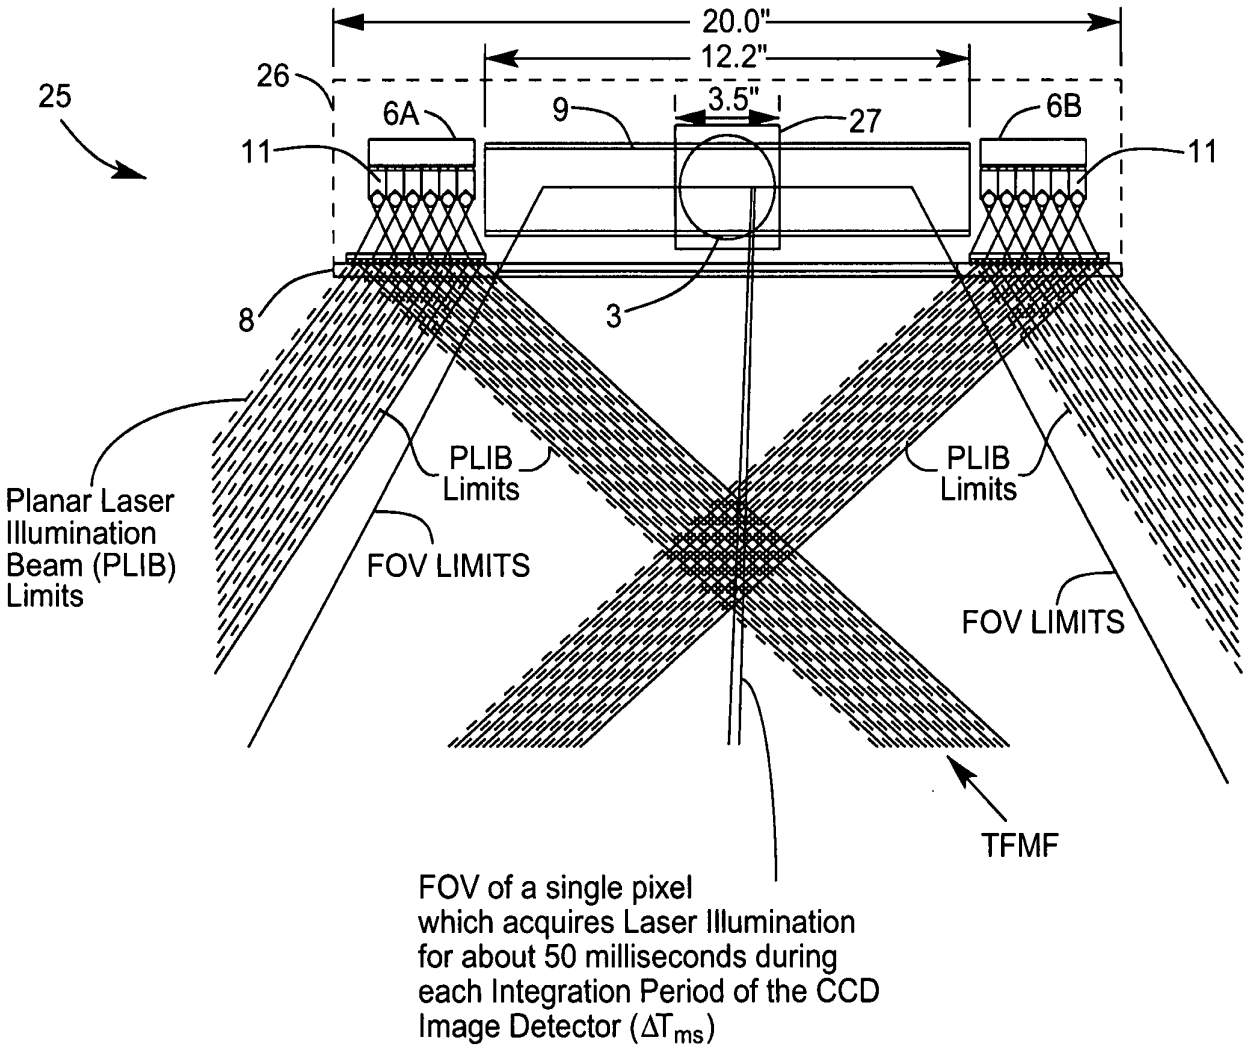
20.0"
12.2"
3.5"
25
26
6A
9
27
6B
11
11
8
3
Planar Laser
Illumination
Beam (PLIB)
Limits
PLIB
Limits
PLIB
Limits
FOV LIMITS
FOV LIMITS
TFMF
FOV of a single pixel
which acquires Laser Illumination
for about 50 milliseconds during
each Integration Period of the CCD
Image Detector (ΔT_{ms})

FIG. 1I18A

THE FOURTH GENERALIZED SPECKLE-NOISE PATTERN REDUCTION METHOD OF THE PRESENT INVENTION

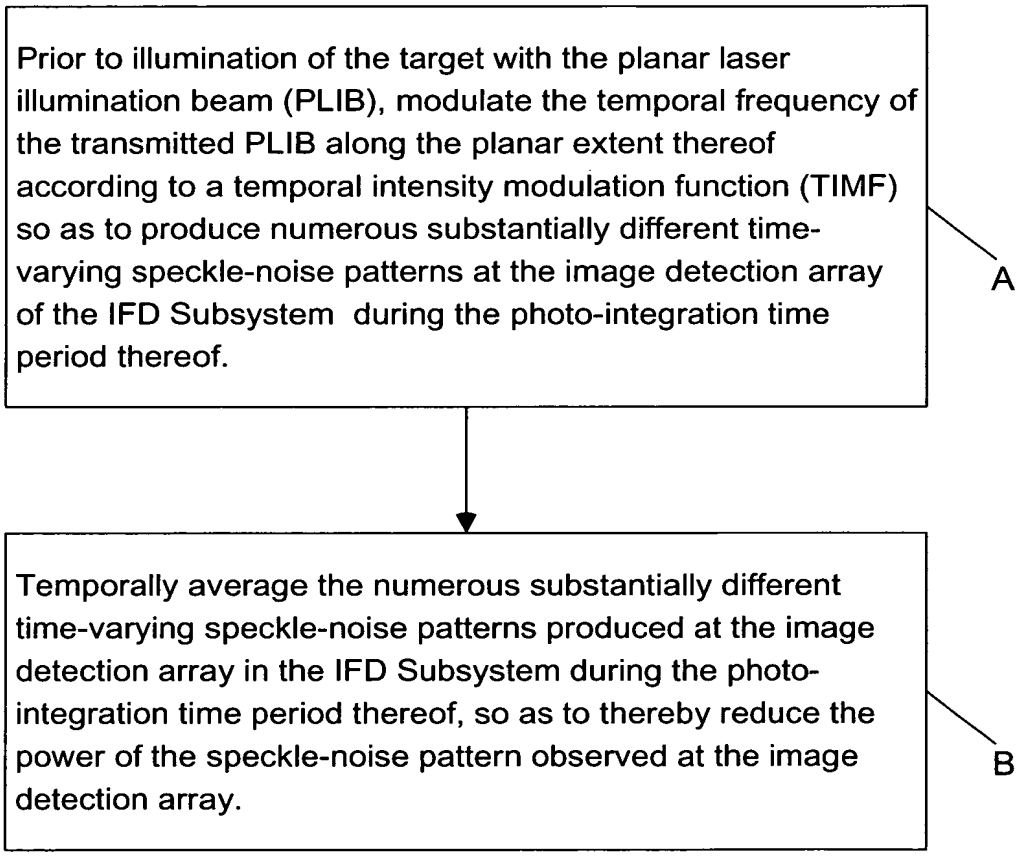

FIG. 1I18B

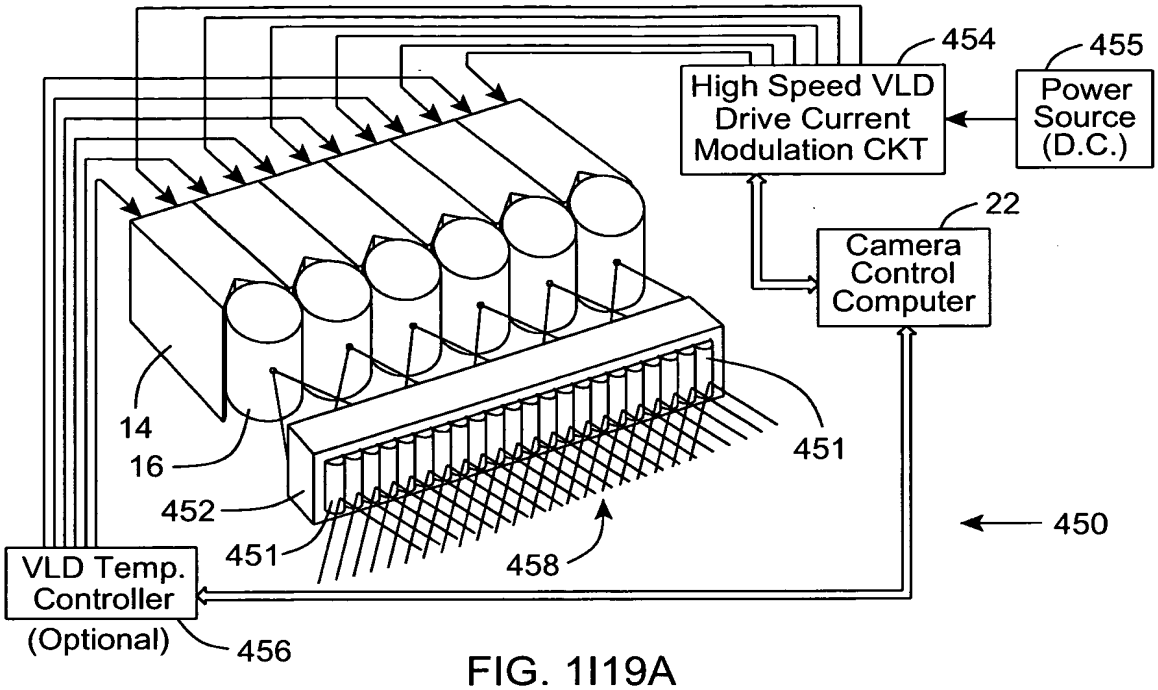

FIG. 1I19A

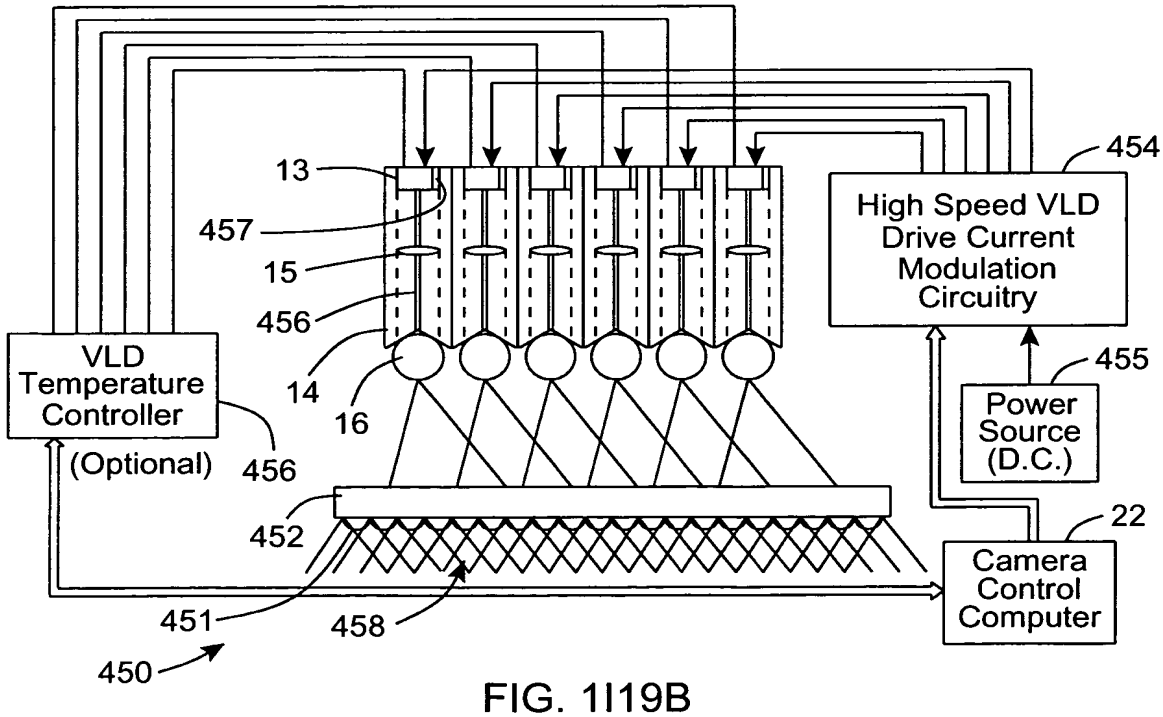

FIG. 1I19B

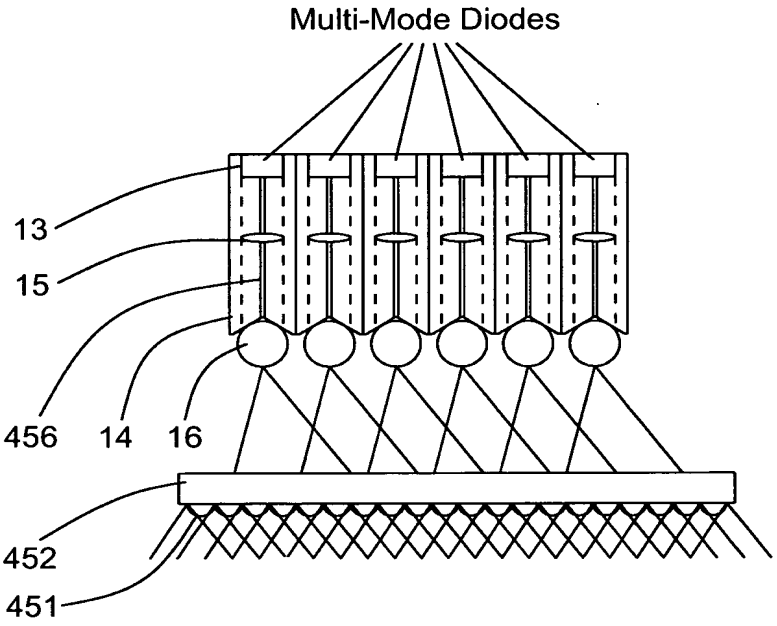

FIG. 1I19C

Fifth Generalized Method Of
Reducing Speckle-Noise Patterns
At Image Detection Array
Of The IFD Subsystem (3)

(SIMF)

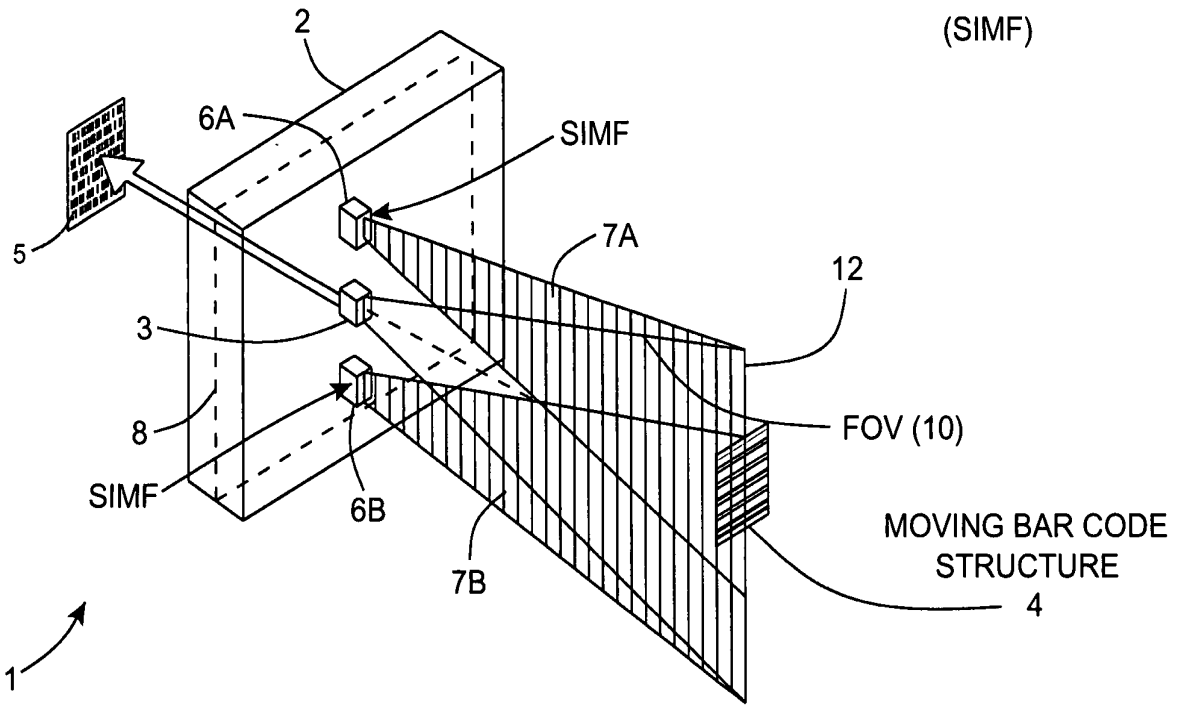

FIG. 1I20

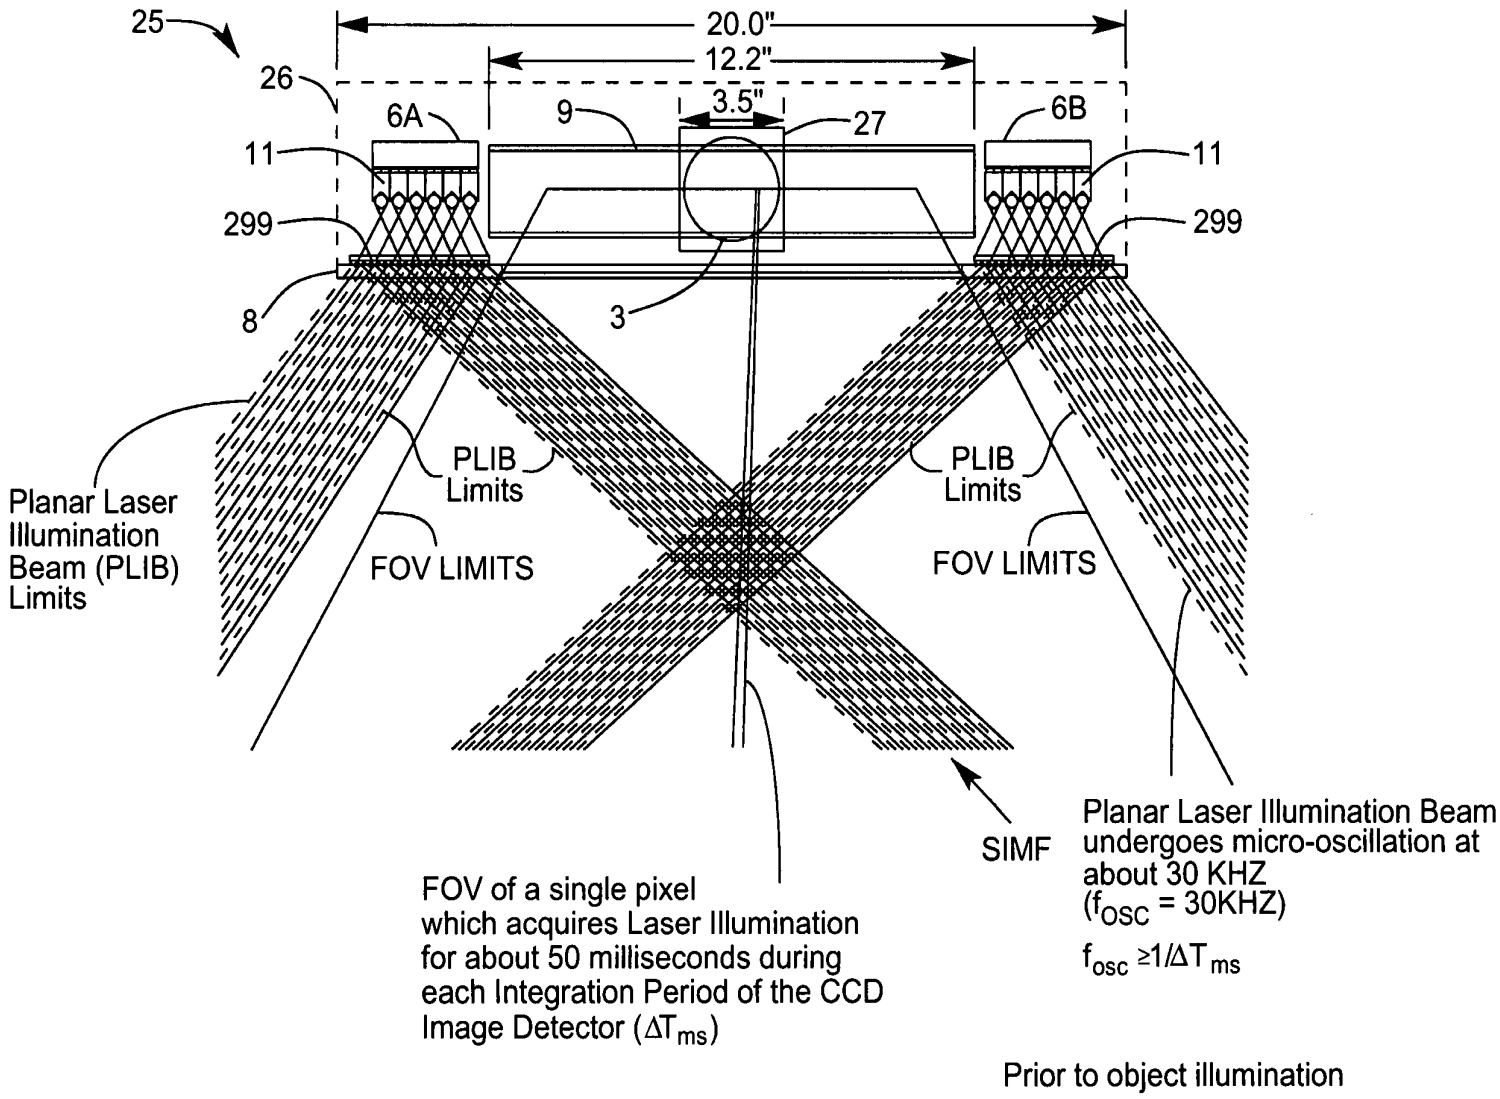
25
20.0"
12.2"
26
3.5"
6A
9
27
6B
11
11
299
299
8
3
PLIB
Limits
PLIB
Limits
Planar Laser
Illumination
Beam (PLIB)
Limits
FOV LIMITS
FOV LIMITS
SIMF
Planar Laser Illumination Beam
undergoes micro-oscillation at
about 30 KHZ
(f_{OSC} = 30KHZ)
$f_{osc} \geq 1/\Delta T_{ms}$
FOV of a single pixel
which acquires Laser Illumination
for about 50 milliseconds during
each Integration Period of the CCD
Image Detector (ΔT_{ms})
Prior to object illumination

FIG. 1I20A

THE FIFTH GENERALIZED SPECKLE-NOISE PATTERN REDUCTION METHOD OF THE PRESENT INVENTION

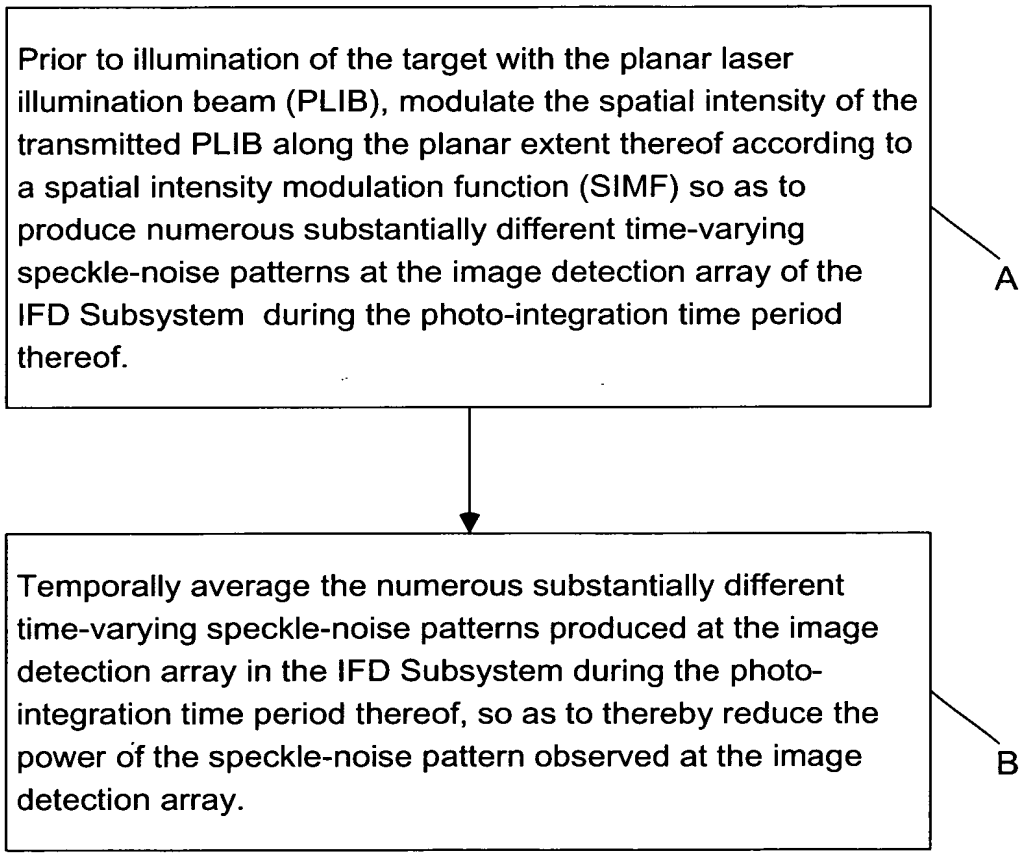

FIG. 1I20B

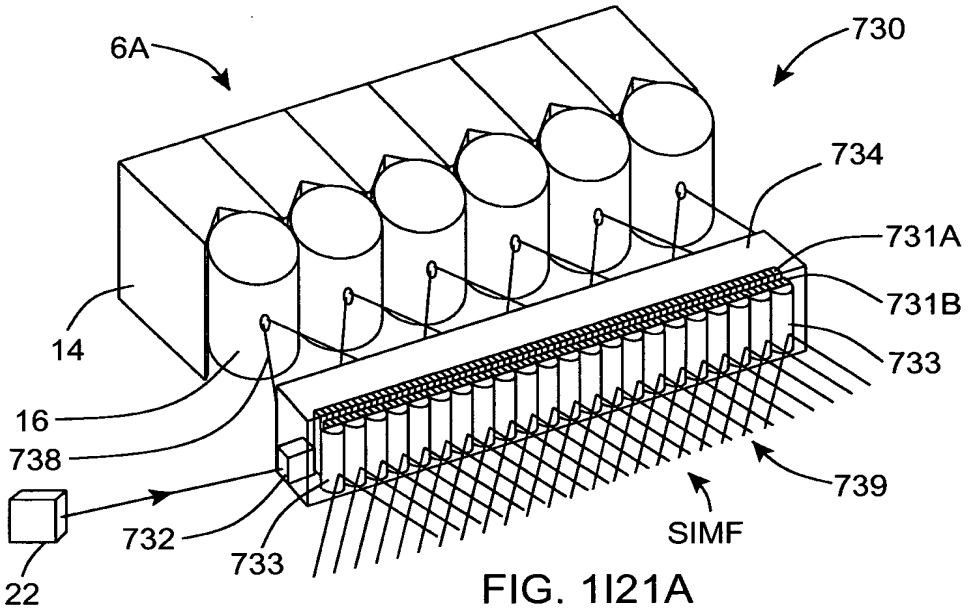

FIG. 1I21A

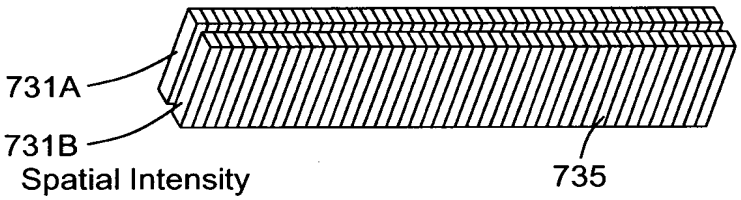

FIG. 1I21B

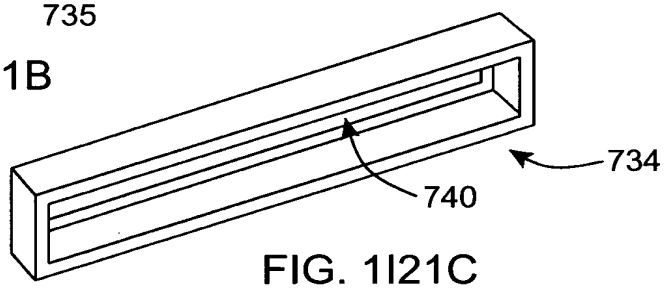

FIG. 1I21C

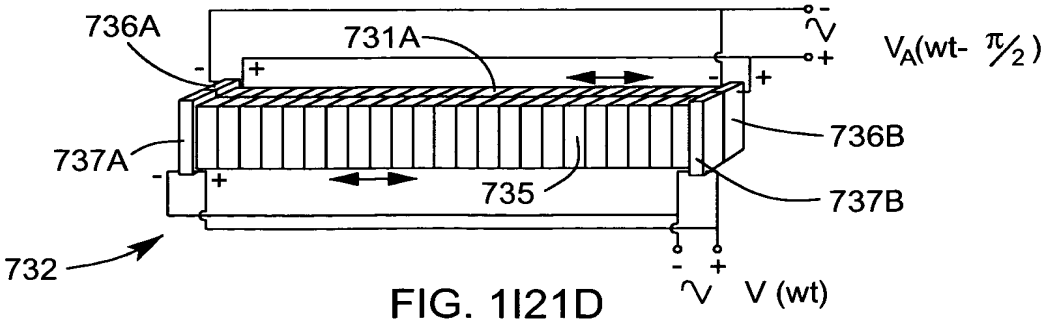

FIG. 1I21D

Sixth Generalized Method Of
Reducing Speckle-Noise Patterns
At Image Detection Array
Of The IFD Subsystem (3)

(SIMF)

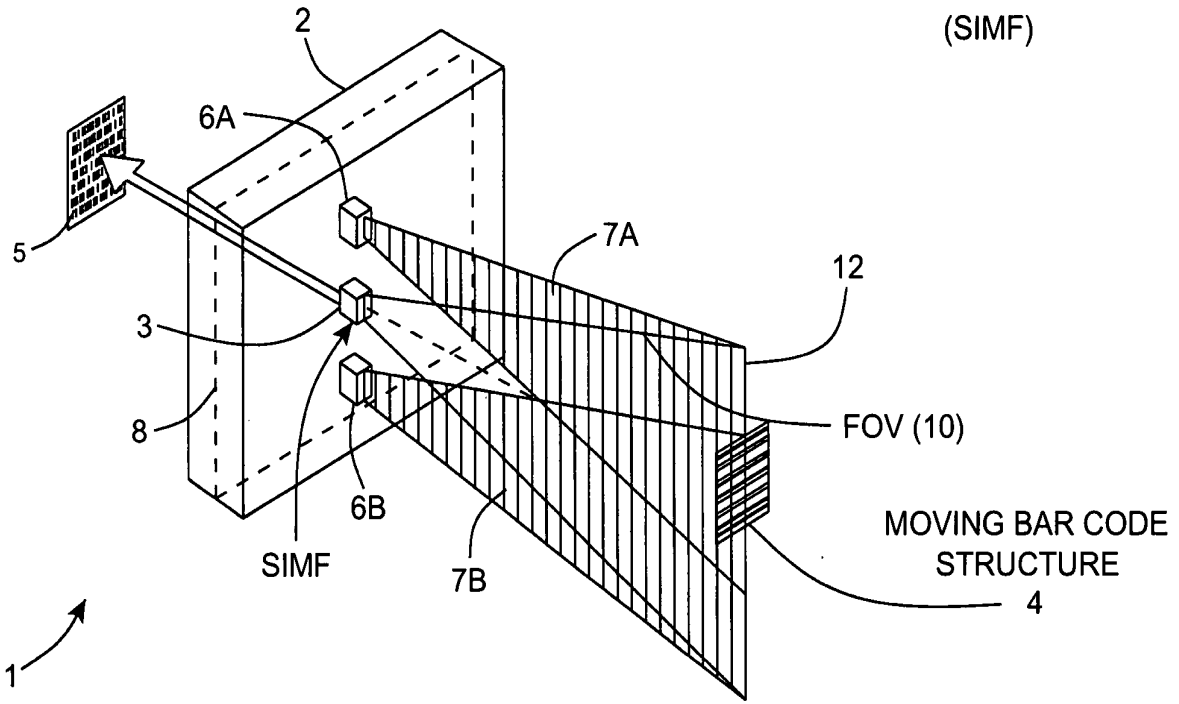

FIG. 1I22

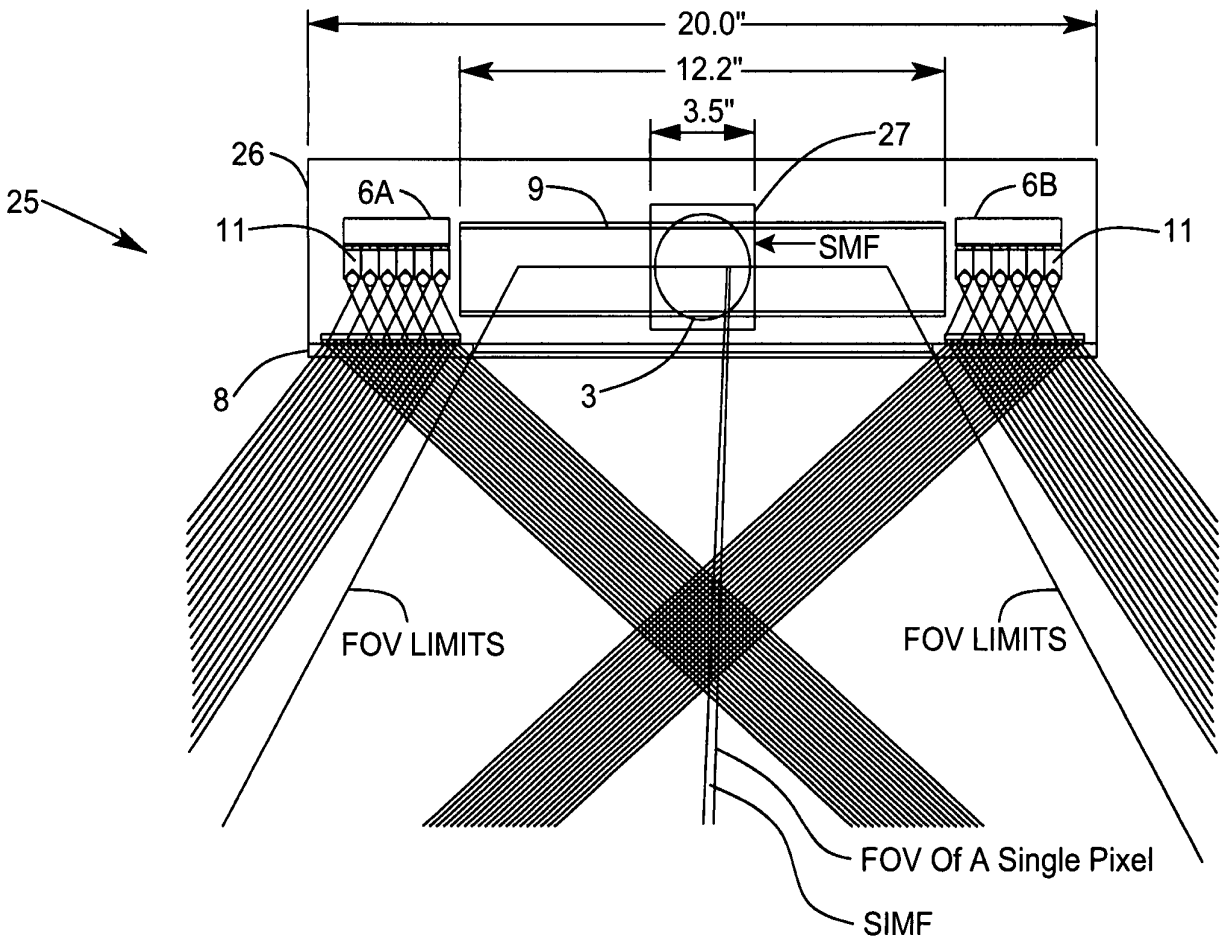
20.0"
12.2"
3.5"
27
26
6A
9
6B
25
11
SMF
11
8
3
FOV LIMITS
FOV LIMITS
FOV Of A Single Pixel
SIMF

FIG. 1I22A

THE SIXTH GENERALIZED SPECKLE-NOISE PATTERN REDUCTION METHOD OF THE PRESENT INVENTION

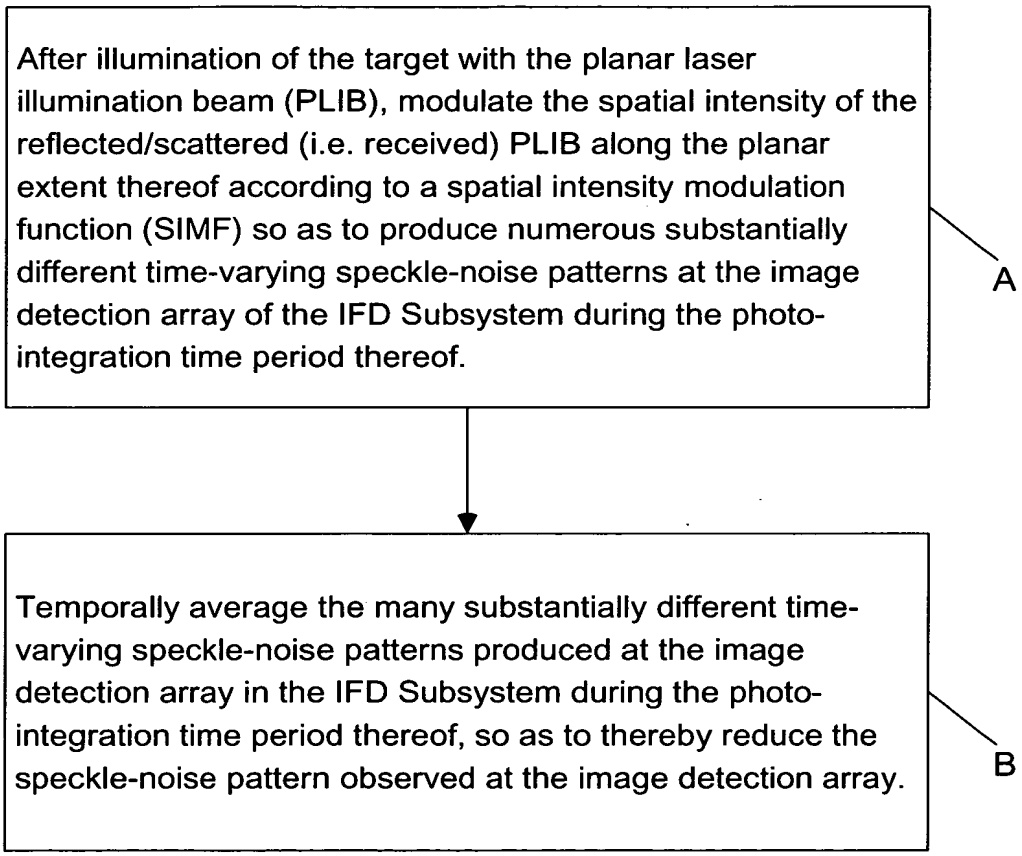

FIG. 1I22B

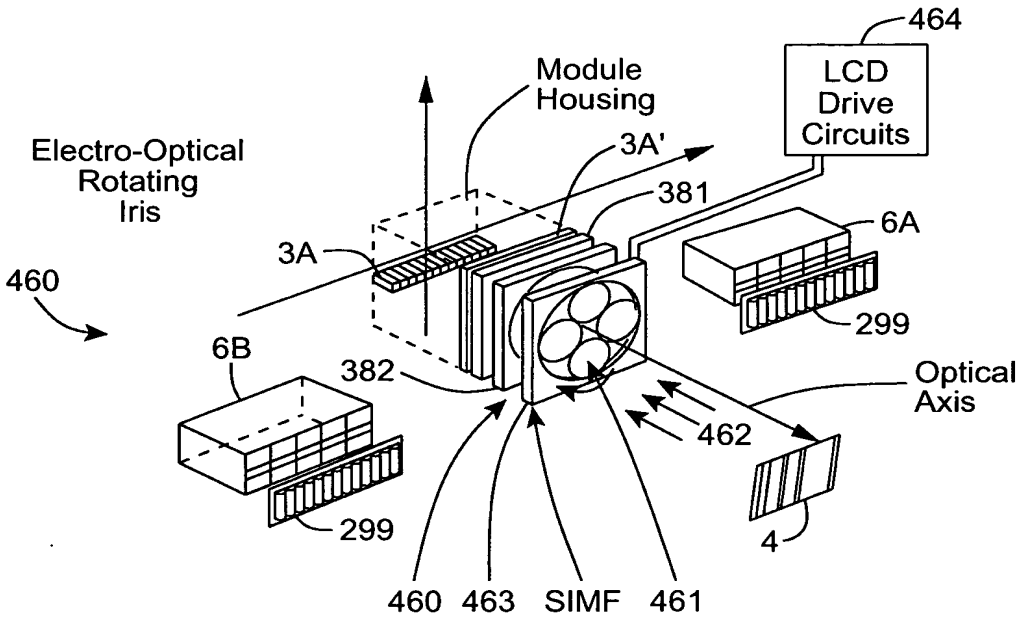

FIG. 1I23A

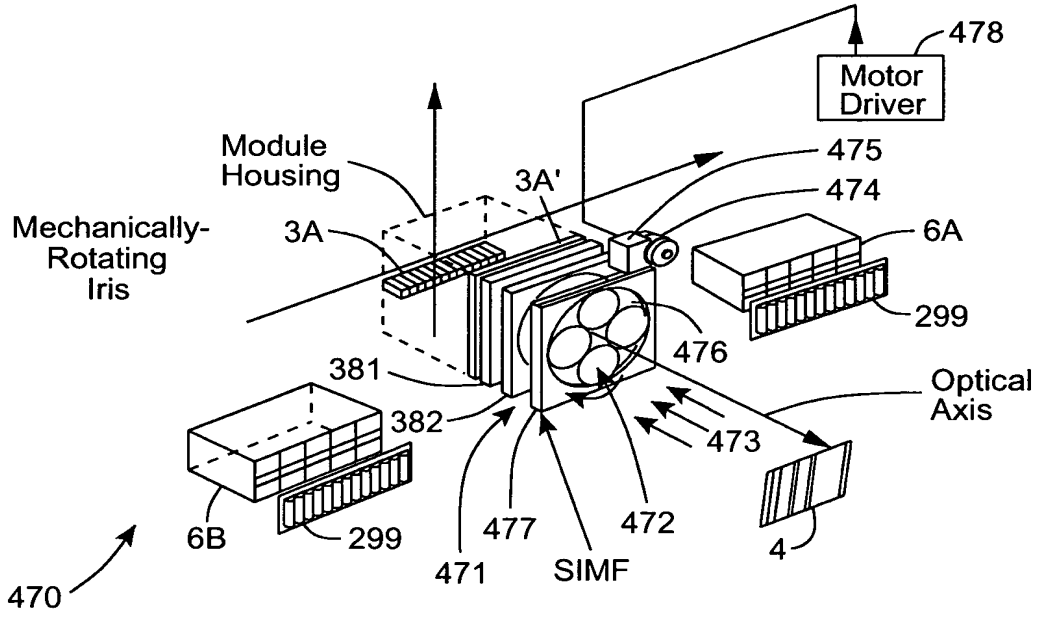

FIG. 1I23B

Seventh Generalized Method Of
Reducing Speckle-Noise Patterns
At Image Detection Array
Of The IFD Subsystem (3)

(TIMF)

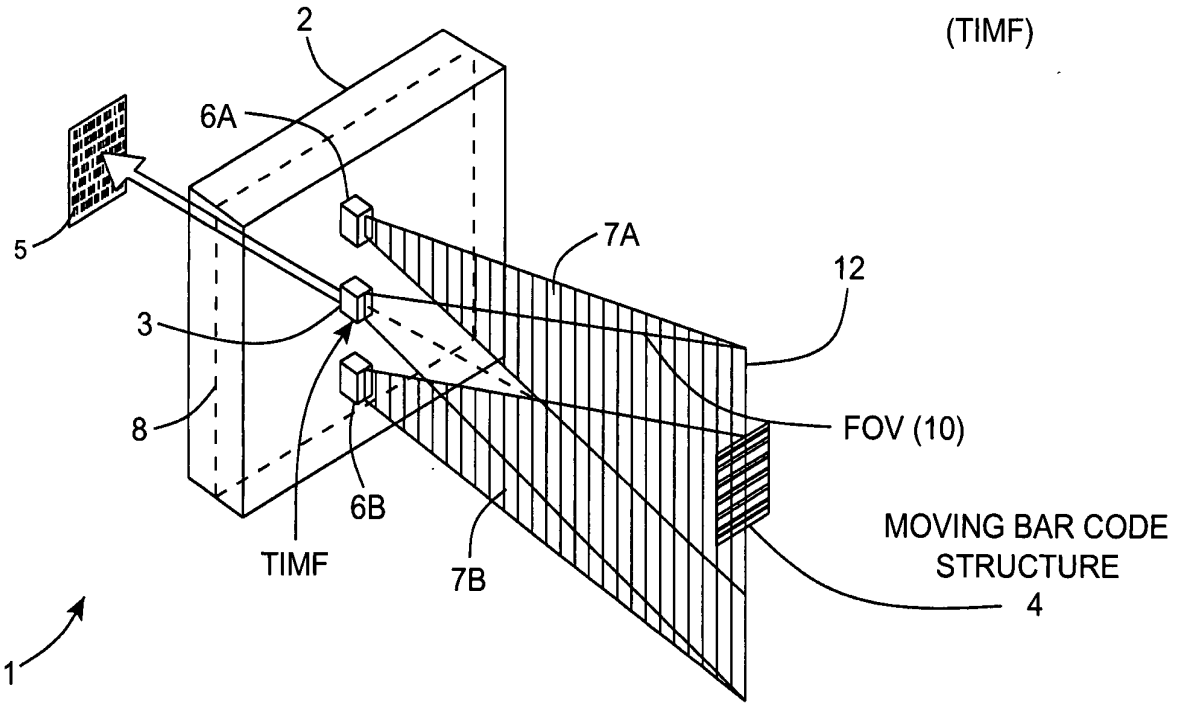

FIG. 1I24

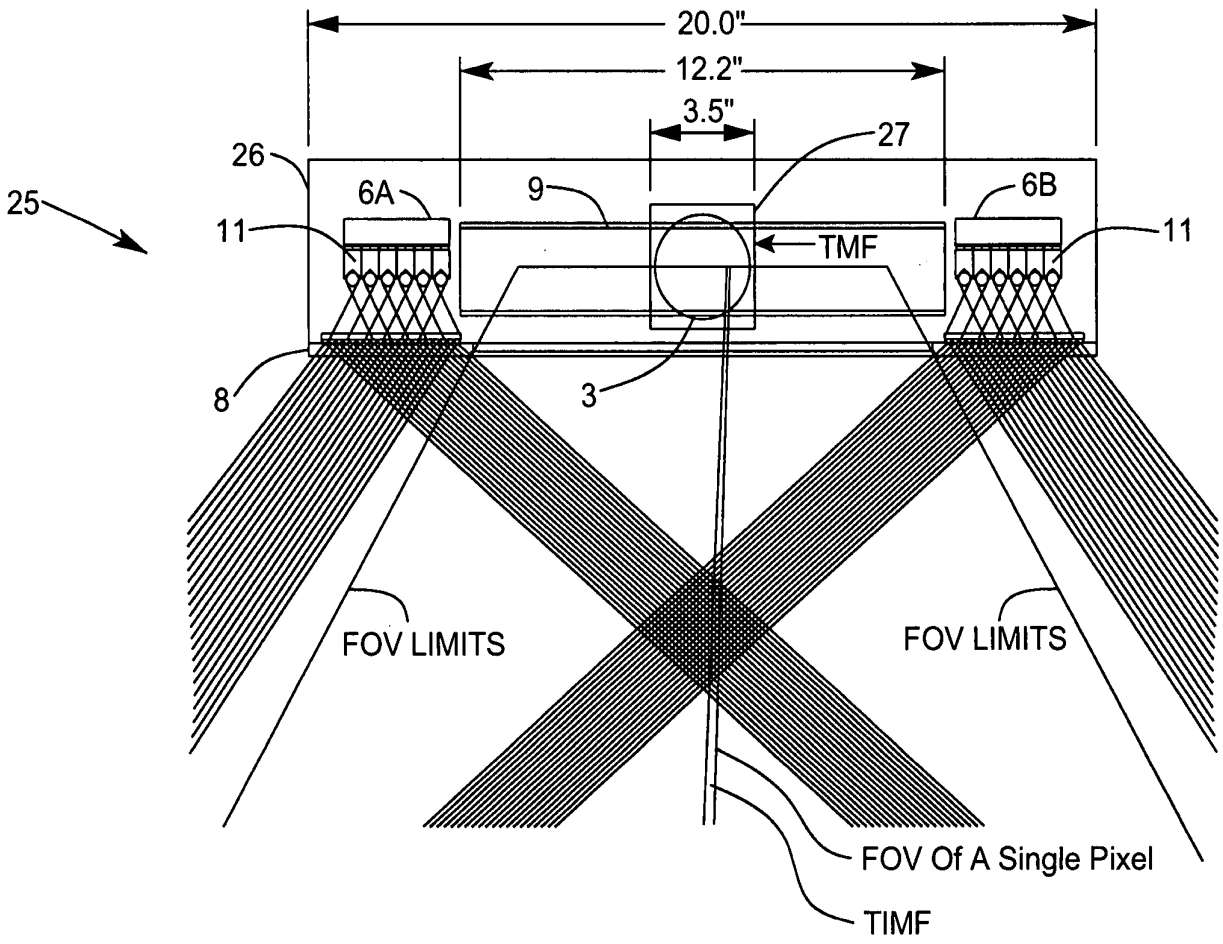
20.0"
12.2"
3.5"
27
26
6A
9
6B
25
11
TMF
11
8
3
FOV LIMITS
FOV LIMITS
FOV Of A Single Pixel
TIMF

FIG. 1I24A

THE SEVENTH GENERALIZED SPECKLE-NOISE PATTERN REDUCTION METHOD OF THE PRESENT INVENTION

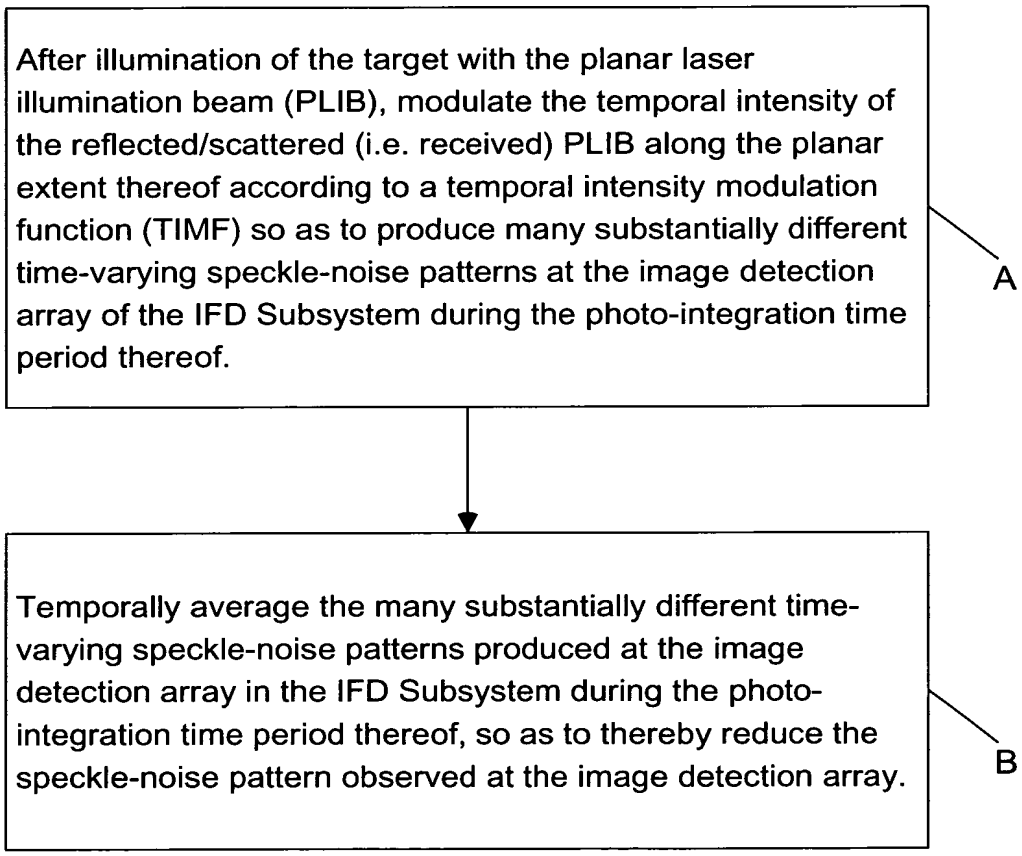

FIG. 1I24B

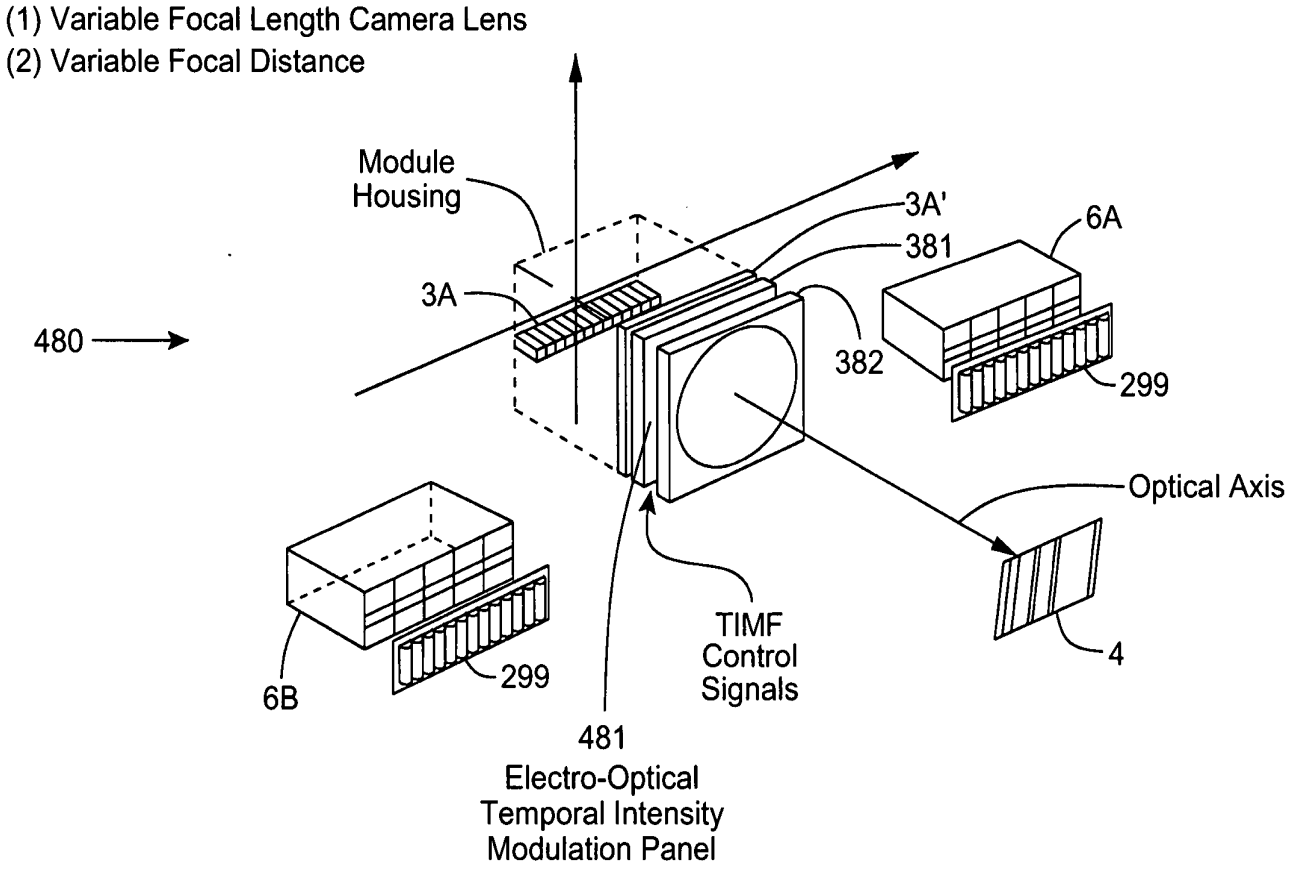
(1) Variable Focal Length Camera Lens
(2) Variable Focal Distance
Module Housing
3A'
381
6A
3A
480
382
299
Optical Axis
6B
299
TIMF Control Signals
4
481
Electro-Optical Temporal Intensity Modulation Panel

FIG. 1I24C

THE EIGHT GENERALIZED SPECKLE-NOISE PATTERN REDUCTION METHOD OF THE PRESENT INVENTION

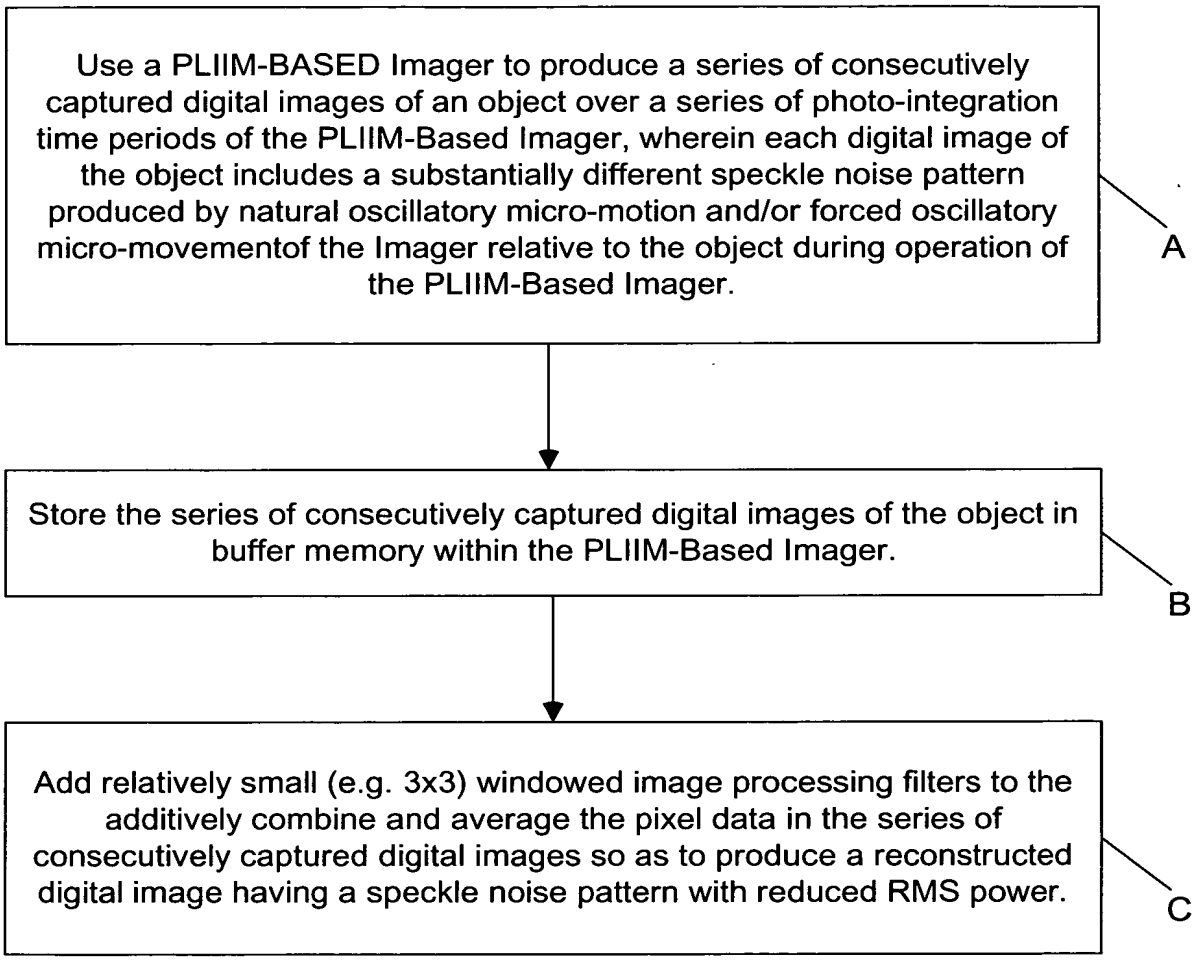

FIG. 1I24D

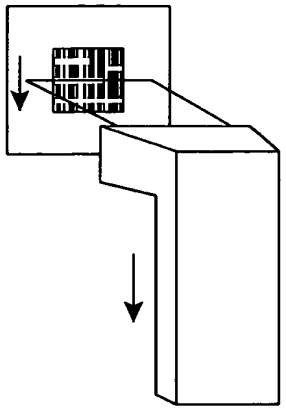

Manual Sweeping Action Across Code Symbol Or Graphical Indicia

FIG. 1I24E

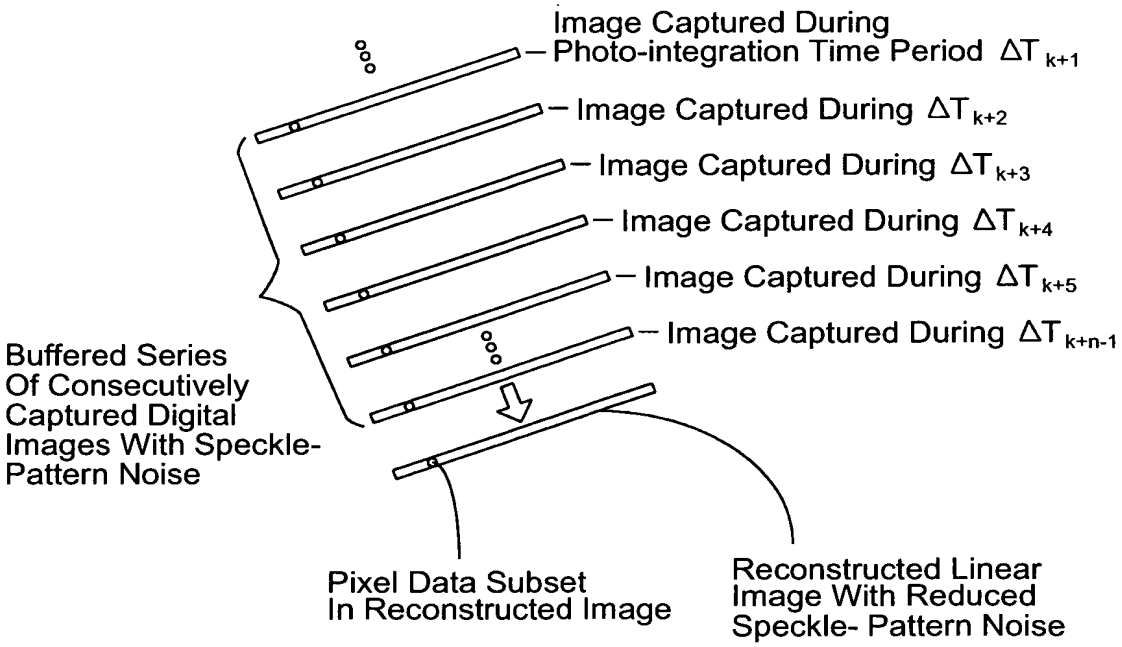

Case: Linear Imager

FIG. 1I24F

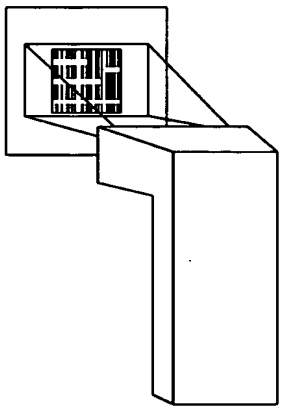

FIG. 1I24G

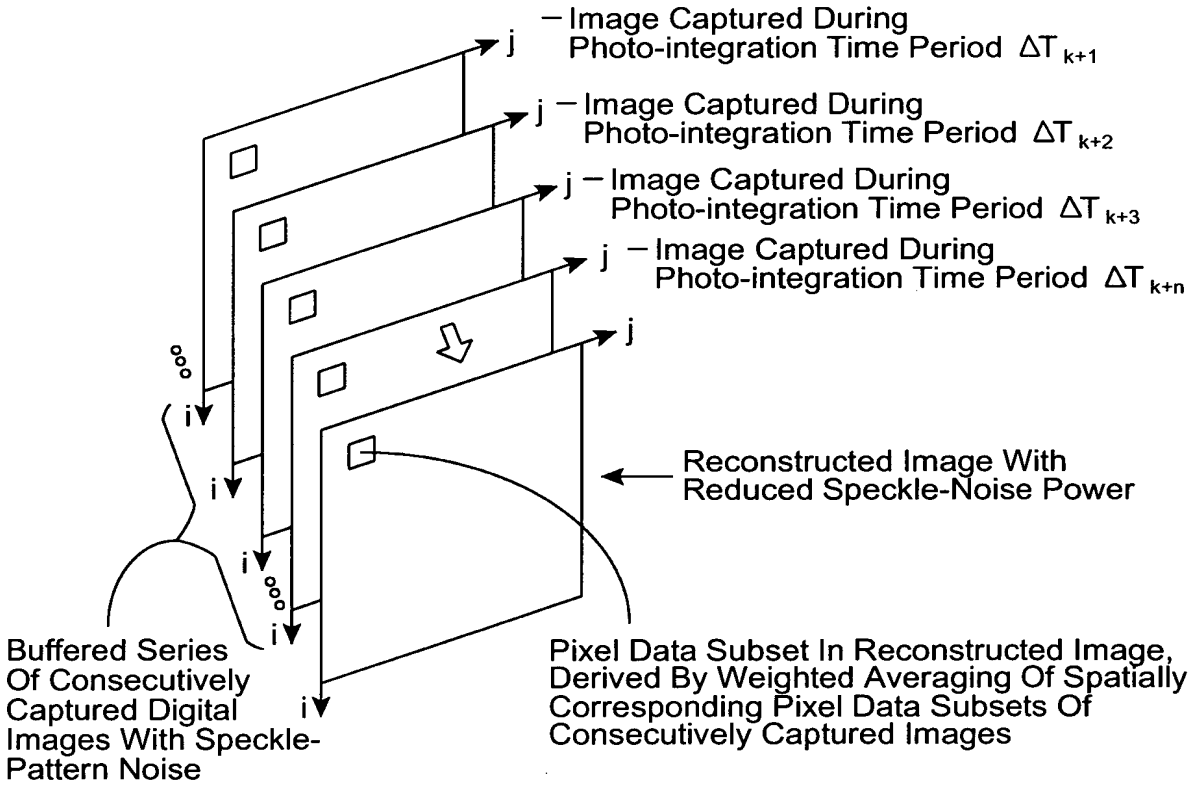

Case: 2D Area Imager

FIG. 1I24H

THE NINTH GENERALIZED METHOD OF REDUCING SPECKLE PATTERN NOISE IN PLIIM-BASED IMAGING SYSTEMS

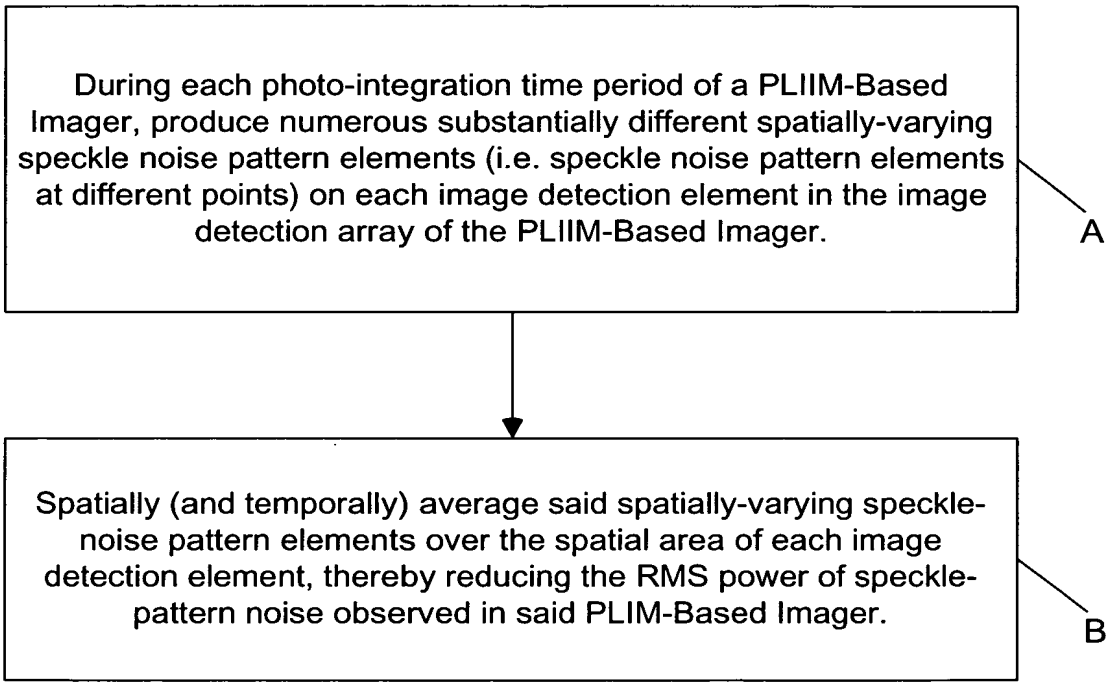

FIG. 1I24I

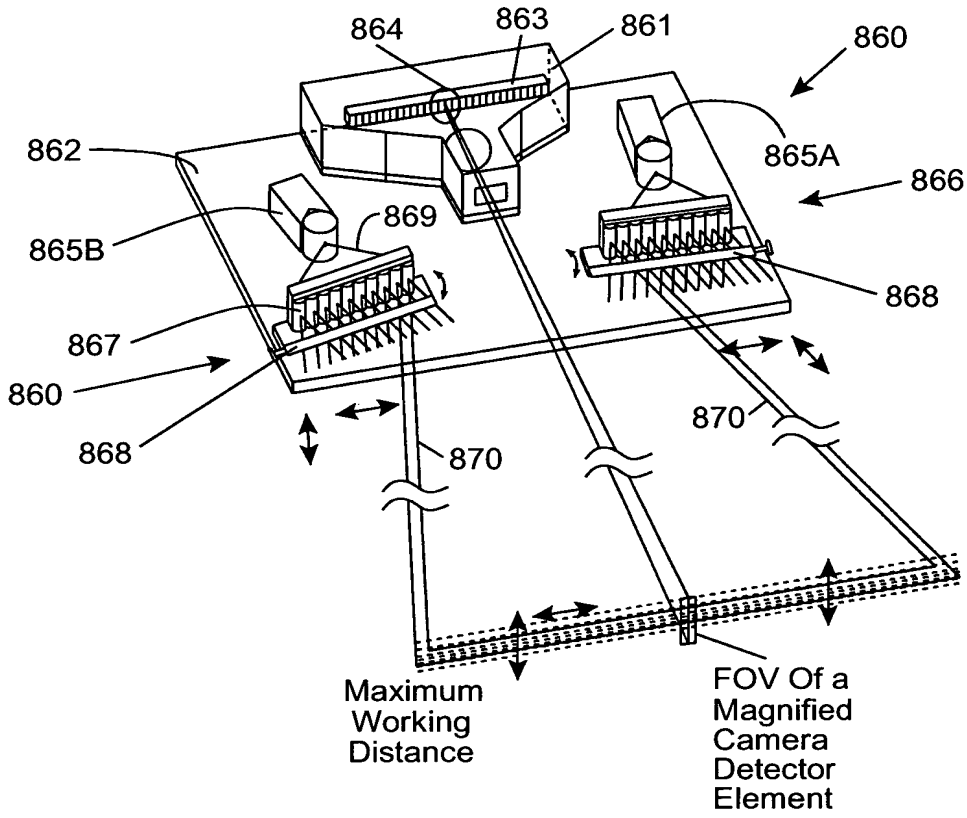

* Lateral And Transverse Micro-oscillation Of PLIB

FIG. 1I25A1

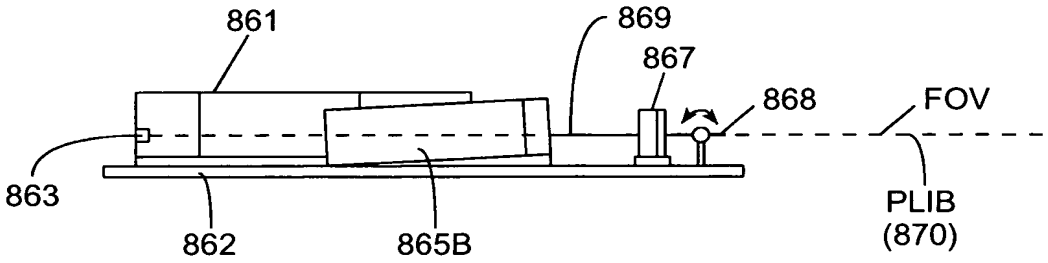

FIG. 1I25A2

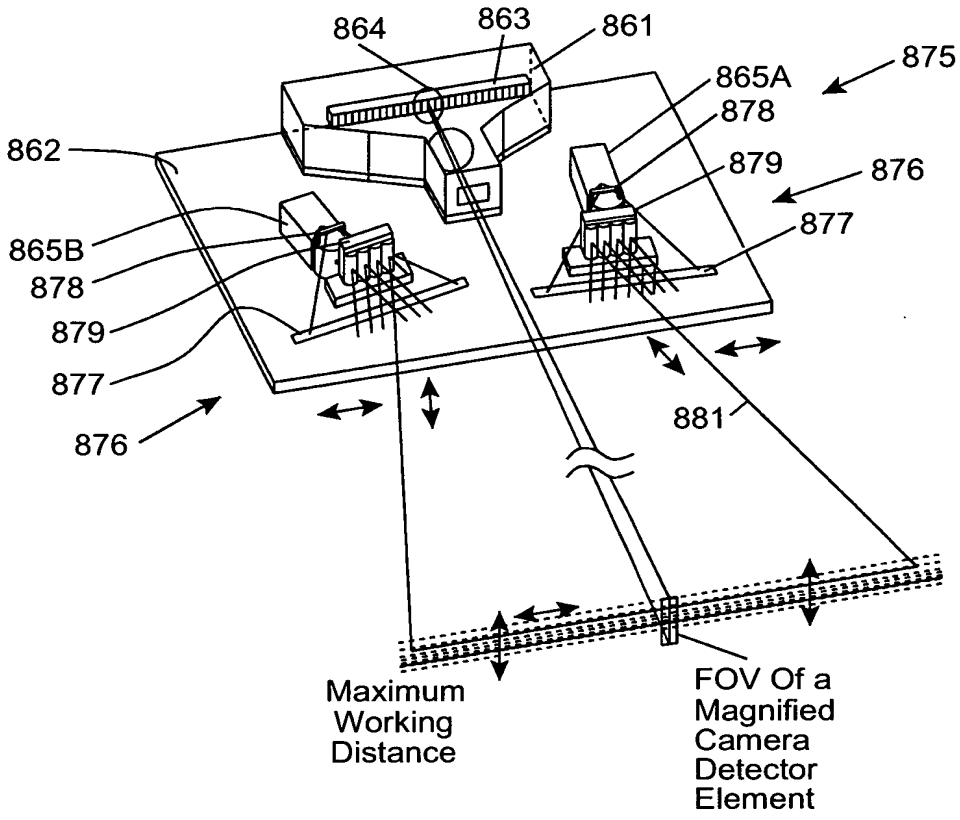

FIG. 1I25B1

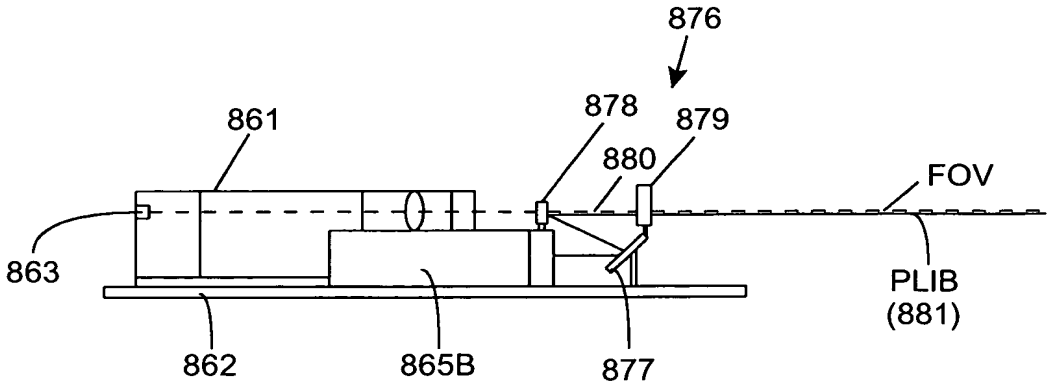

FIG. 1I25B2

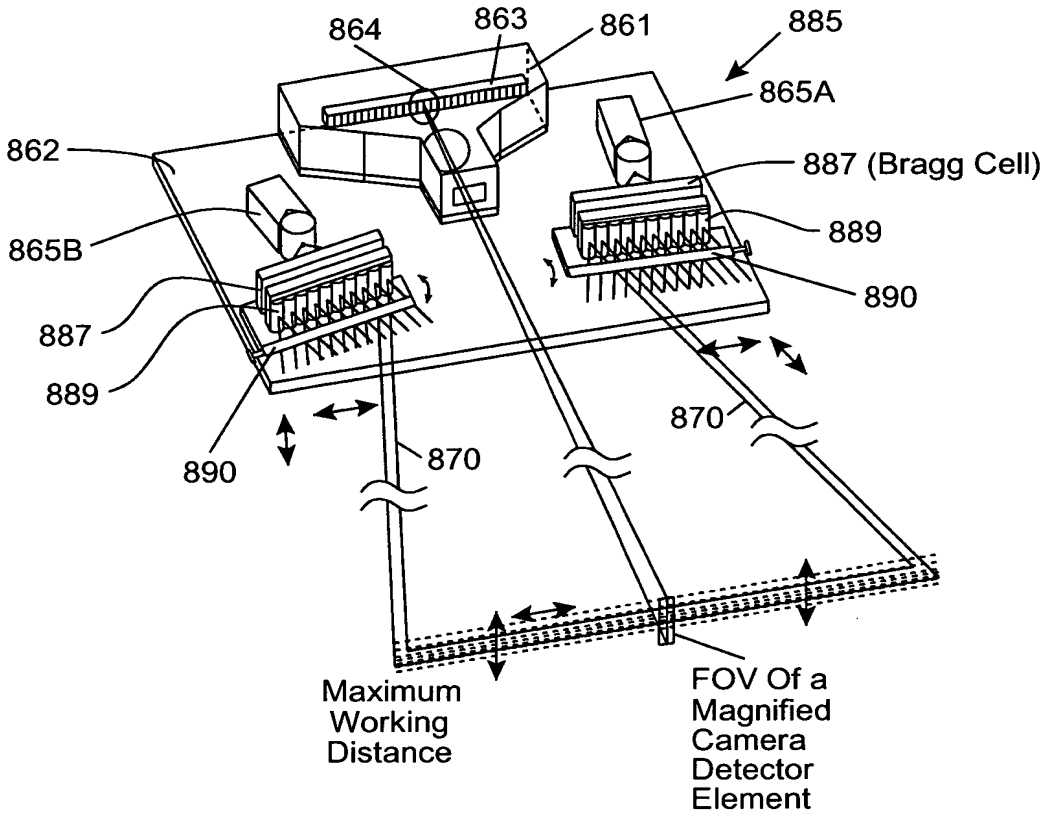

FIG. 1I25C1

* Lateral And Transverse Micro-oscillation Of PLIB

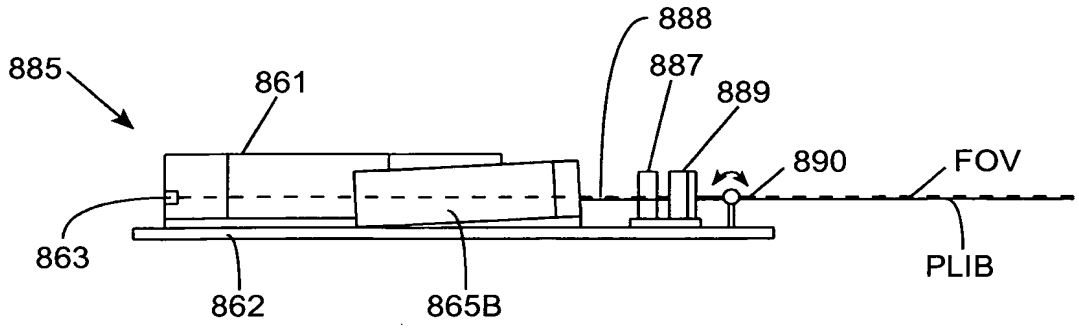

FIG. 1I25C2

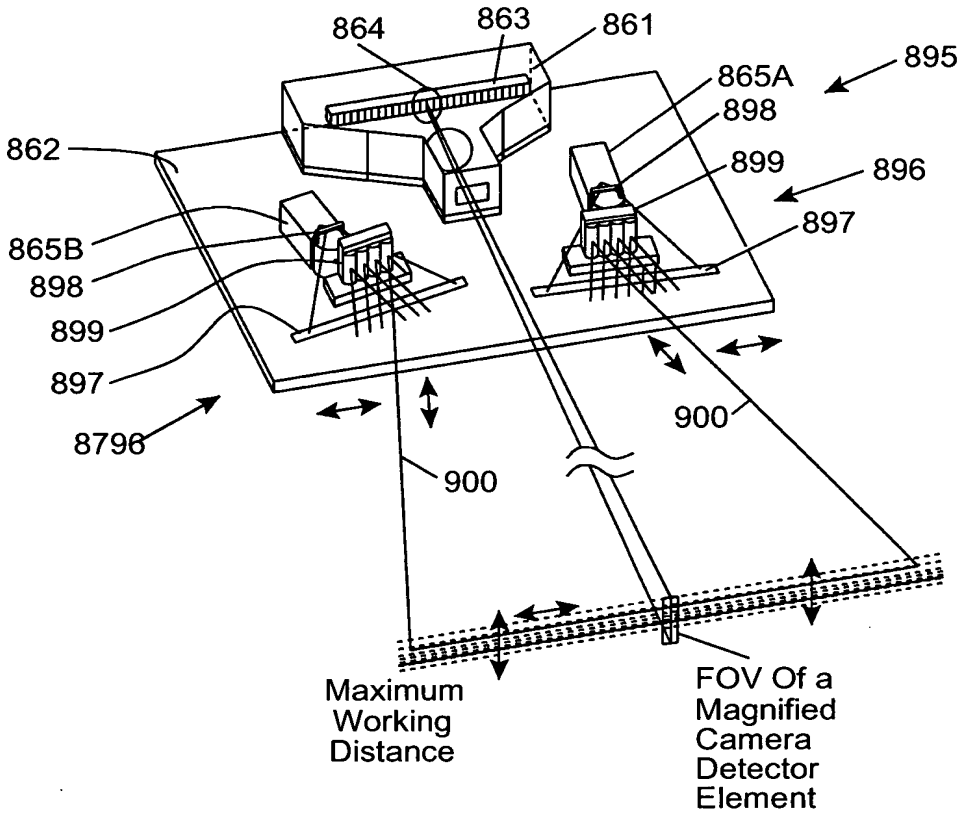

FIG. 1I25D1

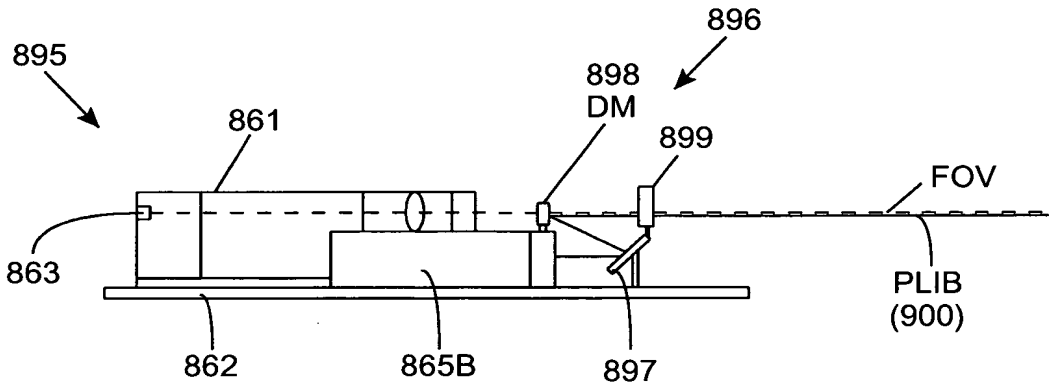

FIG. 1I25D2

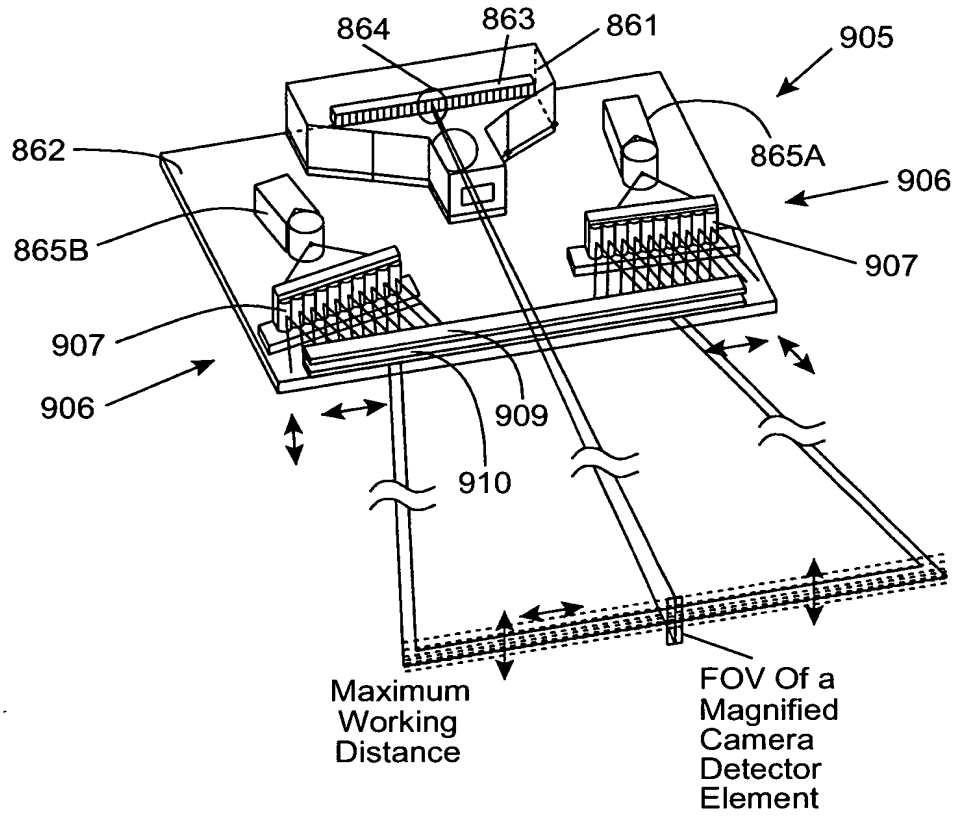

FIG. 1I25E1

* Lateral And Transverse Micro-oscillation Of PLIB

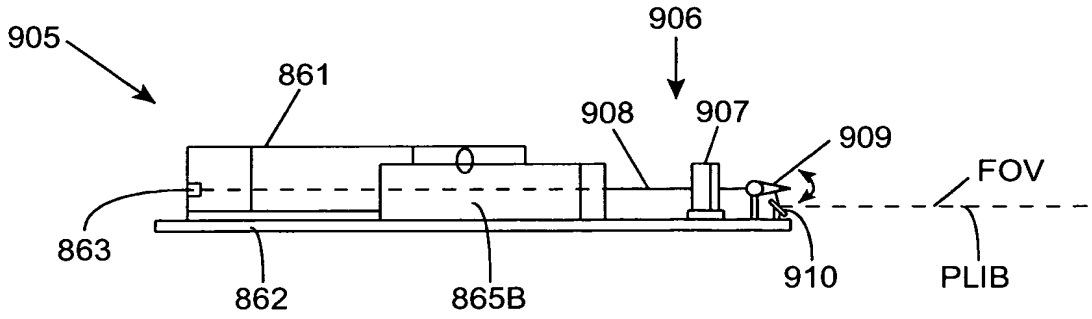

FIG. 1I25E2

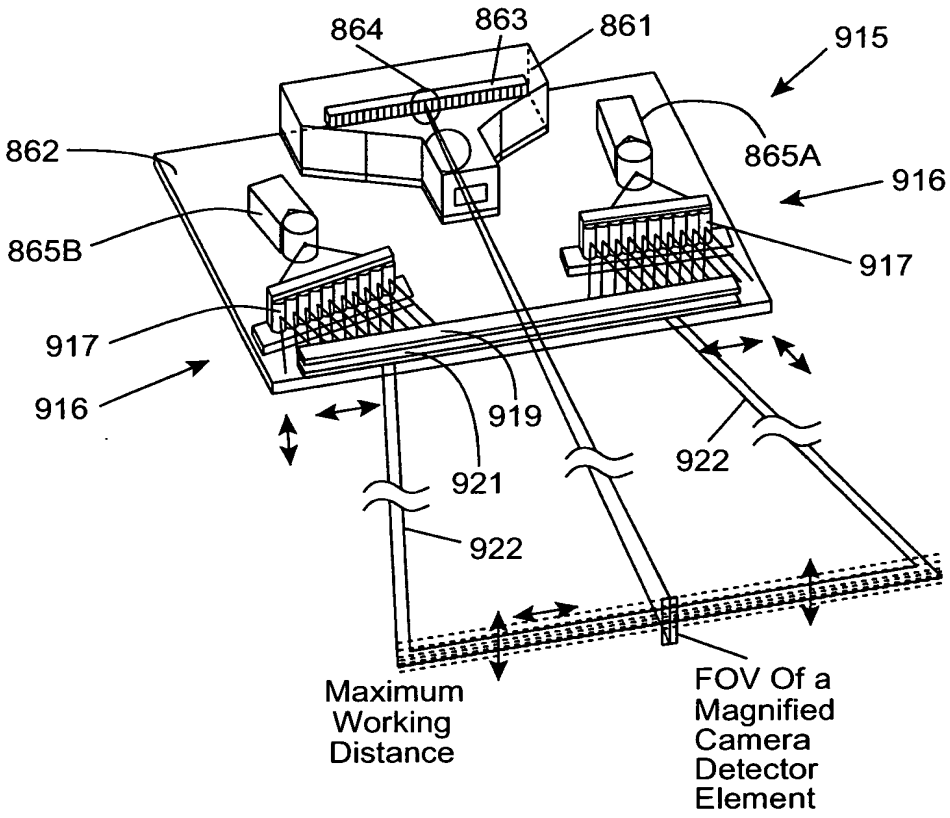

FIG. 1I25F1

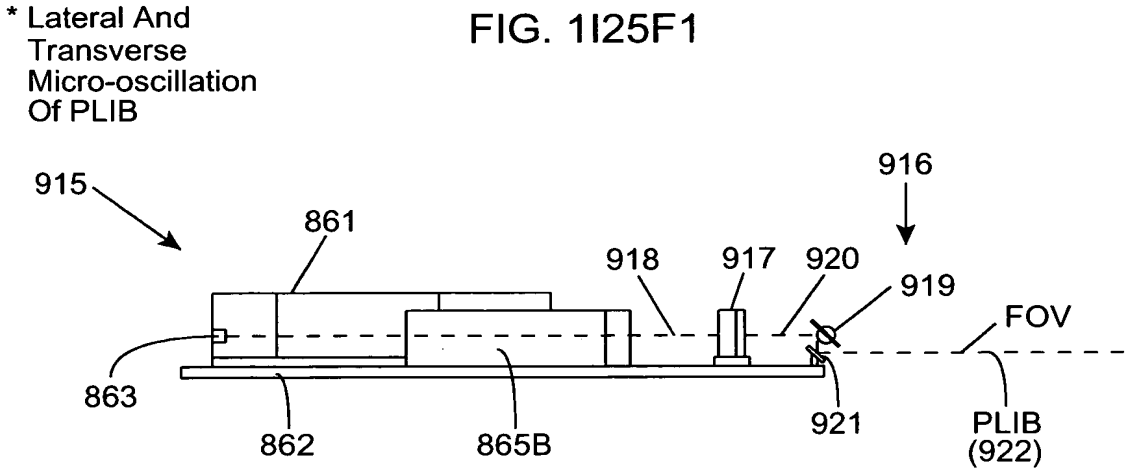

FIG. 1I25F2

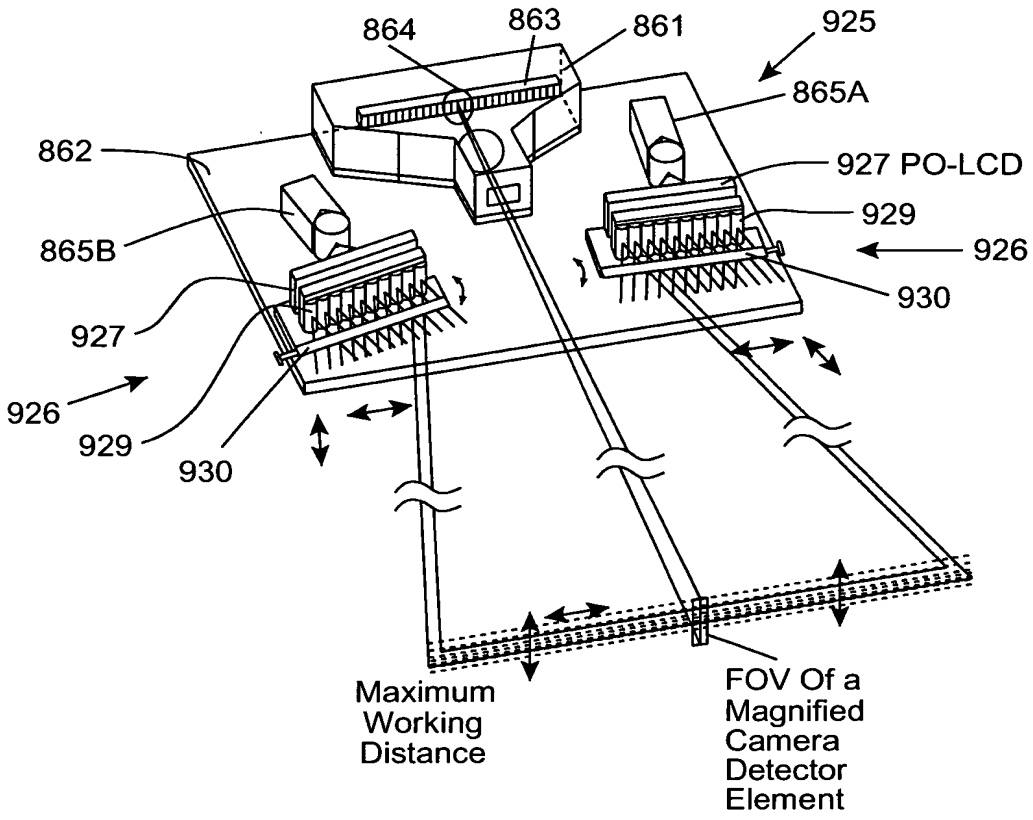

FIG. 1I25G1

* Lateral And Transverse Micro-oscillation Of PLIB

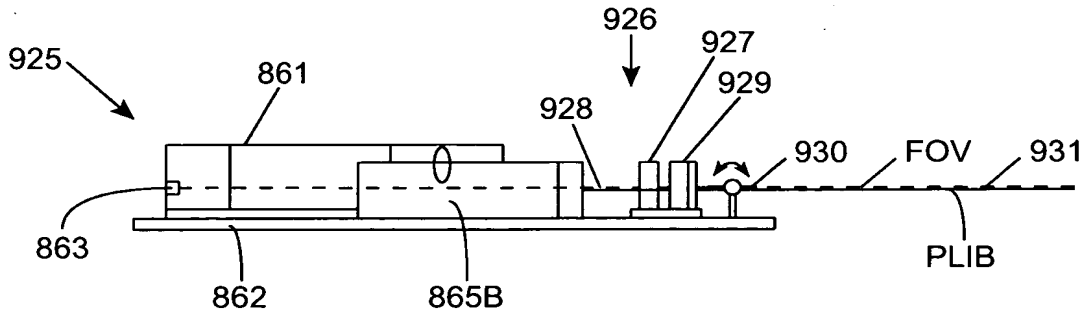

FIG. 1I25G2

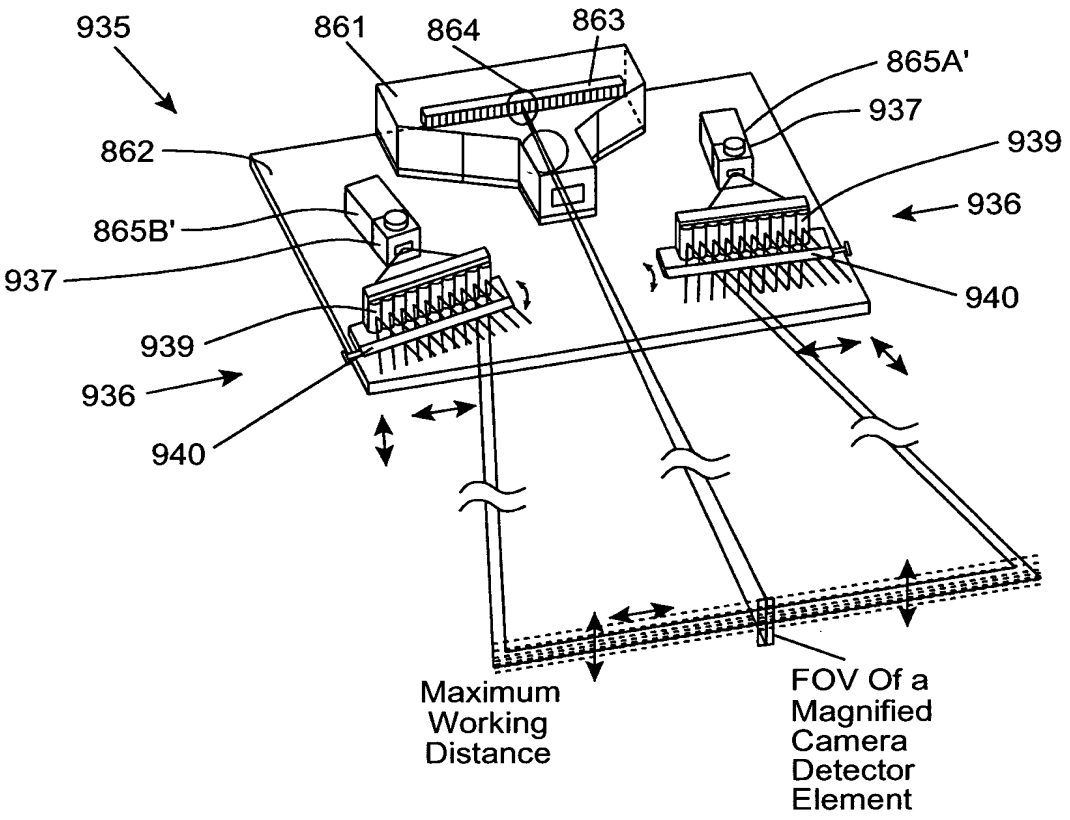

FIG. 1I25H1

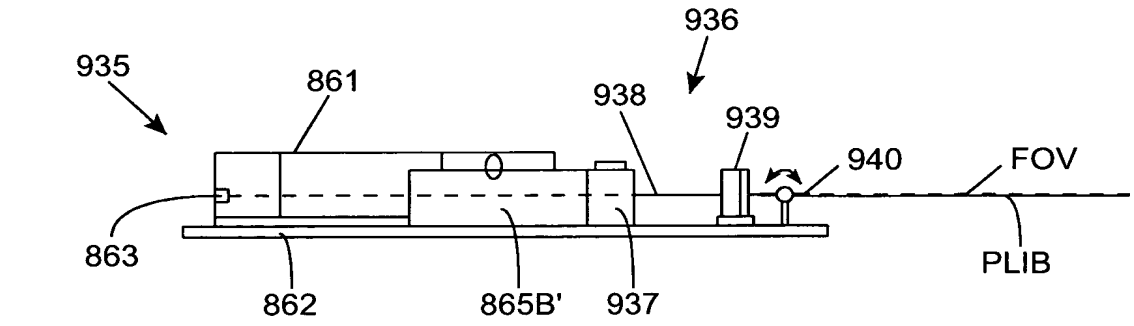

FIG. 1I25H2

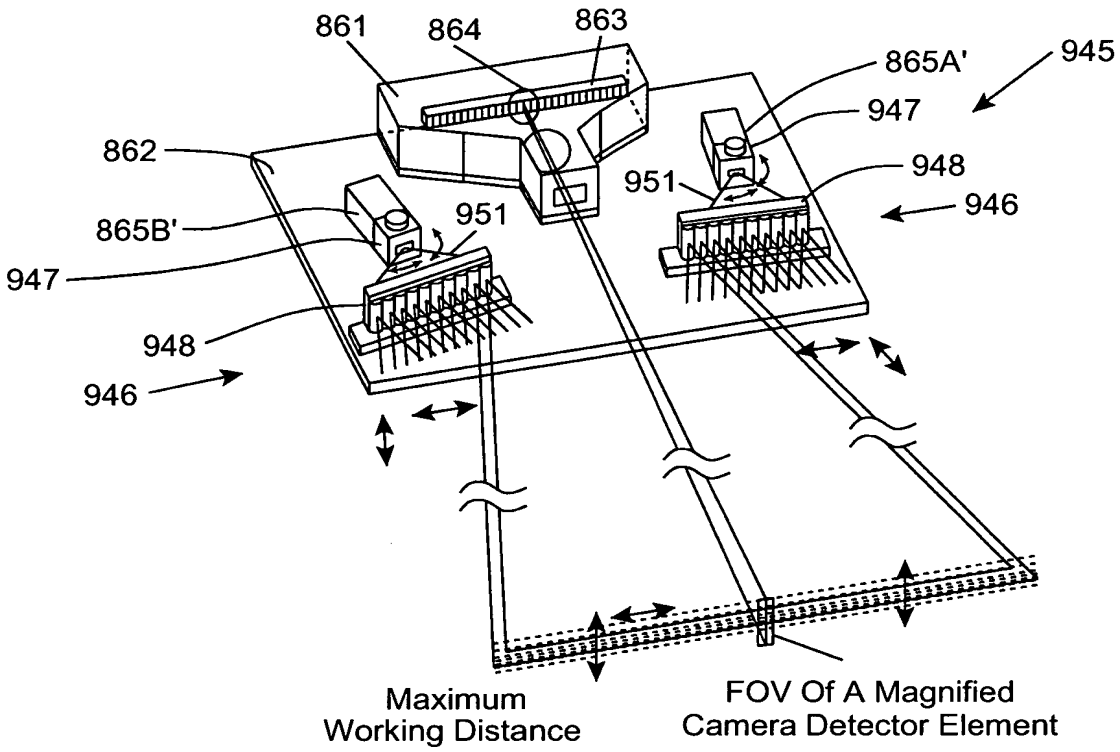

FIG. 1I25I1

* Lateral And
Transverse
Micro-oscillation
Of PLIB

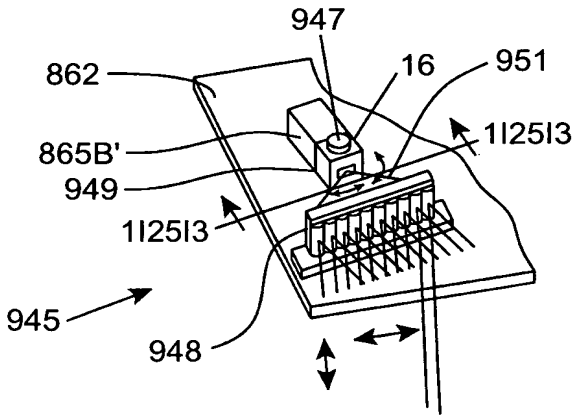

FIG. 1I25I2

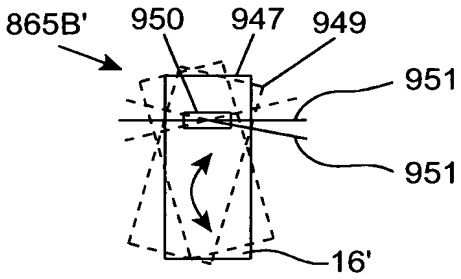

FIG. 1I25I3

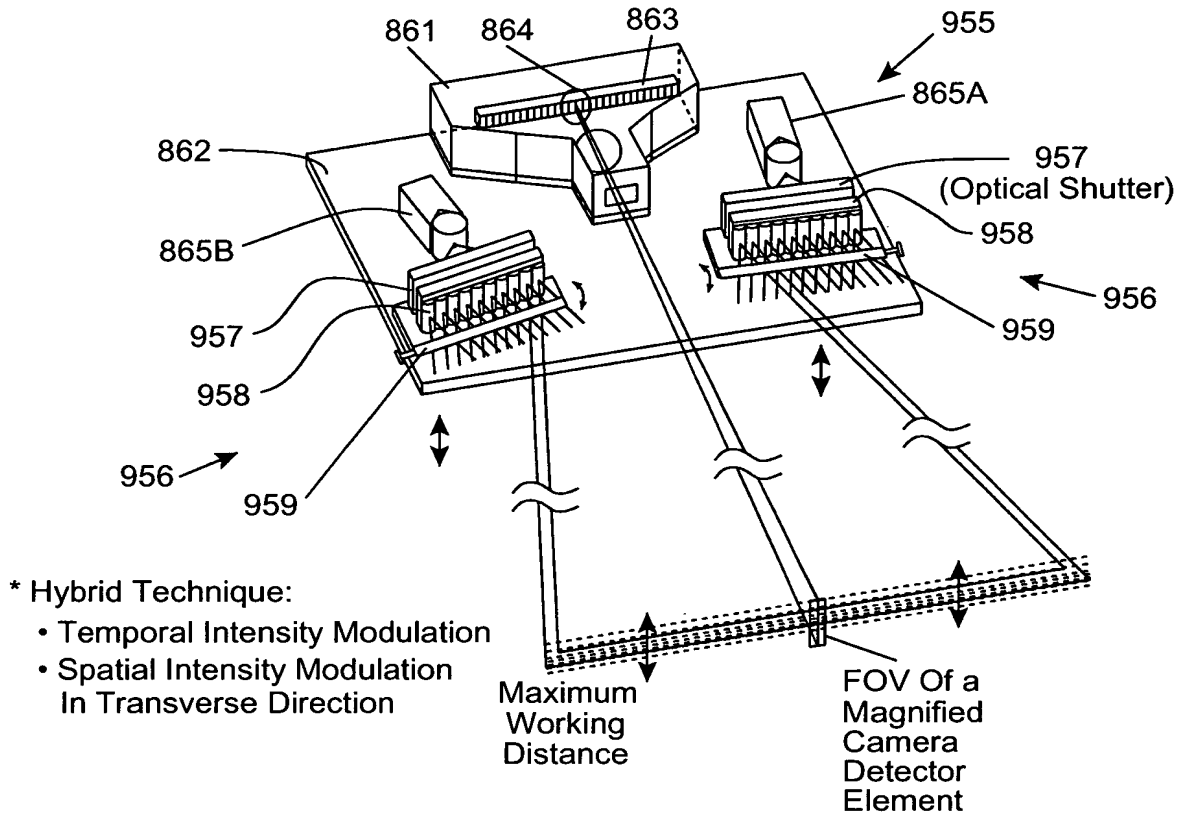

FIG. 1I25J1

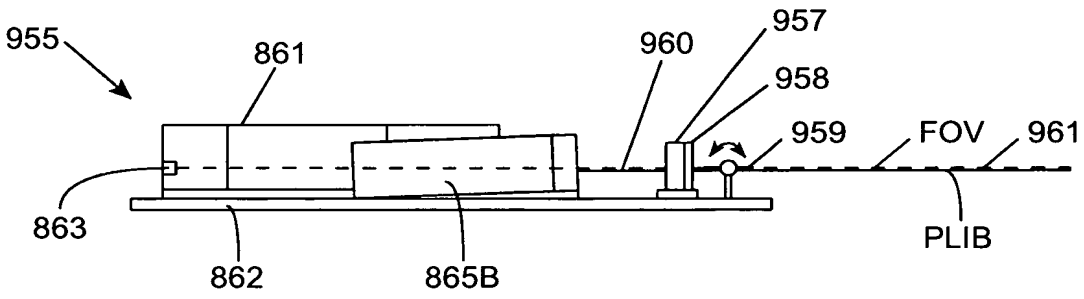

FIG. 1I25J2

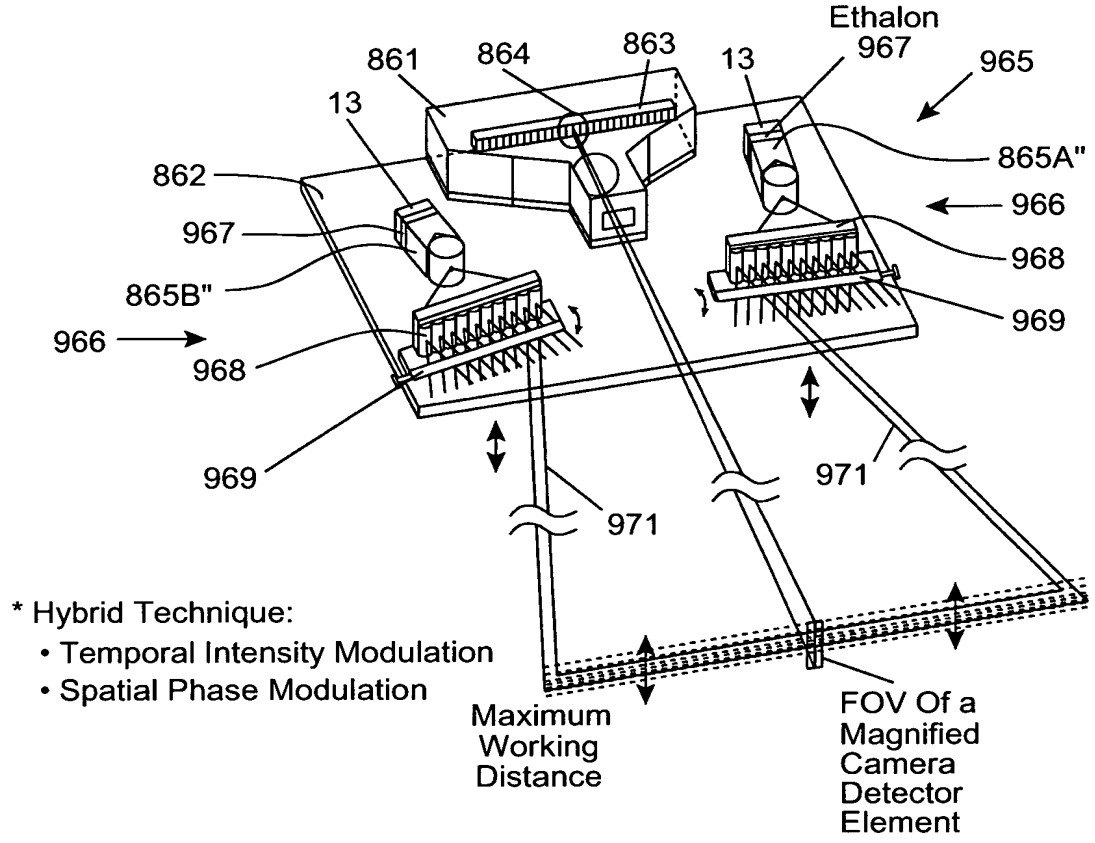

FIG. 1I25K1

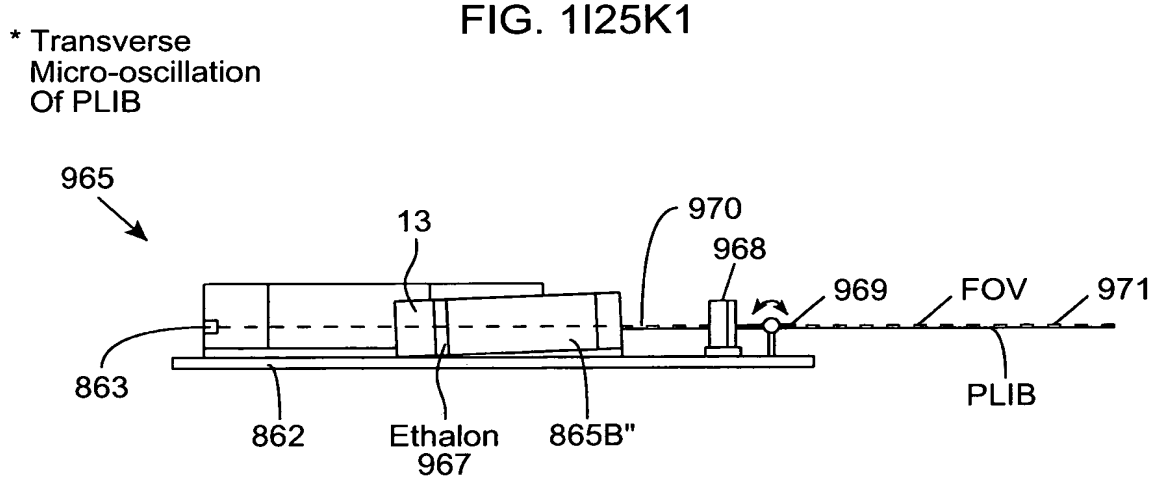

FIG. 1I25K2

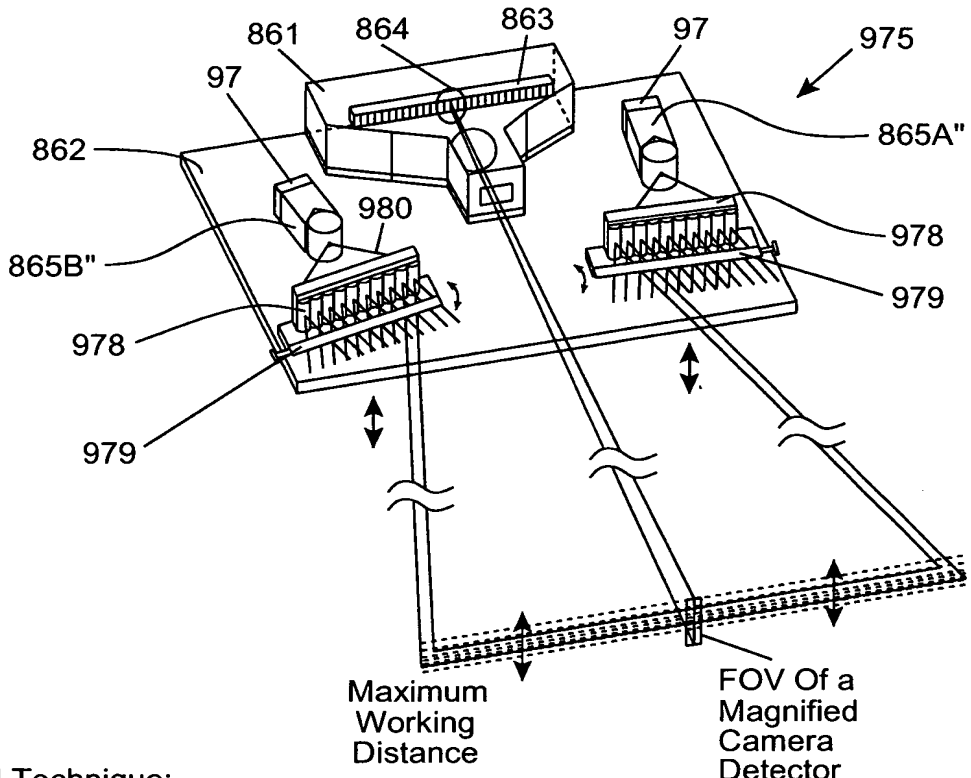

* Hybrid Technique:
  - Temporal Frequency Modulation
  - Spatial Phase Modulation

* Transverse Micro-oscillation Of PLIB

FIG. 1I25L1

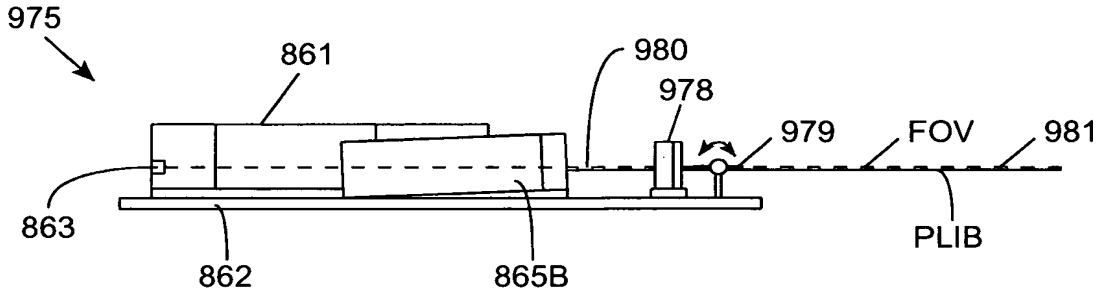

FIG. 1I25L2

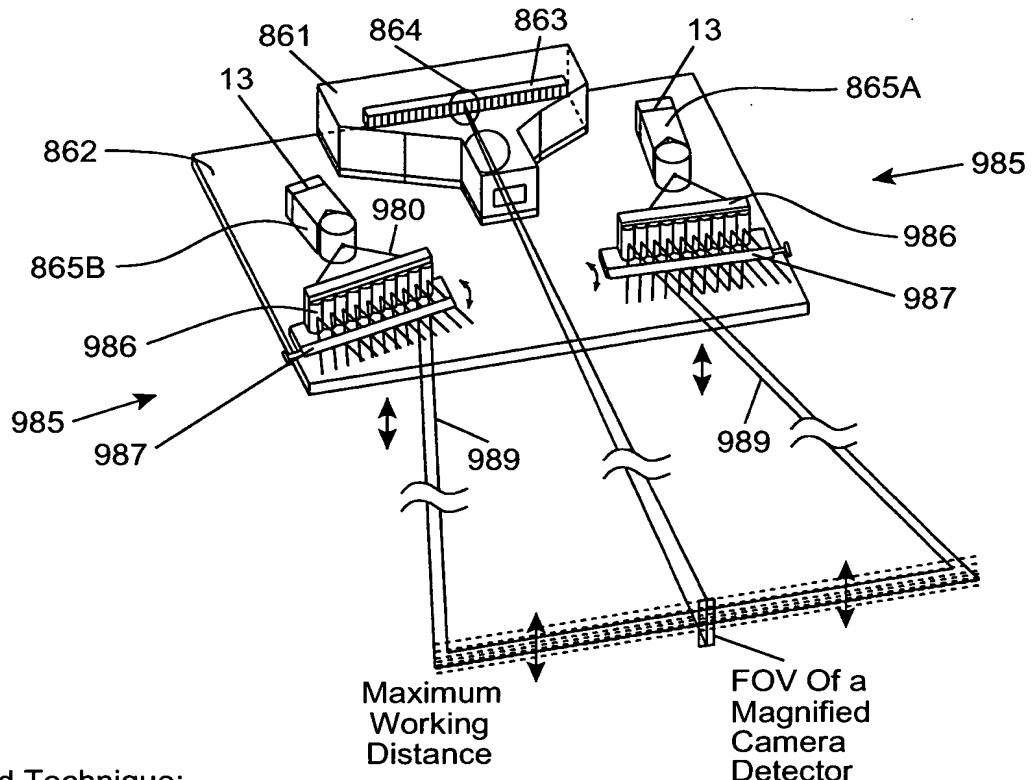

* Hybrid Technique:
  - Temporal Frequency Modulation
  - Spatial Phase Modulation

* Transverse Micro-oscillation Of PLIB

FIG. 1I25M1

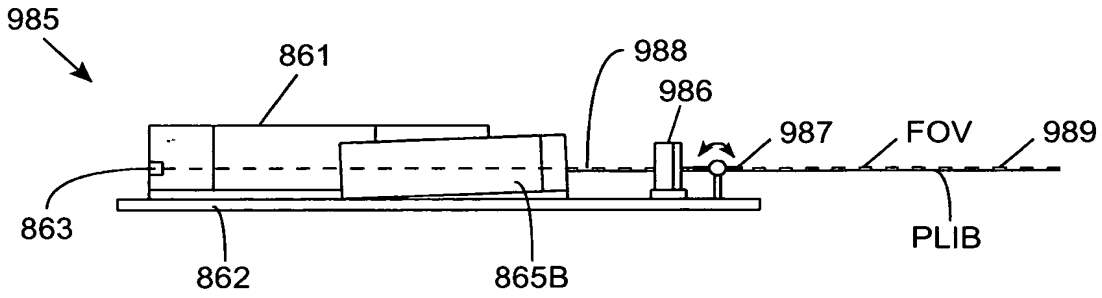

FIG. 1I25M2

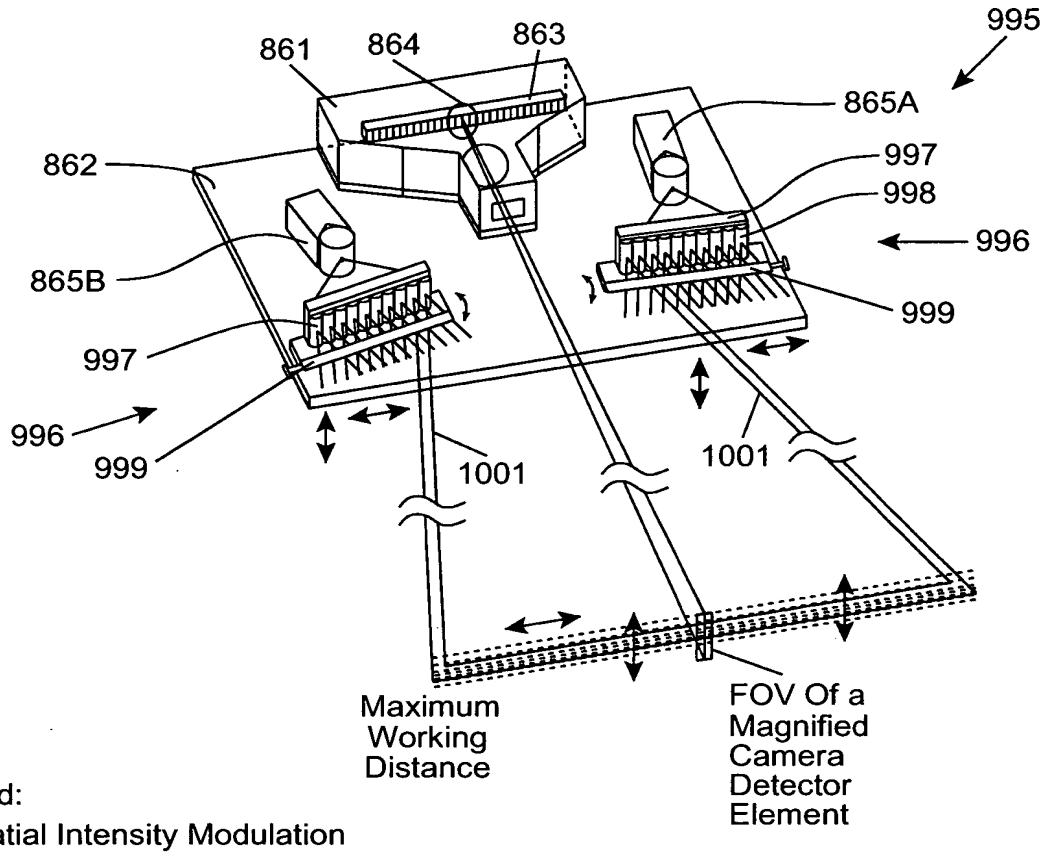

* Hybrid:
  - Spatial Intensity Modulation
  - Spatial Phase Modulation

* Lateral And Transverse Micro-oscillation Of PLIB

FIG. 1I25N1

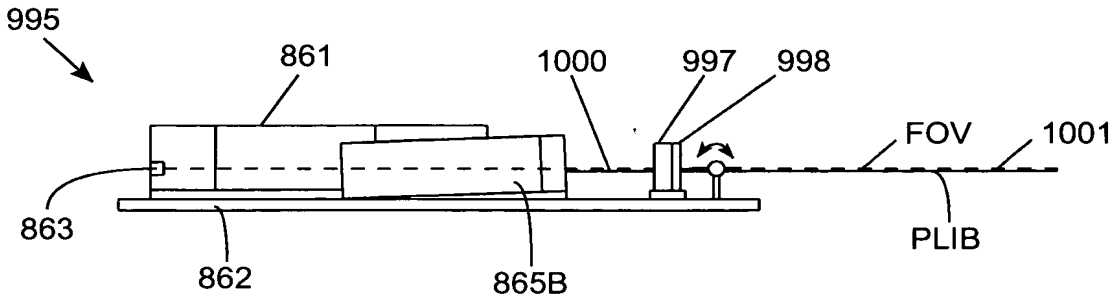

FIG. 1I25N2

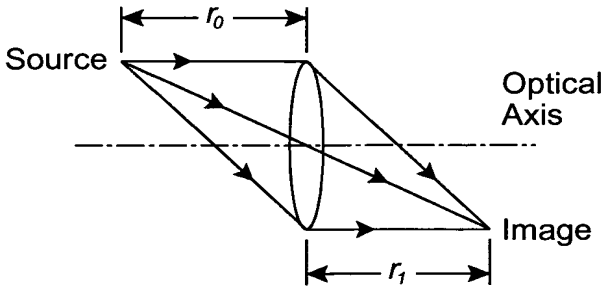

FIG. 1H1

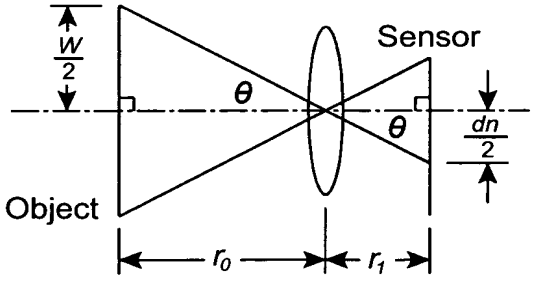

FIG. 1H2

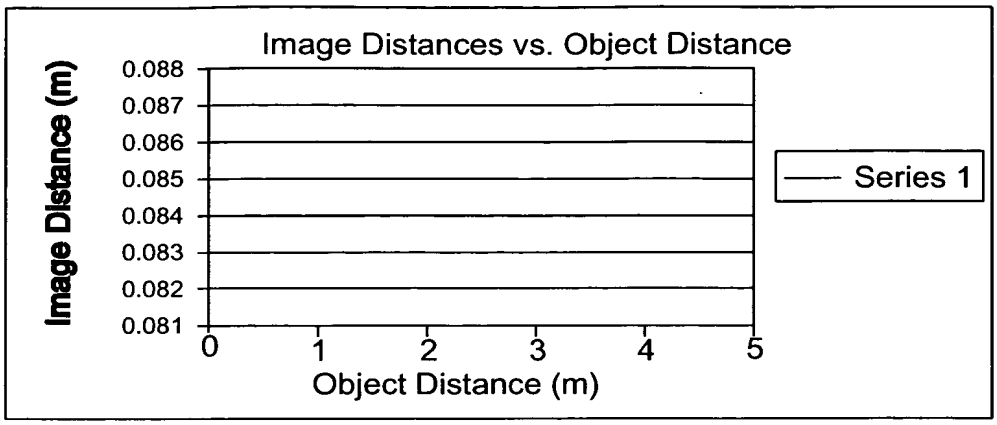

FIG. 1H3

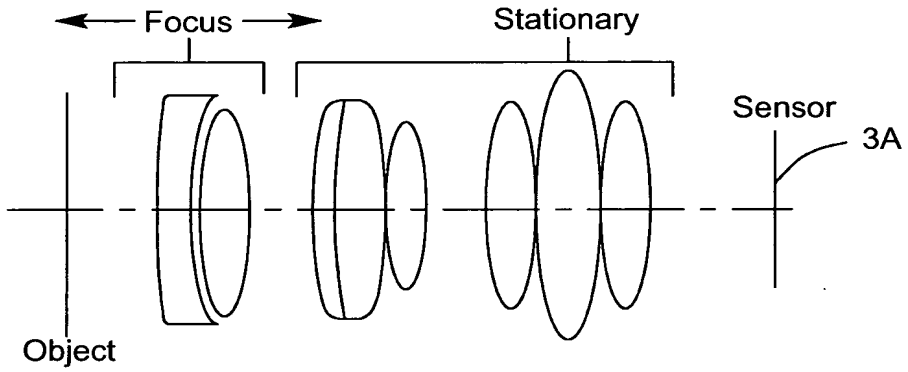

FIG. 1H4

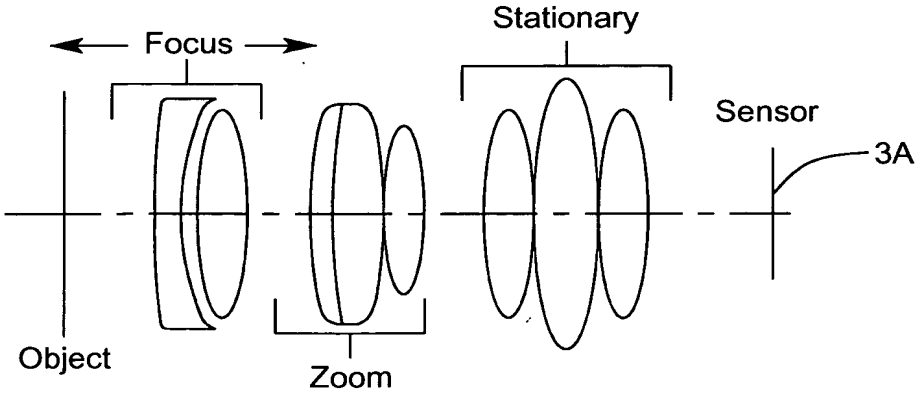

FIG. 1H5

Fixed Focal Length

Lens Cases

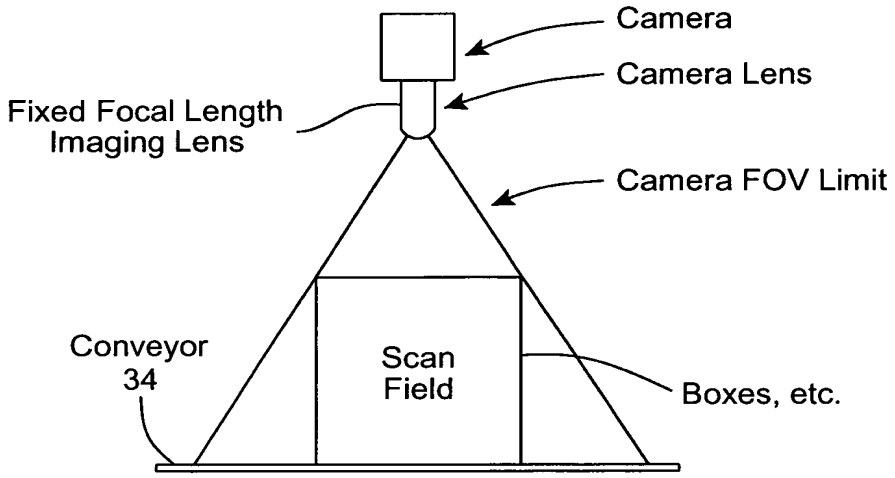

FIG. 1K1

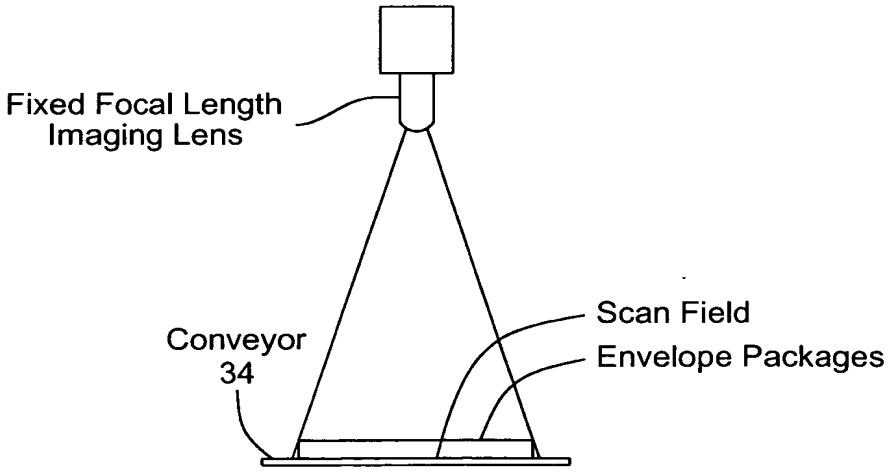

FIG. 1K2

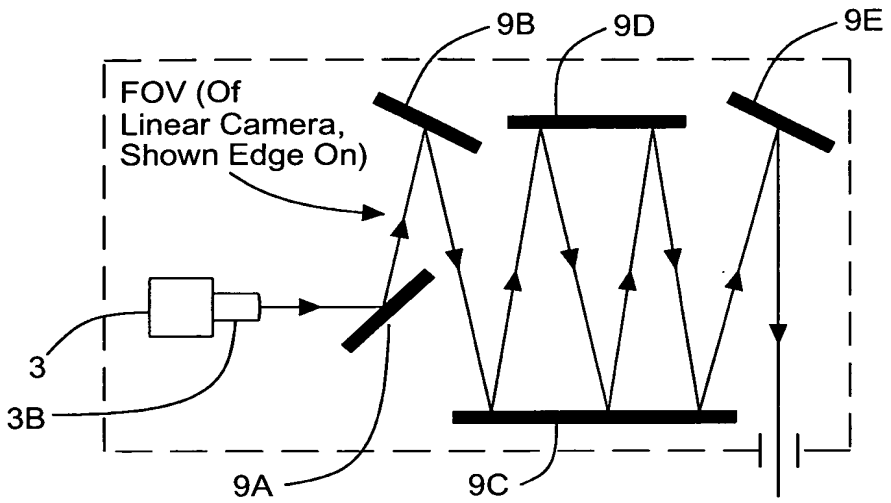

FIG. 1L1

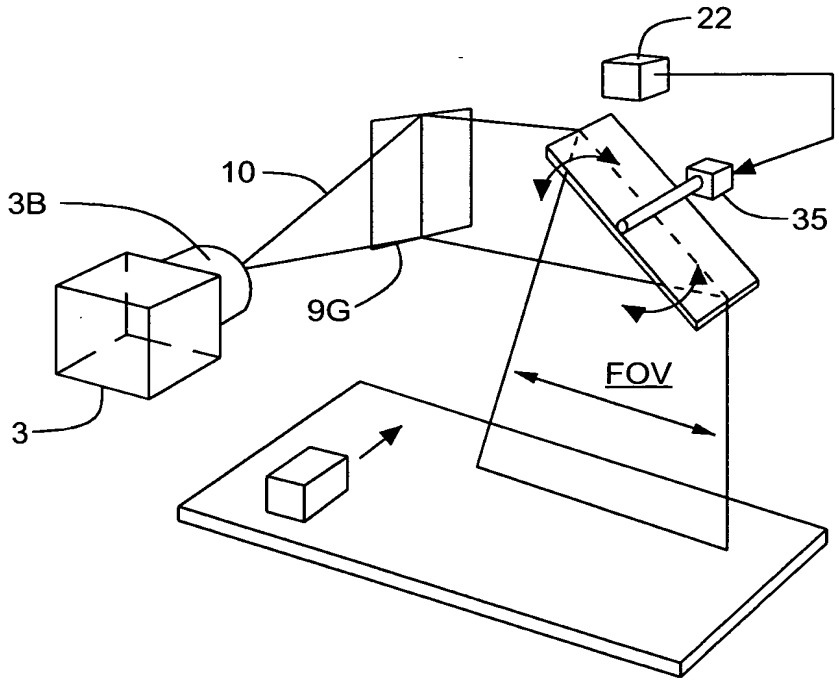

FIG. 1L2

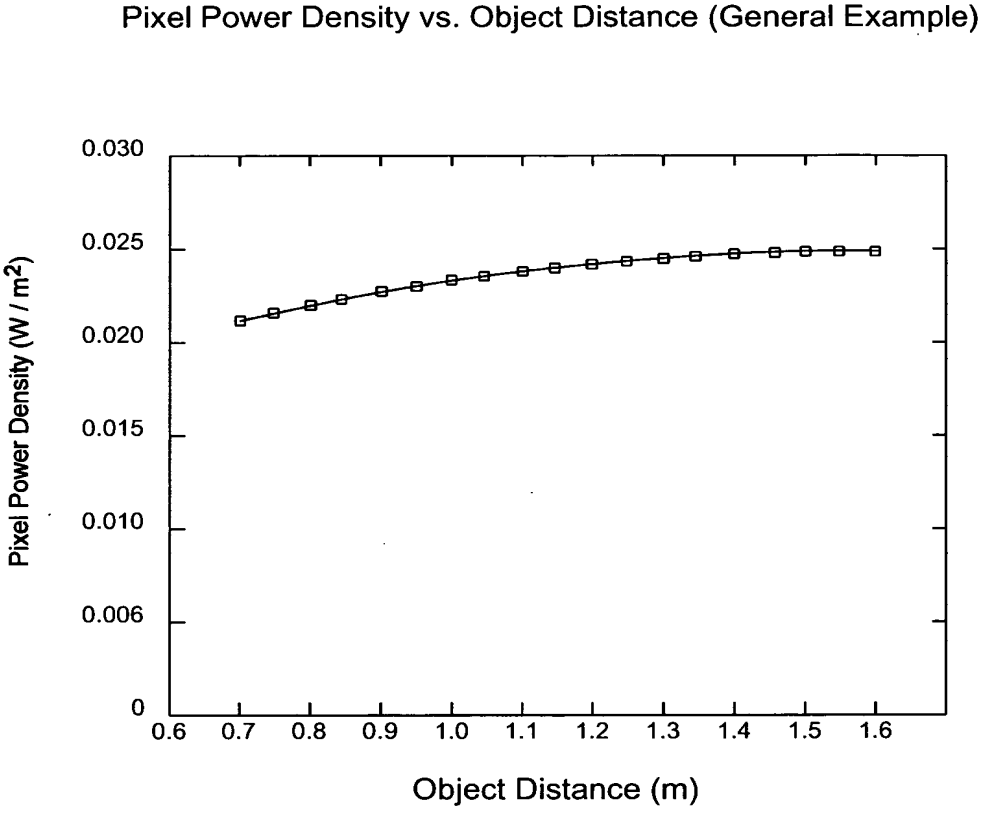
Pixel Power Density vs. Object Distance (General Example)
Pixel Power Density (W / m2)
0.030
0.025
0.020
0.015
0.010
0.006
0
0.6
0.7
0.8
0.9
1.0
1.1
1.2
1.3
1.4
1.5
1.6
Object Distance (m)

FIG. 1M1

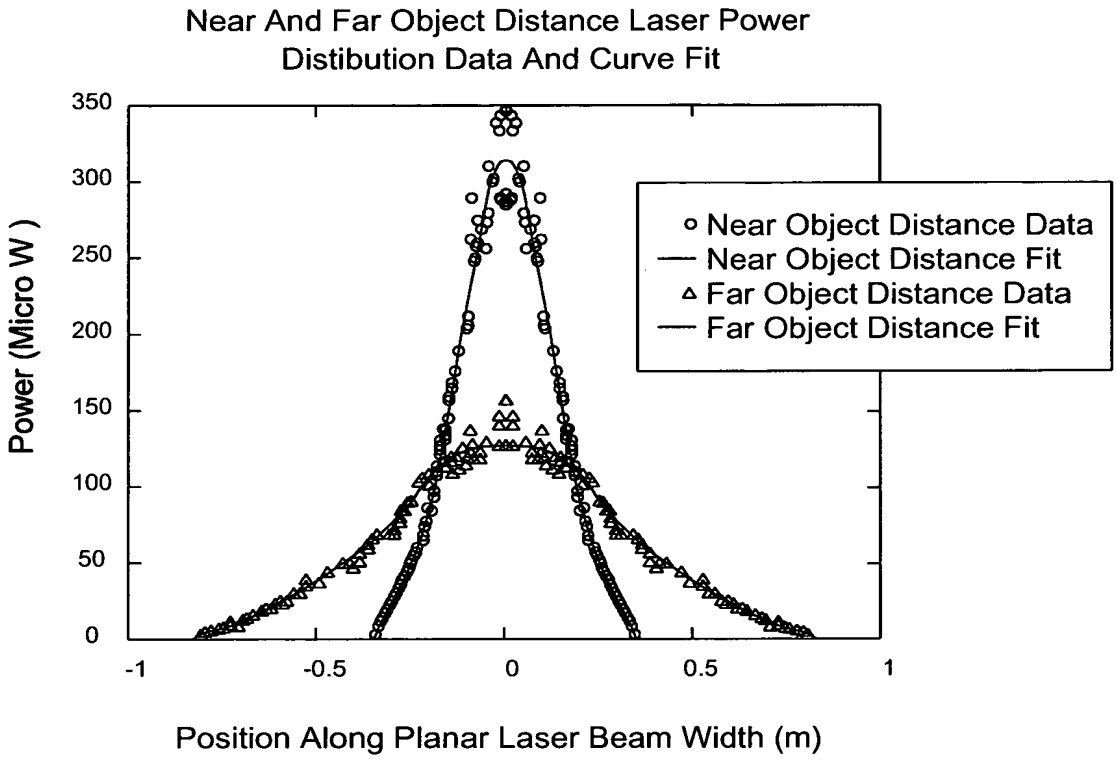
Near And Far Object Distance Laser Power
Distibution Data And Curve Fit
Power (Micro W)
350
300
250
200
150
100
50
0
-1
-0.5
0
0.5
1
Near Object Distance Data
Near Object Distance Fit
Far Object Distance Data
Far Object Distance Fit
Position Along Planar Laser Beam Width (m)

FIG. 1M2

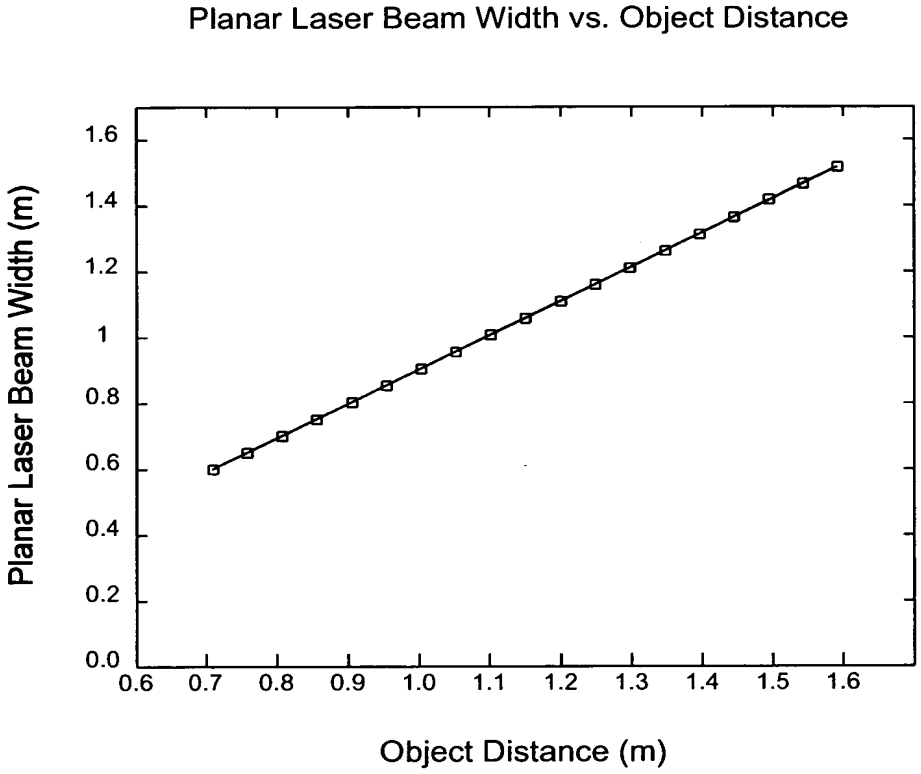
Planar Laser Beam Width vs. Object Distance
Planar Laser Beam Width (m)
1.6
1.4
1.2
1
0.8
0.6
0.4
0.2
0.0
0.6
0.7
0.8
0.9
1.0
1.1
1.2
1.3
1.4
1.5
1.6
Object Distance (m)

FIG. 1M3

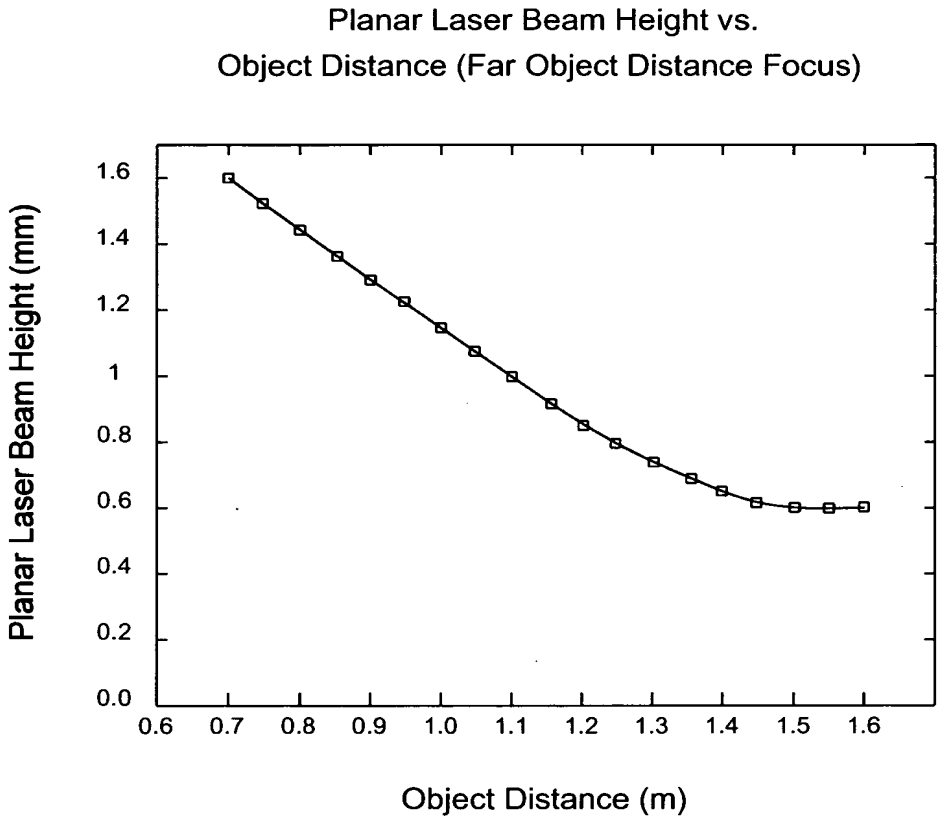
Planar Laser Beam Height vs.
Object Distance (Far Object Distance Focus)
Planar Laser Beam Height (mm)
1.6
1.4
1.2
1
0.8
0.6
0.4
0.2
0.0
0.6
0.7
0.8
0.9
1.0
1.1
1.2
1.3
1.4
1.5
1.6
Object Distance (m)

FIG. 1M4

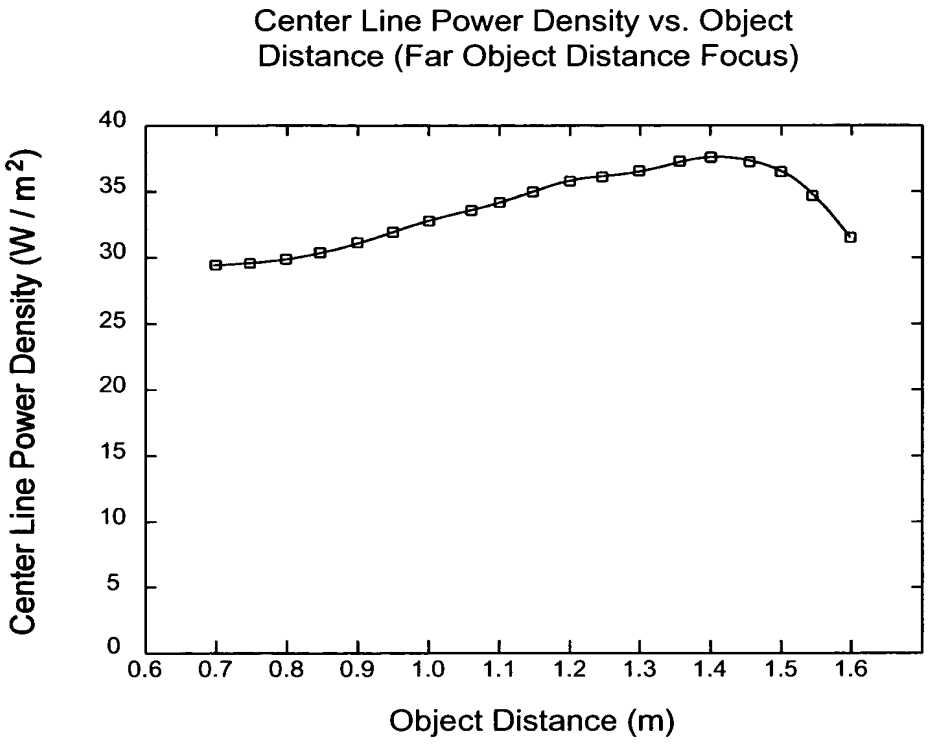
Center Line Power Density vs. Object Distance (Far Object Distance Focus)
Center Line Power Density (W / m2)
40
35
30
25
20
15
10
5
0
0.6
0.7
0.8
0.9
1.0
1.1
1.2
1.3
1.4
1.5
1.6
Object Distance (m)

FIG. 1N

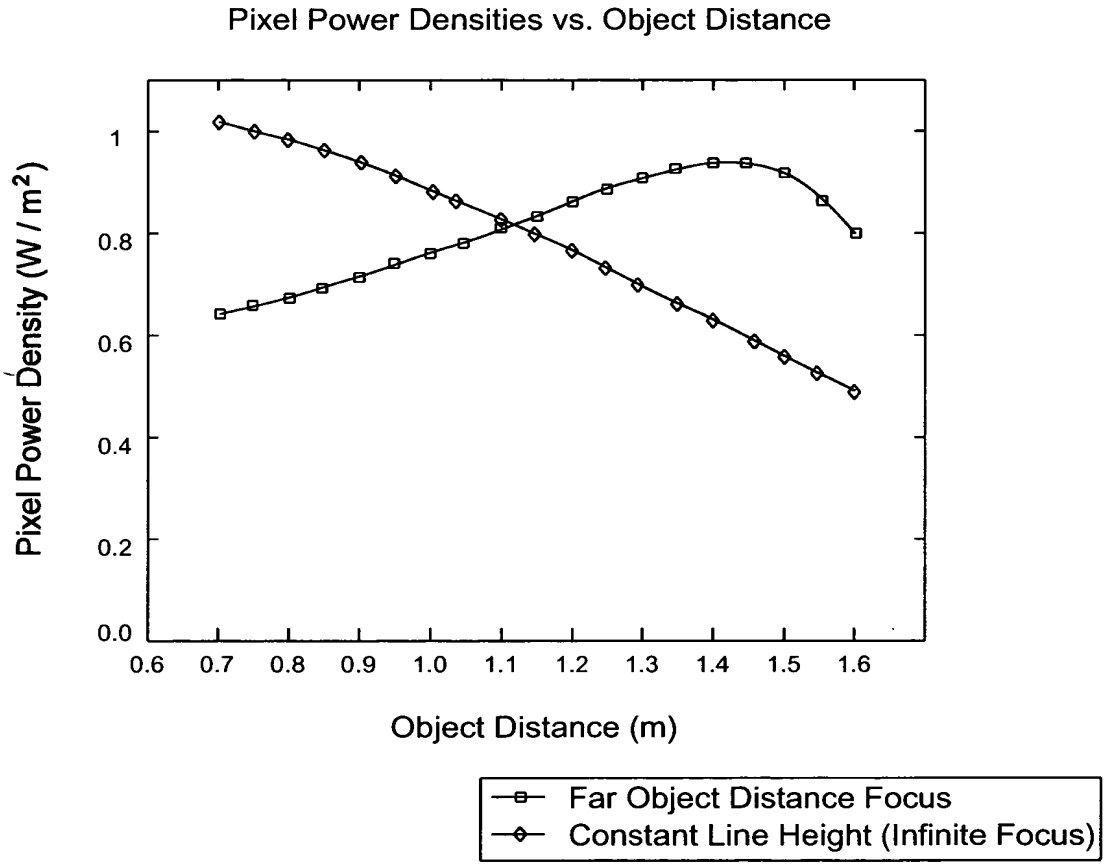
Pixel Power Densities vs. Object Distance
Pixel Power Density (W / m2)
1
0.8
0.6
0.4
0.2
0.0
0.6
0.7
0.8
0.9
1.0
1.1
1.2
1.3
1.4
1.5
1.6
Object Distance (m)
Far Object Distance Focus
Constant Line Height (Infinite Focus)

FIG. 10

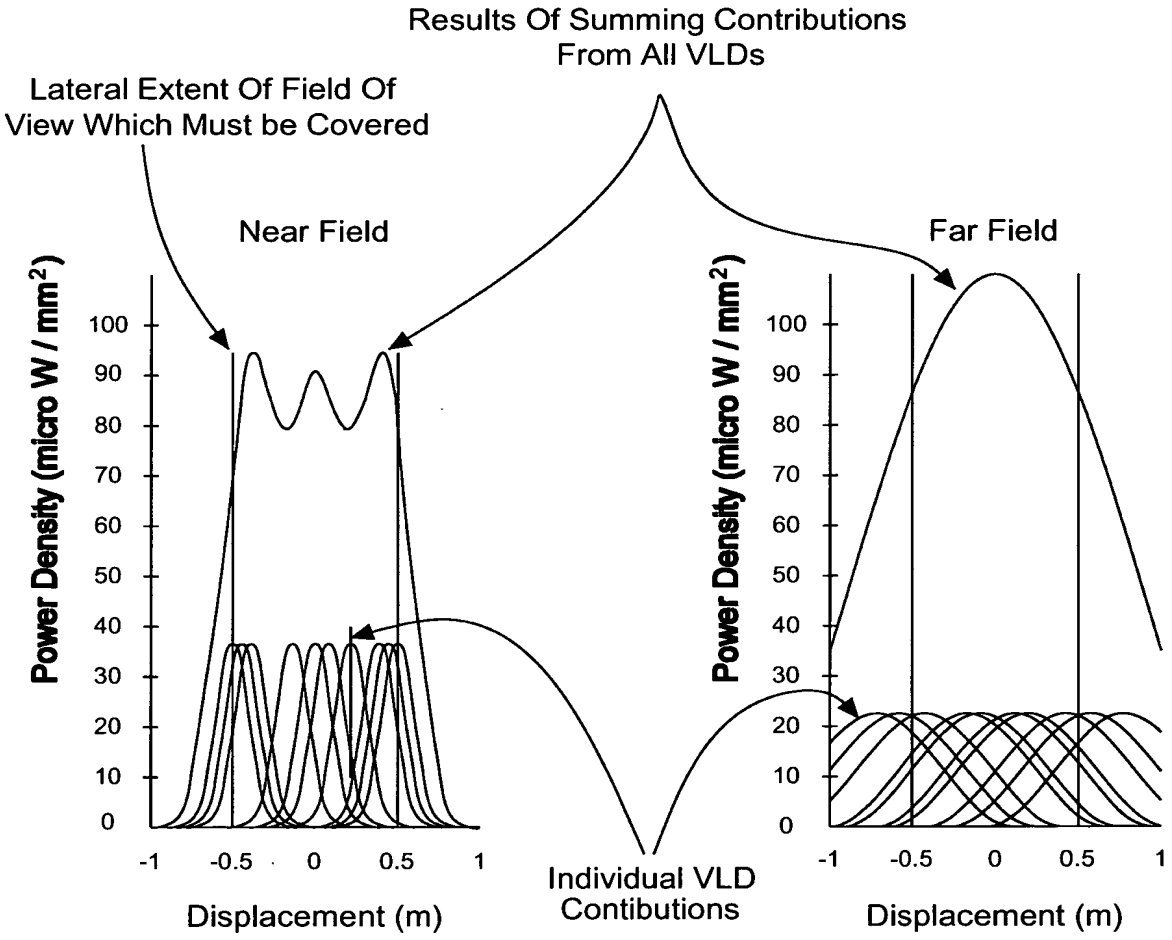

FIG. 1P1

FIG. 1P2

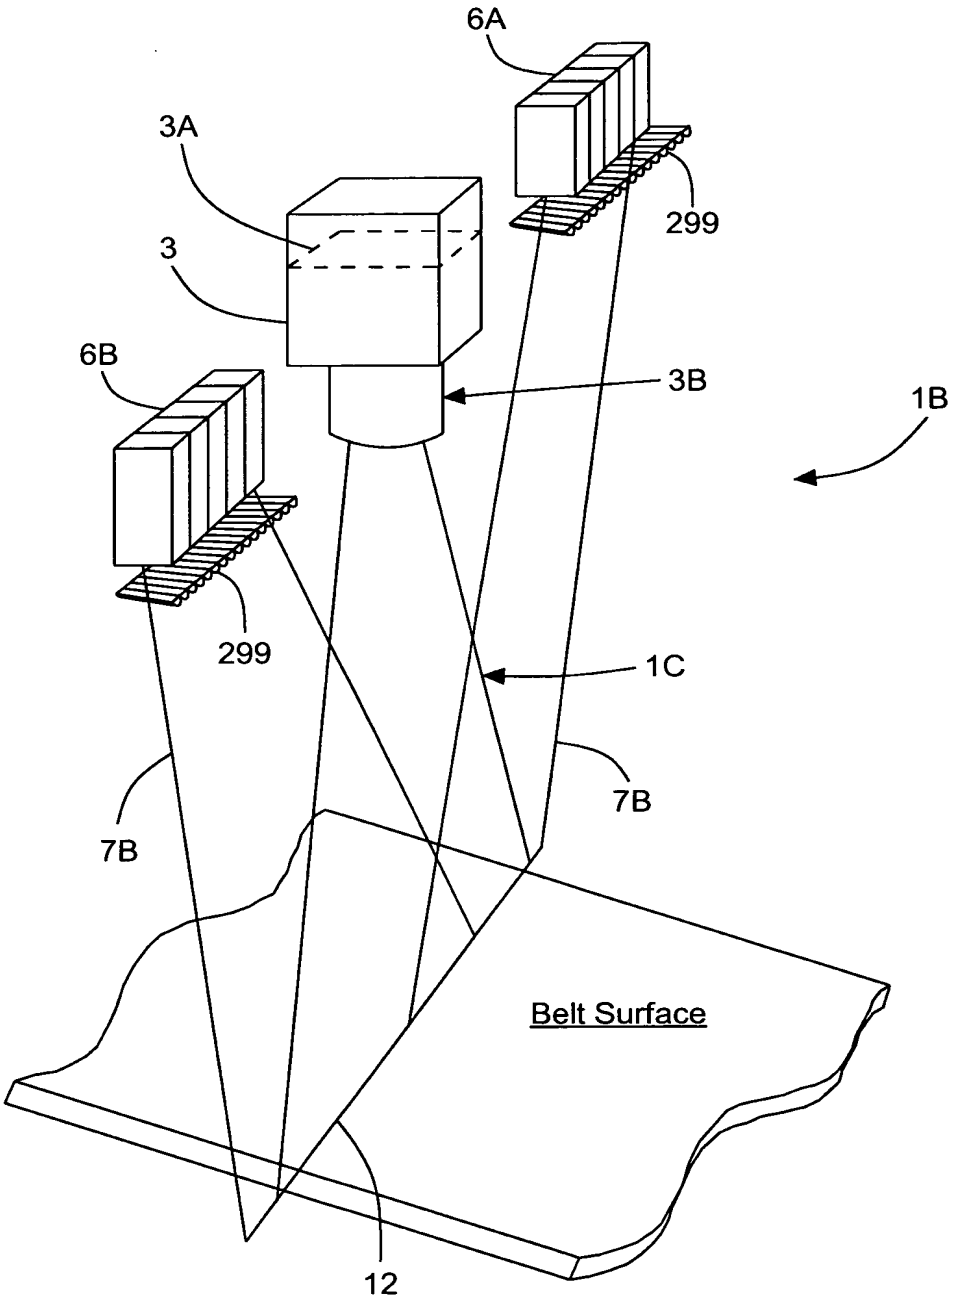

FIG. 1Q1

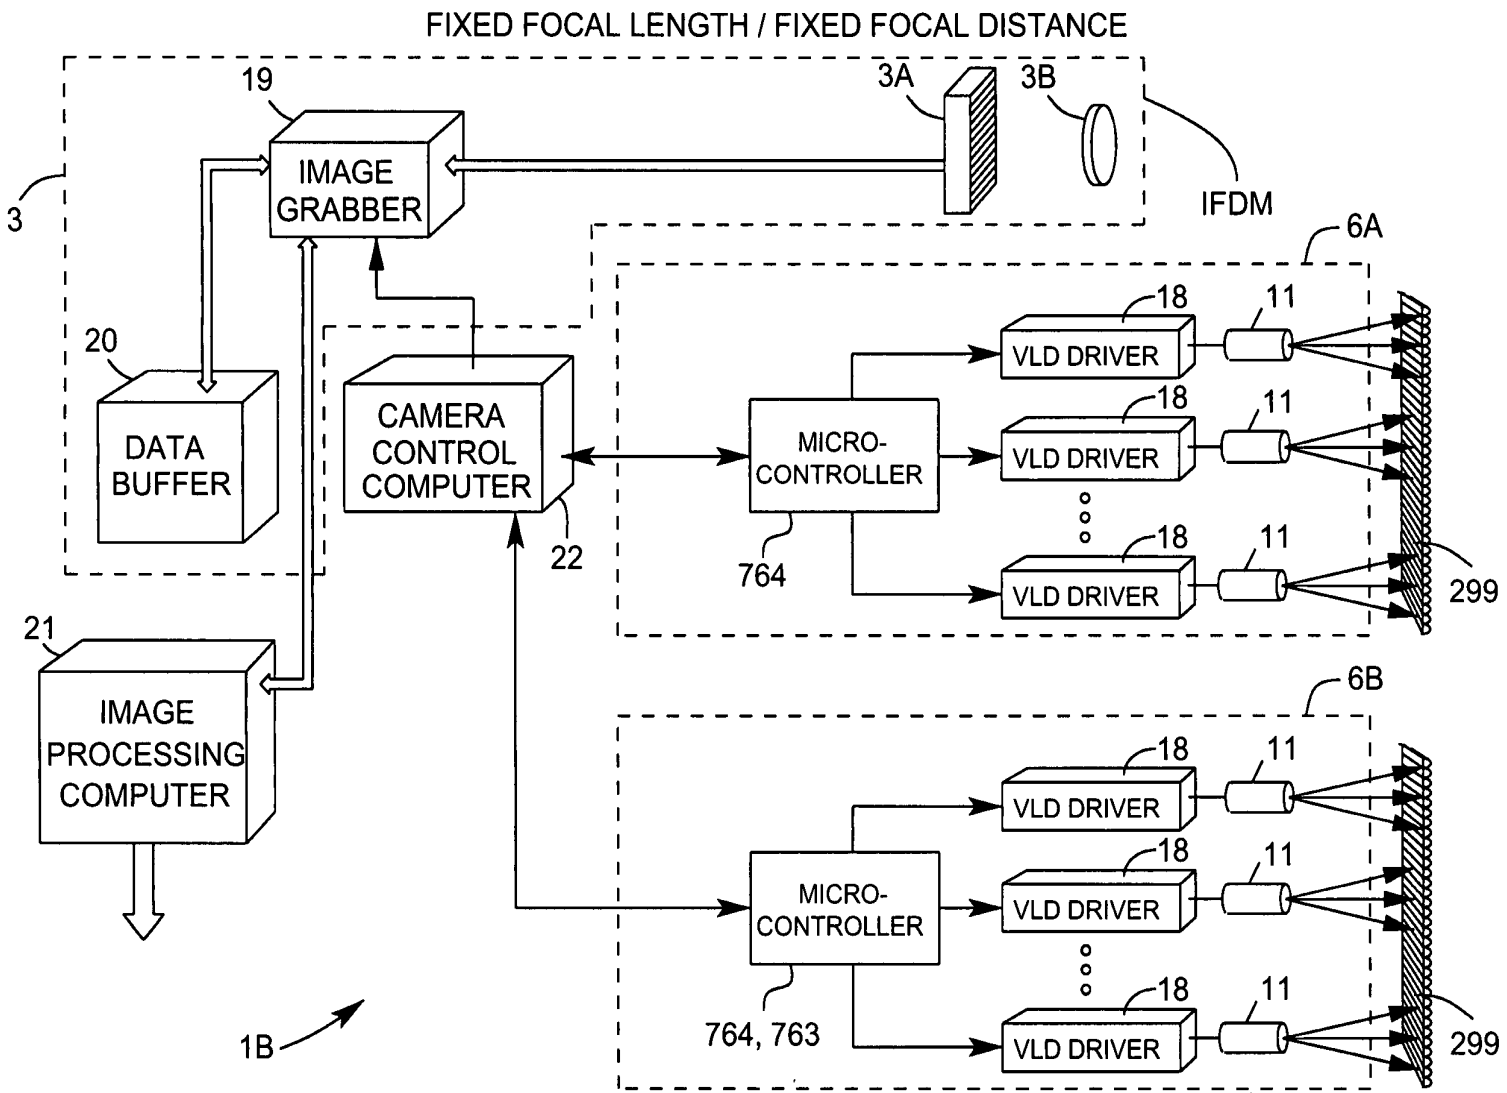
FIXED FOCAL LENGTH / FIXED FOCAL DISTANCE
3
19
IMAGE GRABBER
3A
3B
IFDM
6A
20
DATA BUFFER
CAMERA CONTROL COMPUTER
22
MICRO-CONTROLLER
764
18
11
VLD DRIVER
299
21
IMAGE PROCESSING COMPUTER
6B
764, 763
1B

FIG. 1Q2

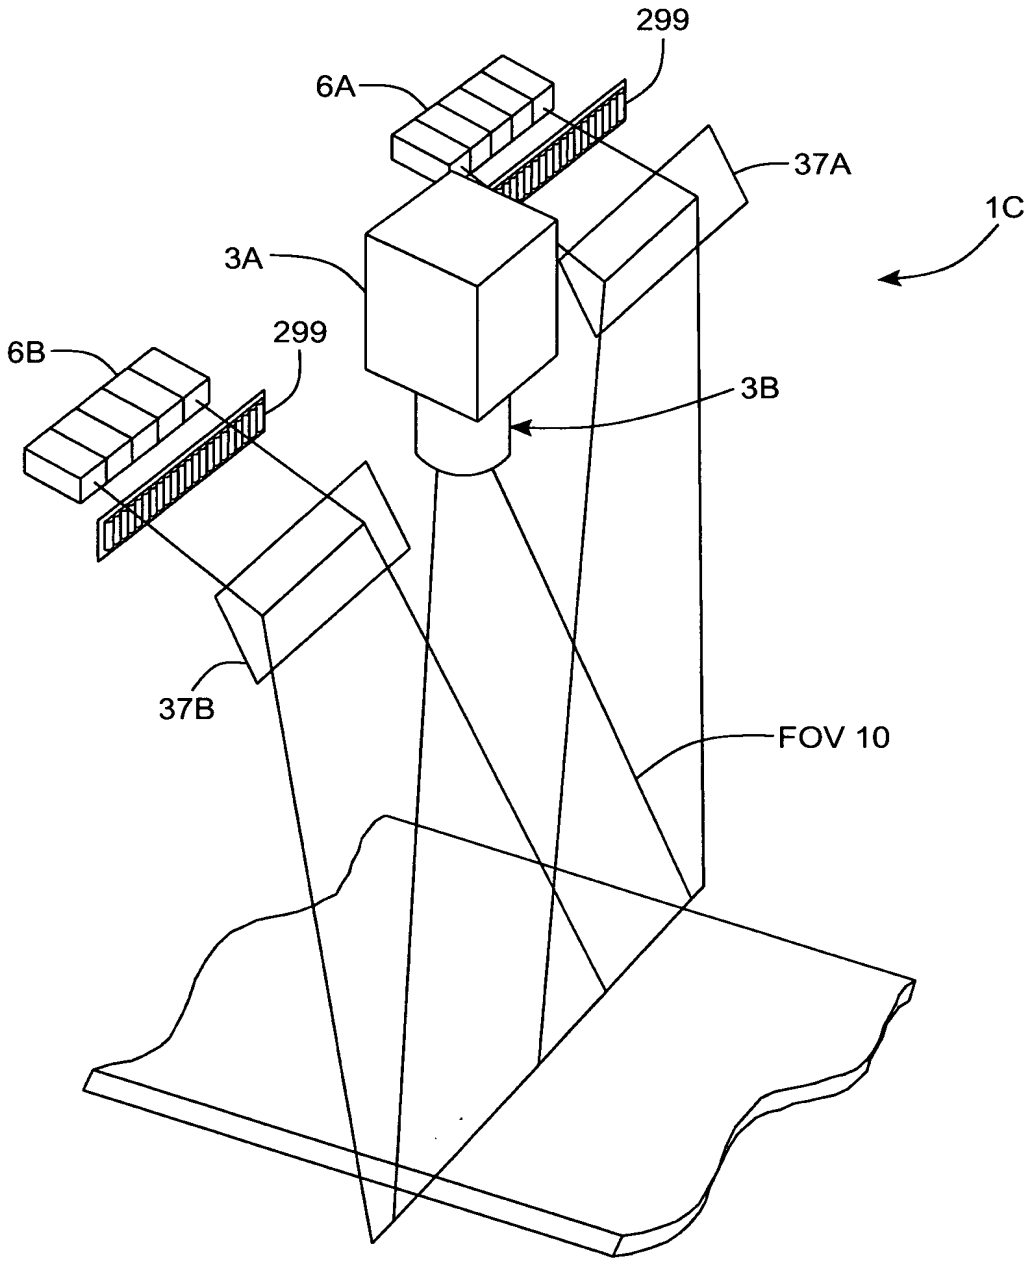

FIG. 1R1

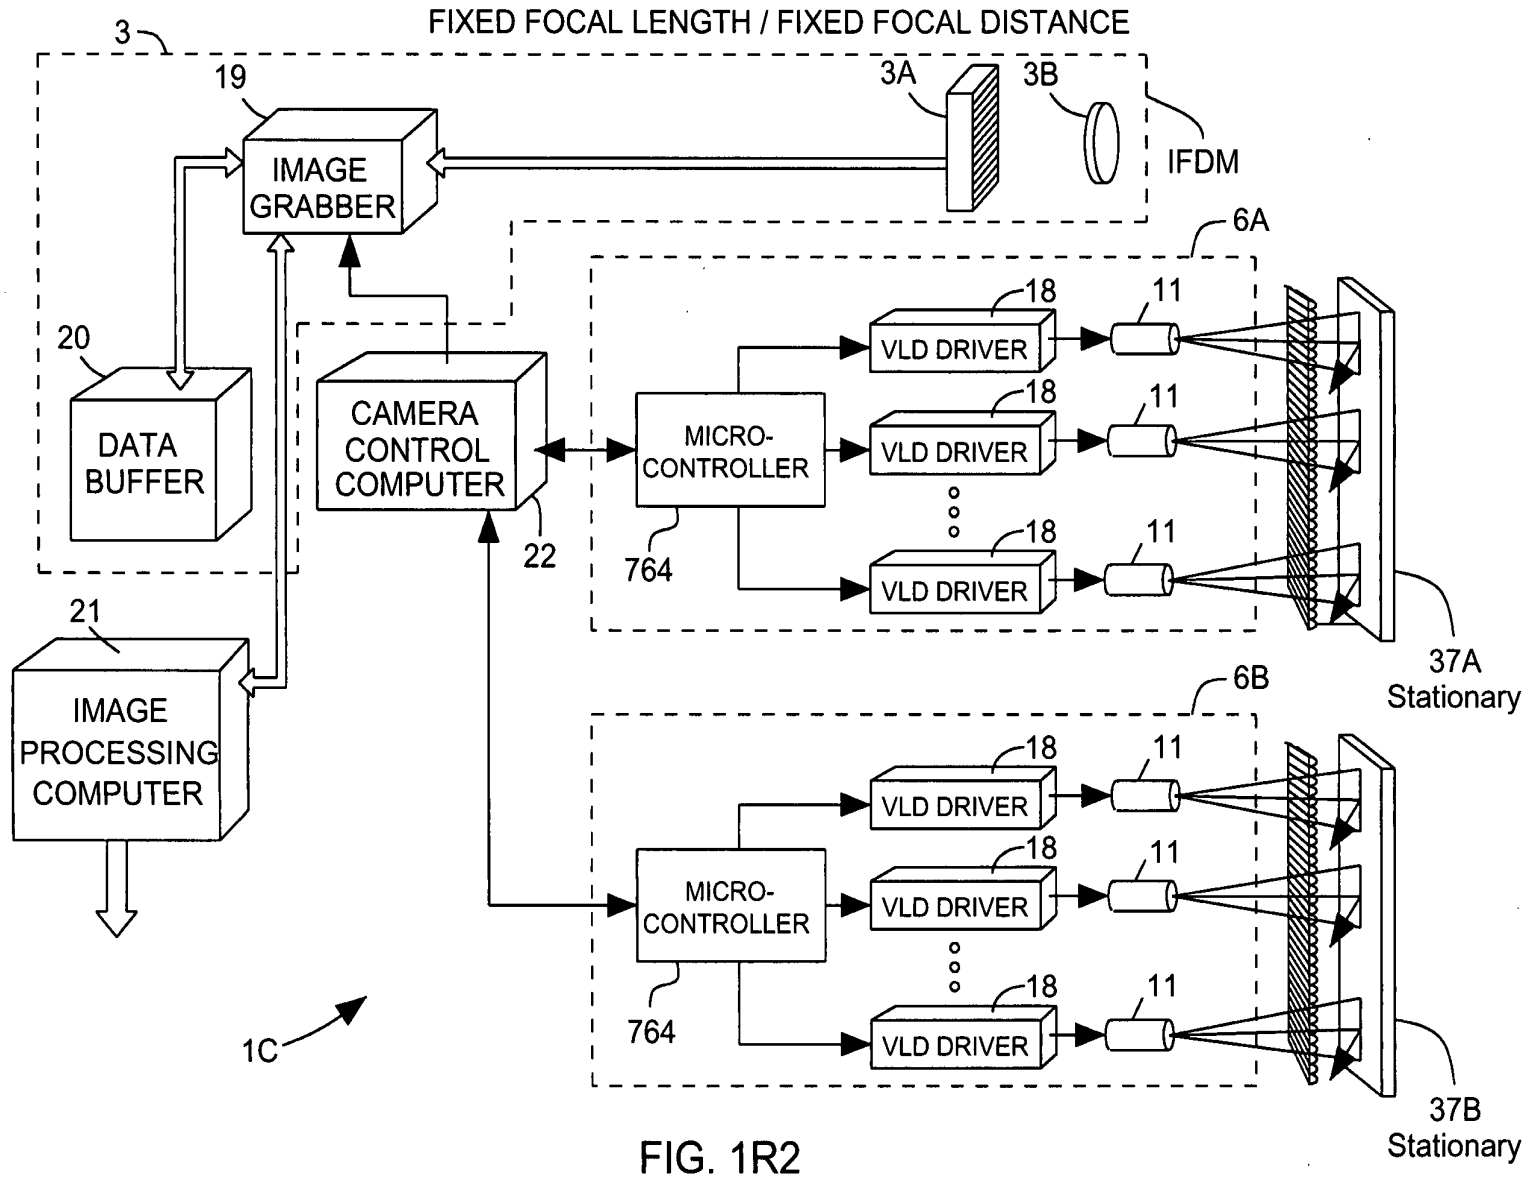
FIXED FOCAL LENGTH / FIXED FOCAL DISTANCE
3
19
3A
3B
IFDM
IMAGE GRABBER
6A
20
DATA BUFFER
CAMERA CONTROL COMPUTER
22
MICRO-CONTROLLER
764
18
11
VLD DRIVER
VLD DRIVER
VLD DRIVER
37A Stationary
21
IMAGE PROCESSING COMPUTER
6B
MICRO-CONTROLLER
764
VLD DRIVER
VLD DRIVER
VLD DRIVER
37B Stationary
1C

FIG. 1R2

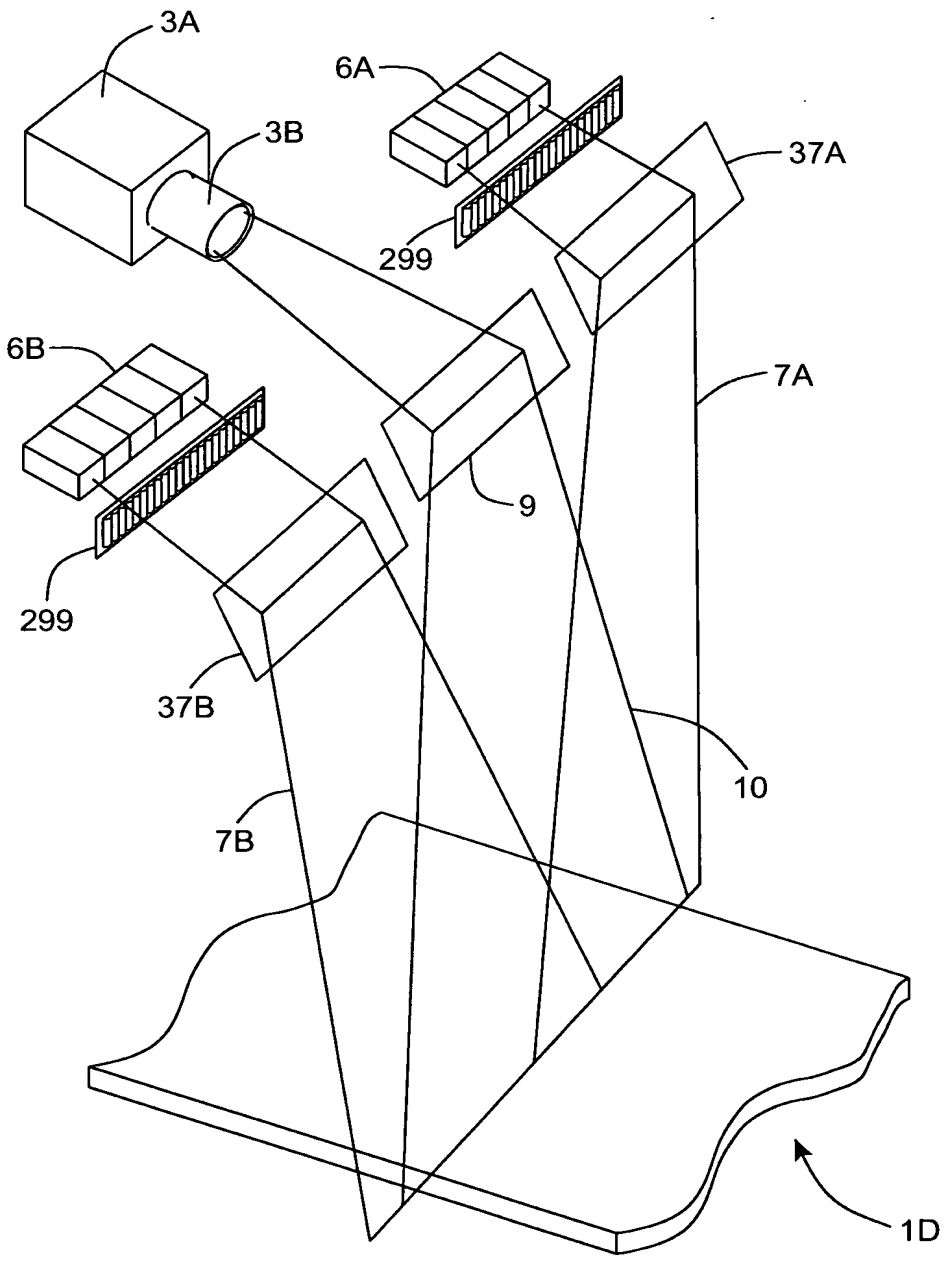

FIG. 1S1

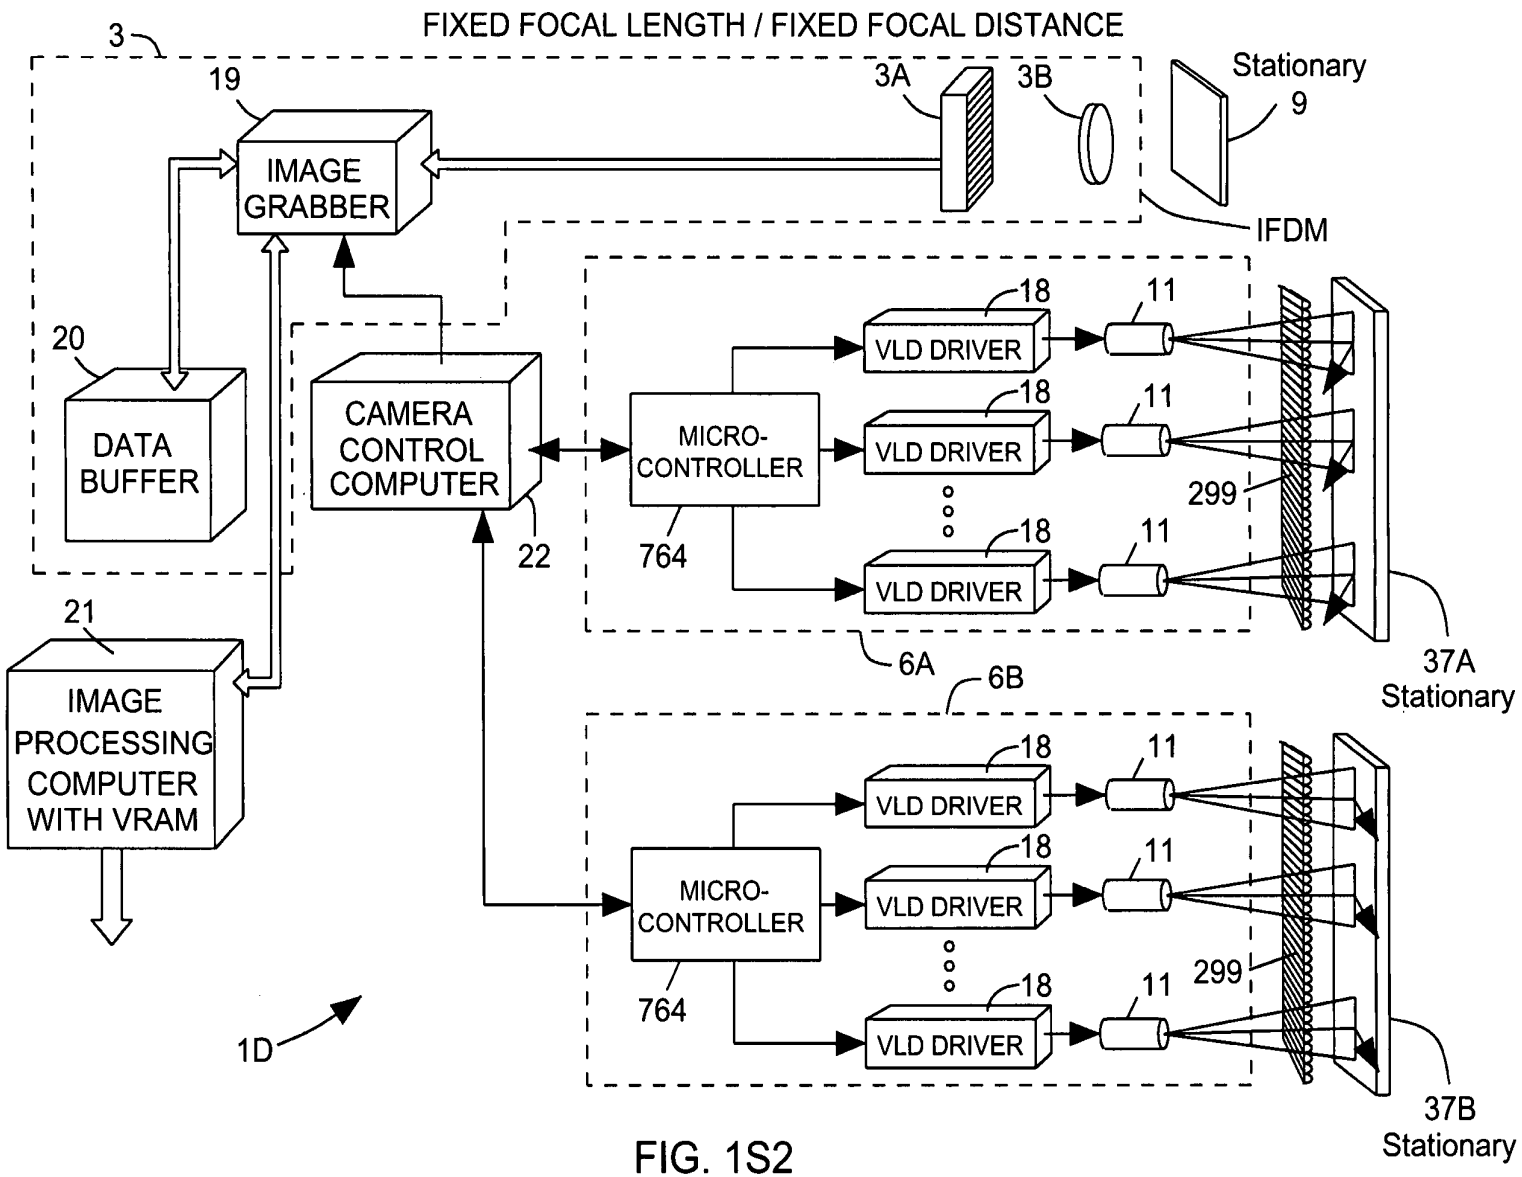
FIXED FOCAL LENGTH / FIXED FOCAL DISTANCE
3
19
IMAGE GRABBER
3A
3B
Stationary
9
IFDM
20
DATA BUFFER
CAMERA CONTROL COMPUTER
22
MICRO-CONTROLLER
764
VLD DRIVER
18
11
299
6A
6B
37A
Stationary
21
IMAGE PROCESSING COMPUTER WITH VRAM
1D
37B
Stationary

FIG. 1S2

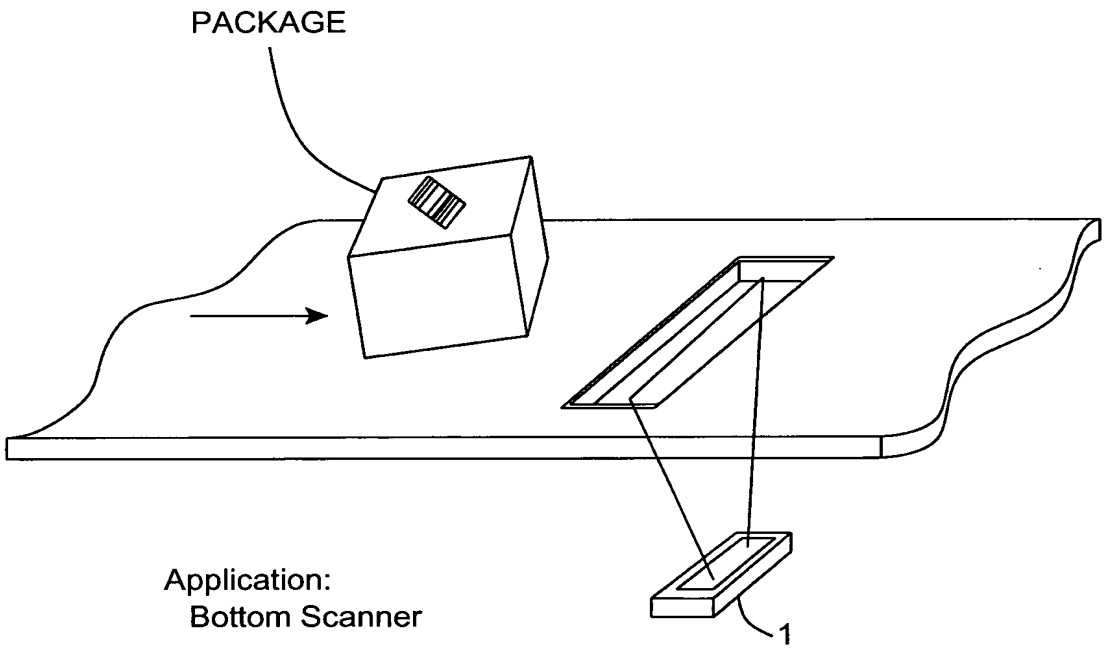

FIG. 1T

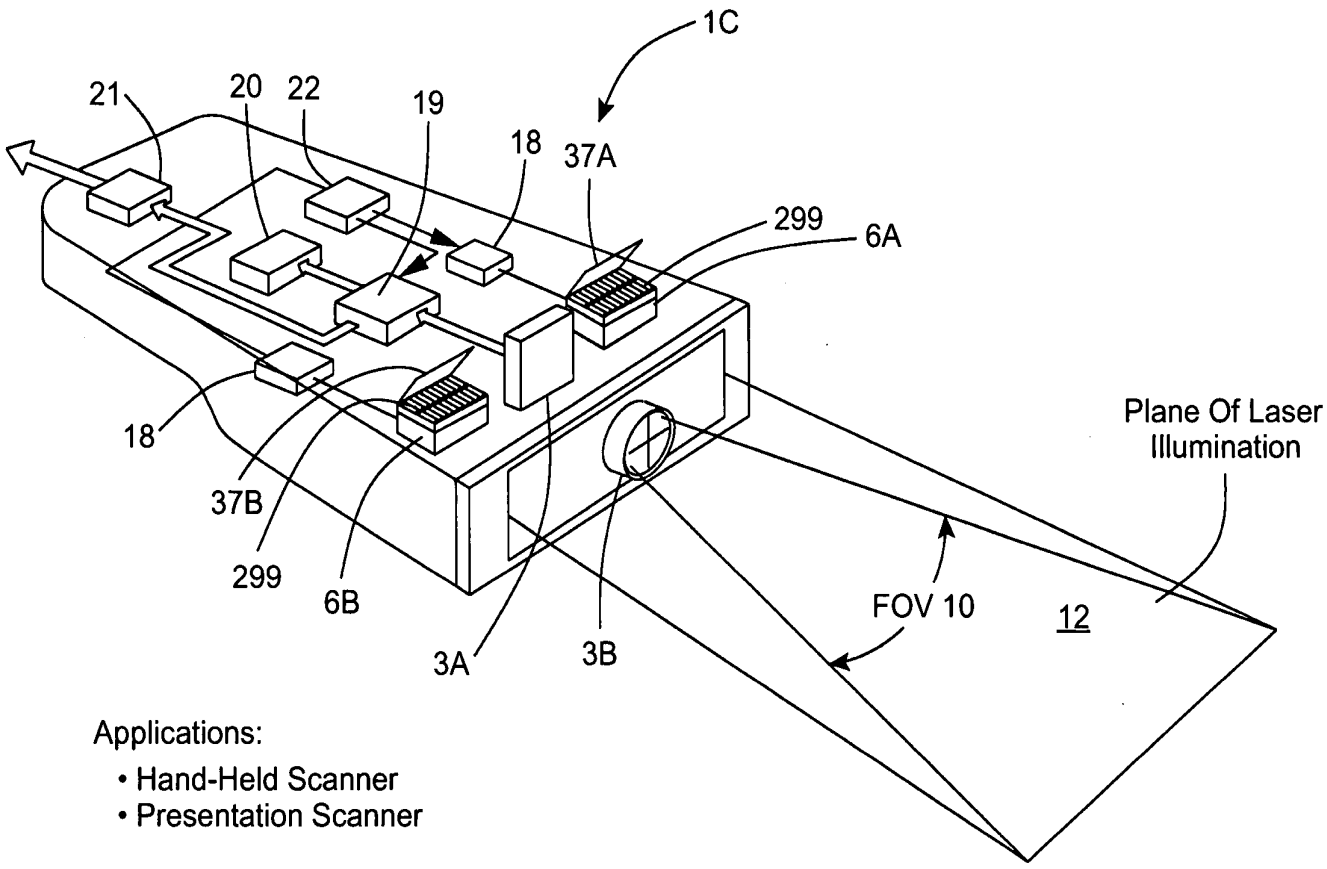
1C
21
20
22
19
18
37A
299
6A
18
37B
299
6B
3A
3B
Plane Of Laser Illumination
FOV 10
12
Applications:
• Hand-Held Scanner
• Presentation Scanner

FIG. 1U

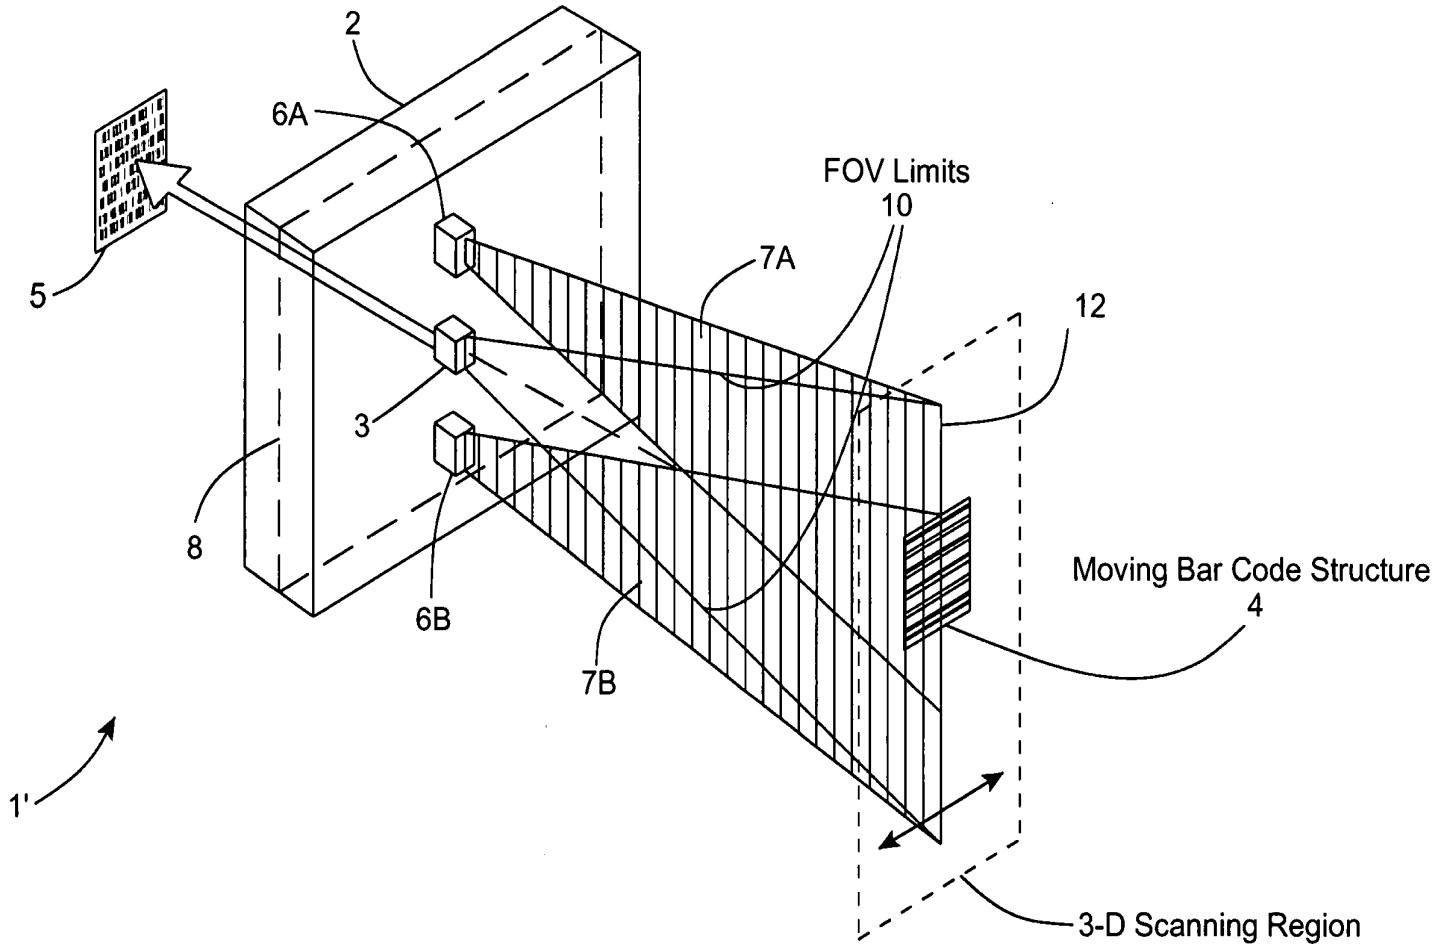
2
6A
FOV Limits
10
7A
12
5
3
8
6B
7B
Moving Bar Code Structure
4
1'
3-D Scanning Region

FIG. 1V1

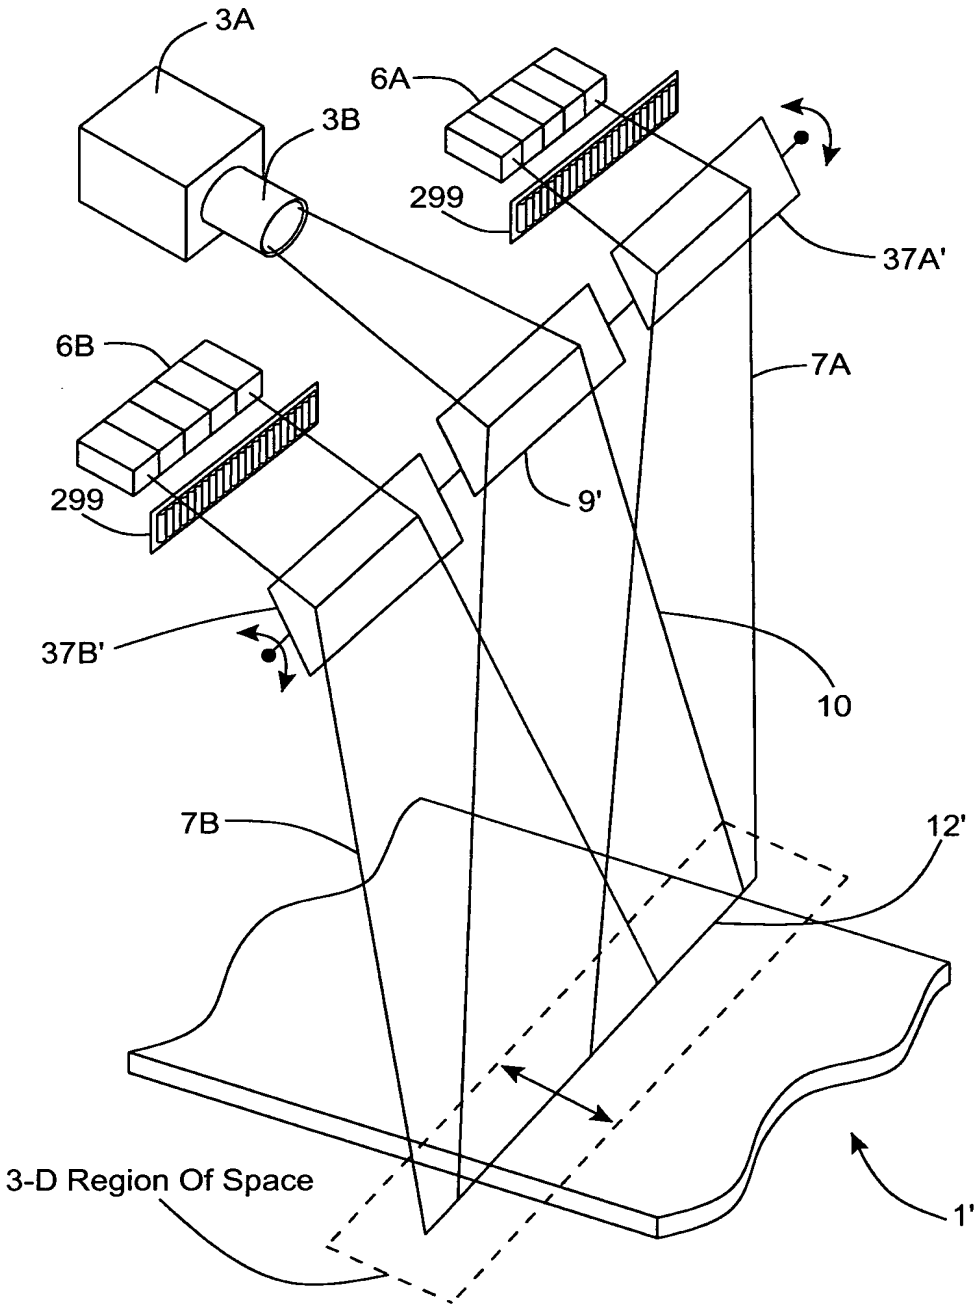

FIG. 1V2

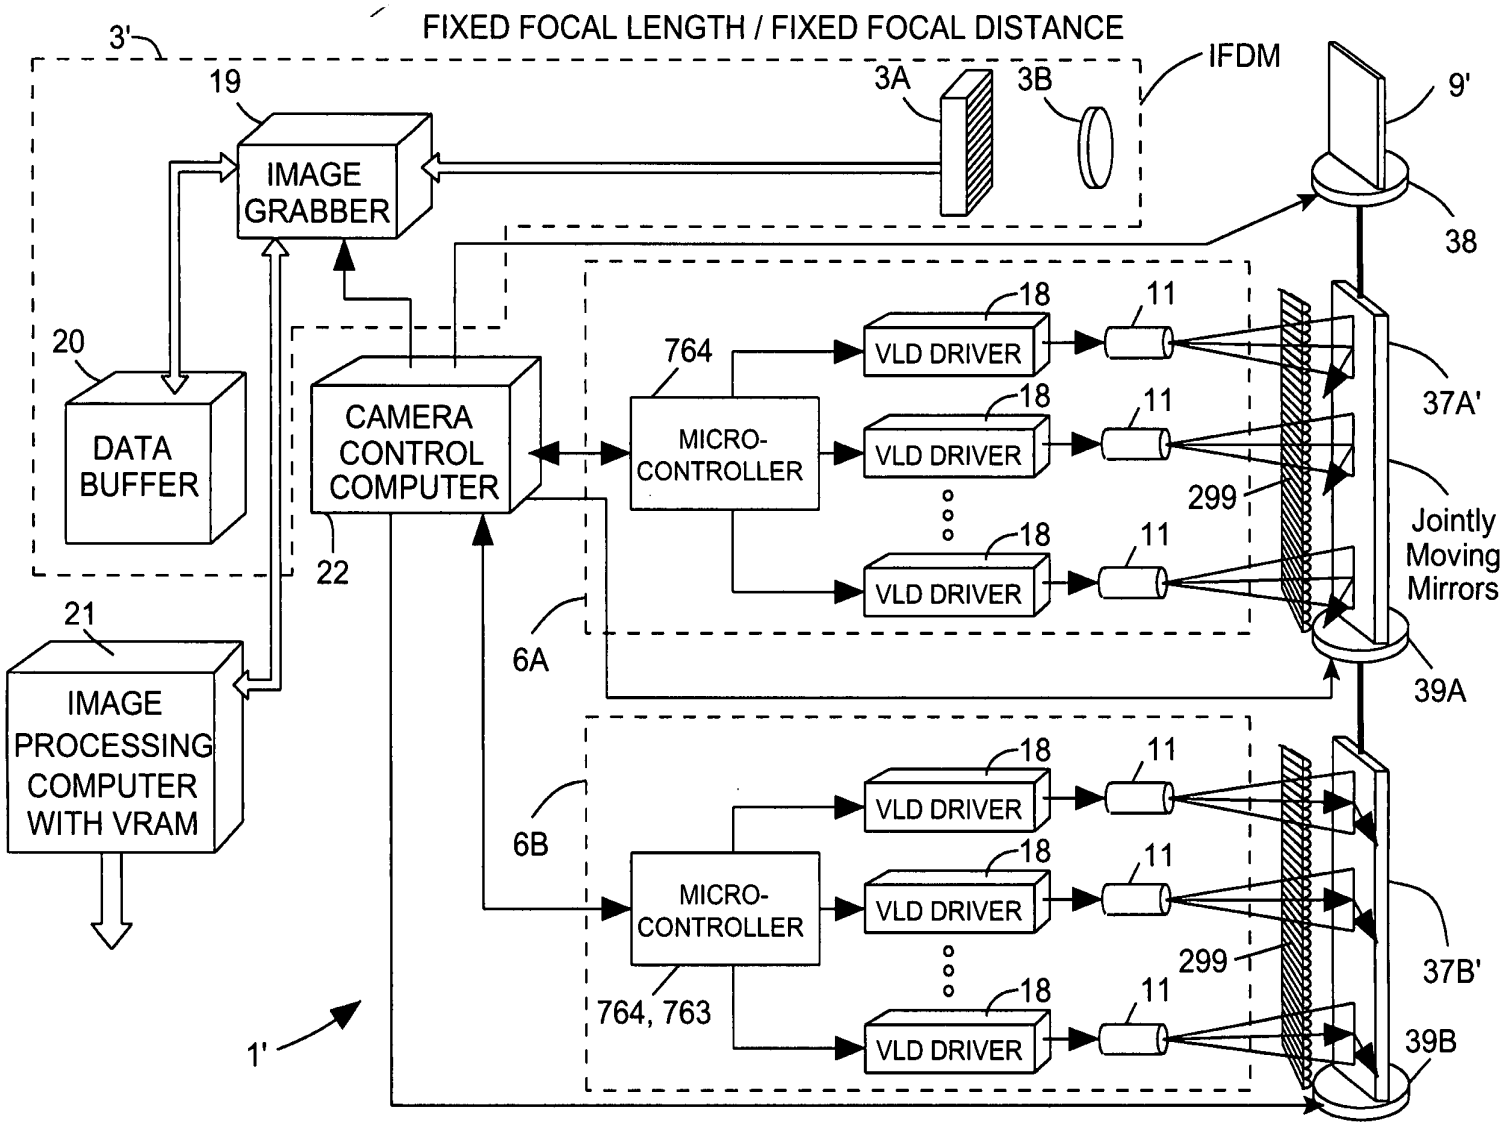
FIXED FOCAL LENGTH / FIXED FOCAL DISTANCE
3'
IFDM
19
3A
3B
9'
IMAGE GRABBER
38
20
DATA BUFFER
CAMERA CONTROL COMPUTER
764
MICRO-CONTROLLER
18
11
VLD DRIVER
37A'
299
Jointly Moving Mirrors
22
6A
39A
21
IMAGE PROCESSING COMPUTER WITH VRAM
6B
764, 763
37B'
39B
1'

FIG. 1V3

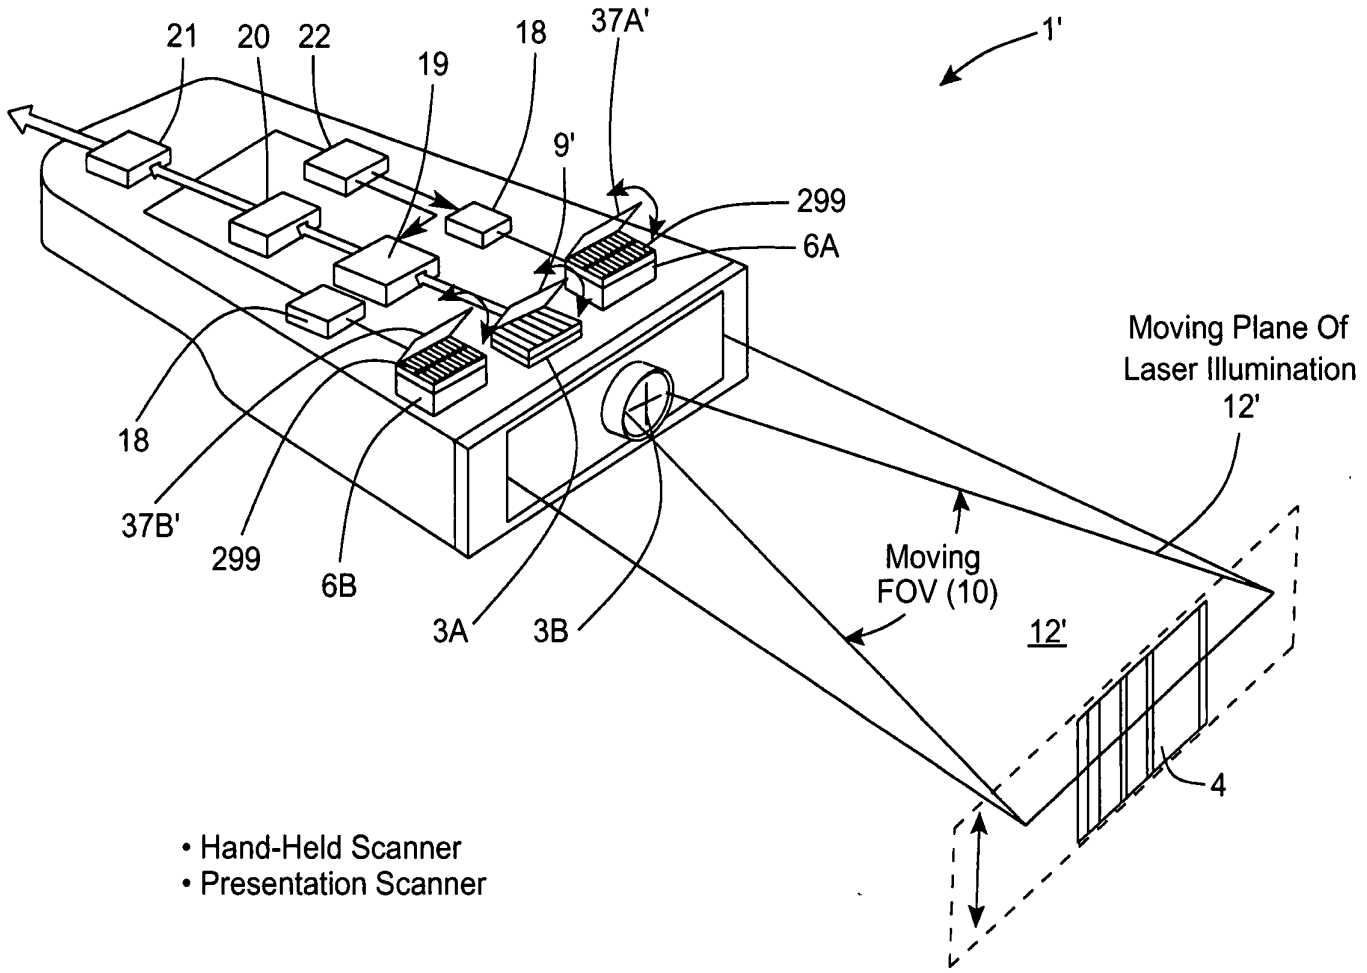
21
20
22
19
18
37A'
1'
9'
299
6A
Moving Plane Of
Laser Illumination
12'
18
37B'
299
6B
3A
3B
Moving
FOV (10)
12'
4
• Hand-Held Scanner
• Presentation Scanner

FIG. 1V4

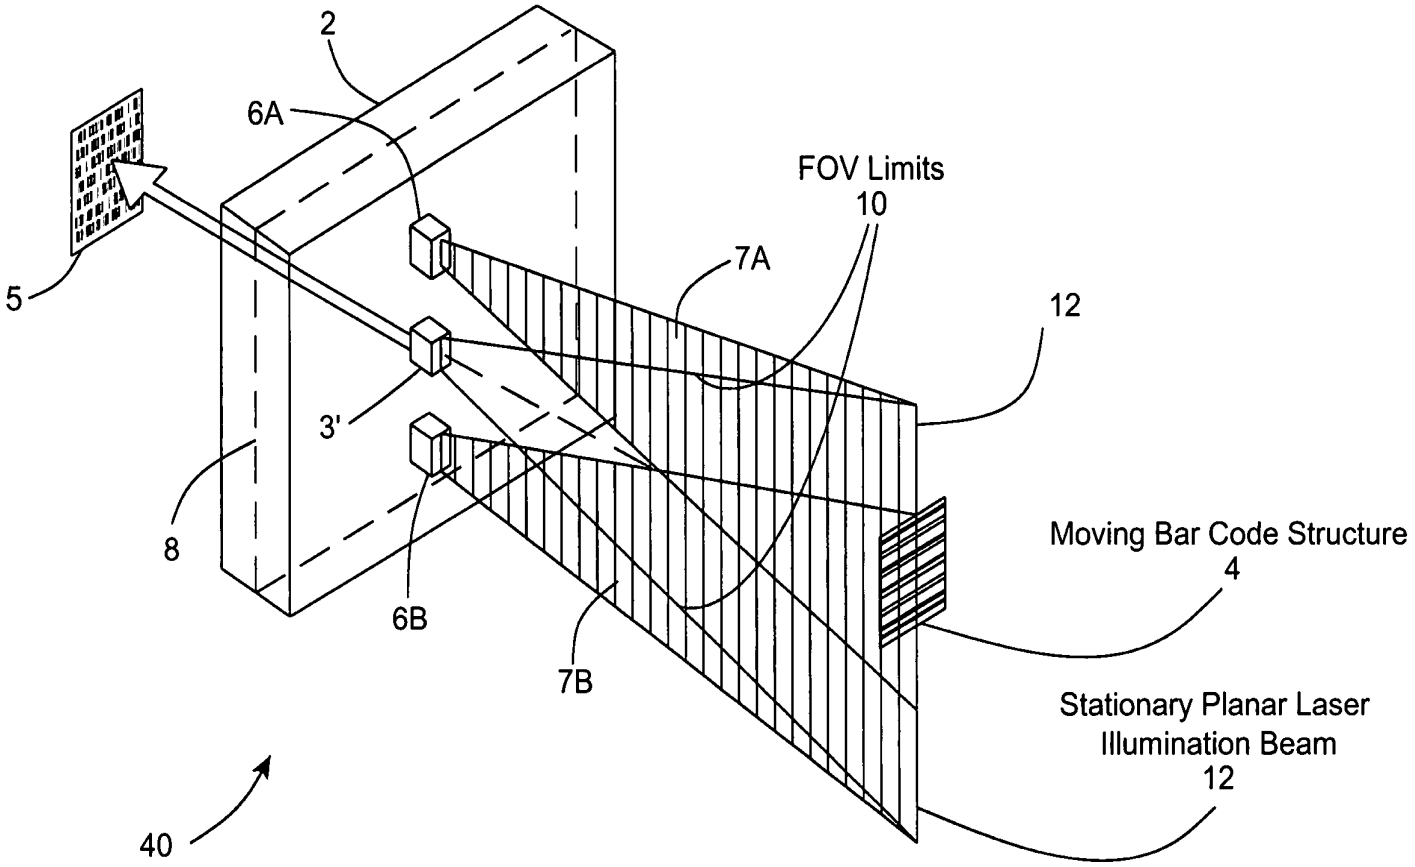
2
6A
FOV Limits
10
7A
12
5
3'
8
6B
7B
Moving Bar Code Structure
4
Stationary Planar Laser
Illumination Beam
12
40

FIG. 2A

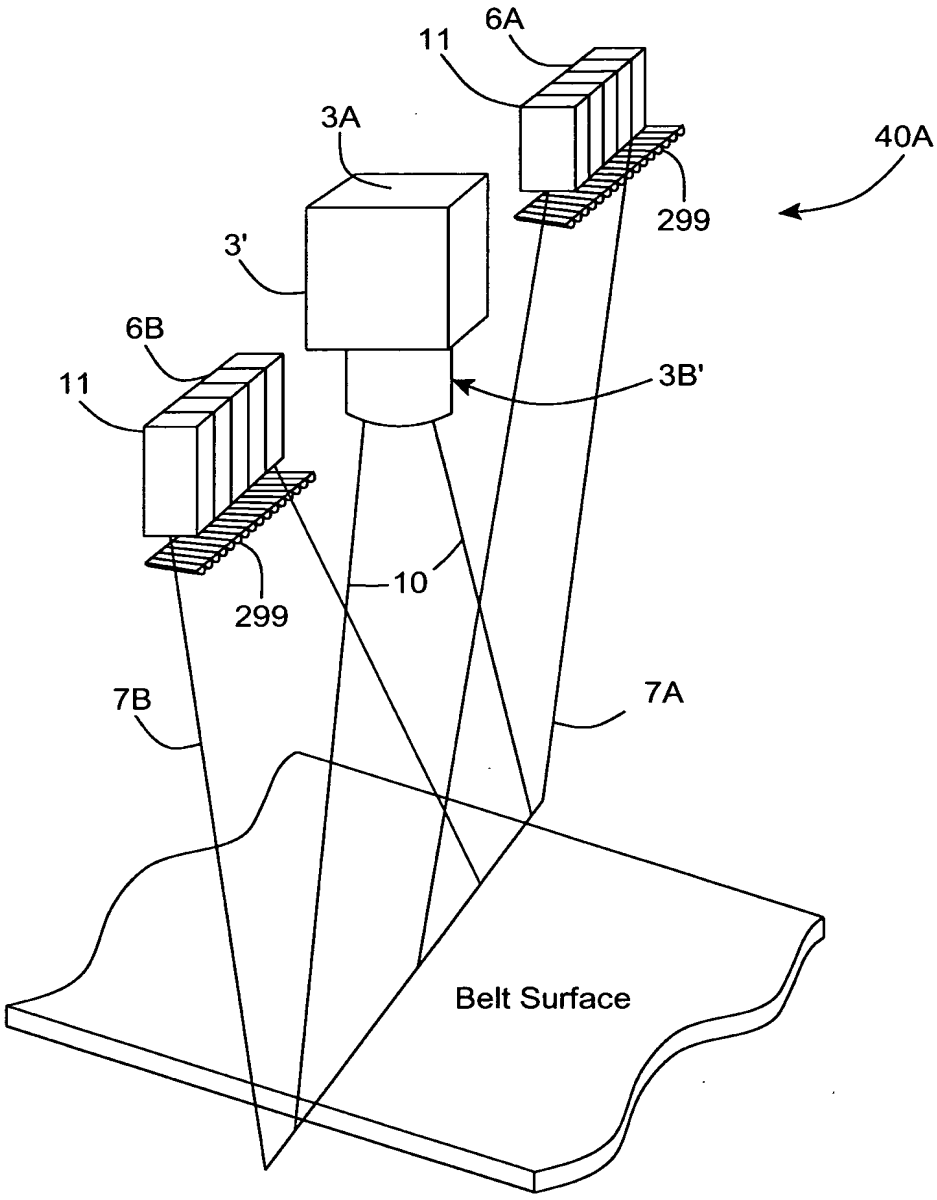

FIG. 2B1

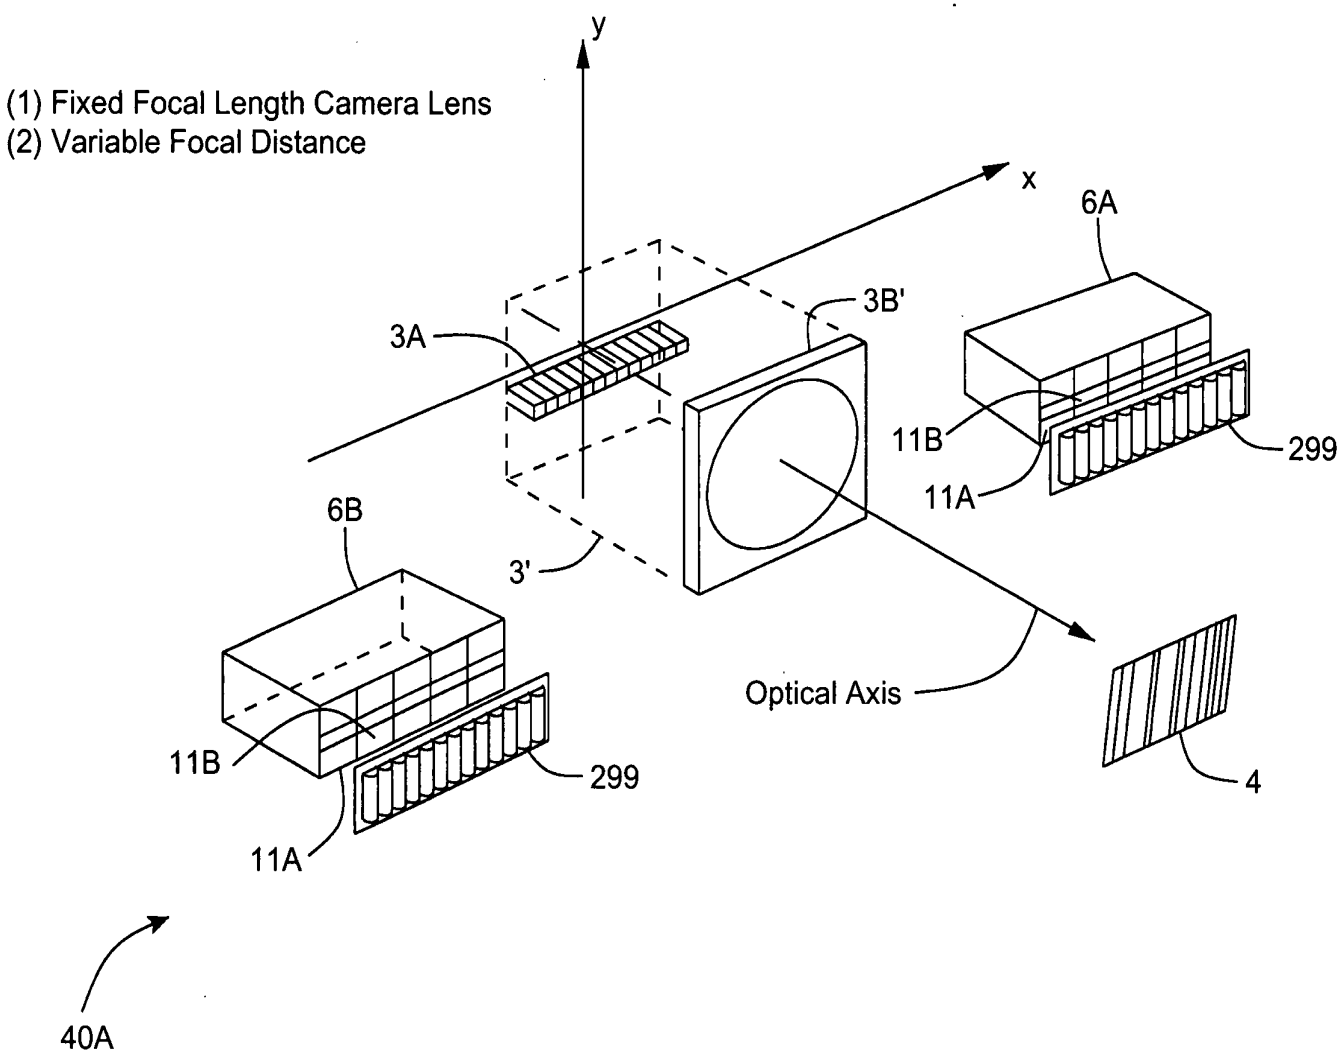
(1) Fixed Focal Length Camera Lens
(2) Variable Focal Distance
y
x
6A
3B'
3A
11B
299
11A
6B
3'
Optical Axis
11B
299
11A
4
40A

FIG. 2B2

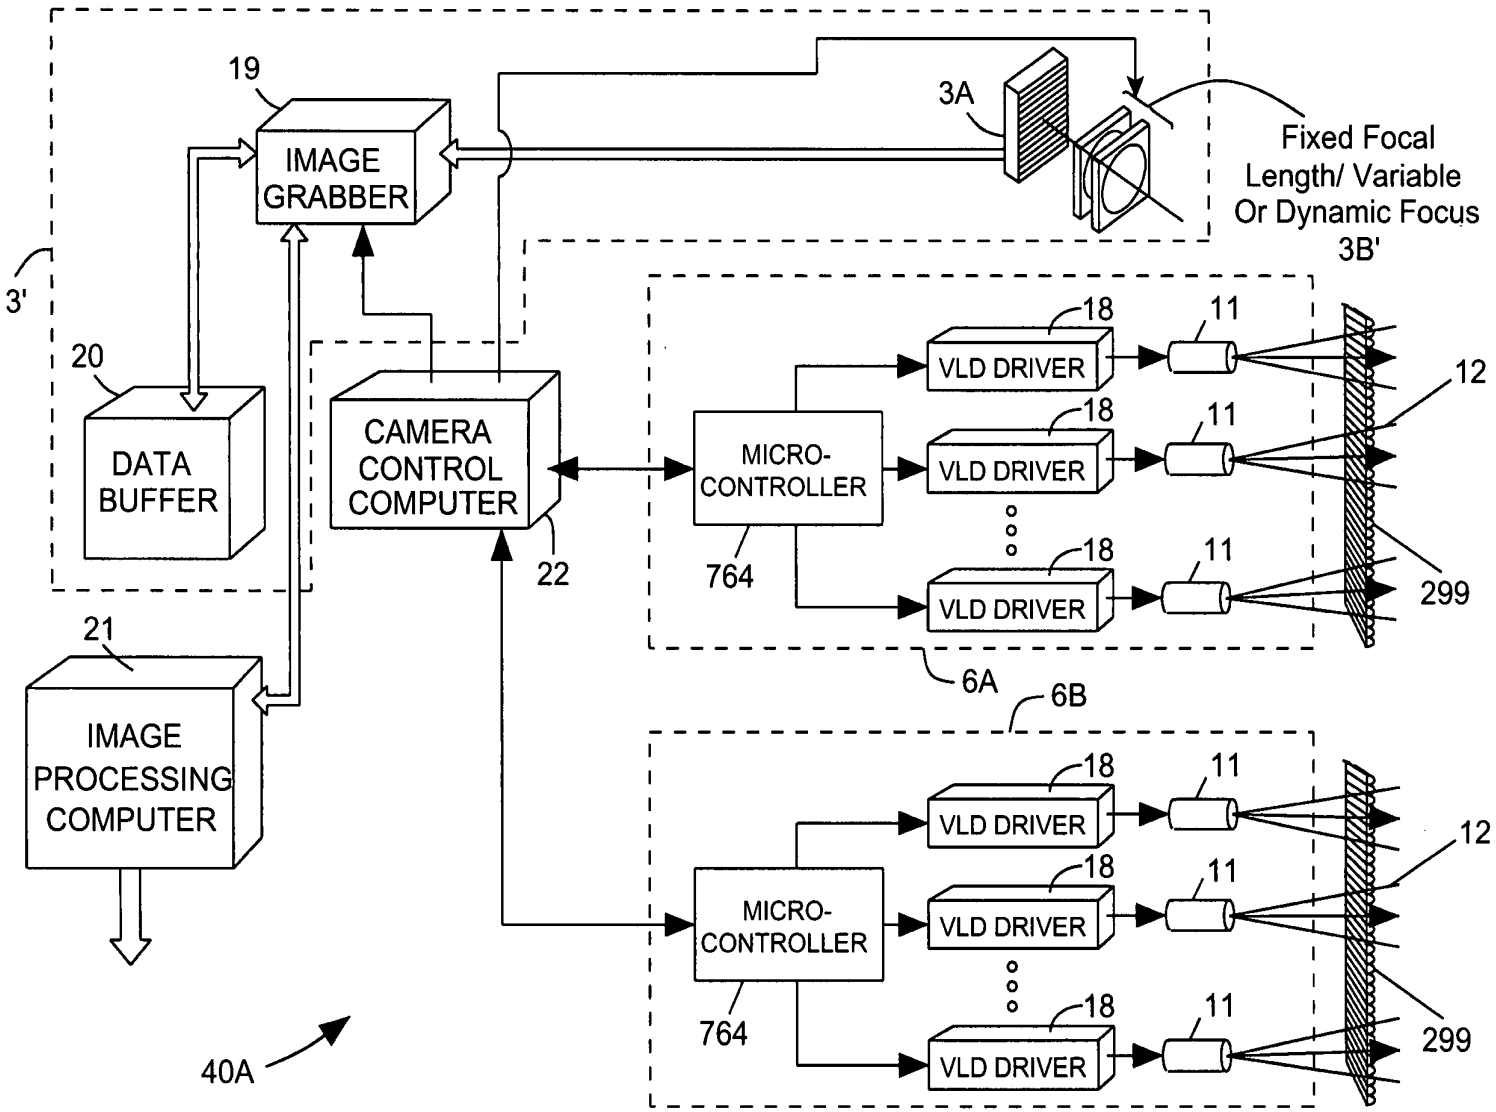
19
IMAGE GRABBER
3A
Fixed Focal Length/ Variable Or Dynamic Focus 3B'
3'
20
DATA BUFFER
CAMERA CONTROL COMPUTER
22
21
IMAGE PROCESSING COMPUTER
MICRO-CONTROLLER
764
VLD DRIVER
18
11
12
299
6A
6B
40A

FIG. 2C1

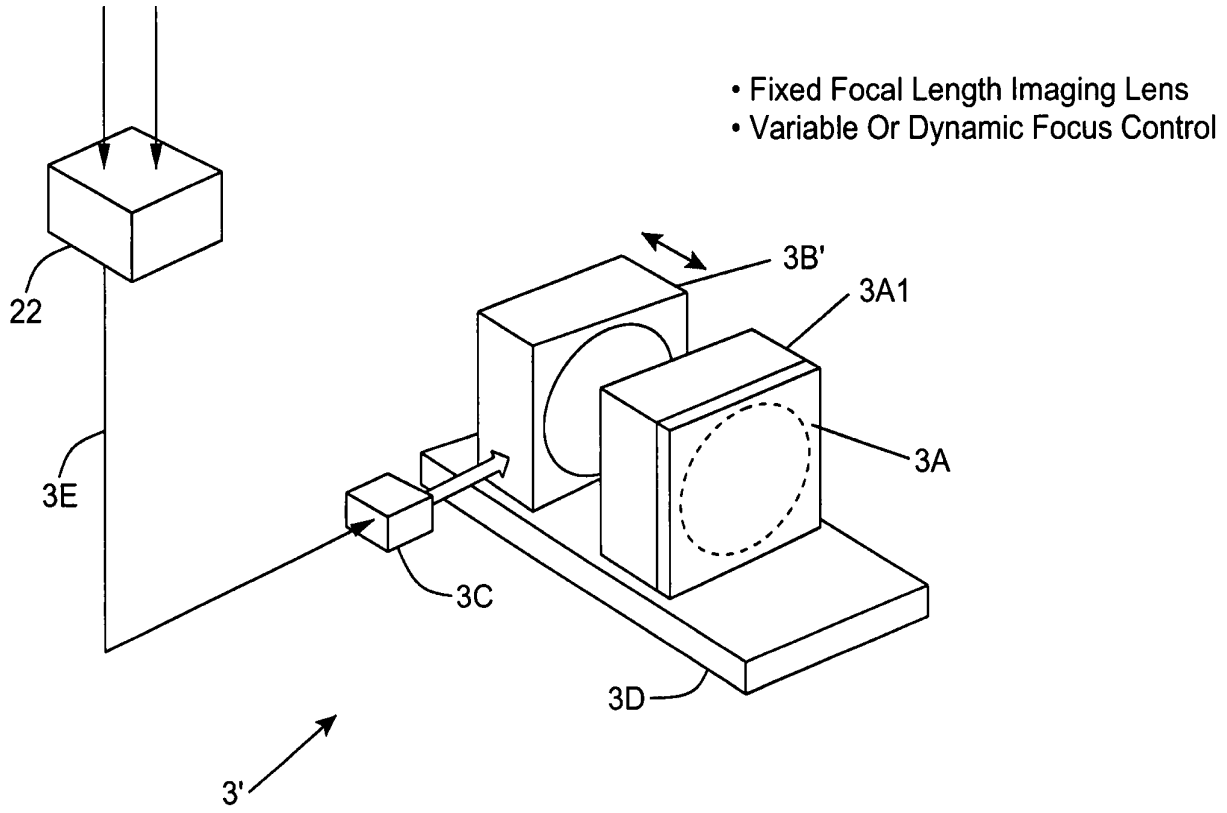
• Fixed Focal Length Imaging Lens
• Variable Or Dynamic Focus Control
22
3E
3B'
3A1
3A
3C
3D
3'

FIG. 2C2

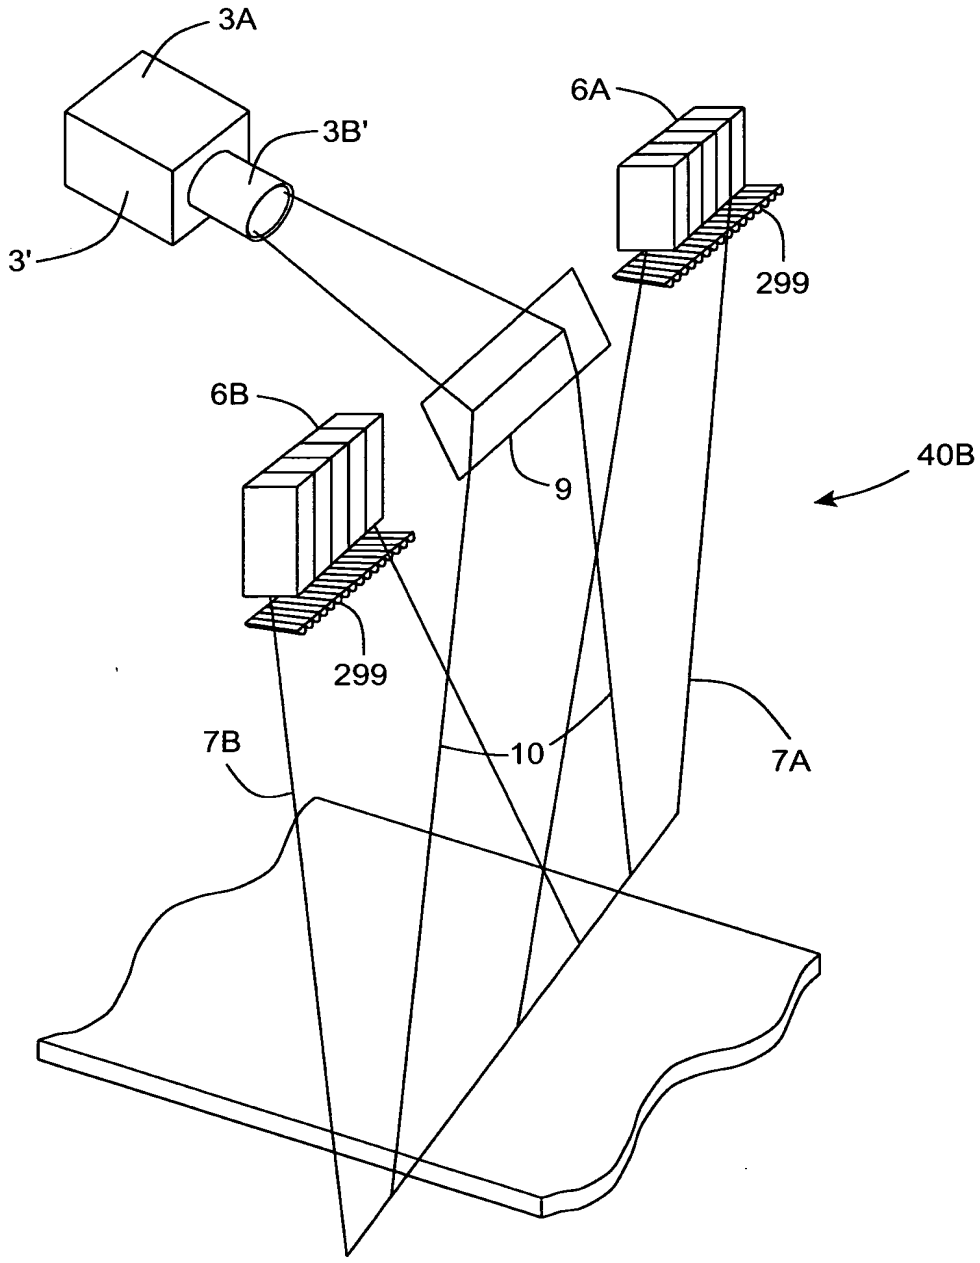

FIG. 2D1

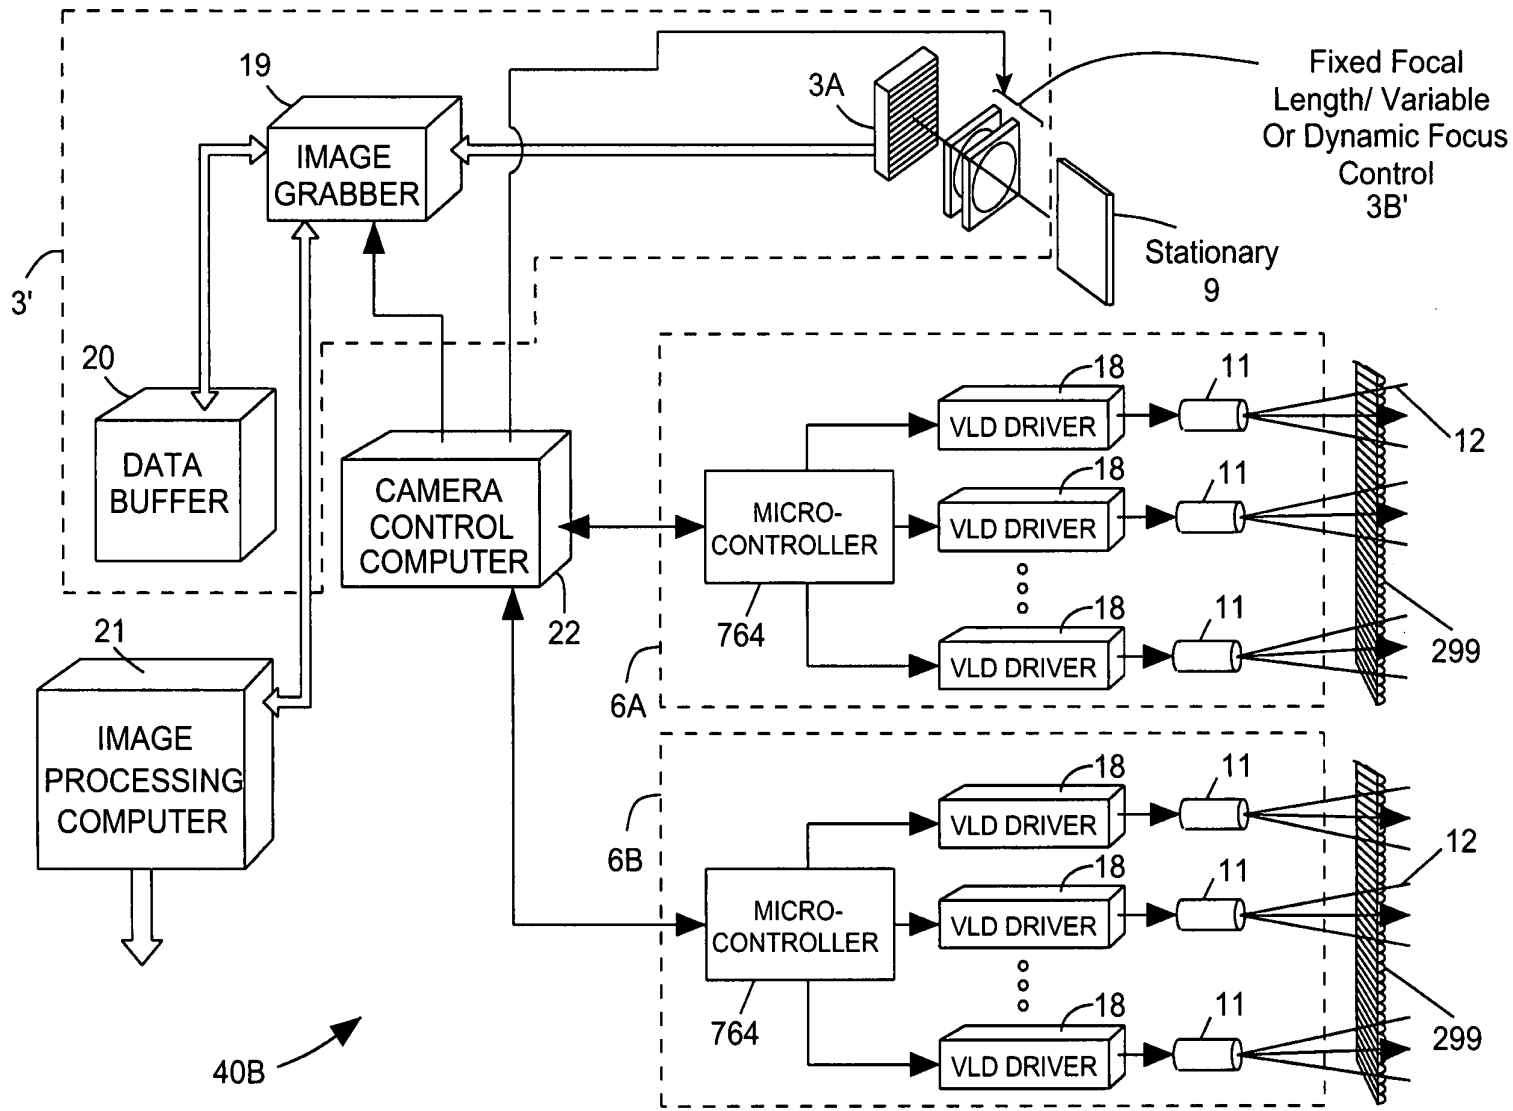
3'
19
IMAGE GRABBER
3A
Fixed Focal Length/ Variable Or Dynamic Focus Control 3B'
Stationary 9
20
DATA BUFFER
CAMERA CONTROL COMPUTER
22
21
IMAGE PROCESSING COMPUTER
MICRO-CONTROLLER
764
6A
6B
VLD DRIVER
18
11
12
299
40B

FIG. 2D2

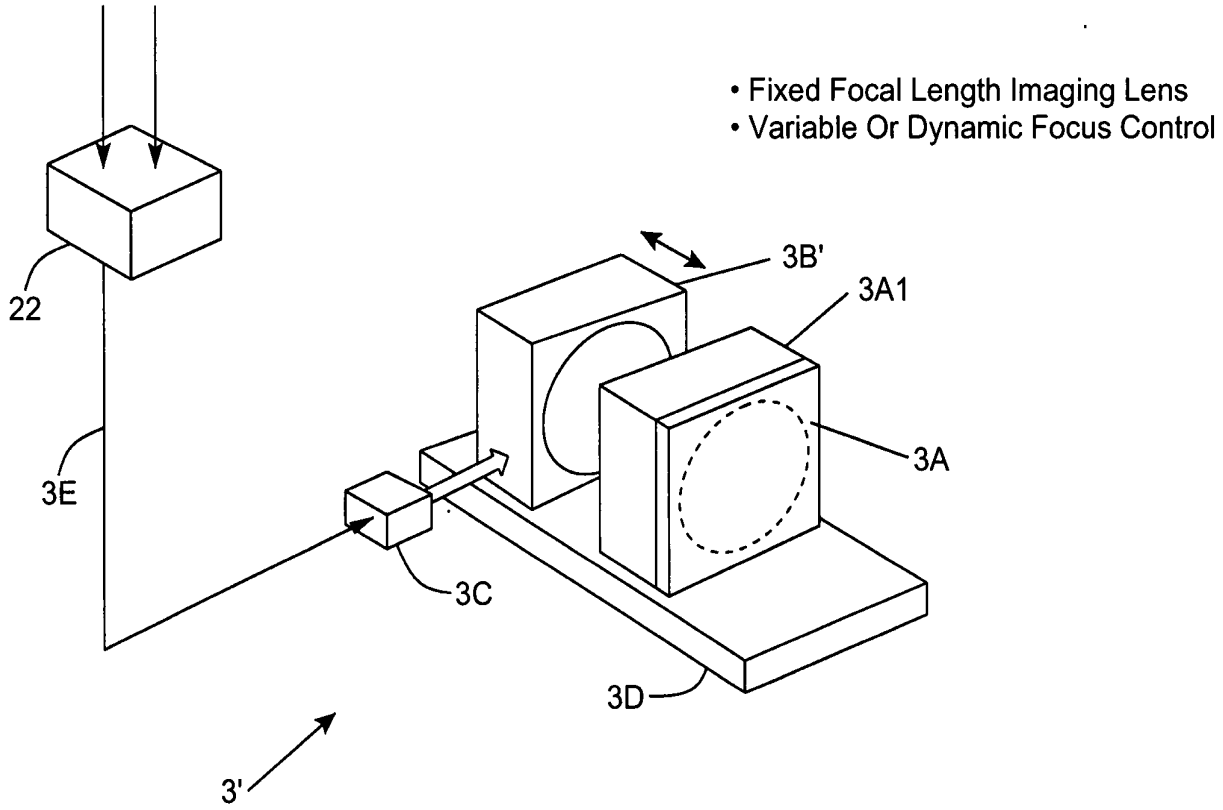
• Fixed Focal Length Imaging Lens
• Variable Or Dynamic Focus Control
22
3E
3B'
3A1
3A
3C
3D
3'

FIG. 2D3

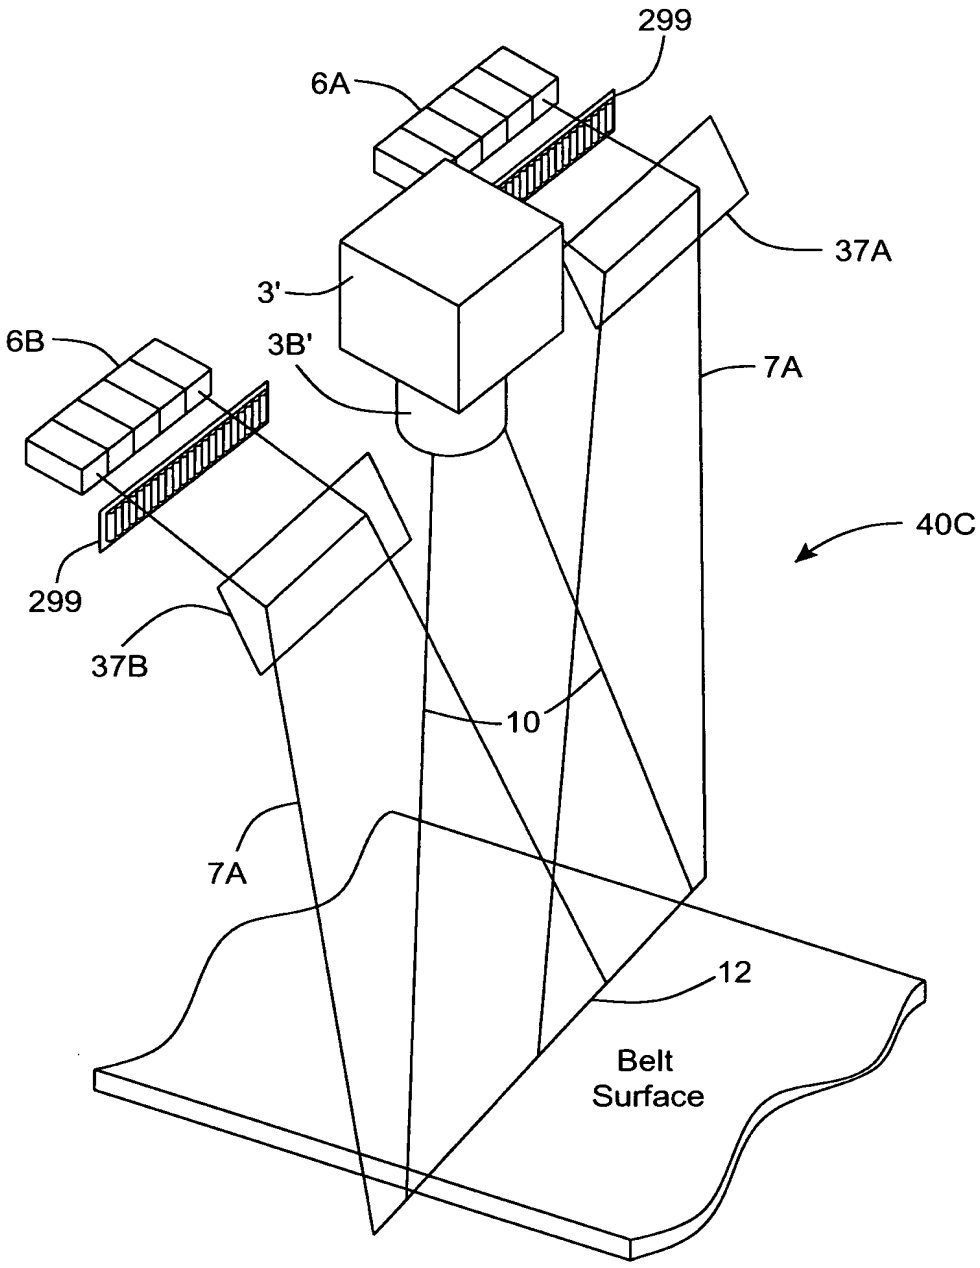

FIG. 2E1

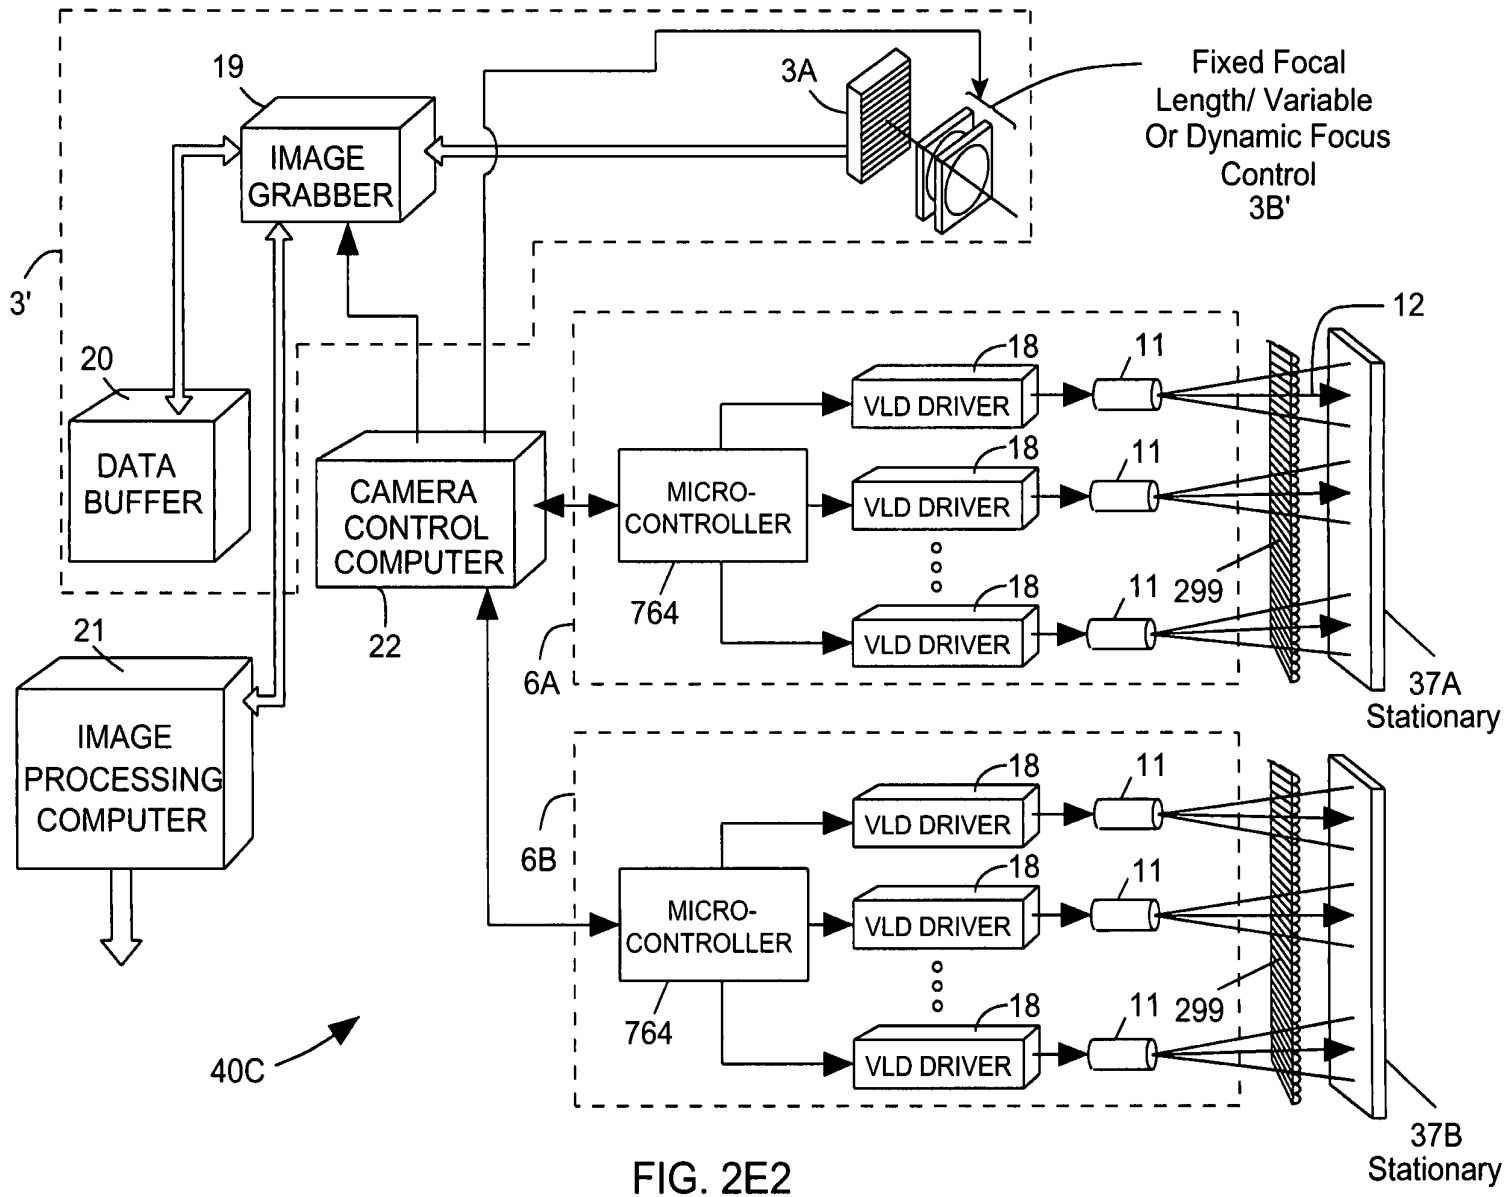
19
IMAGE GRABBER
3A
Fixed Focal Length/ Variable Or Dynamic Focus Control 3B'
3'
20
DATA BUFFER
CAMERA CONTROL COMPUTER
22
21
IMAGE PROCESSING COMPUTER
40C
6A
MICRO-CONTROLLER
764
VLD DRIVER
18
11
299
12
37A Stationary
6B
37B Stationary

FIG. 2E2

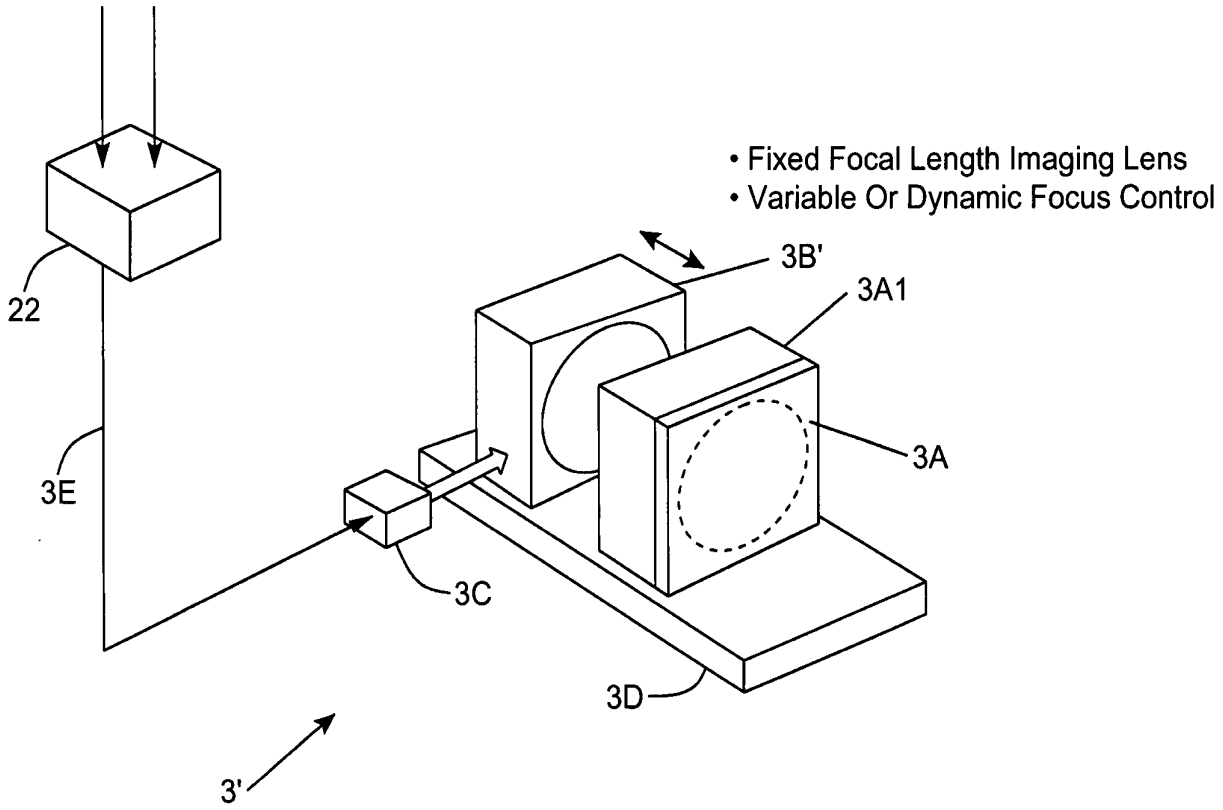
• Fixed Focal Length Imaging Lens
• Variable Or Dynamic Focus Control
22
3E
3B'
3A1
3A
3C
3D
3'

FIG. 2E3

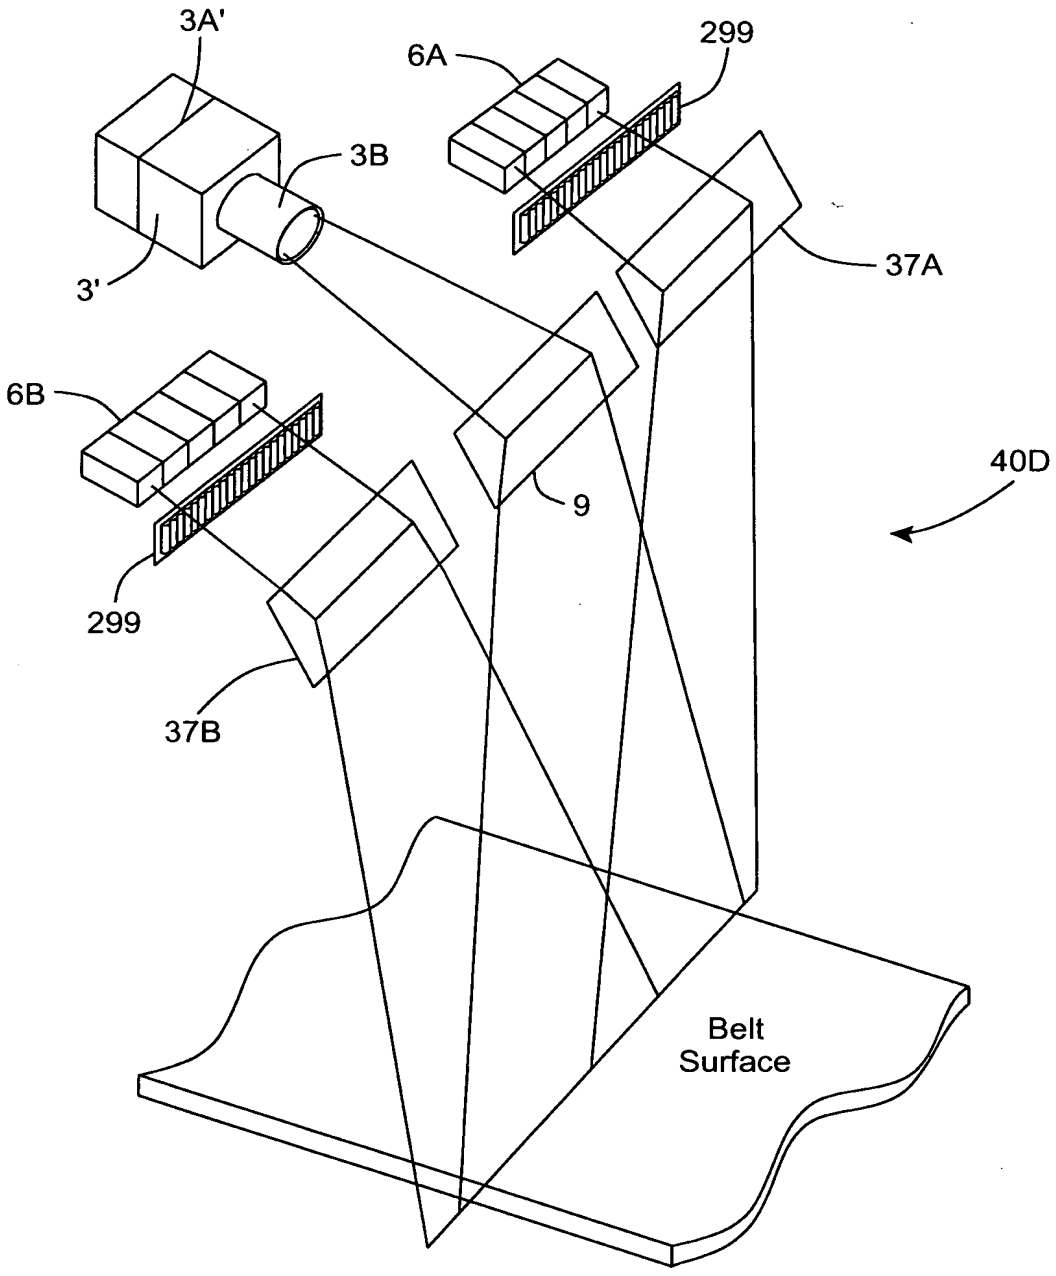

FIG. 2F1

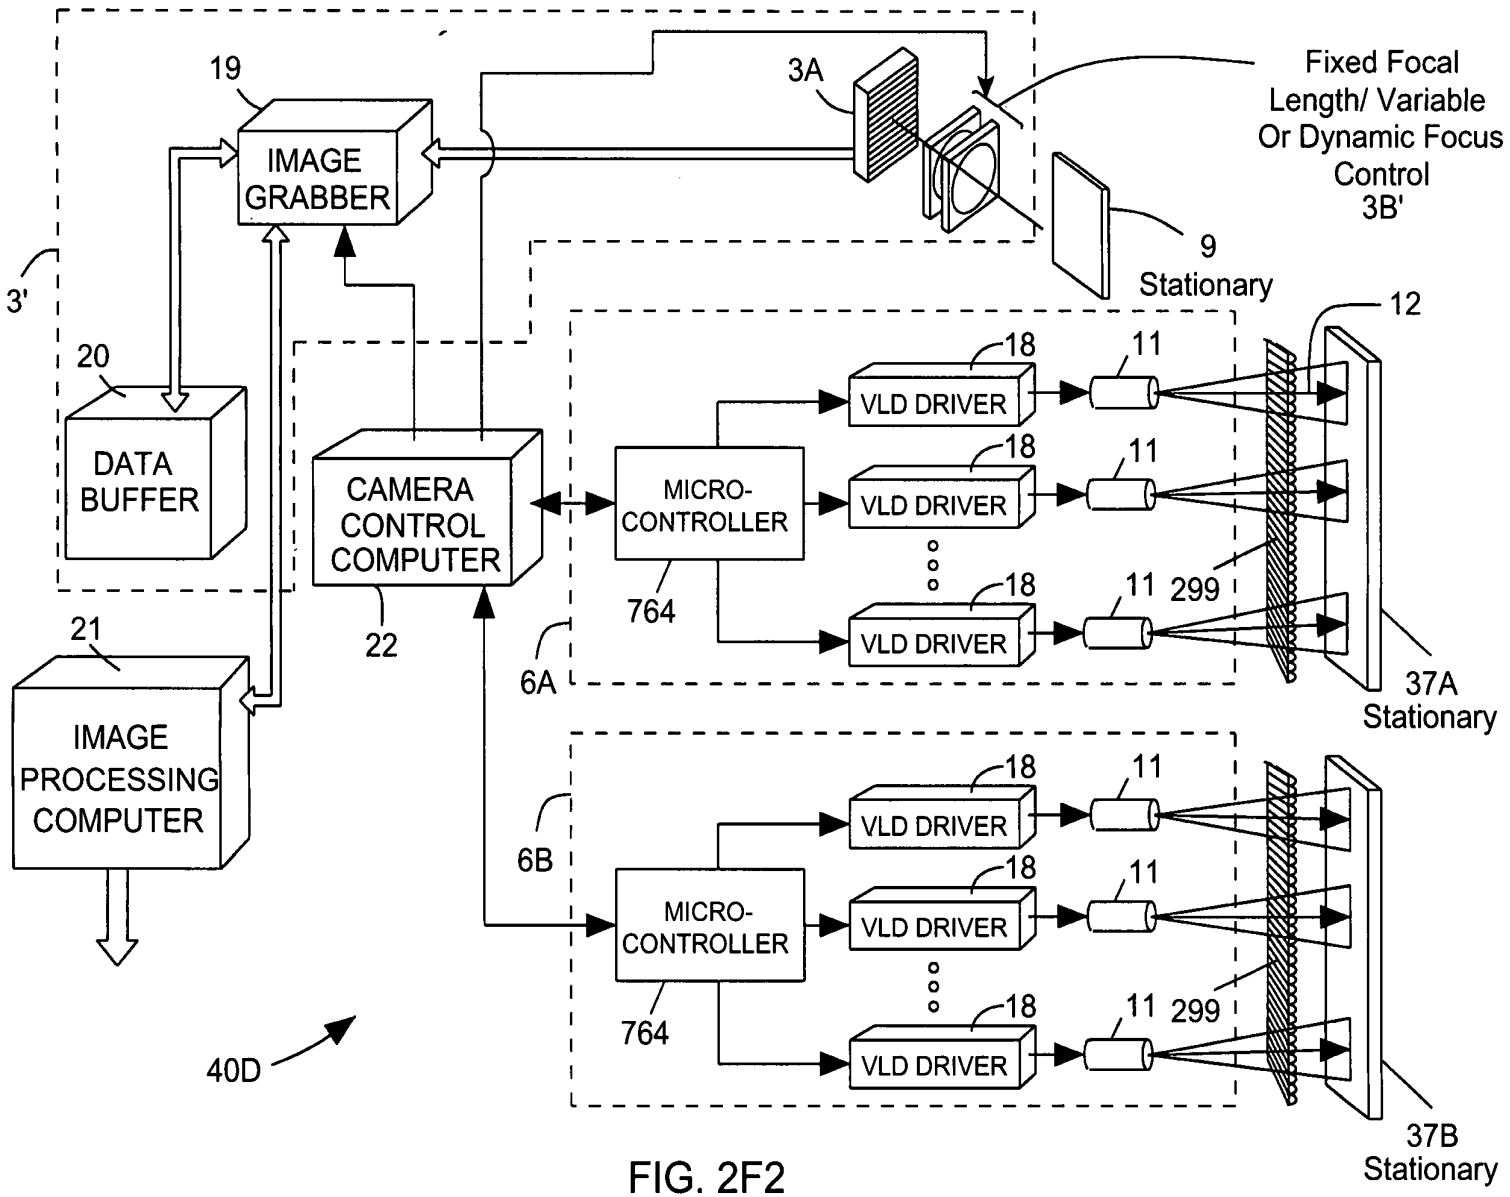
19
IMAGE GRABBER
3A
Fixed Focal Length/ Variable Or Dynamic Focus Control 3B'
9
Stationary
3'
20
DATA BUFFER
CAMERA CONTROL COMPUTER
22
MICRO-CONTROLLER
764
18
VLD DRIVER
11
12
299
6A
37A
Stationary
21
IMAGE PROCESSING COMPUTER
6B
MICRO-CONTROLLER
764
VLD DRIVER
37B
Stationary
40D

FIG. 2F2

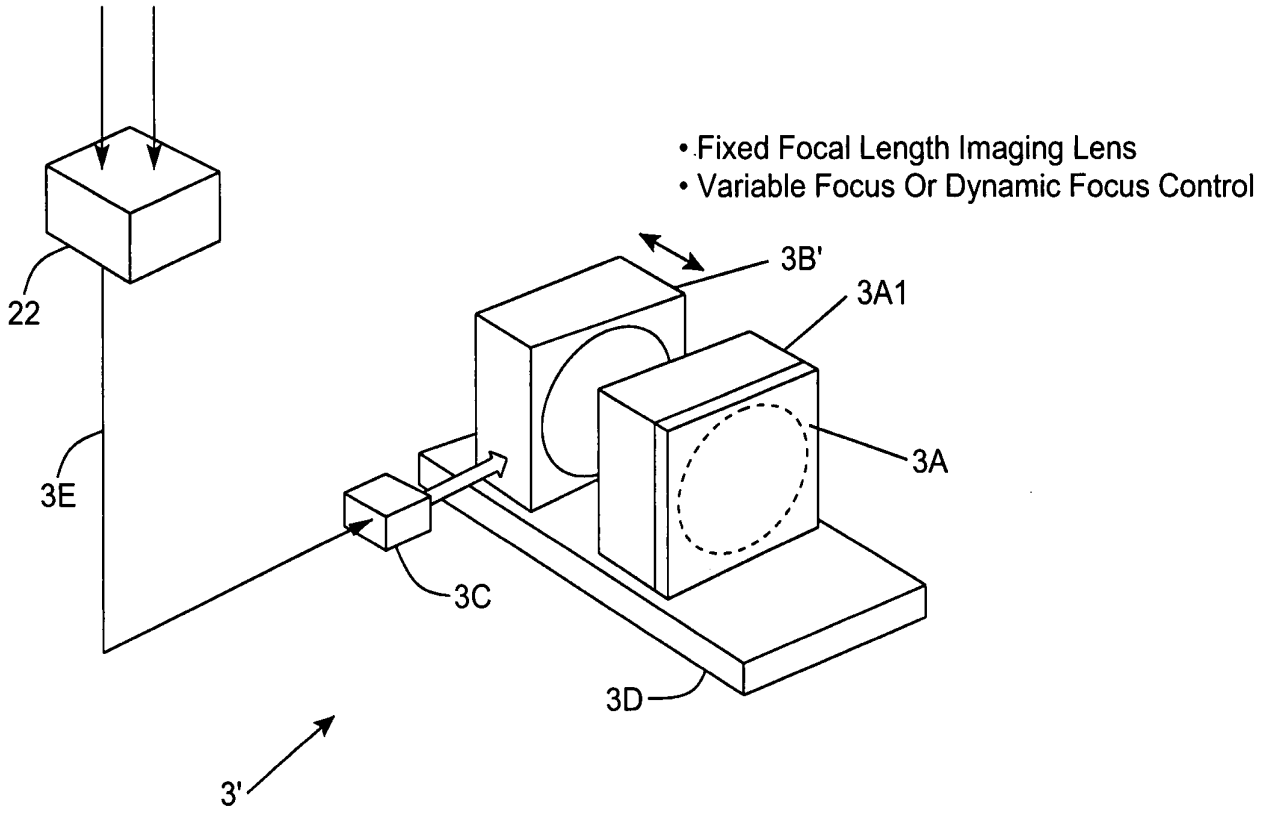
• Fixed Focal Length Imaging Lens
• Variable Focus Or Dynamic Focus Control
22
3E
3B'
3A1
3A
3C
3D
3'

FIG. 2F3

Top Conveyor Scanner:

- Fixed Focal Length Imaging Lens
- Variable Focal Distance Control

Side Conveyor Scanner:

- Fixed Focal Length Imaging Lens
- Dynamic Focal Distance Control

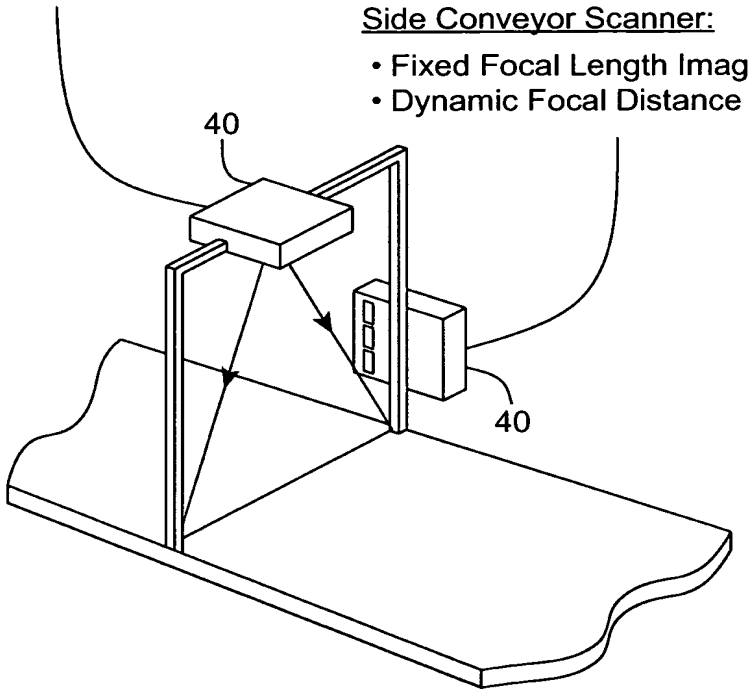

FIG. 2G

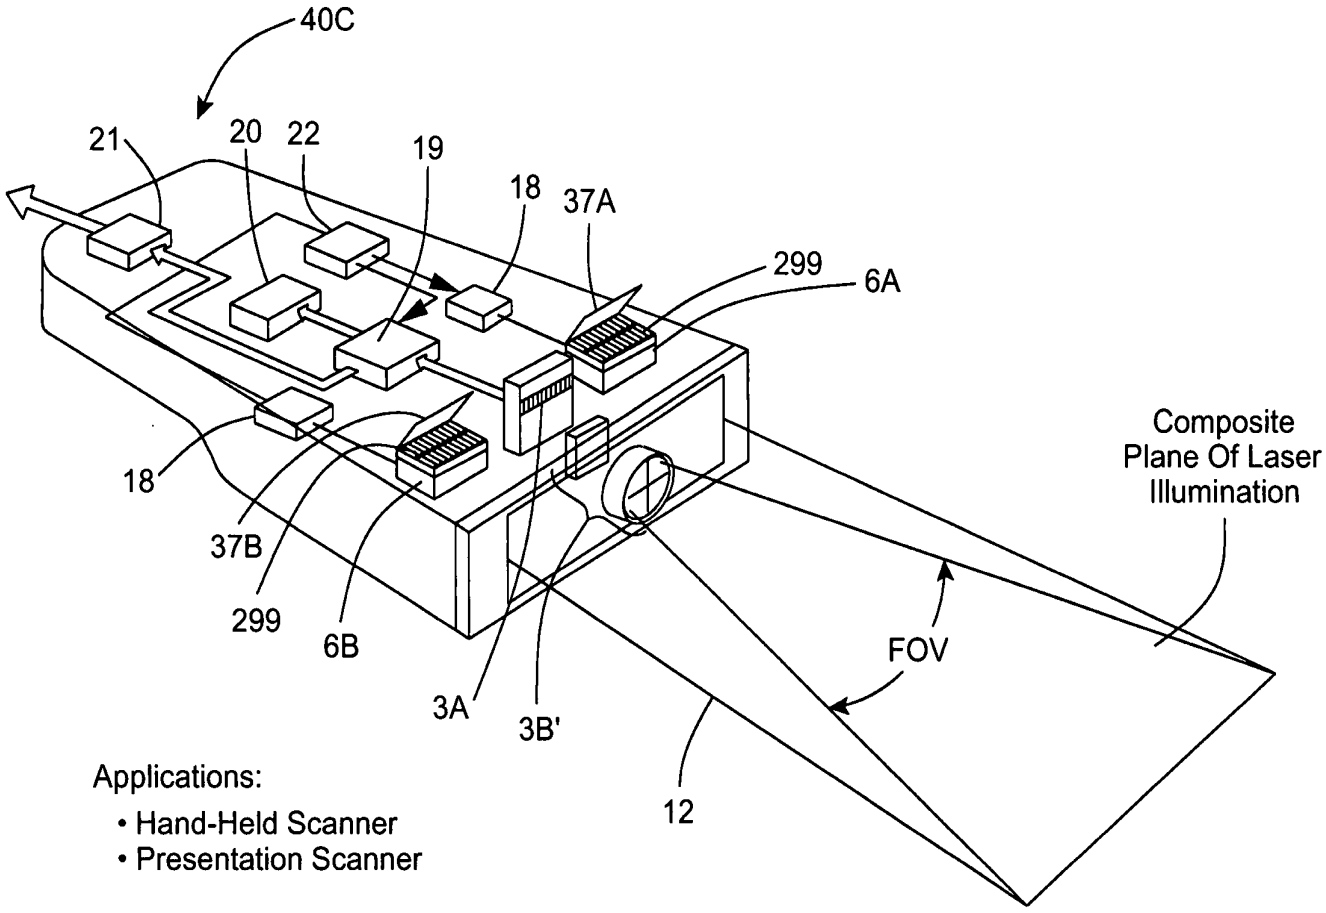
40C
21
20
22
19
18
37A
299
6A
18
37B
299
6B
3A
3B'
12
Composite
Plane Of Laser
Illumination
FOV
Applications:
• Hand-Held Scanner
• Presentation Scanner

FIG. 2H

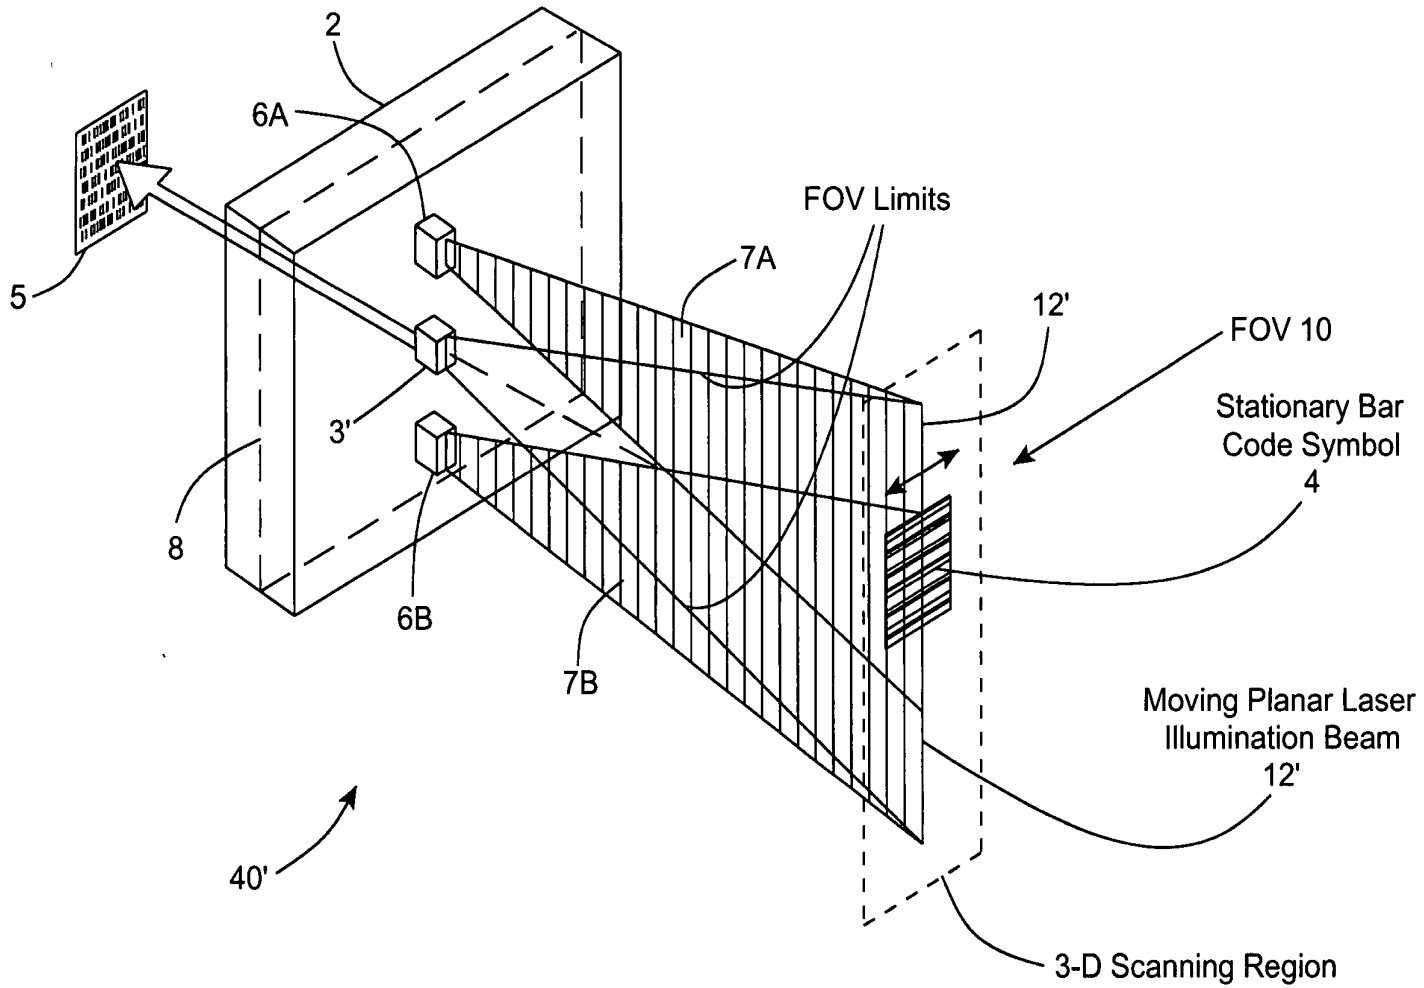
2
6A
FOV Limits
7A
12'
FOV 10
5
Stationary Bar
Code Symbol
4
3'
8
6B
7B
Moving Planar Laser
Illumination Beam
12'
40'
3-D Scanning Region

FIG. 2I1

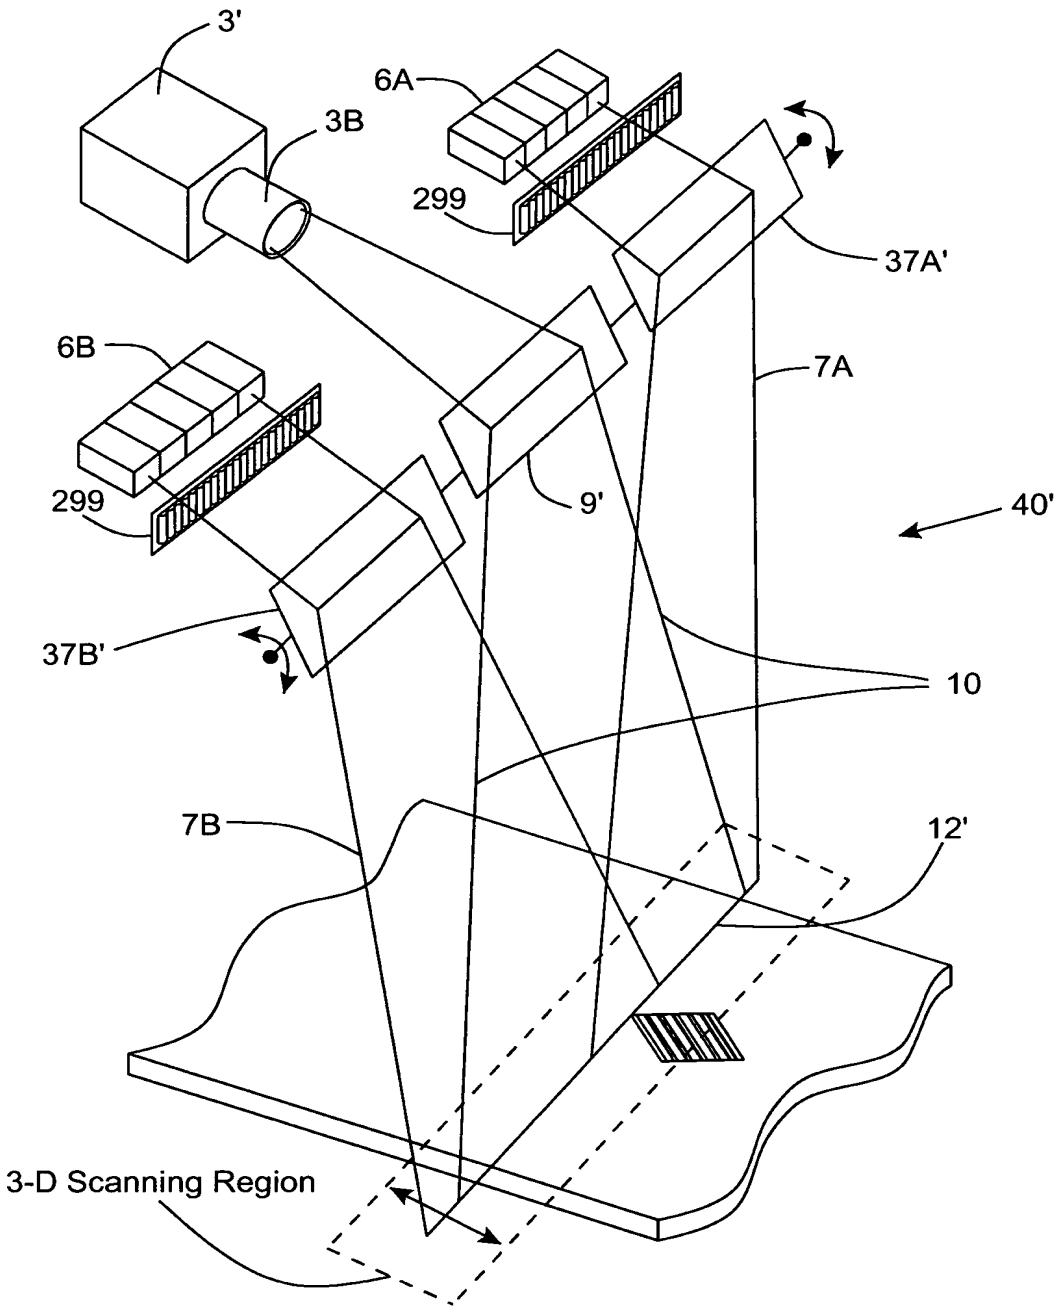

FIG. 2I2

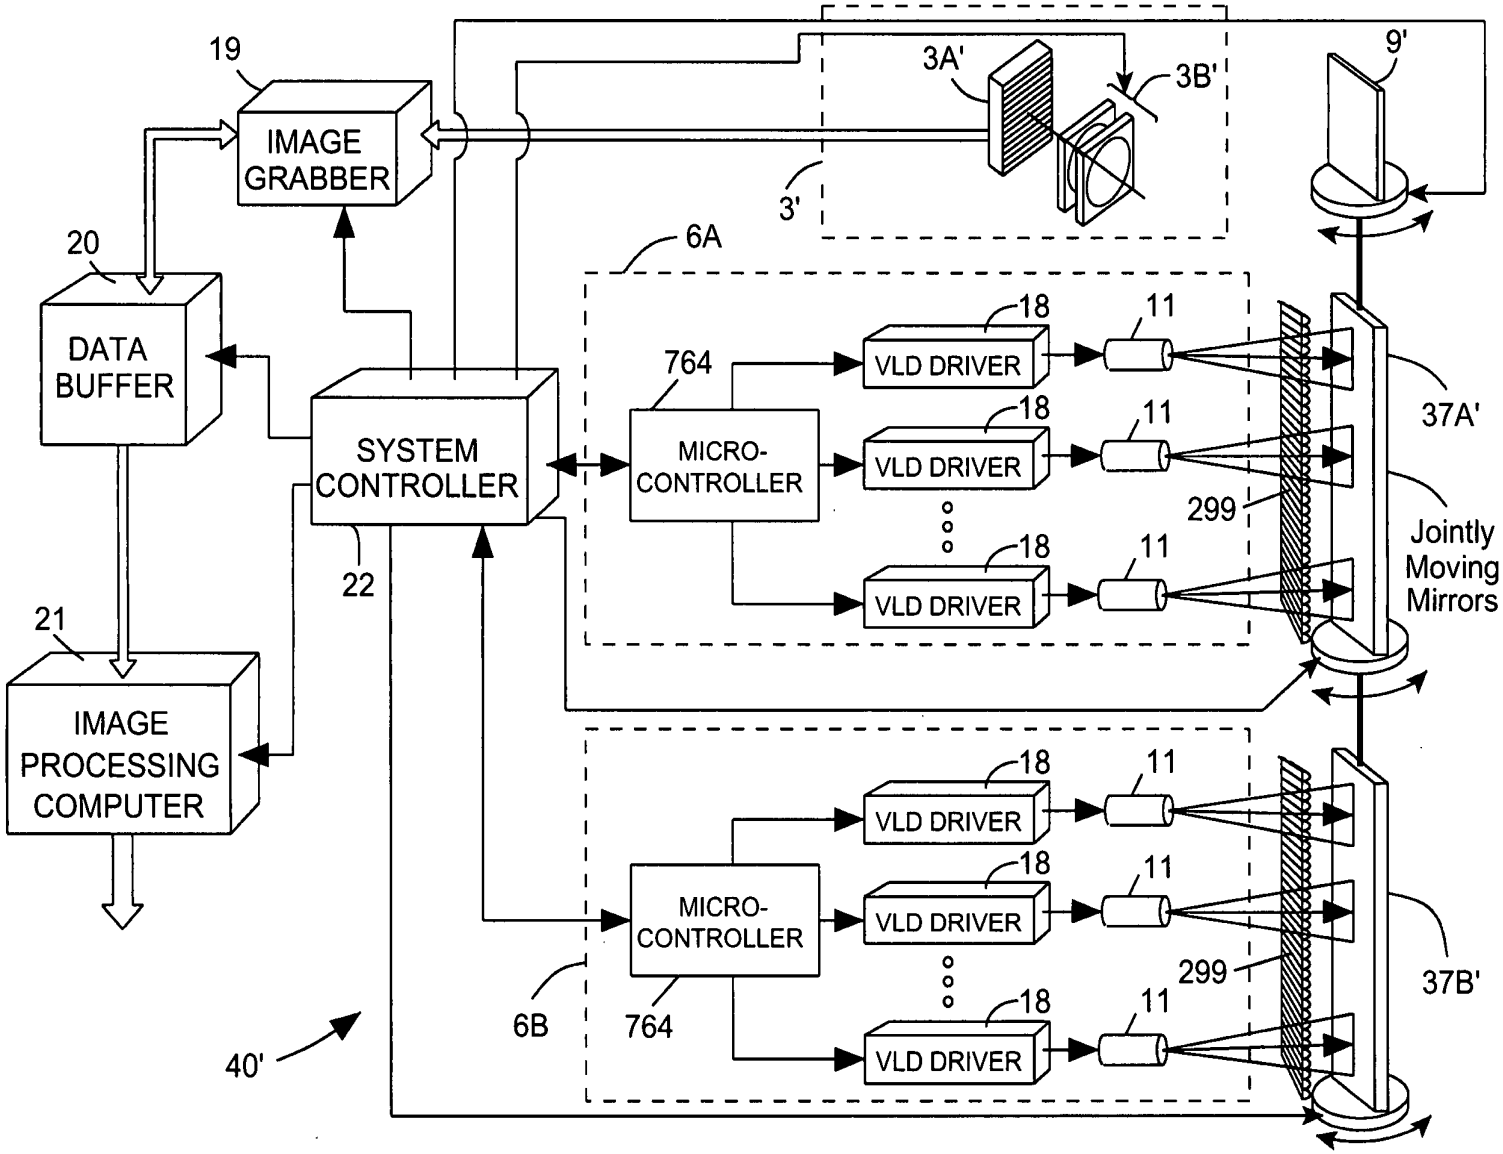
19
IMAGE GRABBER
3A'
3B'
9'
3'
20
DATA BUFFER
6A
764
MICRO-CONTROLLER
18
VLD DRIVER
11
37A'
299
Jointly Moving Mirrors
SYSTEM CONTROLLER
22
21
IMAGE PROCESSING COMPUTER
6B
764
37B'
40'

FIG. 2I3

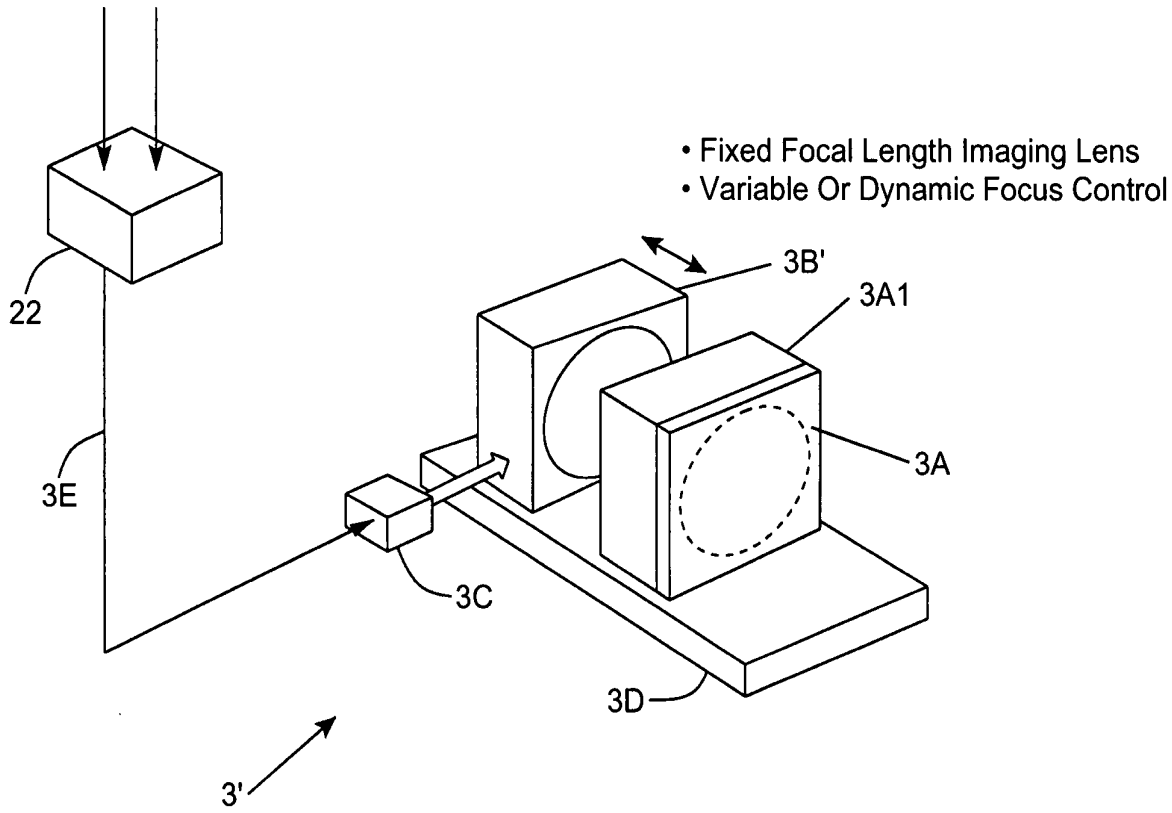
• Fixed Focal Length Imaging Lens
• Variable Or Dynamic Focus Control
22
3E
3B'
3A1
3A
3C
3D
3'

FIG. 2I4

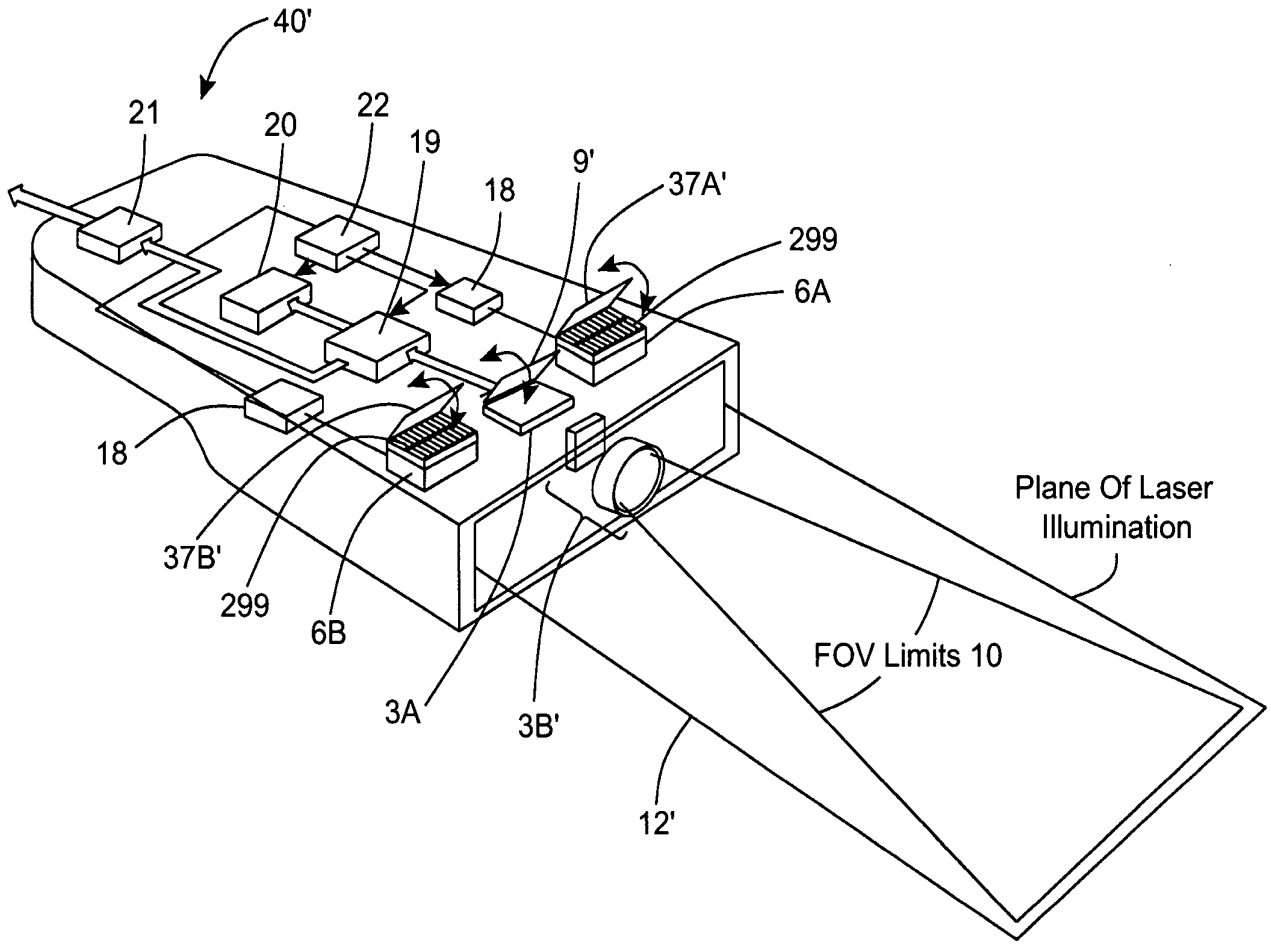
40'
21
20
22
19
18
9'
37A'
299
6A
18
37B'
299
6B
3A
3B'
12'
Plane Of Laser Illumination
FOV Limits 10

FIG. 2I5

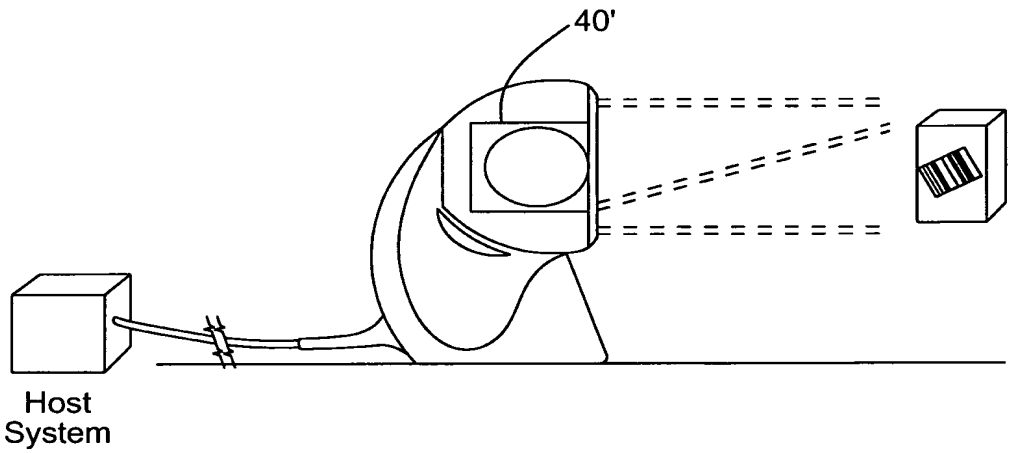

FIG. 2I6

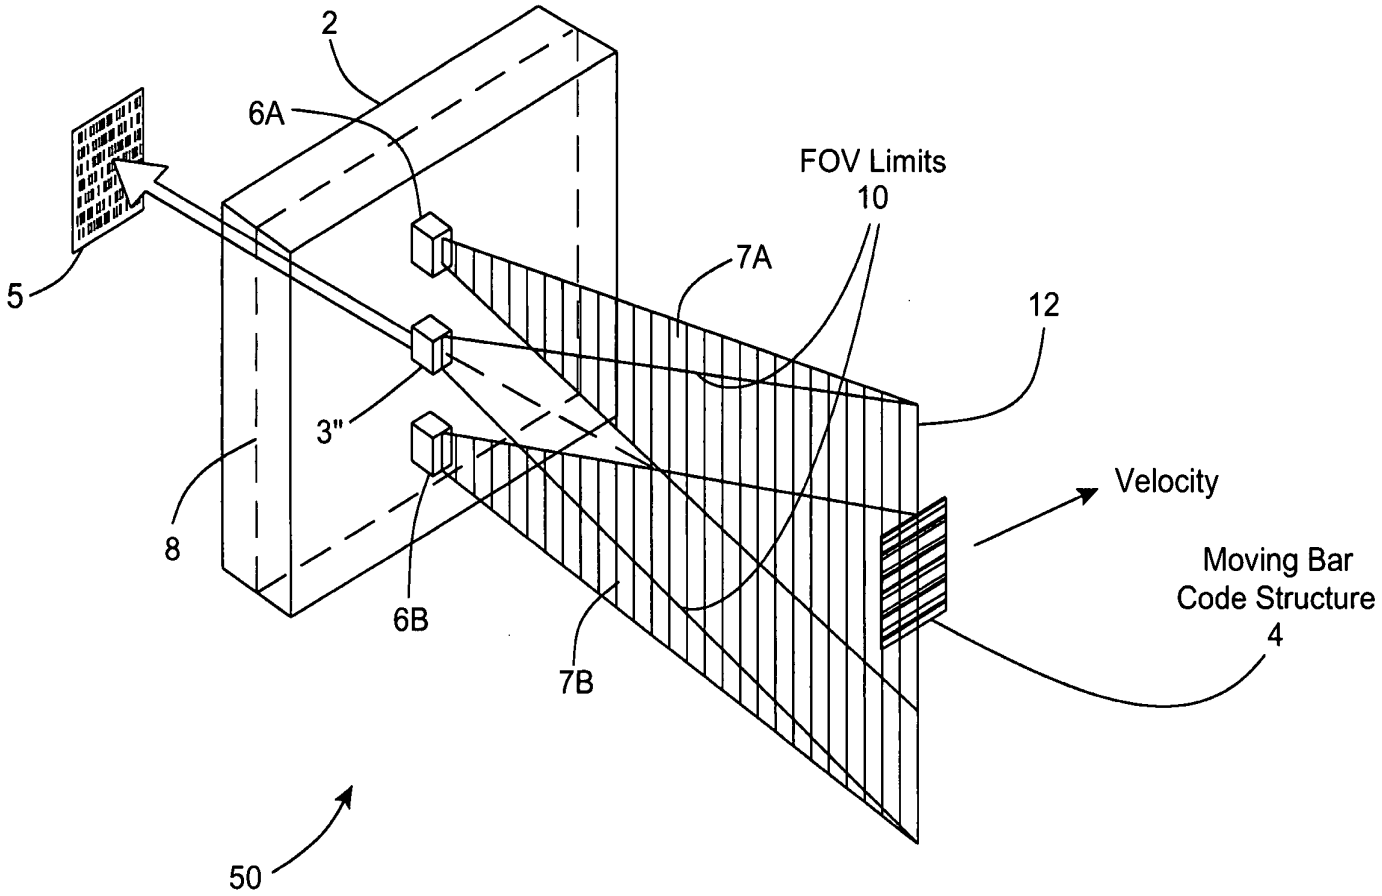
2
6A
FOV Limits
10
7A
12
5
3"
8
6B
7B
Velocity
Moving Bar
Code Structure
4
50

FIG. 3A

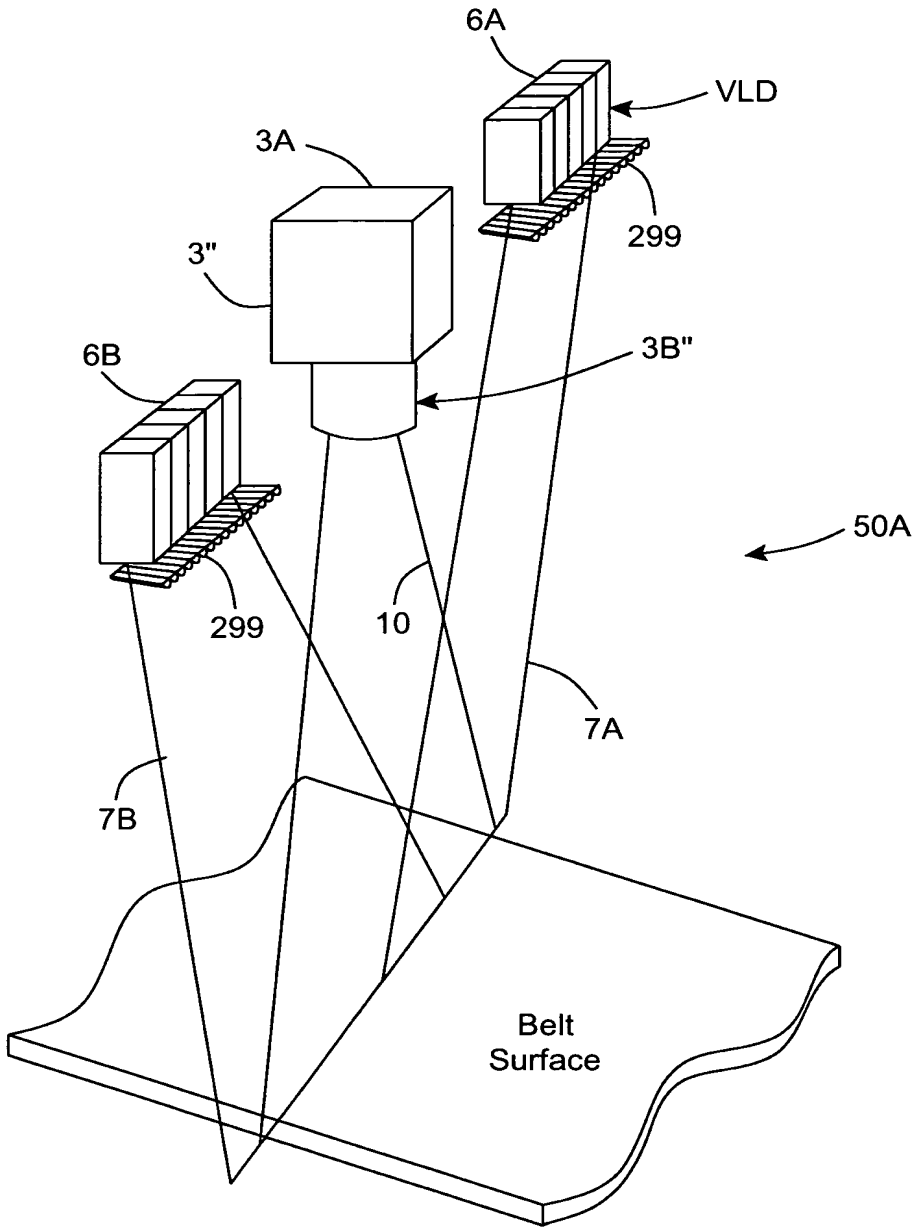

FIG. 3B1

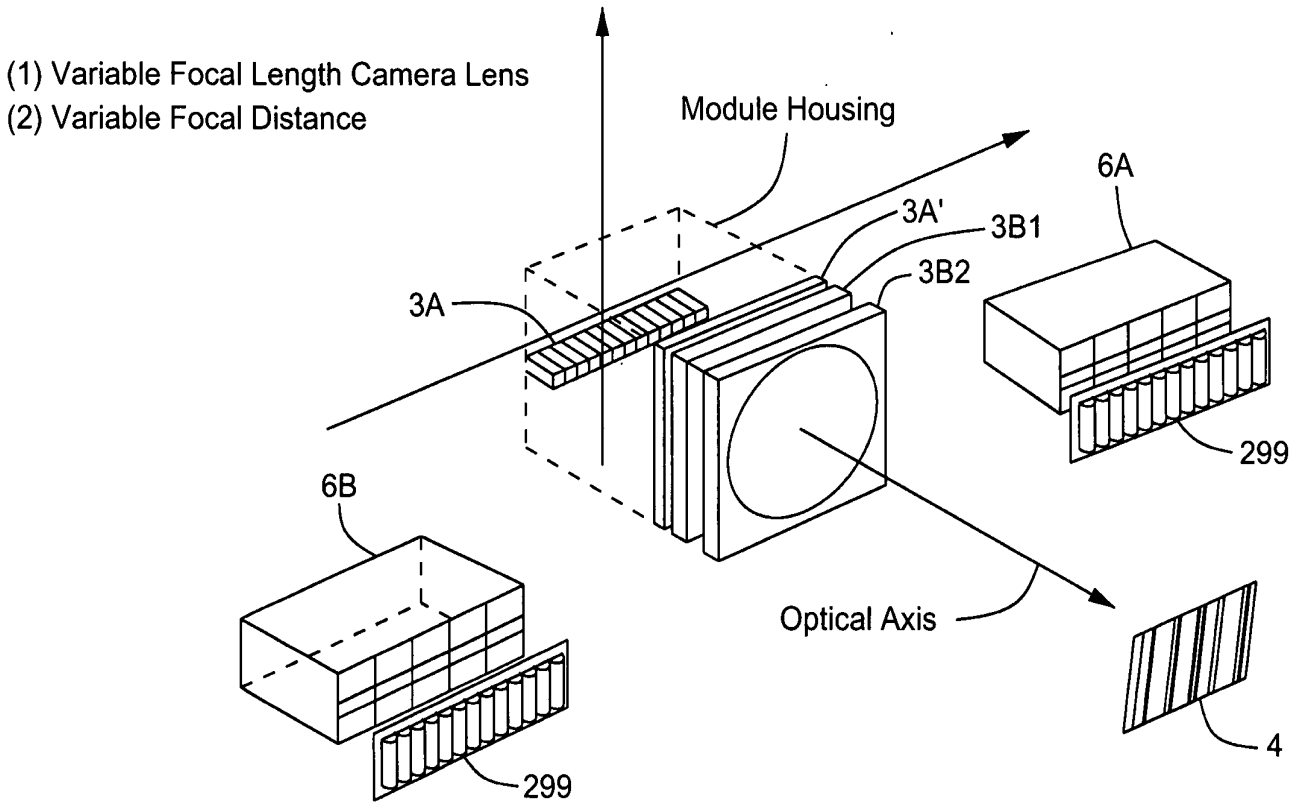
(1) Variable Focal Length Camera Lens
(2) Variable Focal Distance
Module Housing
6A
3A'
3B1
3B2
3A
299
6B
Optical Axis
299
4

FIG. 3B2

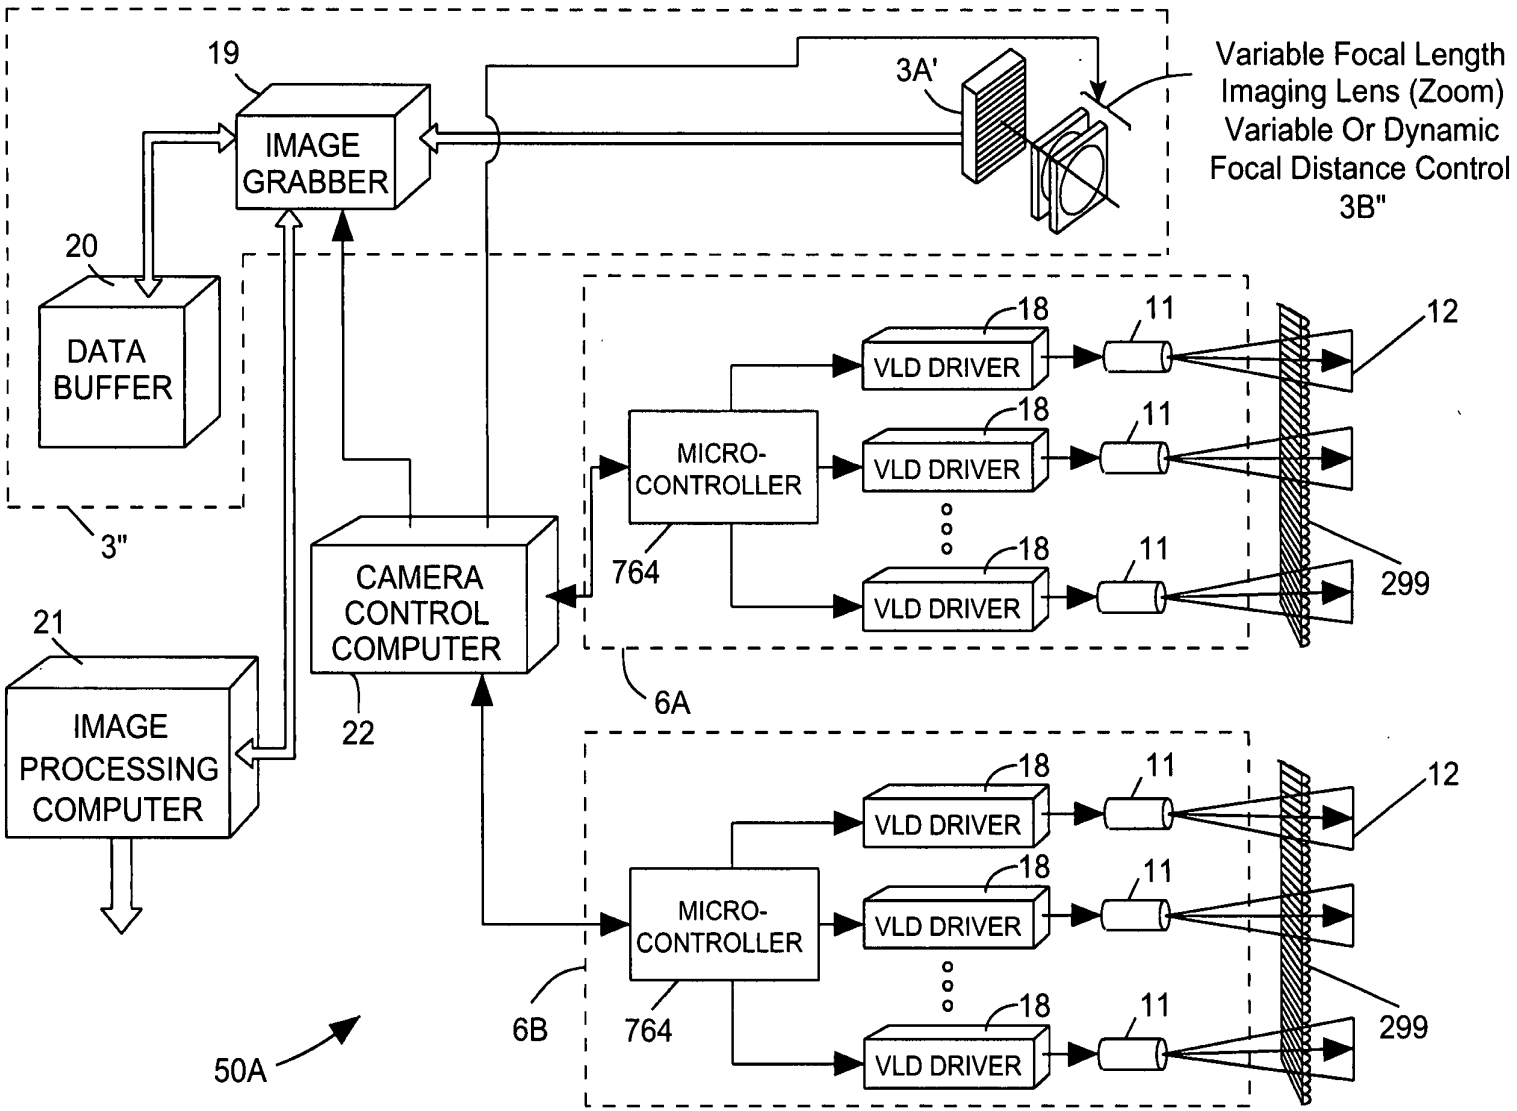
19
IMAGE GRABBER
3A'
Variable Focal Length Imaging Lens (Zoom) Variable Or Dynamic Focal Distance Control 3B"
20
DATA BUFFER
3"
21
IMAGE PROCESSING COMPUTER
CAMERA CONTROL COMPUTER
22
MICRO-CONTROLLER
764
VLD DRIVER
18
11
12
299
6A
6B
50A

FIG. 3C1

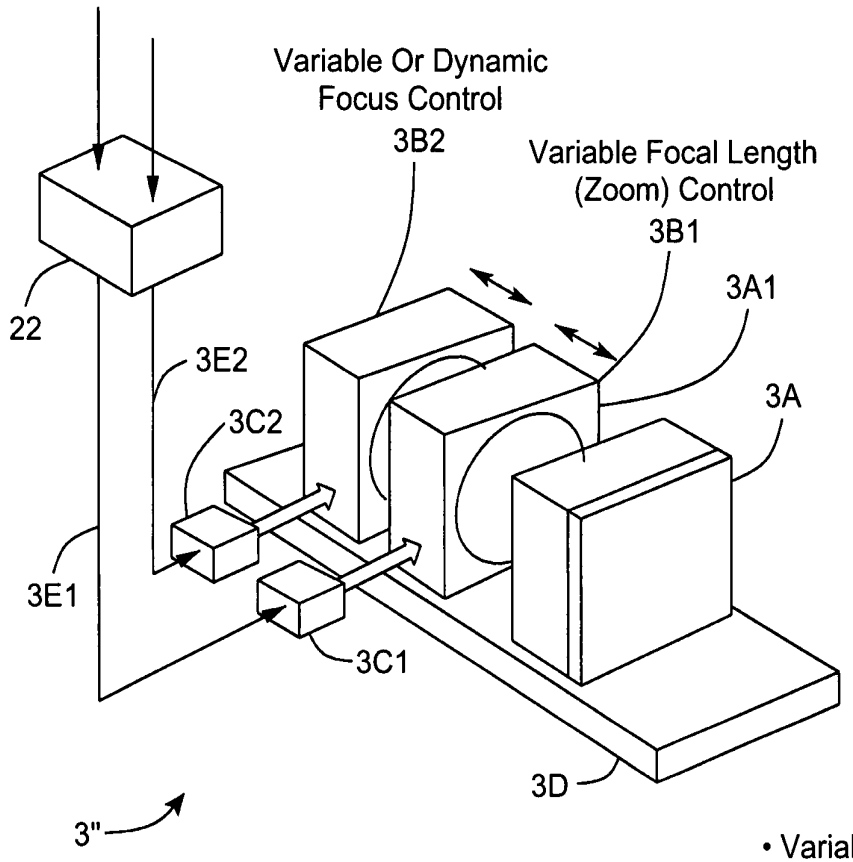

- Variable Focal Length Camera Lens
- Variable Focal Distance

FIG. 3C2

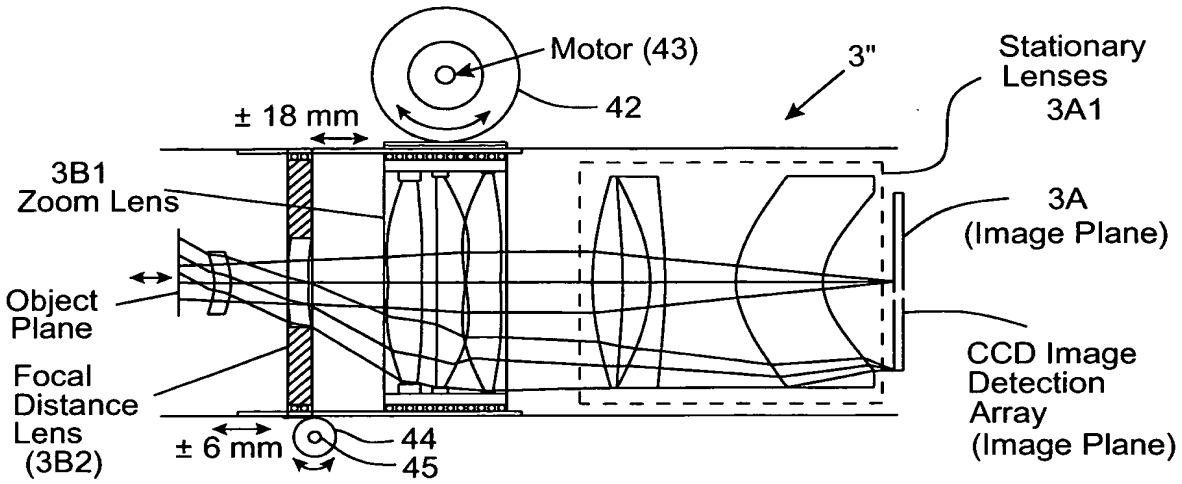

FIG. 3D1

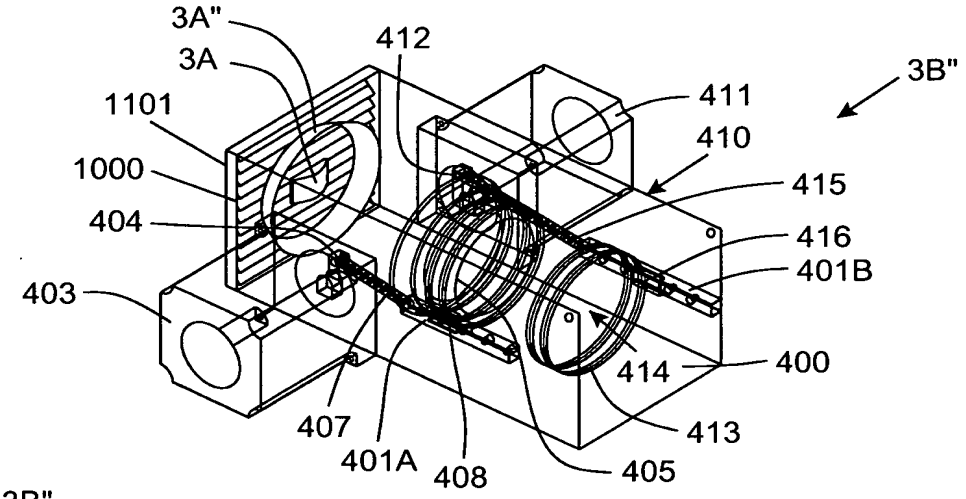

FIG. 3D2

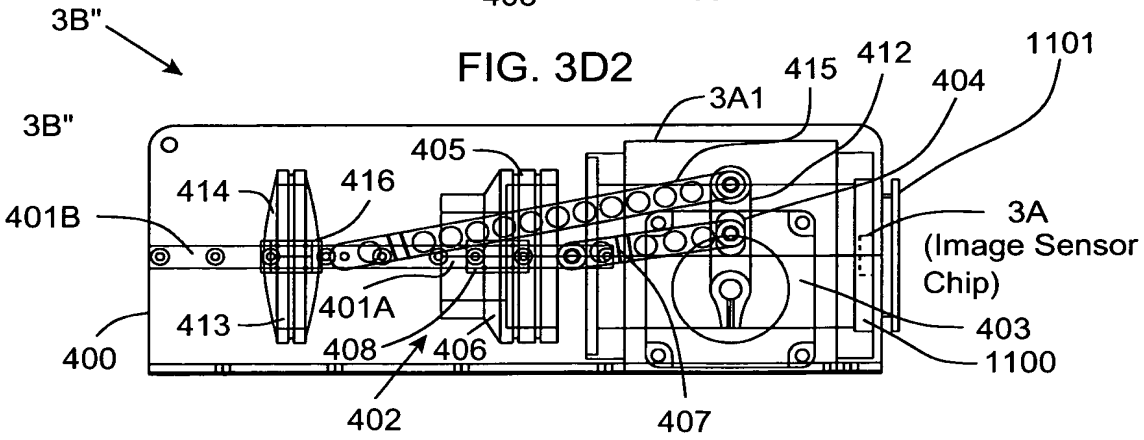

FIG. 3D3

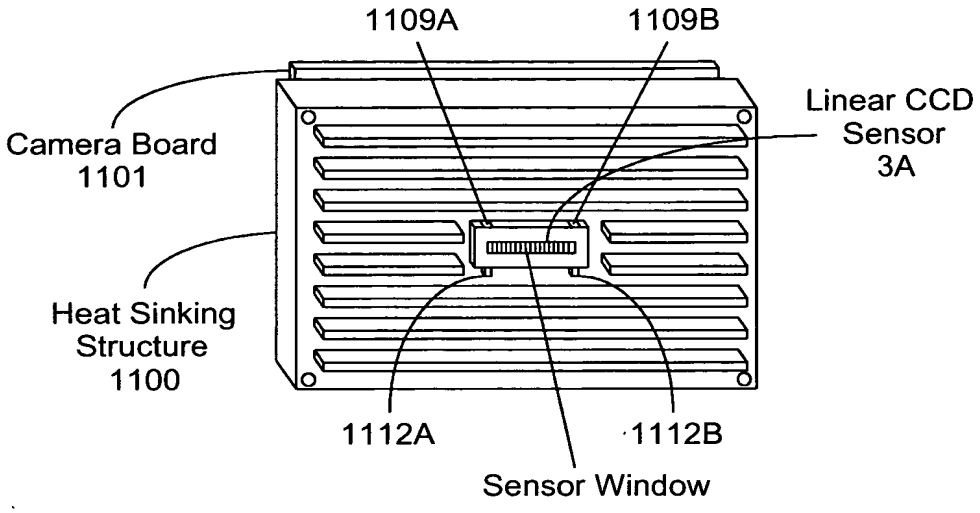

FIG. 3D4

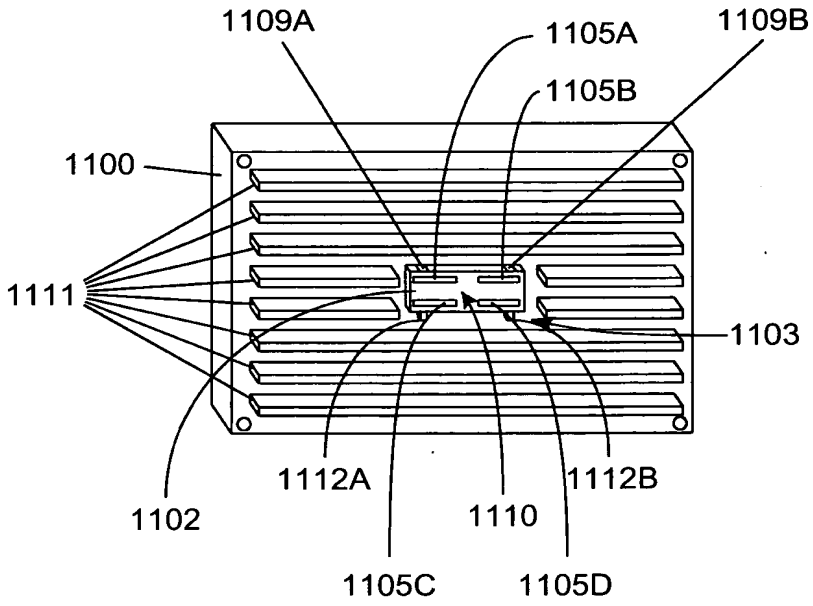

FIG. 3D5

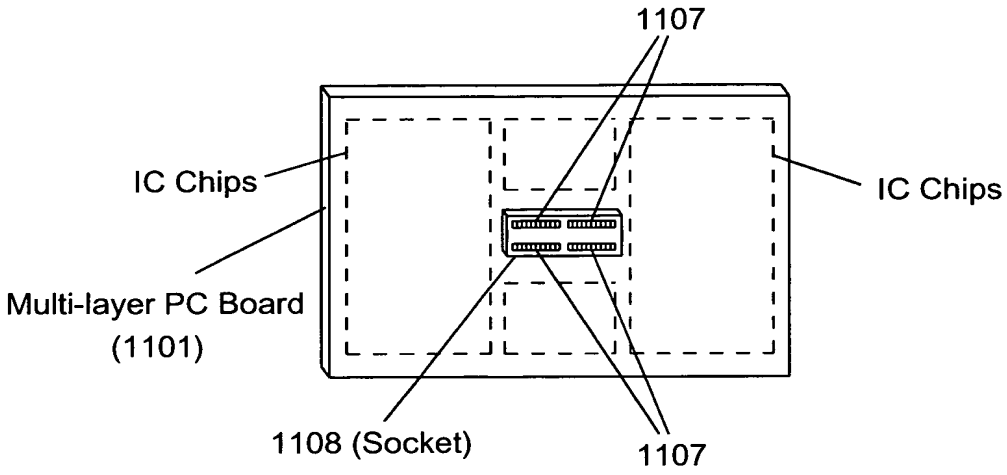

FIG. 3D6

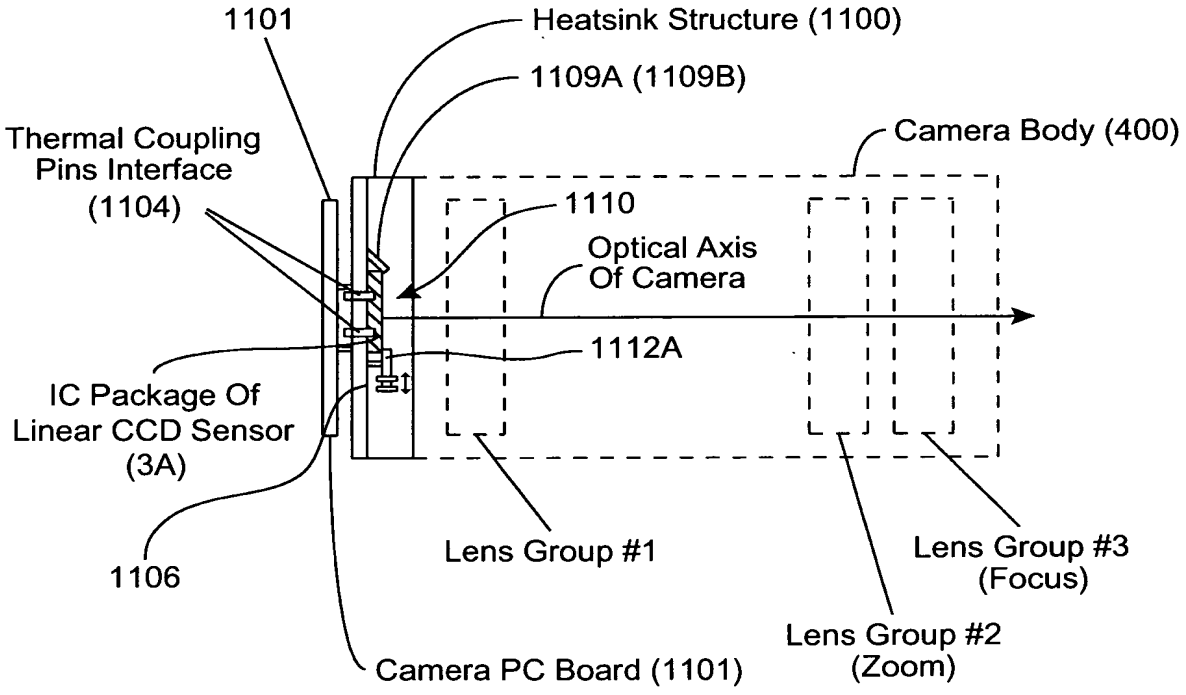

FIG. 3D7

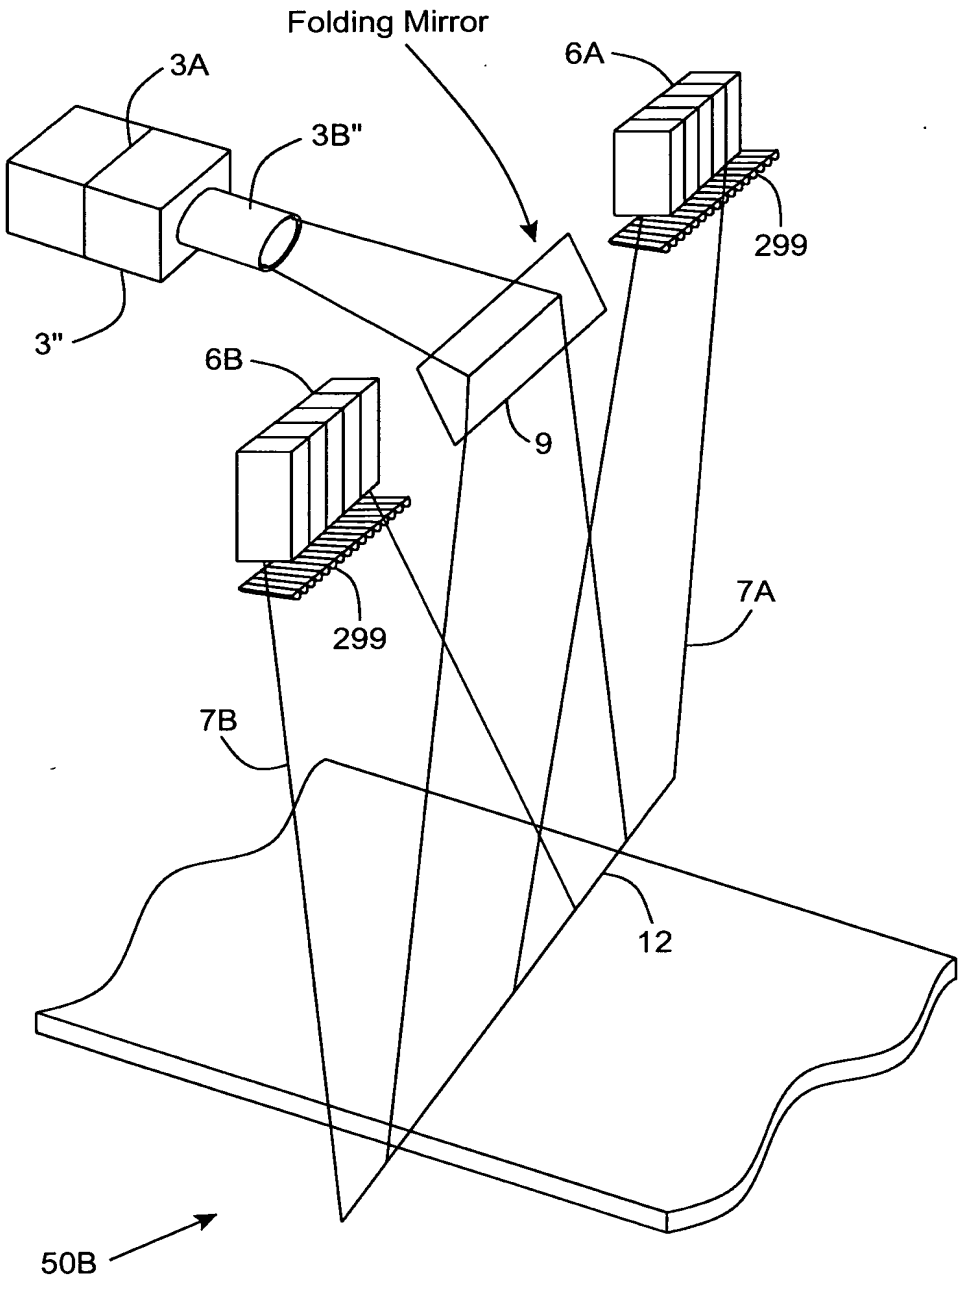

FIG. 3E1

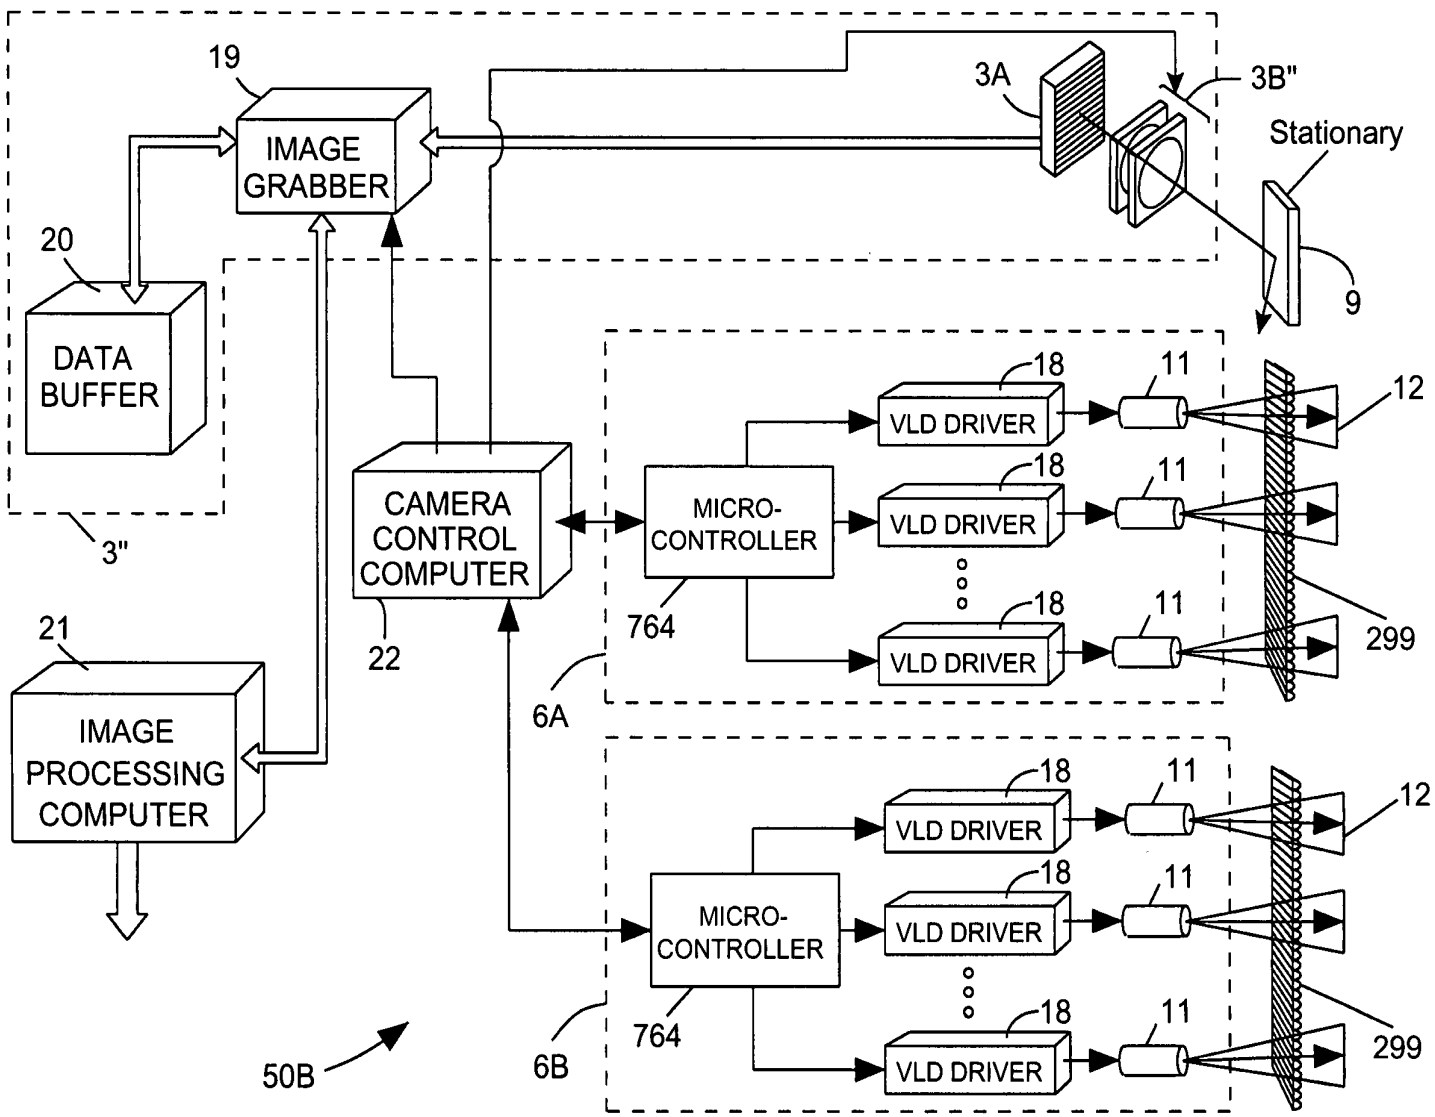
19
IMAGE GRABBER
3A
3B"
Stationary
9
20
DATA BUFFER
3"
CAMERA CONTROL COMPUTER
22
21
IMAGE PROCESSING COMPUTER
MICRO-CONTROLLER
764
6A
18
VLD DRIVER
11
12
299
MICRO-CONTROLLER
764
6B
50B

FIG. 3E2

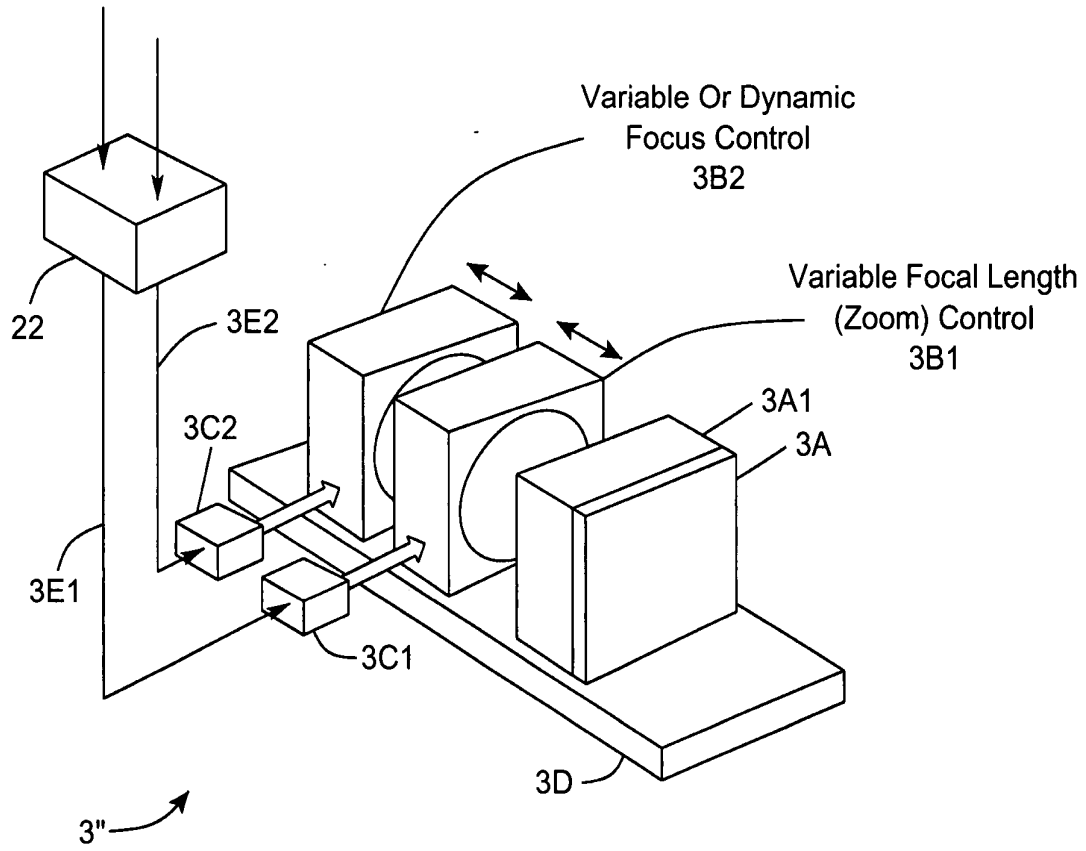
Variable Or Dynamic
Focus Control
3B2
Variable Focal Length
(Zoom) Control
3B1
22
3E2
3C2
3A1
3A
3E1
3C1
3D
3"

FIG. 3E3

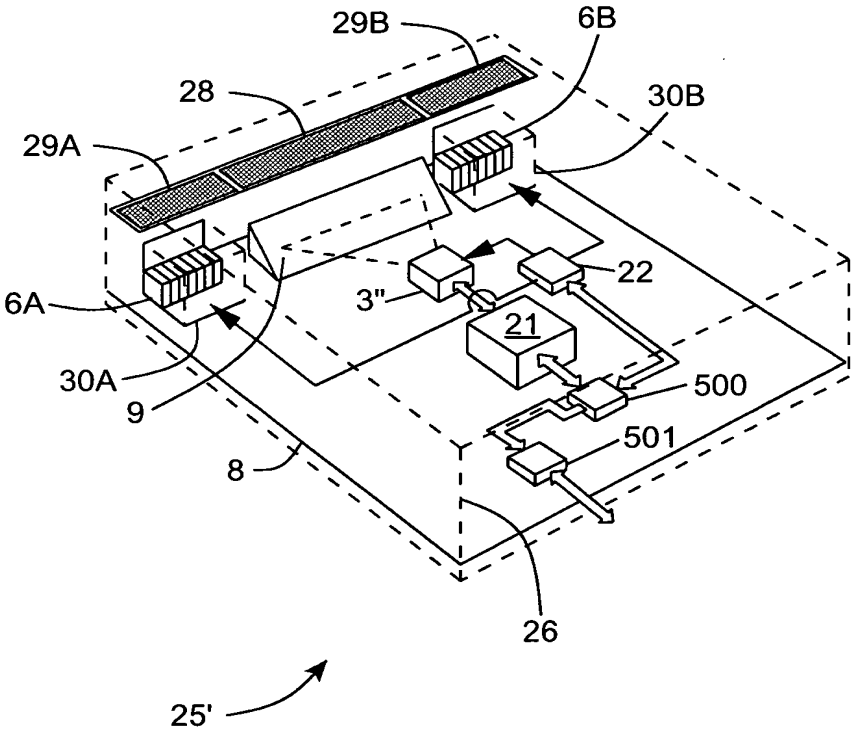

FIG. 3E4

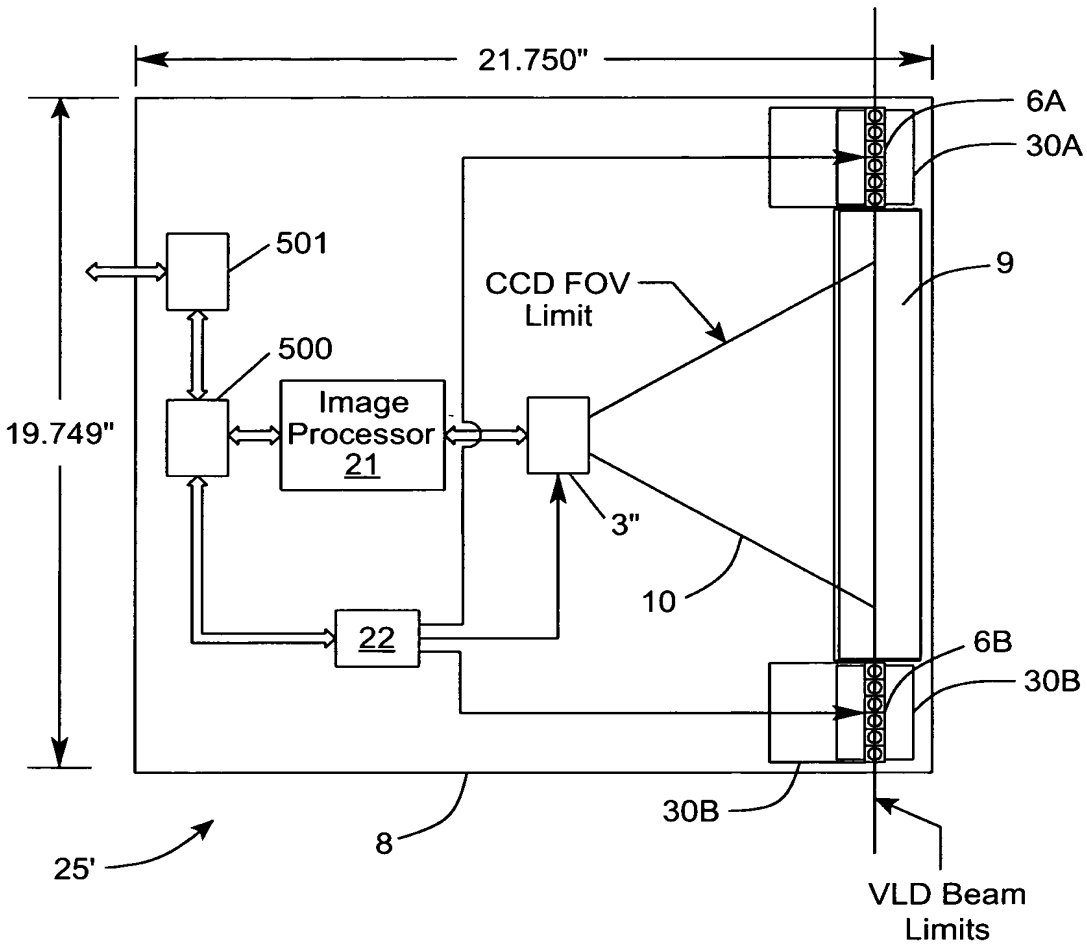
21.750"
19.749"
6A
30A
501
500
Image
Processor
21
CCD FOV
Limit
9
3"
10
22
6B
30B
30B
8
25'
VLD Beam
Limits

FIG. 3E5

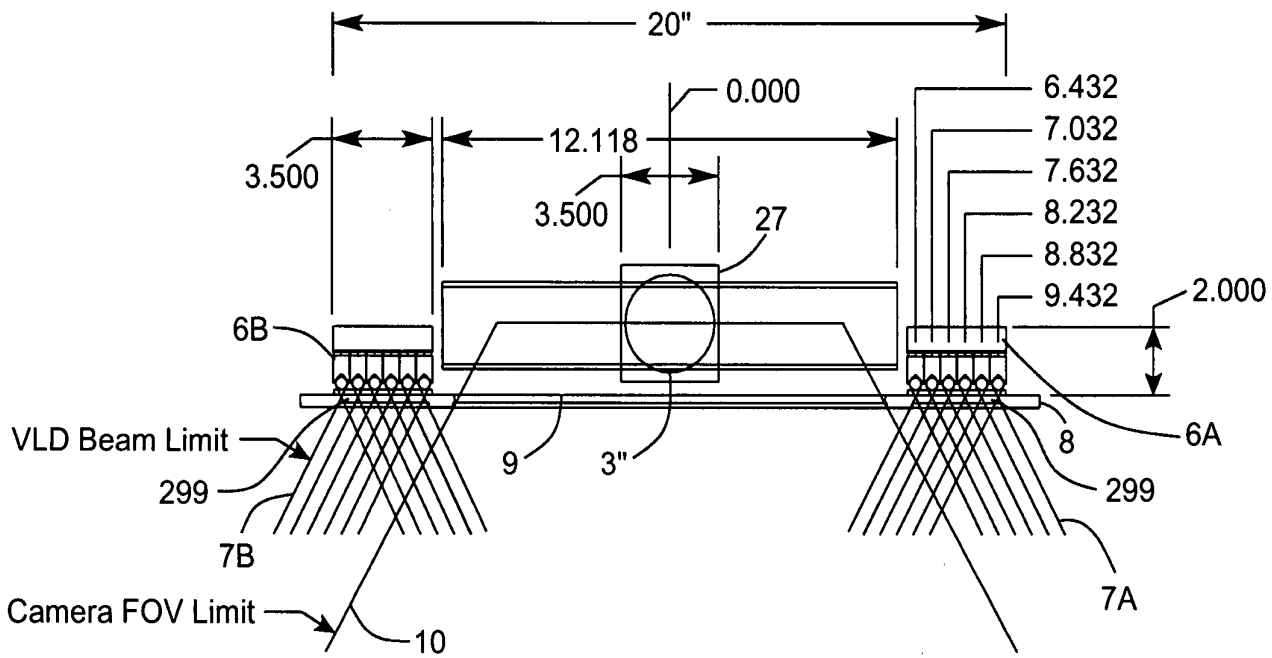
20"
0.000
6.432
7.032
7.632
8.232
8.832
9.432
12.118
3.500
3.500
27
2.000
6B
VLD Beam Limit
299
7B
Camera FOV Limit
10
9
3"
8
6A
299
7A

FIG. 3E6

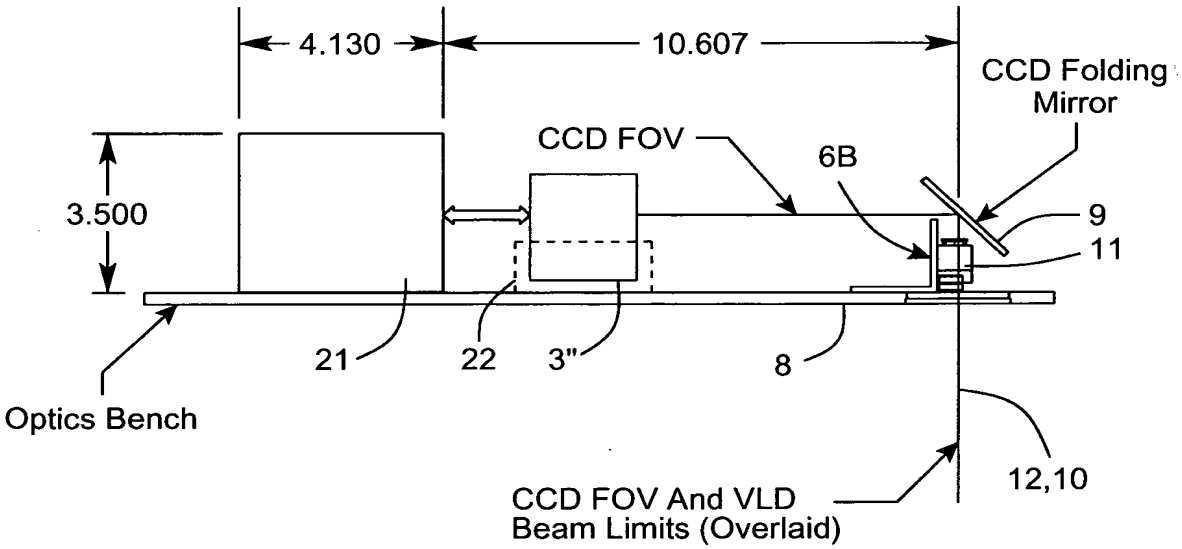
4.130
10.607
CCD Folding Mirror
CCD FOV
6B
3.500
9
11
21
22
3"
8
Optics Bench
12,10
CCD FOV And VLD Beam Limits (Overlaid)

FIG. 3E7

* Variable FOV

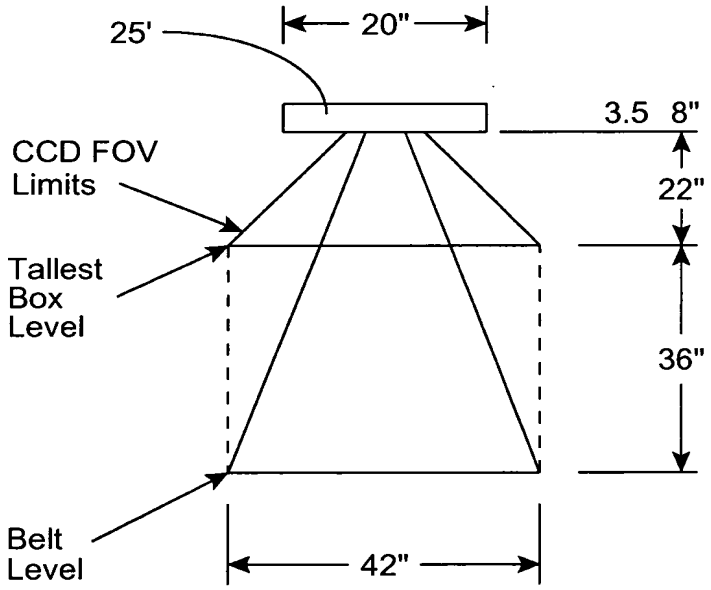

FIG. 3E8

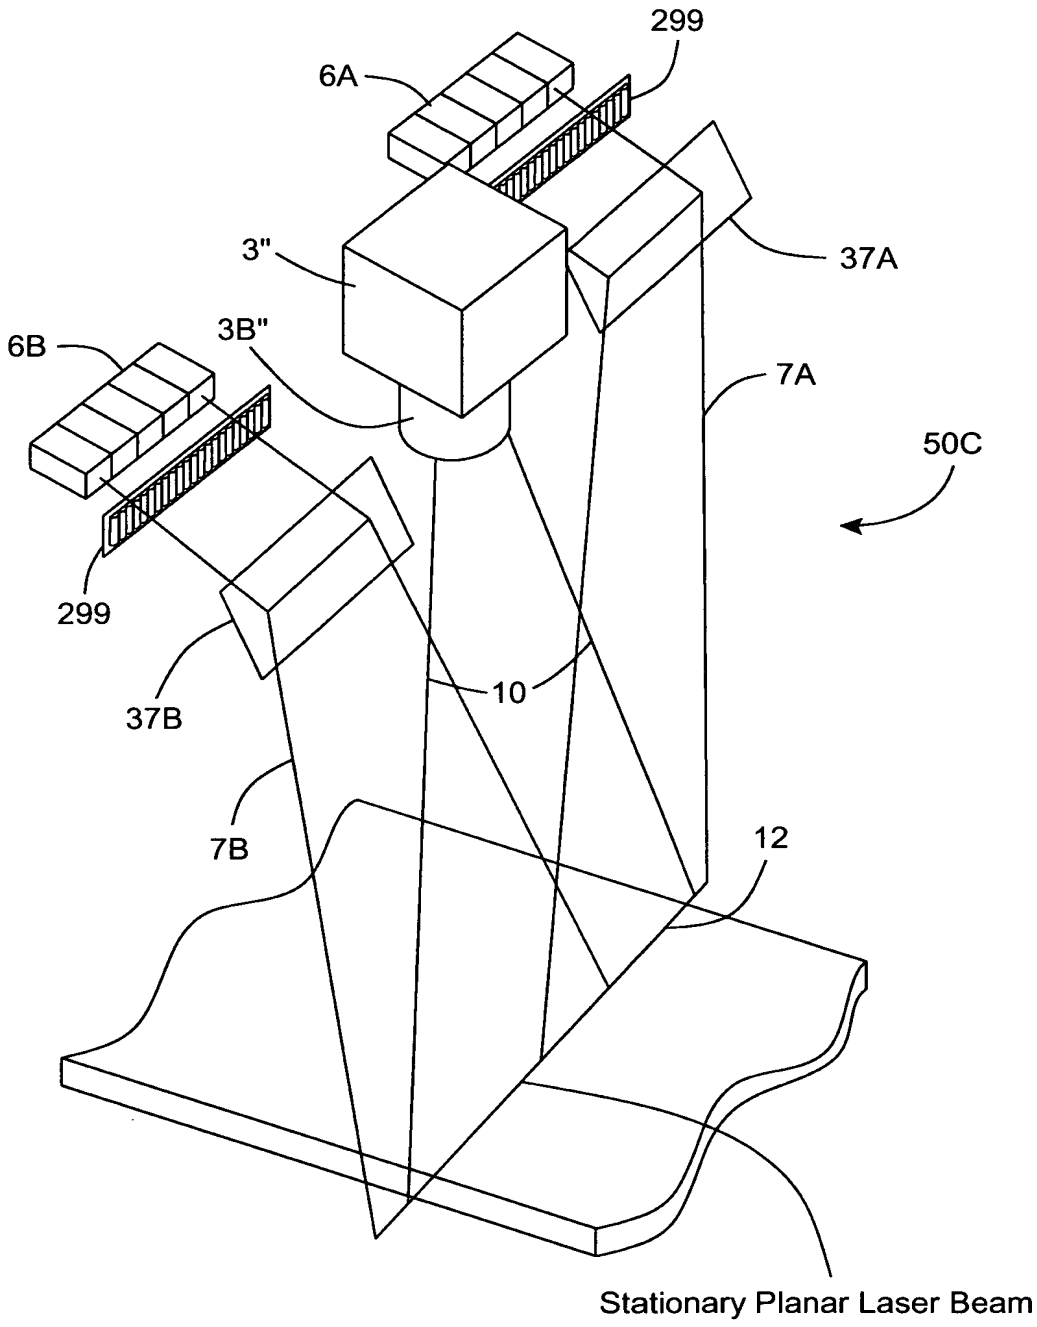
299
6A
3"
37A
6B
3B"
7A
50C
299
37B
10
7B
12
Stationary Planar Laser Beam

FIG. 3F1

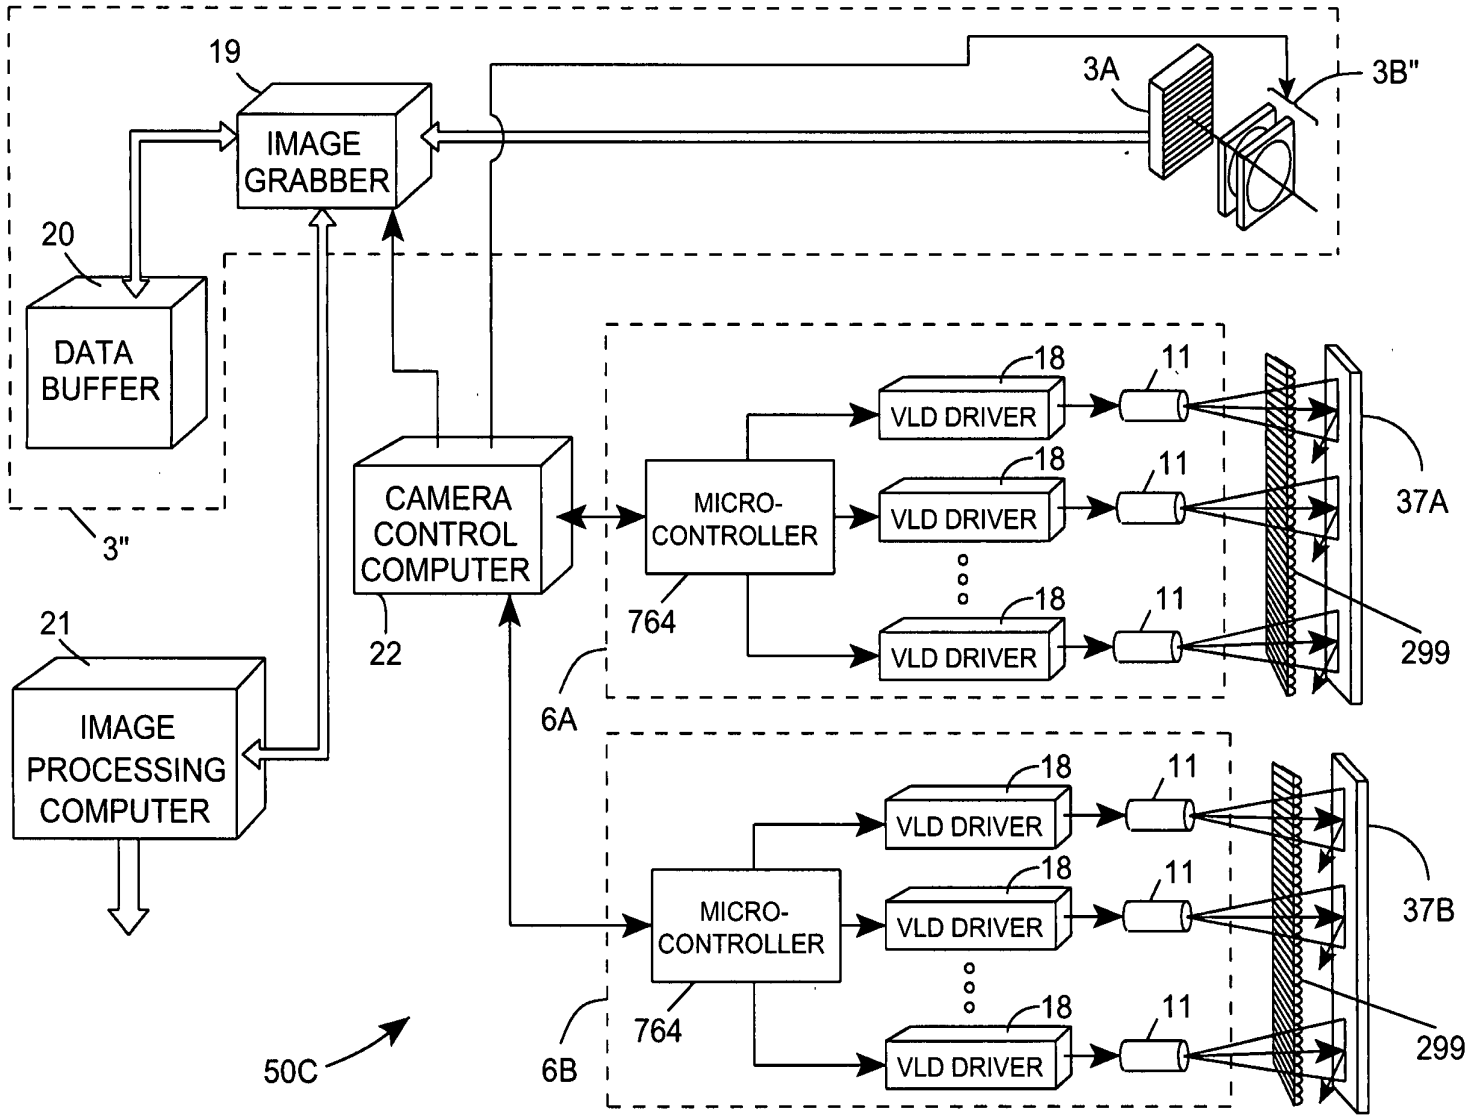
19
IMAGE GRABBER
3A
3B"
20
DATA BUFFER
3"
CAMERA CONTROL COMPUTER
22
21
IMAGE PROCESSING COMPUTER
MICRO-CONTROLLER
764
6A
18
VLD DRIVER
11
37A
299
MICRO-CONTROLLER
764
6B
37B
299
50C

FIG. 3F2

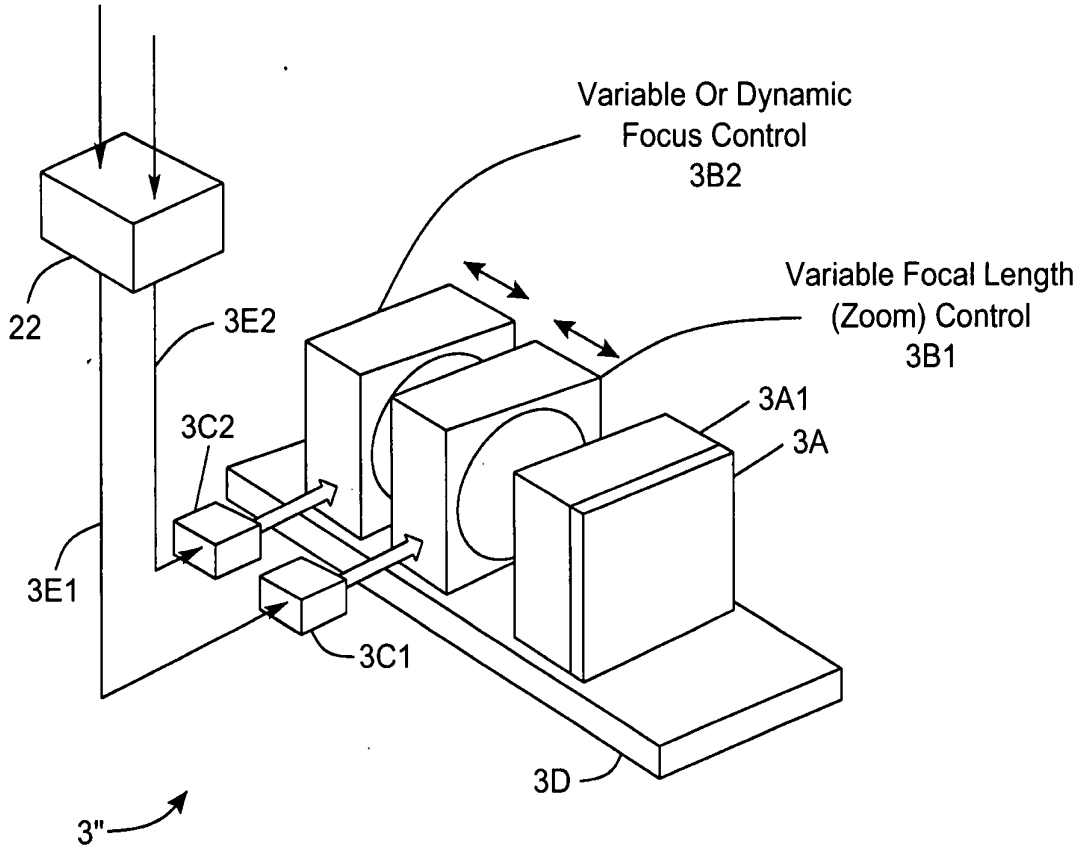
Variable Or Dynamic
Focus Control
3B2
Variable Focal Length
(Zoom) Control
3B1
22
3E2
3C2
3A1
3A
3E1
3C1
3D
3"

FIG. 3F3

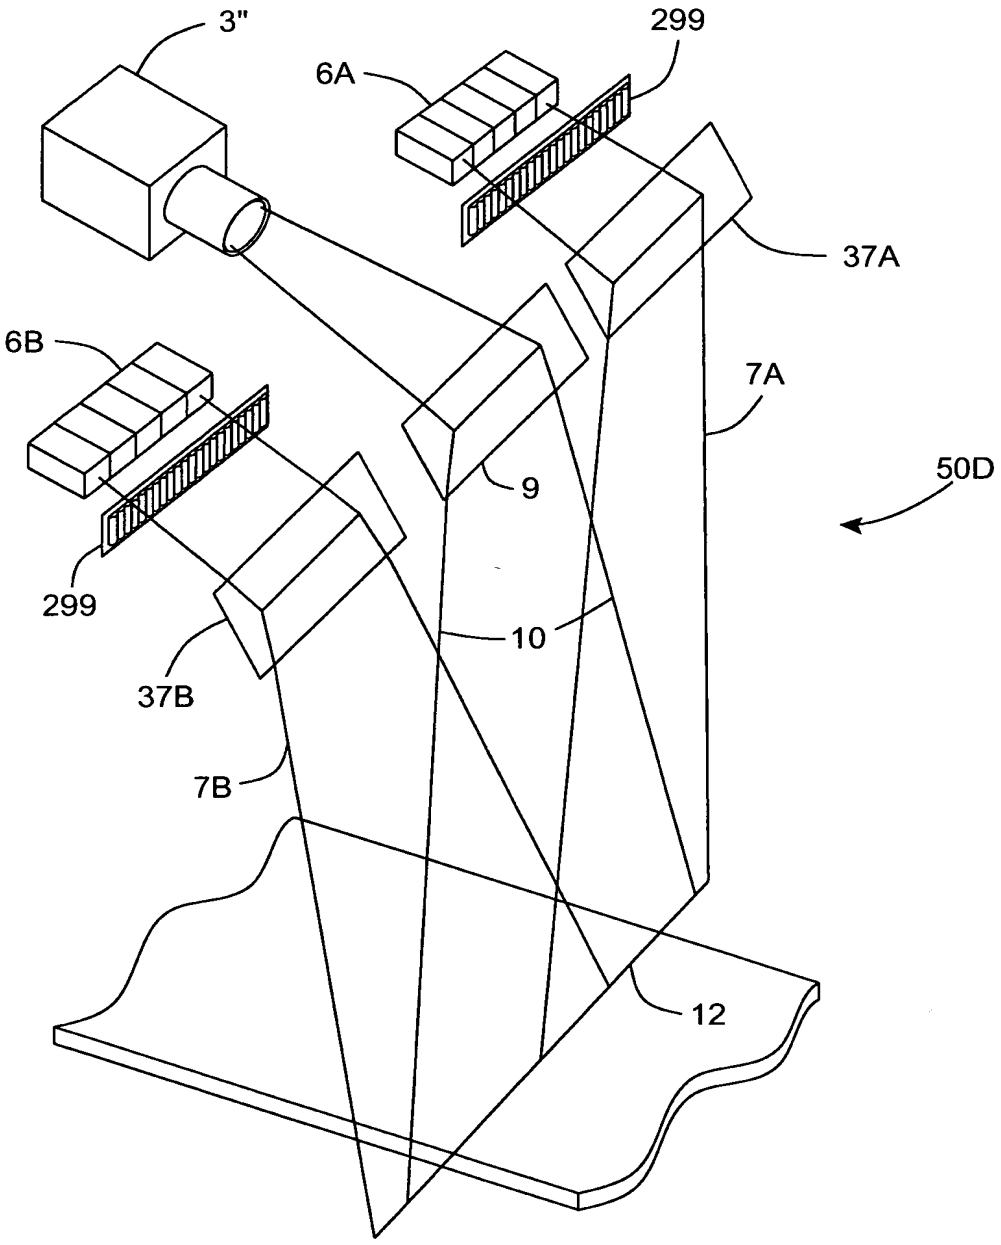

FIG. 3G1

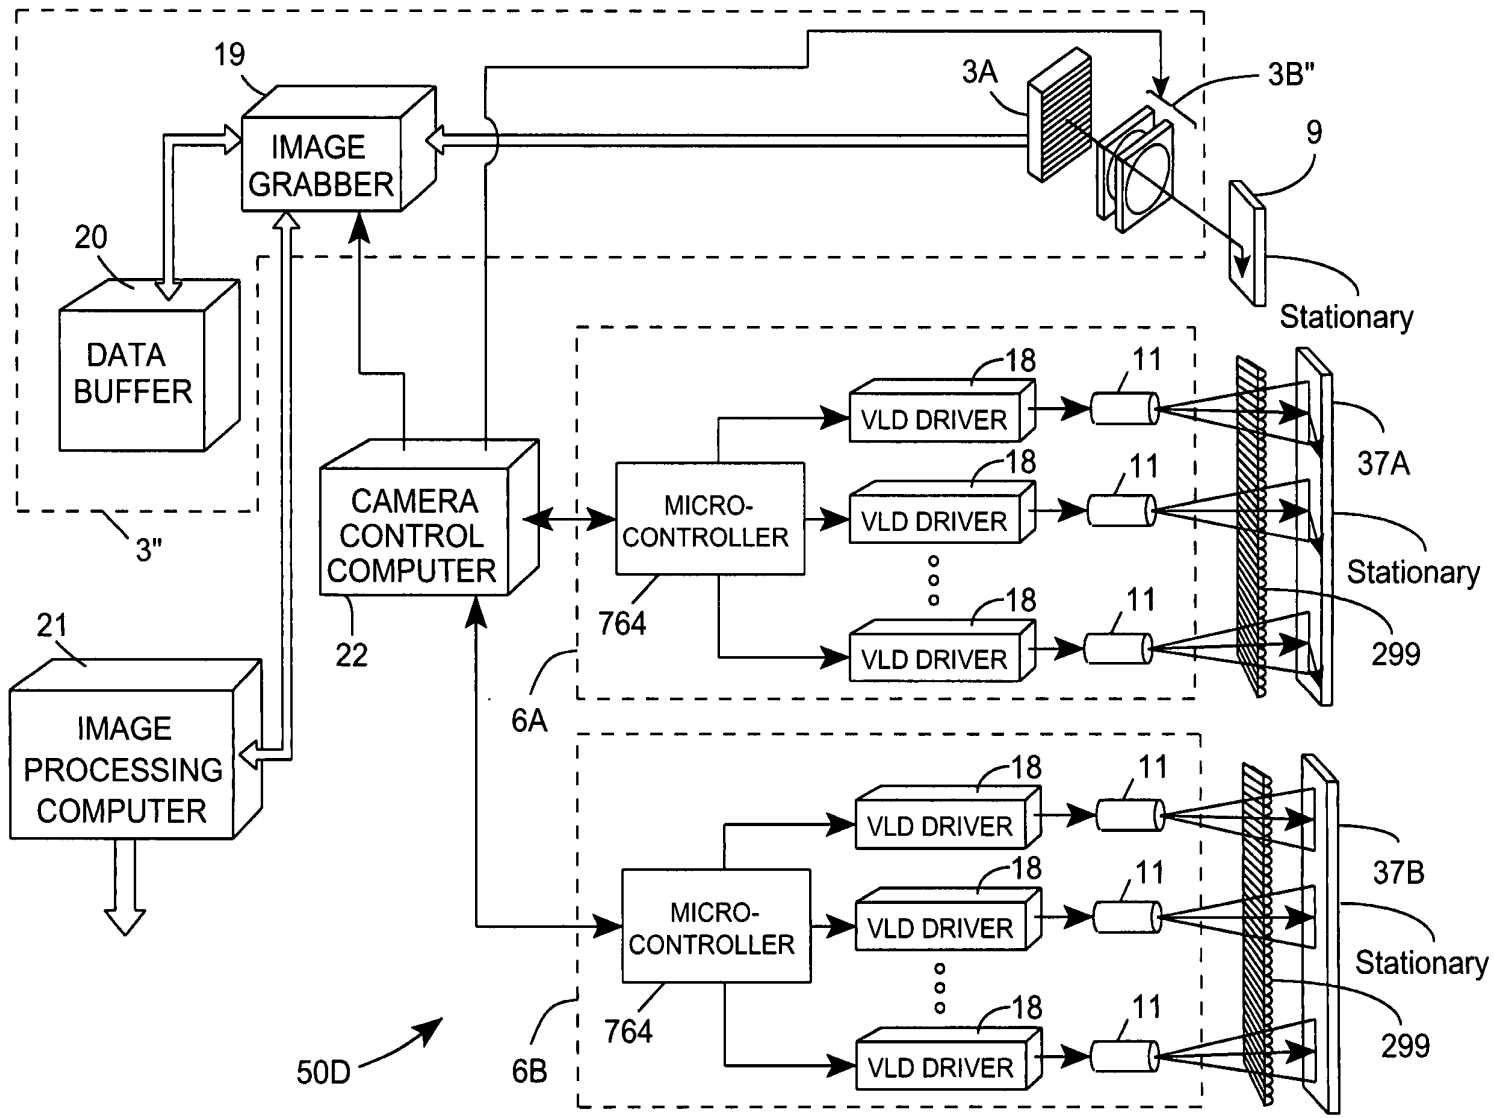
19
IMAGE GRABBER
3A
3B"
9
Stationary
20
DATA BUFFER
3"
CAMERA CONTROL COMPUTER
22
21
IMAGE PROCESSING COMPUTER
MICRO-CONTROLLER
764
6A
VLD DRIVER
18
11
37A
Stationary
299
MICRO-CONTROLLER
764
6B
37B
Stationary
299
50D

FIG. 3G2

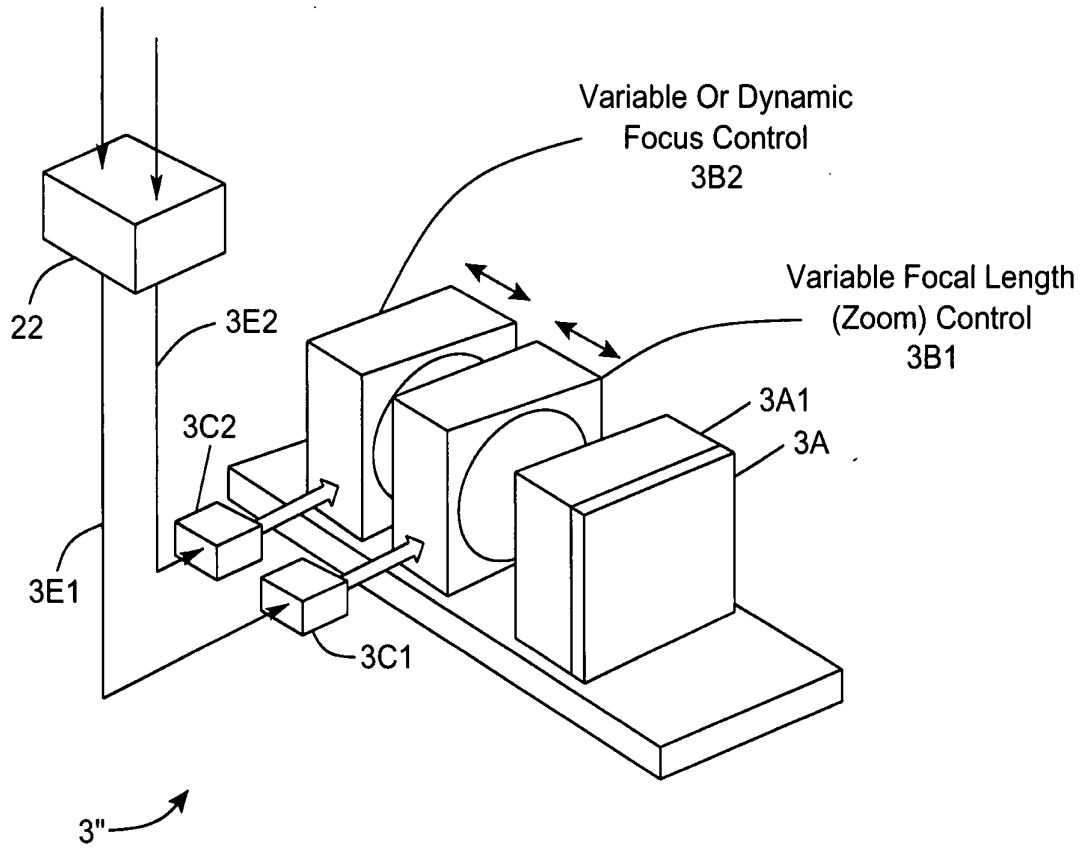
Variable Or Dynamic
Focus Control
3B2
Variable Focal Length
(Zoom) Control
3B1
22
3E2
3C2
3A1
3A
3E1
3C1
3"

FIG. 3G3

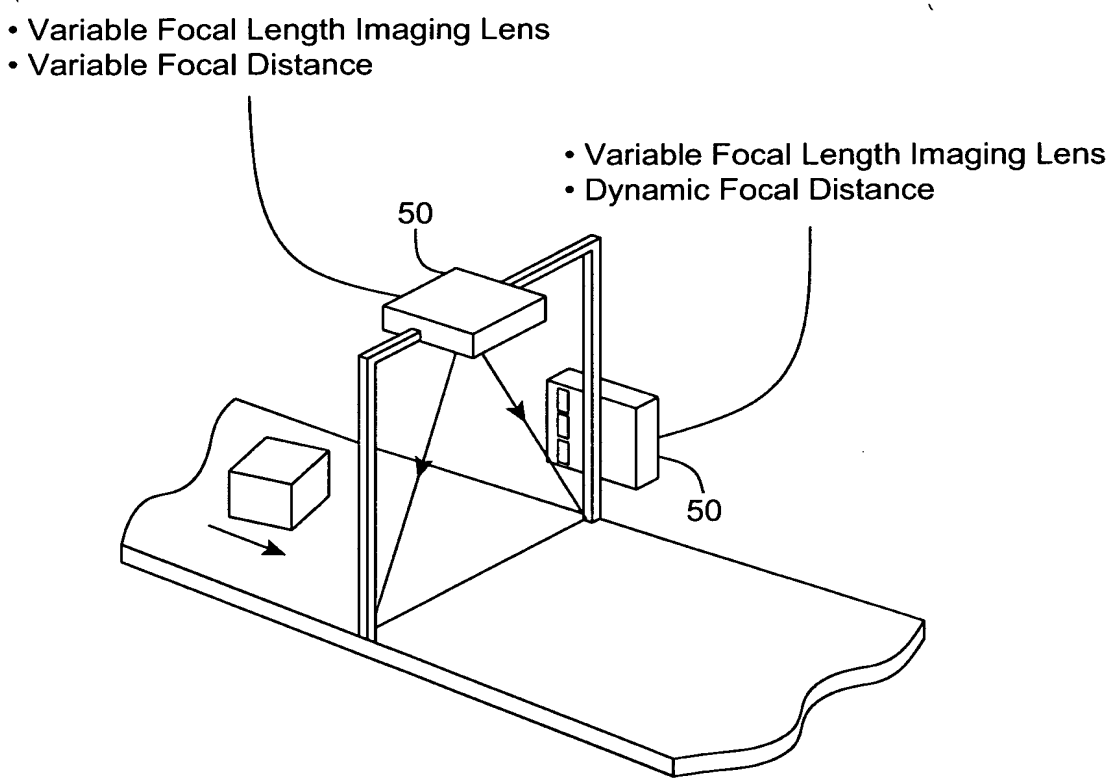
• Variable Focal Length Imaging Lens
• Variable Focal Distance
• Variable Focal Length Imaging Lens
• Dynamic Focal Distance
50
50

FIG. 3H

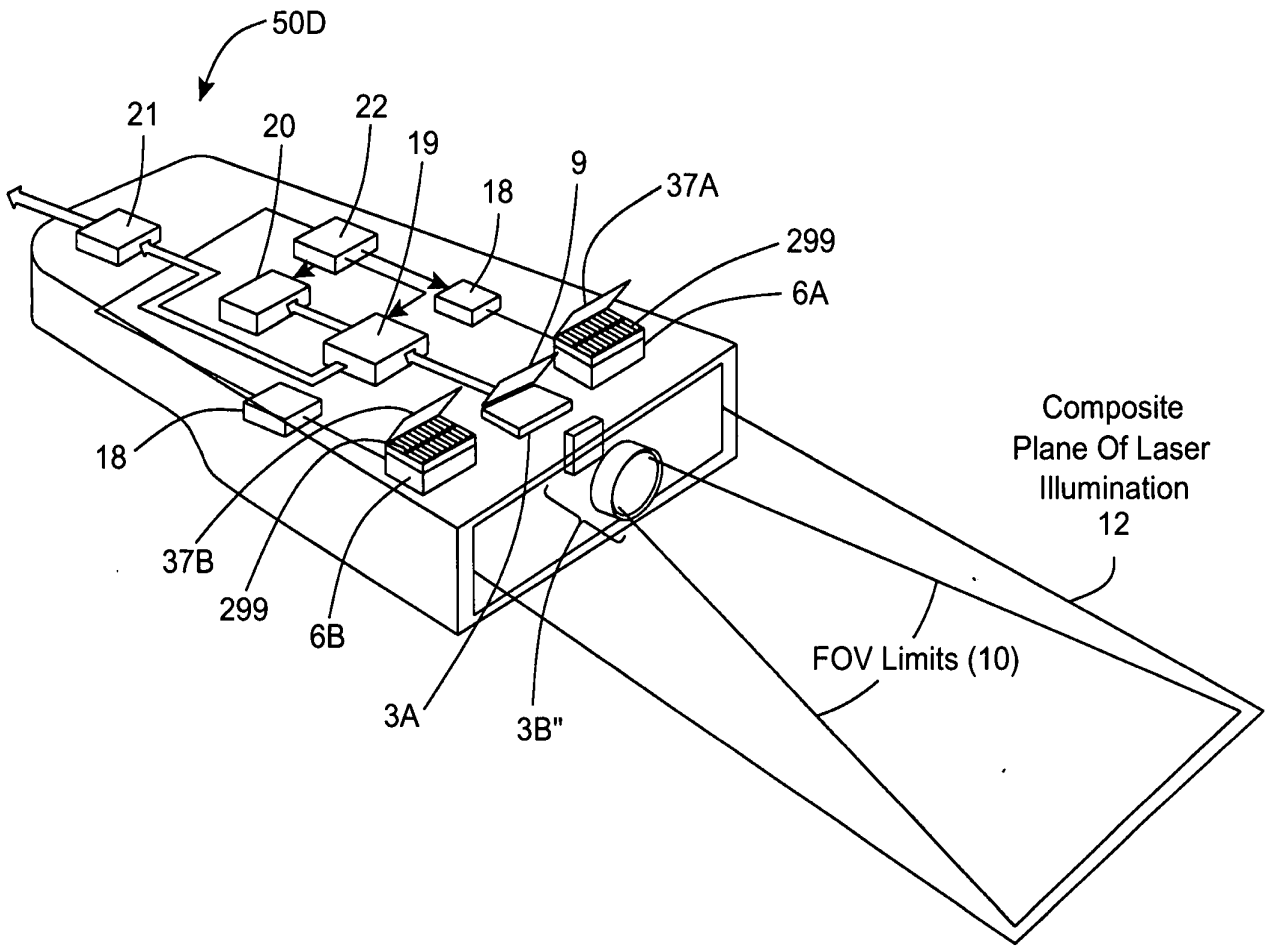
50D
21
20
22
19
18
9
37A
299
6A
18
37B
299
6B
3A
3B"
Composite
Plane Of Laser
Illumination
12
FOV Limits (10)

FIG. 3I

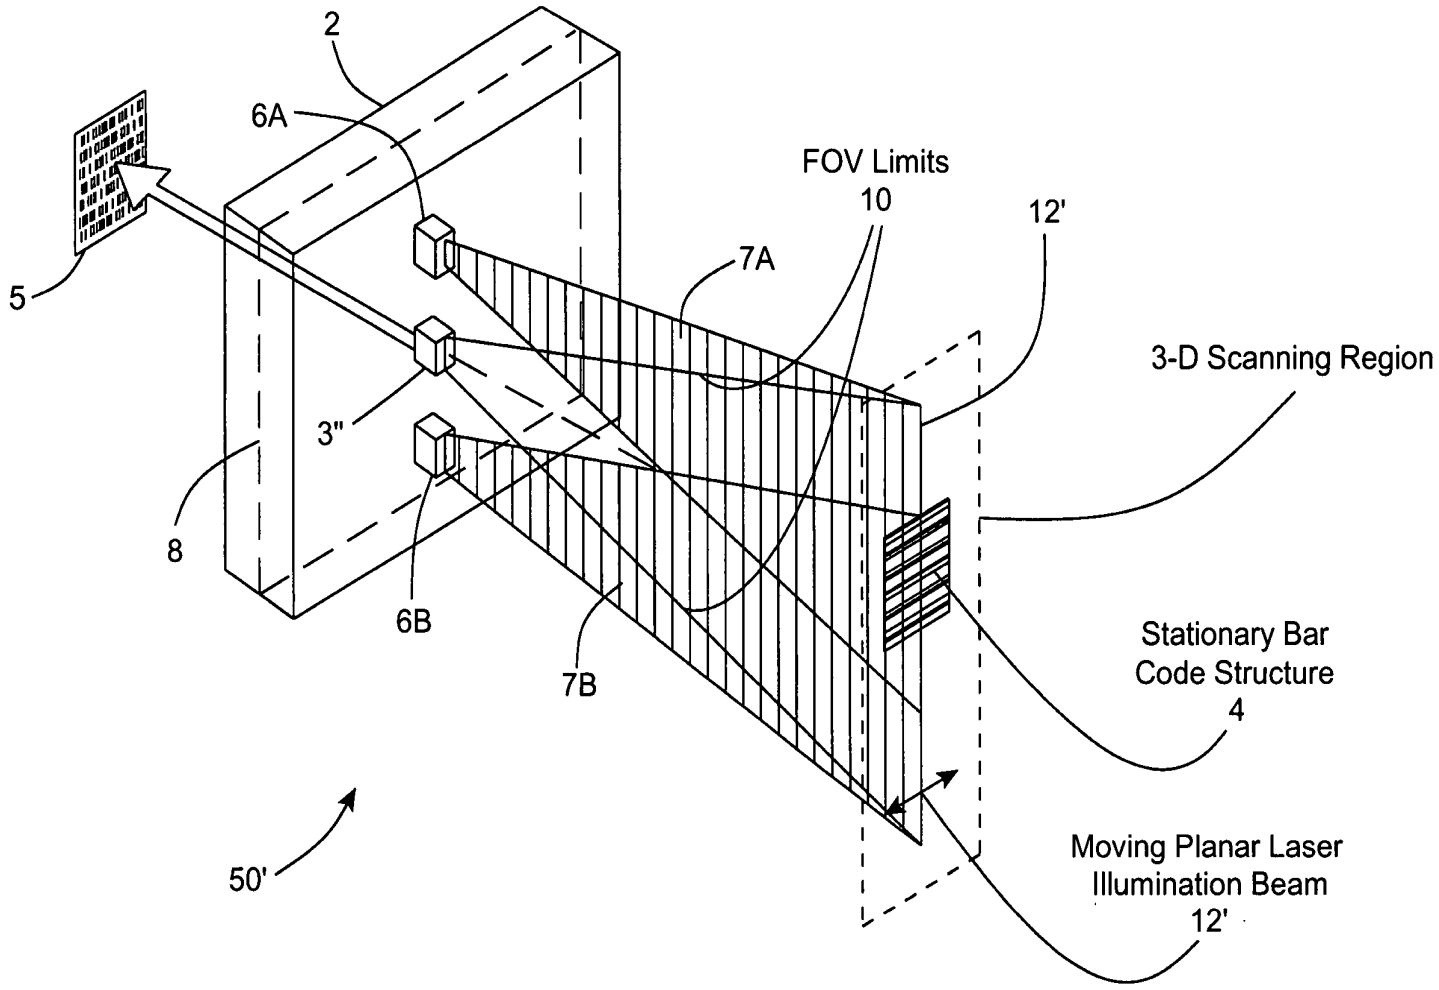
2
6A
FOV Limits
10
12'
7A
5
3-D Scanning Region
3"
8
6B
7B
Stationary Bar
Code Structure
4
50'
Moving Planar Laser
Illumination Beam
12'

FIG. 3J1

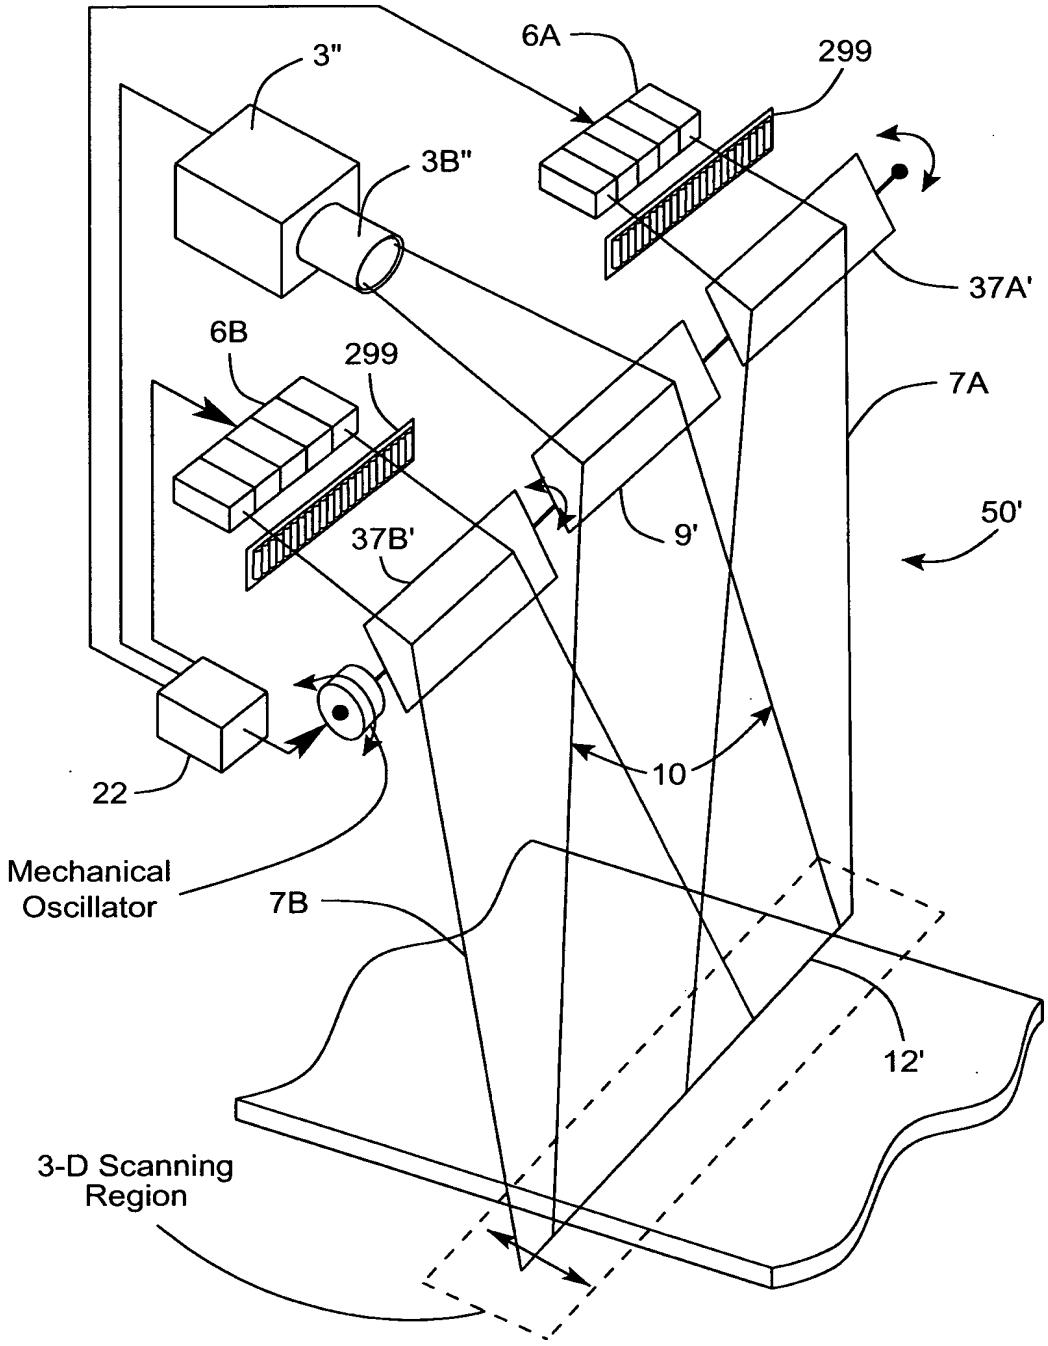
3"
6A
299
3B"
37A'
6B
299
7A
37B'
9'
50'
22
10
Mechanical
Oscillator
7B
12'
3-D Scanning
Region

FIG. 3J2

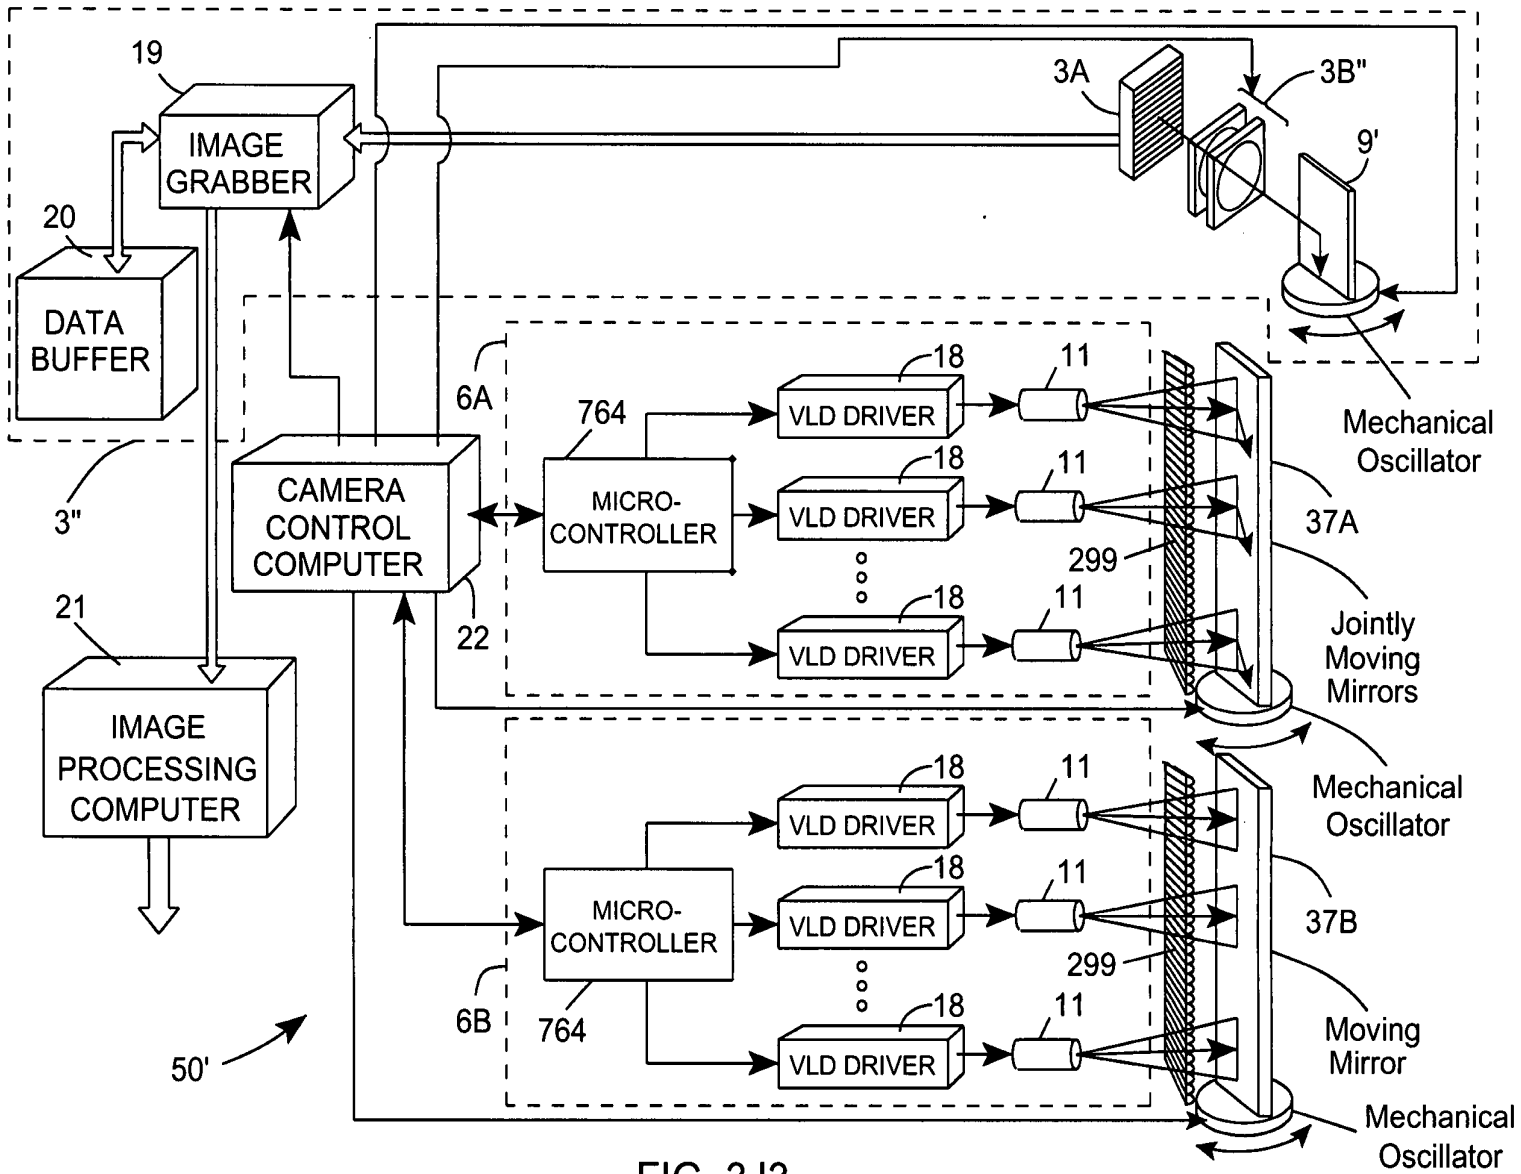
19
IMAGE GRABBER
20
DATA BUFFER
3"
CAMERA CONTROL COMPUTER
22
21
IMAGE PROCESSING COMPUTER
50'
3A
3B"
9'
6A
764
MICRO-CONTROLLER
18
VLD DRIVER
11
299
Mechanical Oscillator
37A
Jointly Moving Mirrors
6B
764
MICRO-CONTROLLER
37B
Moving Mirror
Mechanical Oscillator

FIG. 3J3

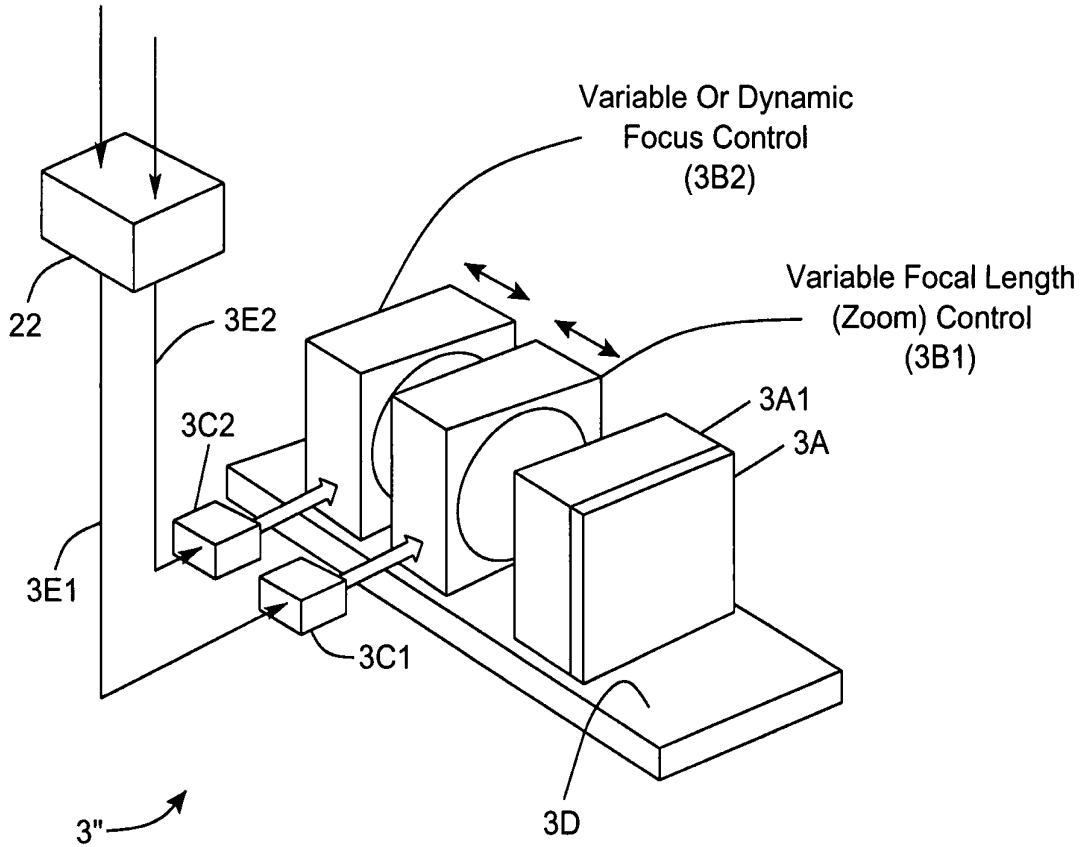
Variable Or Dynamic
Focus Control
(3B2)
Variable Focal Length
(Zoom) Control
(3B1)
22
3E2
3C2
3A1
3A
3E1
3C1
3"
3D

FIG. 3J4

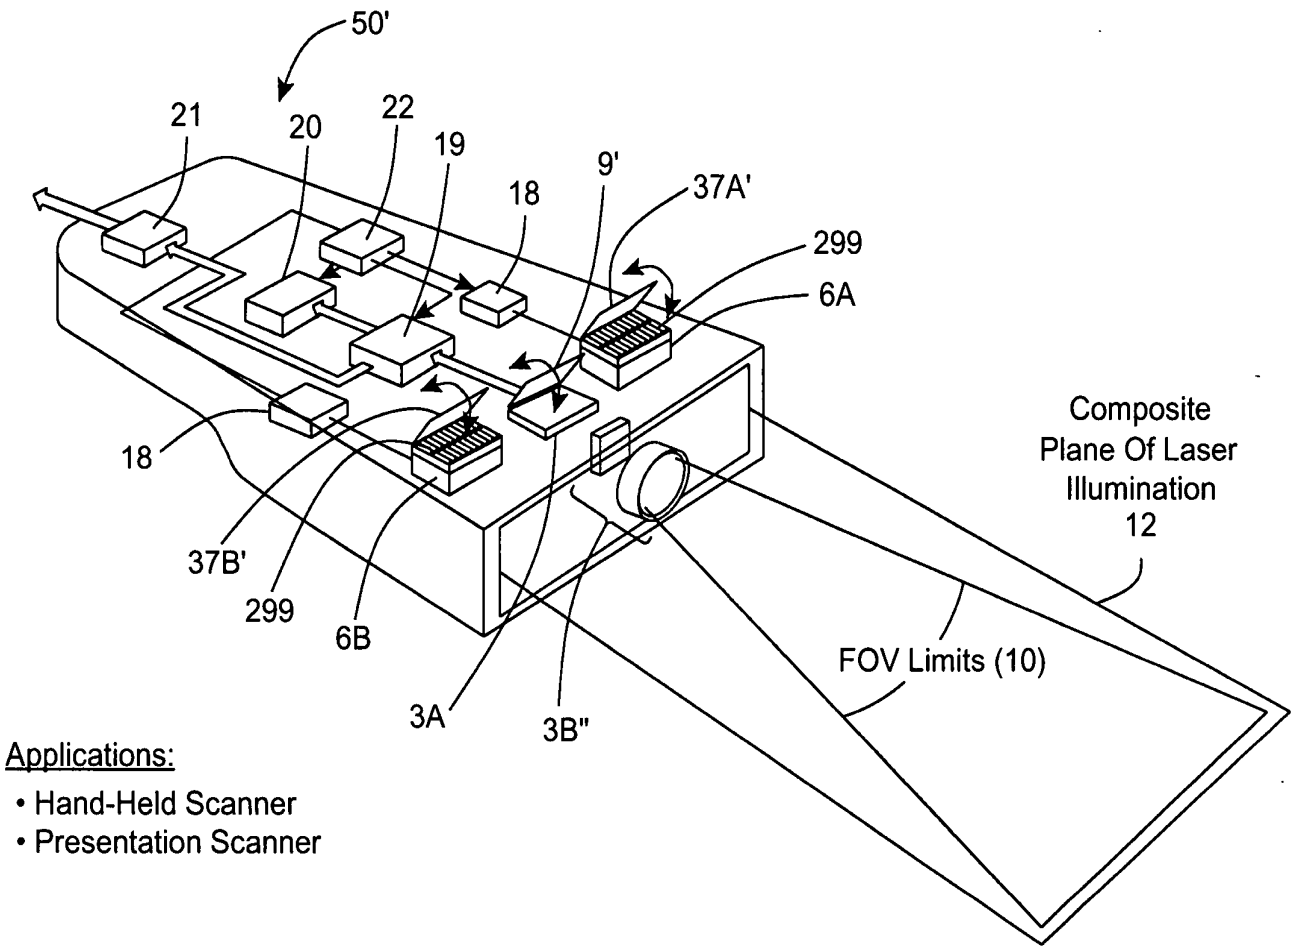
50'
21
20
22
19
18
9'
37A'
299
6A
18
37B'
299
6B
3A
3B"
Composite
Plane Of Laser
Illumination
12
FOV Limits (10)
Applications:
• Hand-Held Scanner
• Presentation Scanner

FIG. 3J5

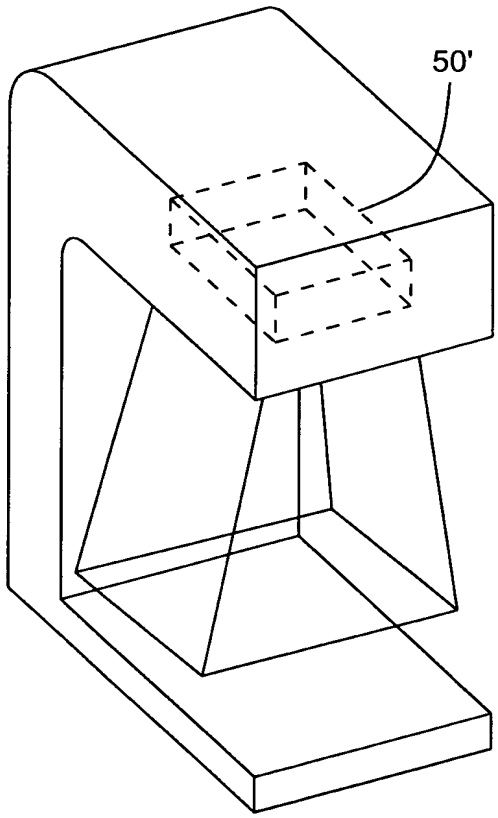

2-D Hold-under Scanner

FIG. 3J6

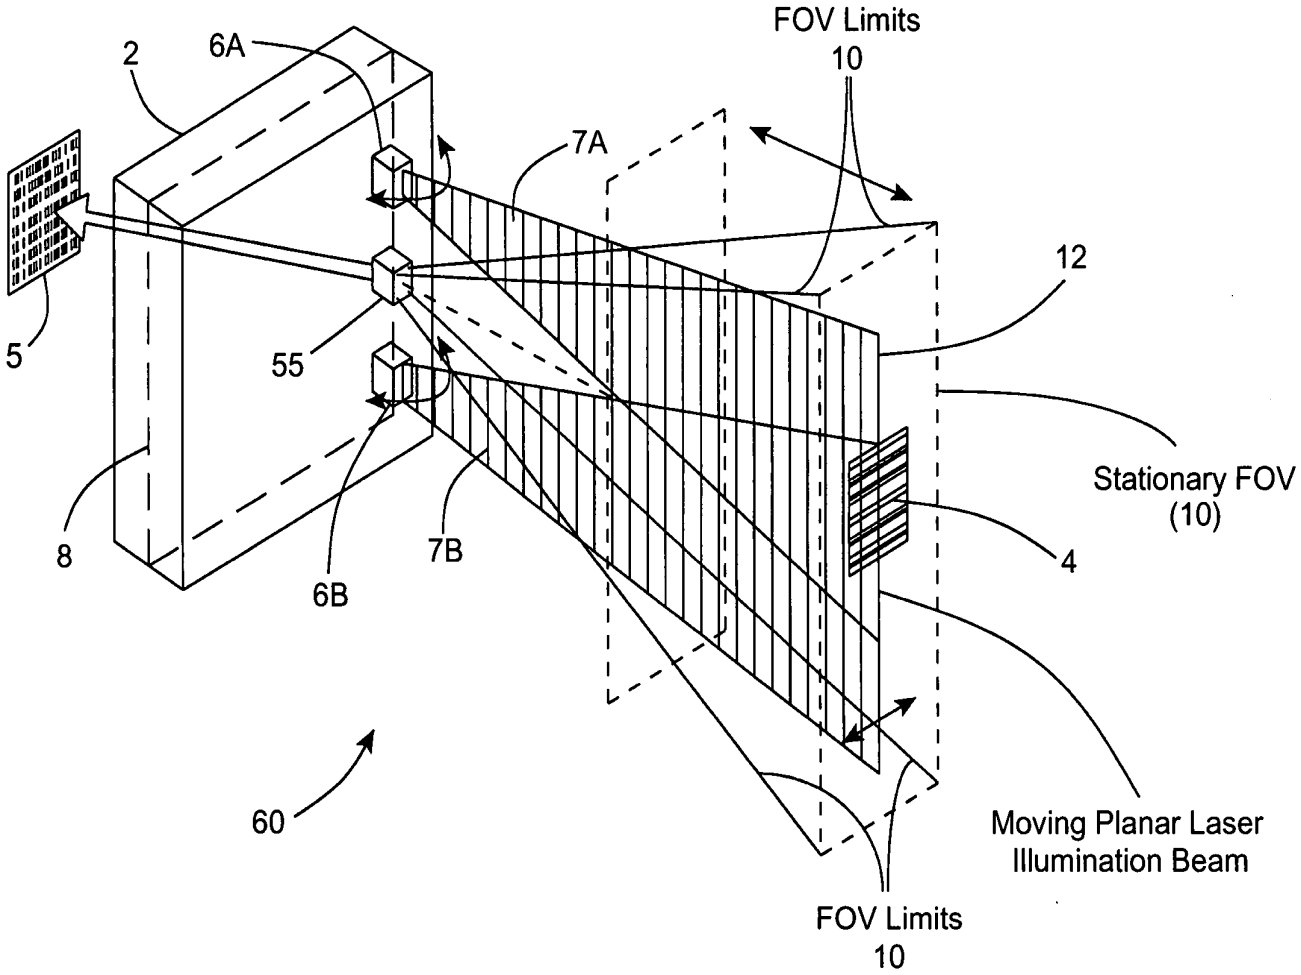
FOV Limits
10
2
6A
7A
12
5
55
Stationary FOV
(10)
8
6B
7B
4
60
Moving Planar Laser
Illumination Beam
FOV Limits
10

FIG. 4A

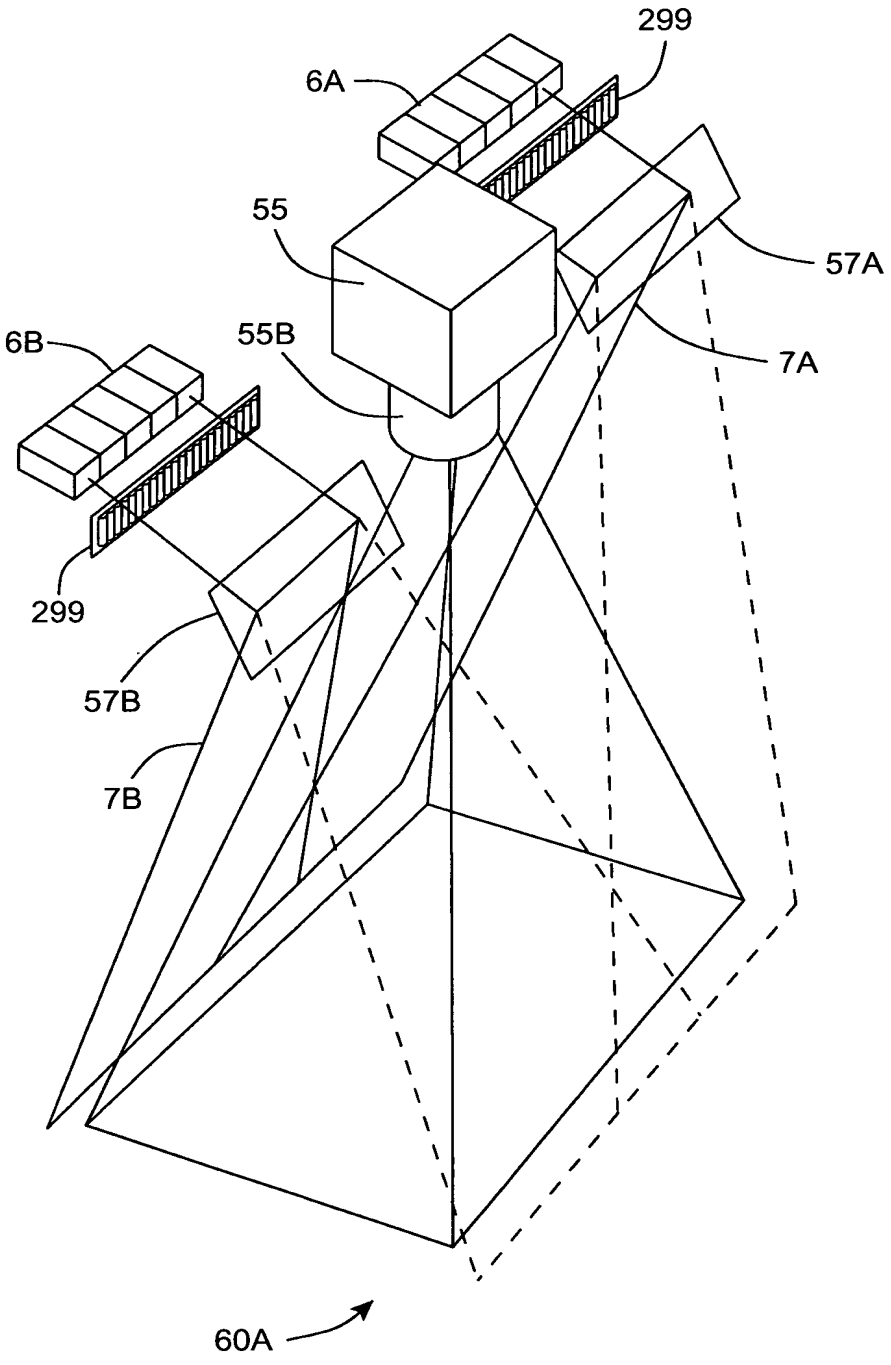

FIG. 4B1

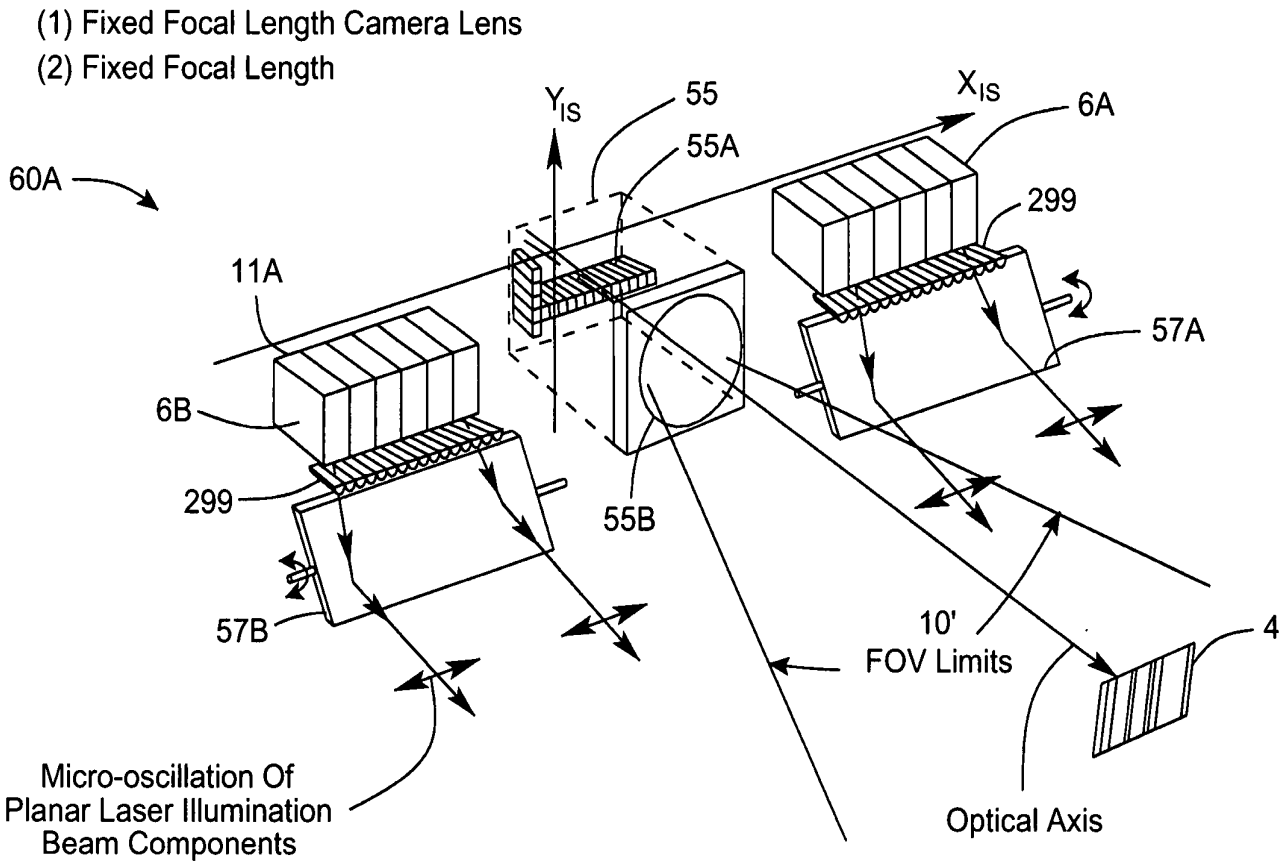
(1) Fixed Focal Length Camera Lens
(2) Fixed Focal Length
60A
Y_{IS}
55
55A
X_{IS}
6A
299
11A
57A
6B
299
55B
57B
10'
FOV Limits
4
Micro-oscillation Of
Planar Laser Illumination
Beam Components
Optical Axis

FIG. 4B2

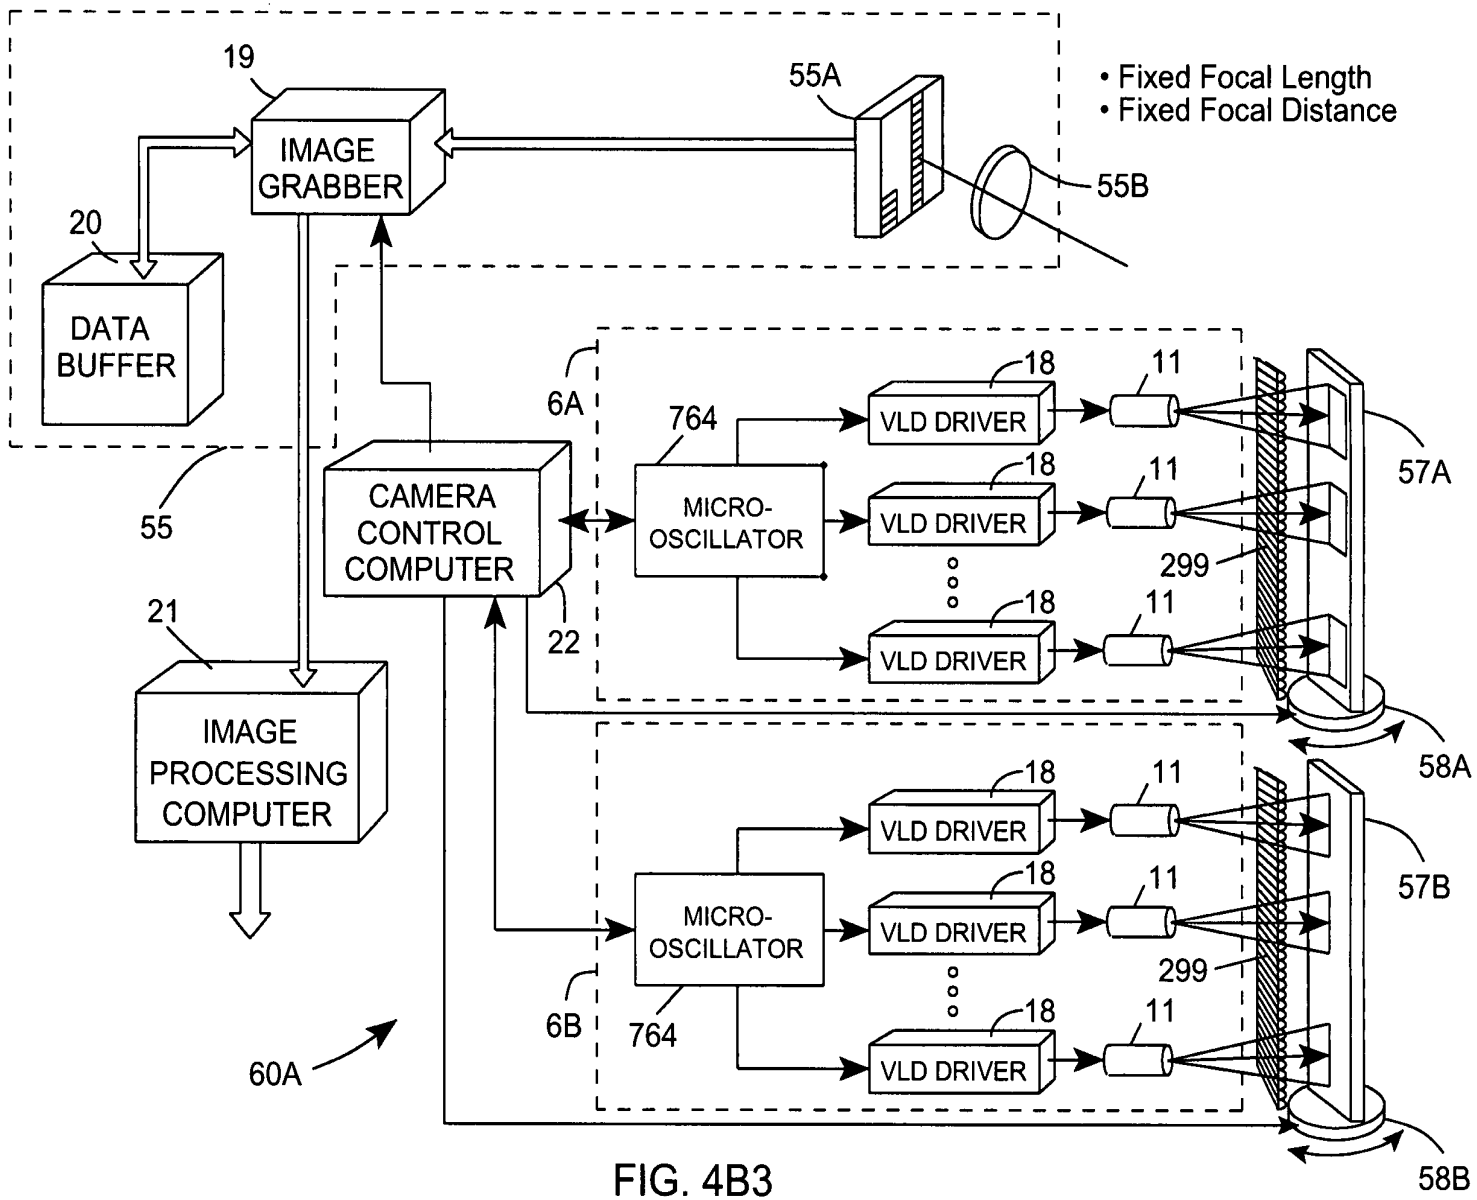
19
IMAGE GRABBER
55A
• Fixed Focal Length
• Fixed Focal Distance
55B
20
DATA BUFFER
55
CAMERA CONTROL COMPUTER
22
21
IMAGE PROCESSING COMPUTER
6A
764
MICRO-OSCILLATOR
18
VLD DRIVER
11
299
57A
58A
6B
764
MICRO-OSCILLATOR
18
VLD DRIVER
11
299
57B
58B
60A

FIG. 4B3

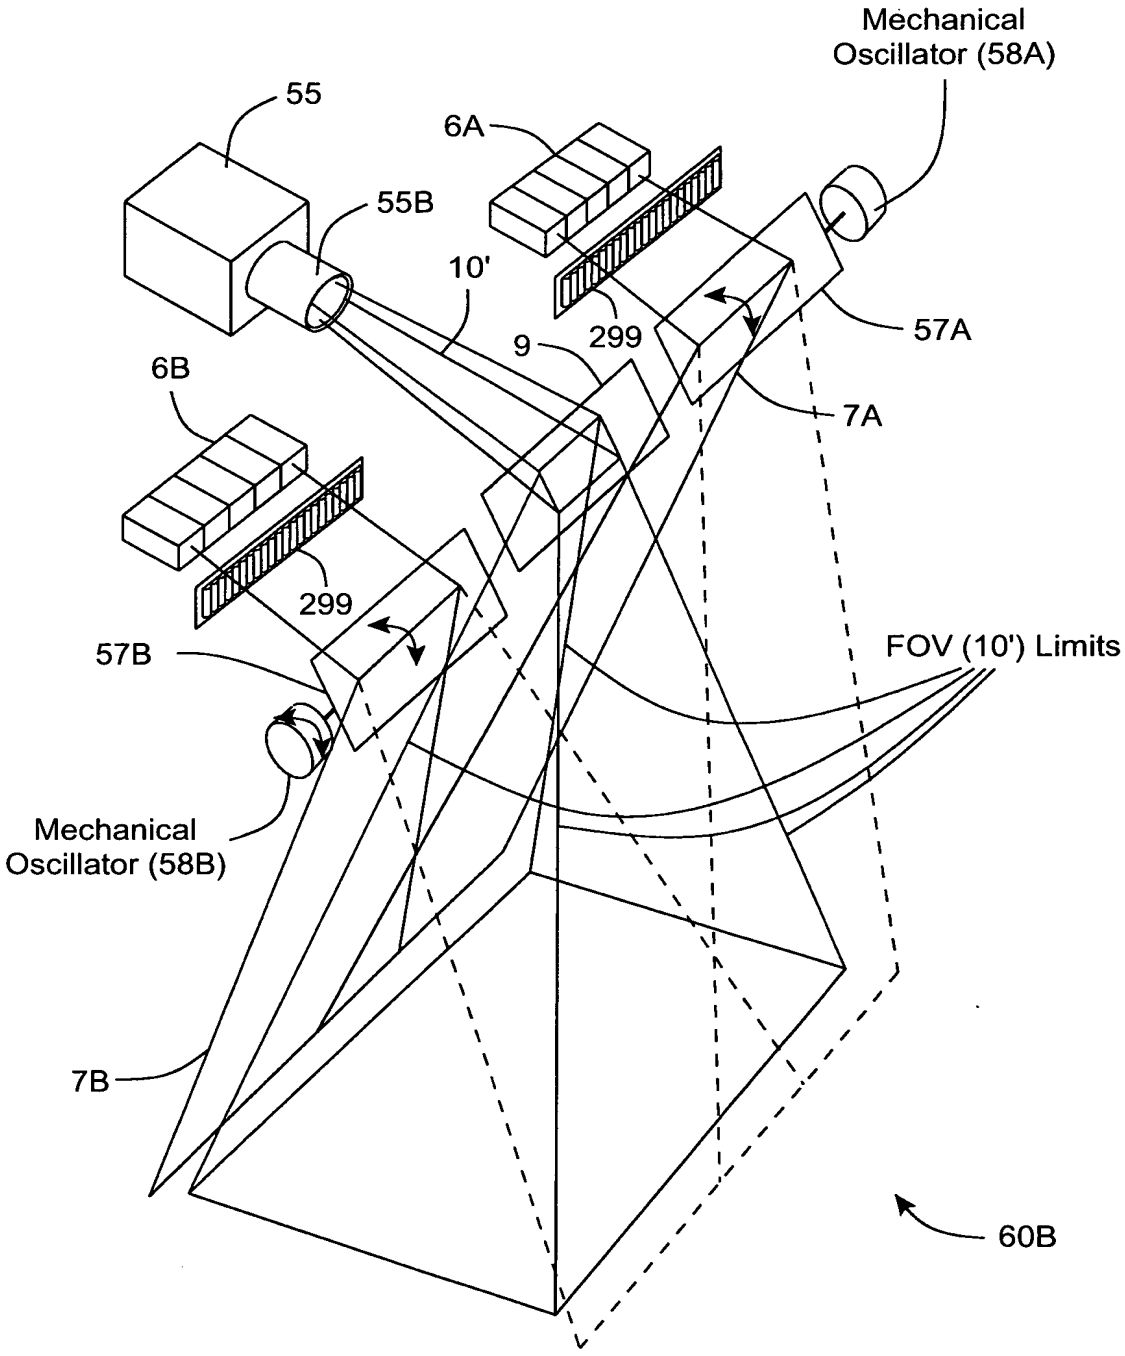
Mechanical
Oscillator (58A)
55
6A
55B
10'
299
9
57A
6B
7A
299
57B
FOV (10') Limits
Mechanical
Oscillator (58B)
7B
60B

FIG. 4C1

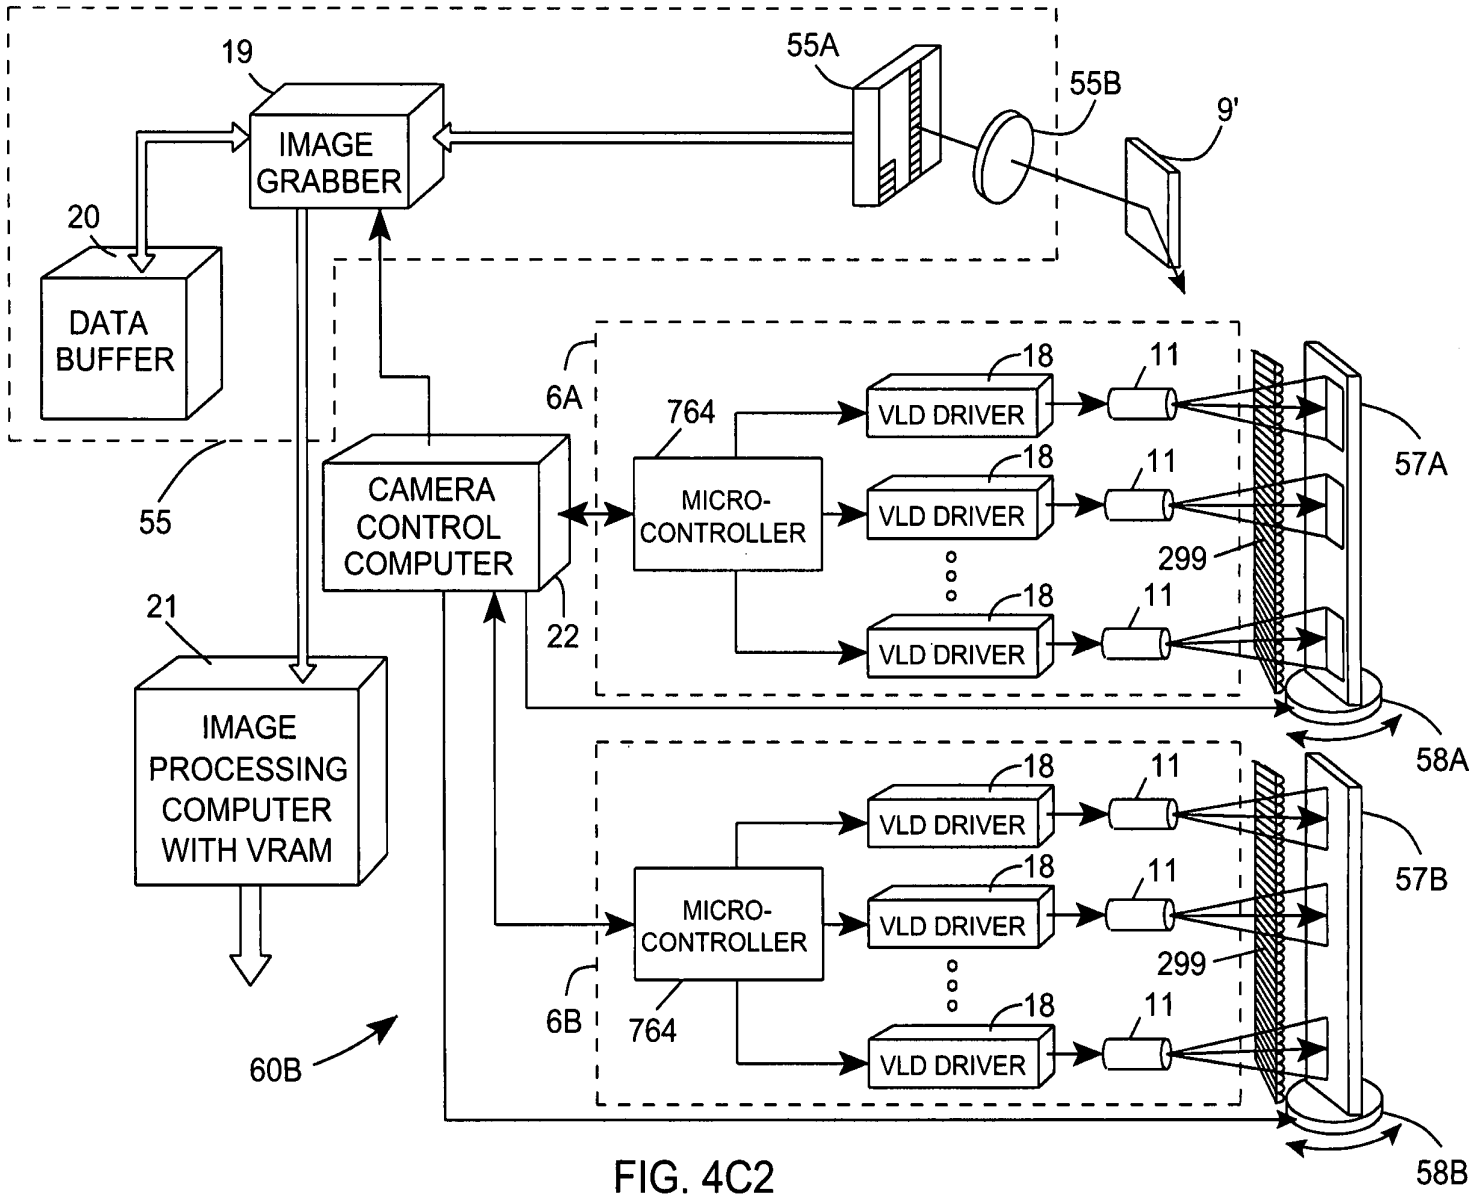
19
IMAGE GRABBER
55A
55B
9'
20
DATA BUFFER
55
6A
764
CAMERA CONTROL COMPUTER
MICRO-CONTROLLER
VLD DRIVER
18
11
57A
299
22
21
IMAGE PROCESSING COMPUTER WITH VRAM
58A
6B
764
MICRO-CONTROLLER
57B
60B
58B

FIG. 4C2

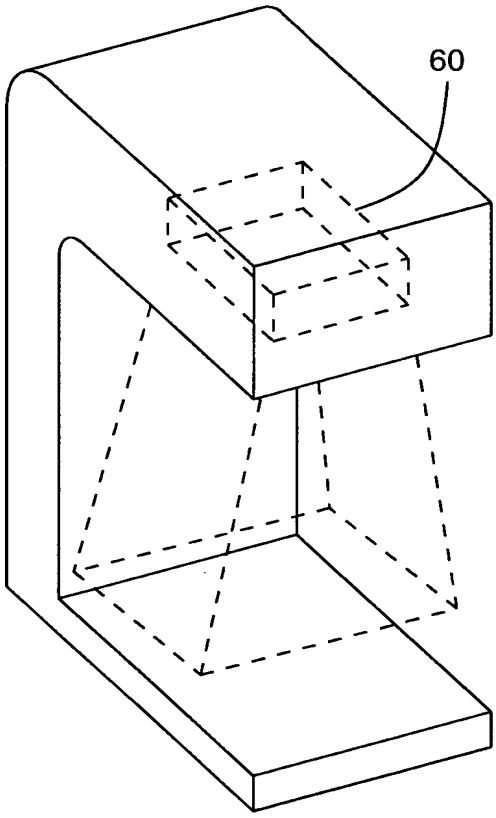

2-D Hold-under Scanner

FIG. 4D

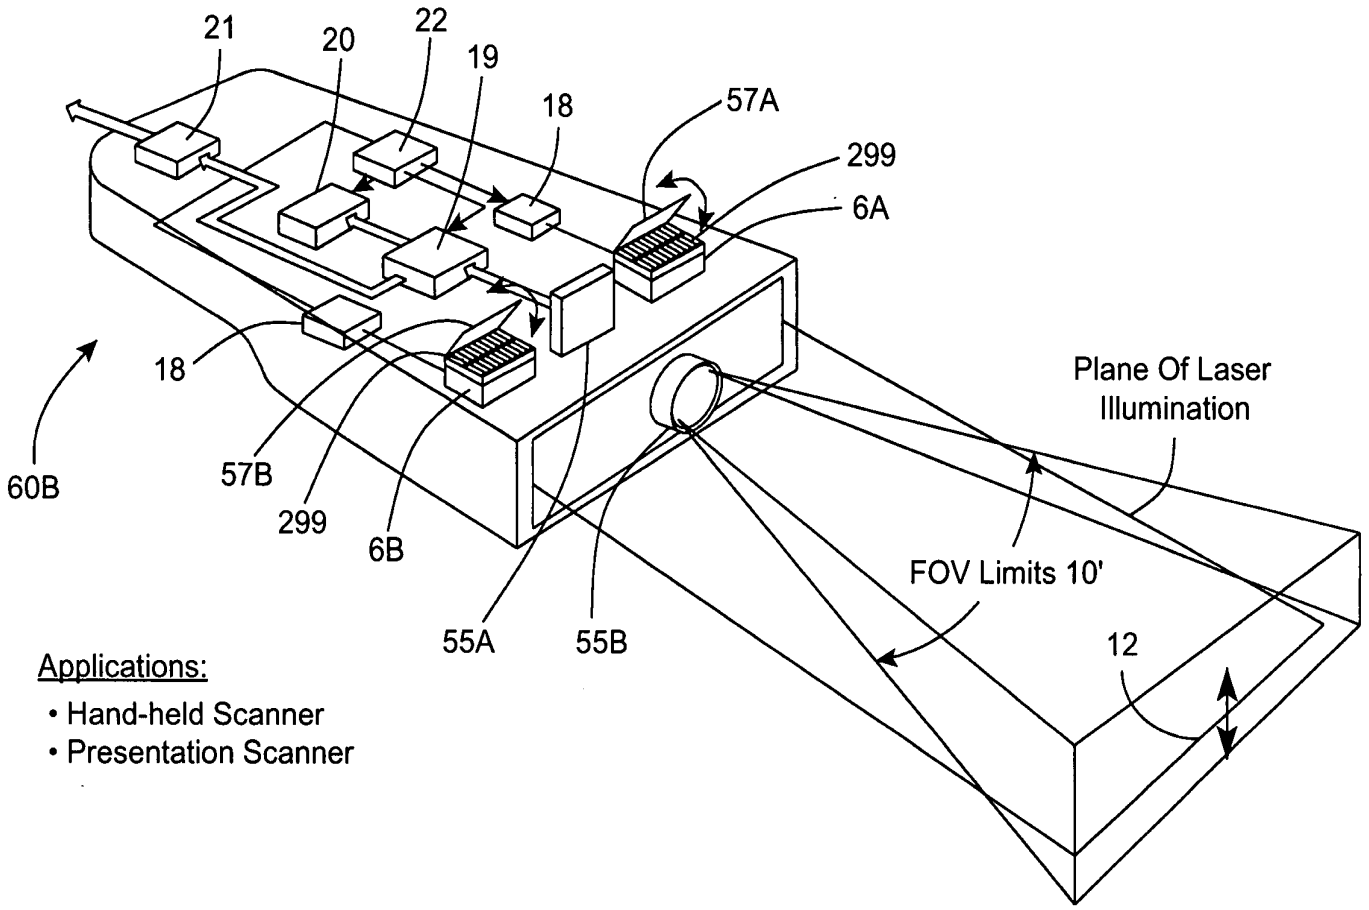
21
20
22
19
18
57A
299
6A
18
60B
57B
299
6B
55A
55B
Plane Of Laser
Illumination
FOV Limits 10'
12
Applications:
• Hand-held Scanner
• Presentation Scanner

FIG. 4E

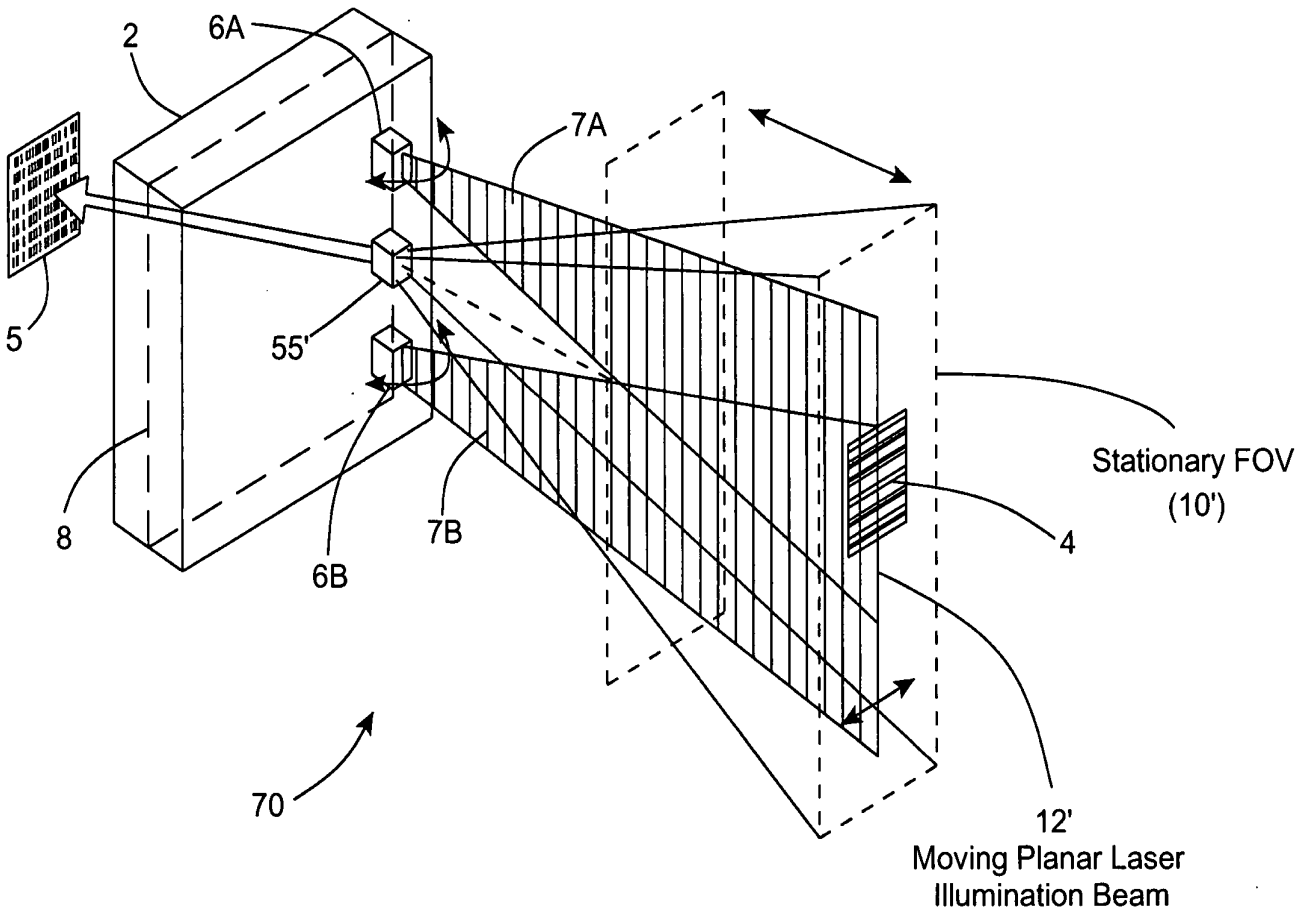
2
6A
7A
5
55'
8
6B
7B
4
Stationary FOV
(10')
70
12'
Moving Planar Laser
Illumination Beam

FIG. 5A

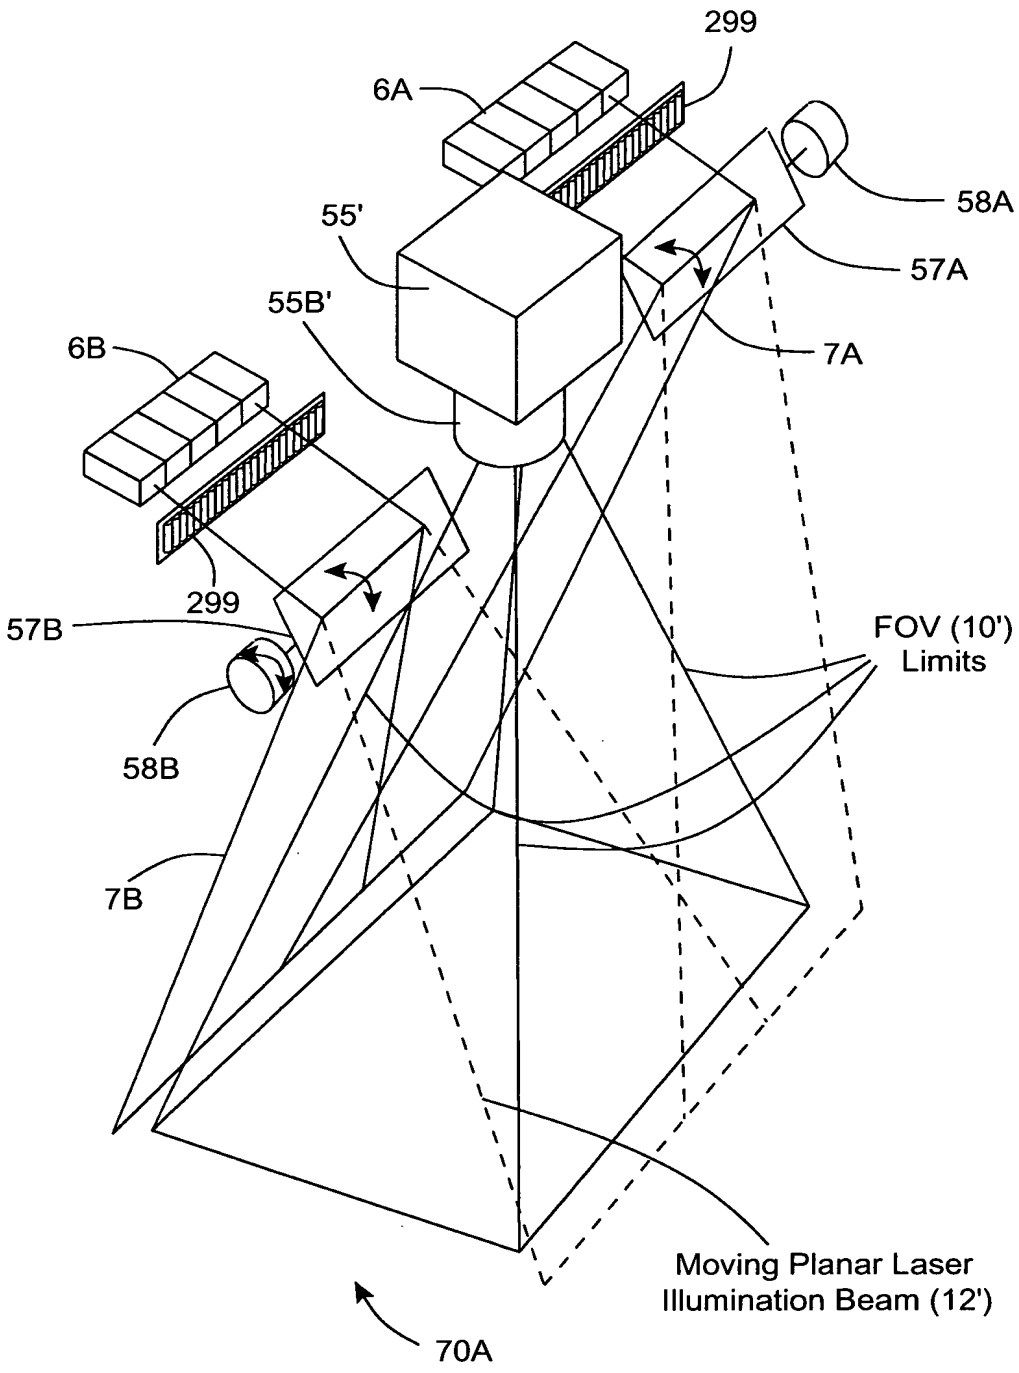
299
6A
58A
55'
57A
55B'
7A
6B
299
57B
FOV (10')
Limits
58B
7B
Moving Planar Laser
Illumination Beam (12')
70A

FIG. 5B1

(1) Fixed Focal Length Camera Lens
(2) Variable Focal Distance

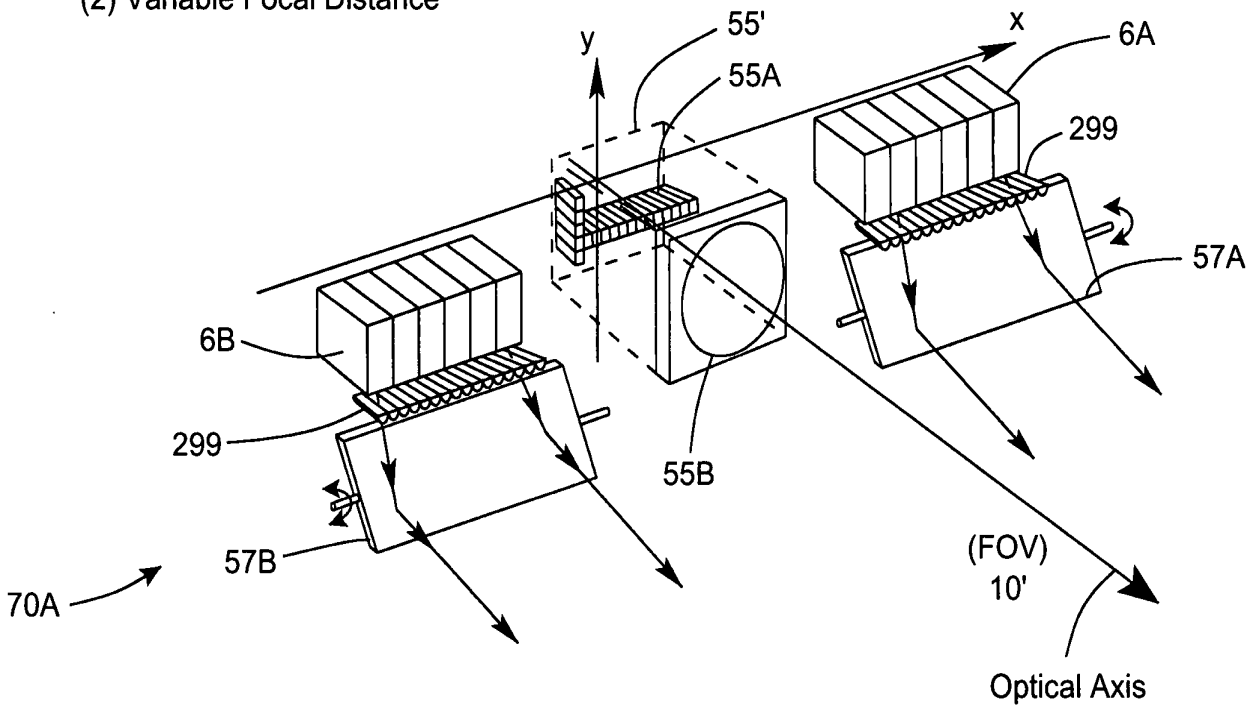

FIG. 5B2

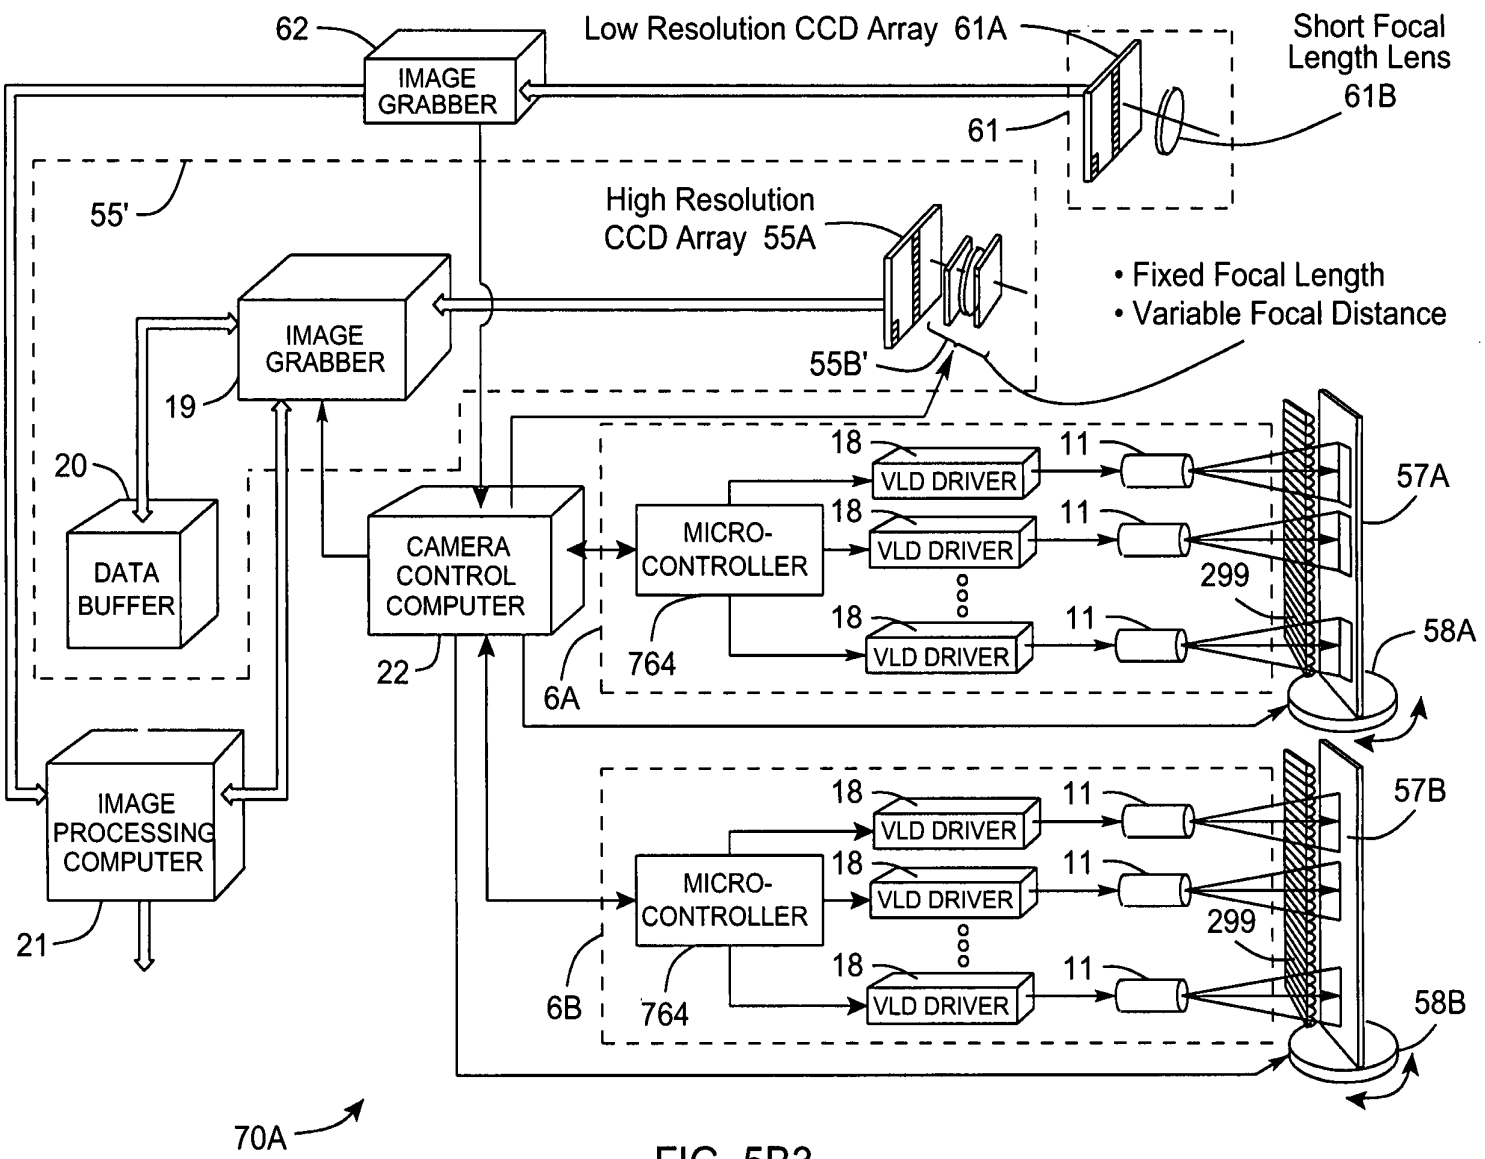
62
IMAGE GRABBER
Low Resolution CCD Array 61A
Short Focal Length Lens 61B
61
55'
High Resolution CCD Array 55A
• Fixed Focal Length
• Variable Focal Distance
55B'
IMAGE GRABBER
19
20
DATA BUFFER
CAMERA CONTROL COMPUTER
22
MICRO-CONTROLLER
764
6A
18
VLD DRIVER
11
57A
299
58A
IMAGE PROCESSING COMPUTER
21
MICRO-CONTROLLER
6B
764
57B
58B
70A

FIG. 5B3

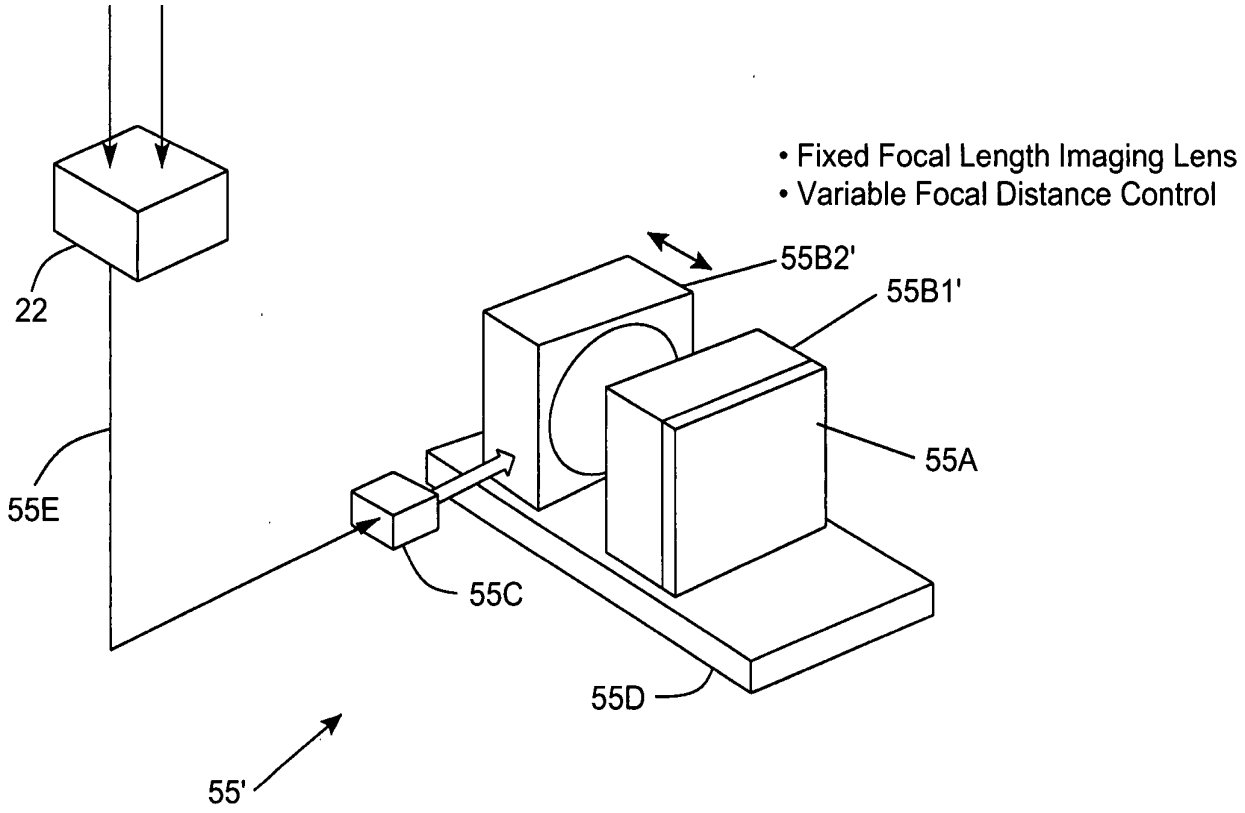
• Fixed Focal Length Imaging Lens
• Variable Focal Distance Control
22
55E
55B2'
55B1'
55A
55C
55D
55'

FIG. 5B4

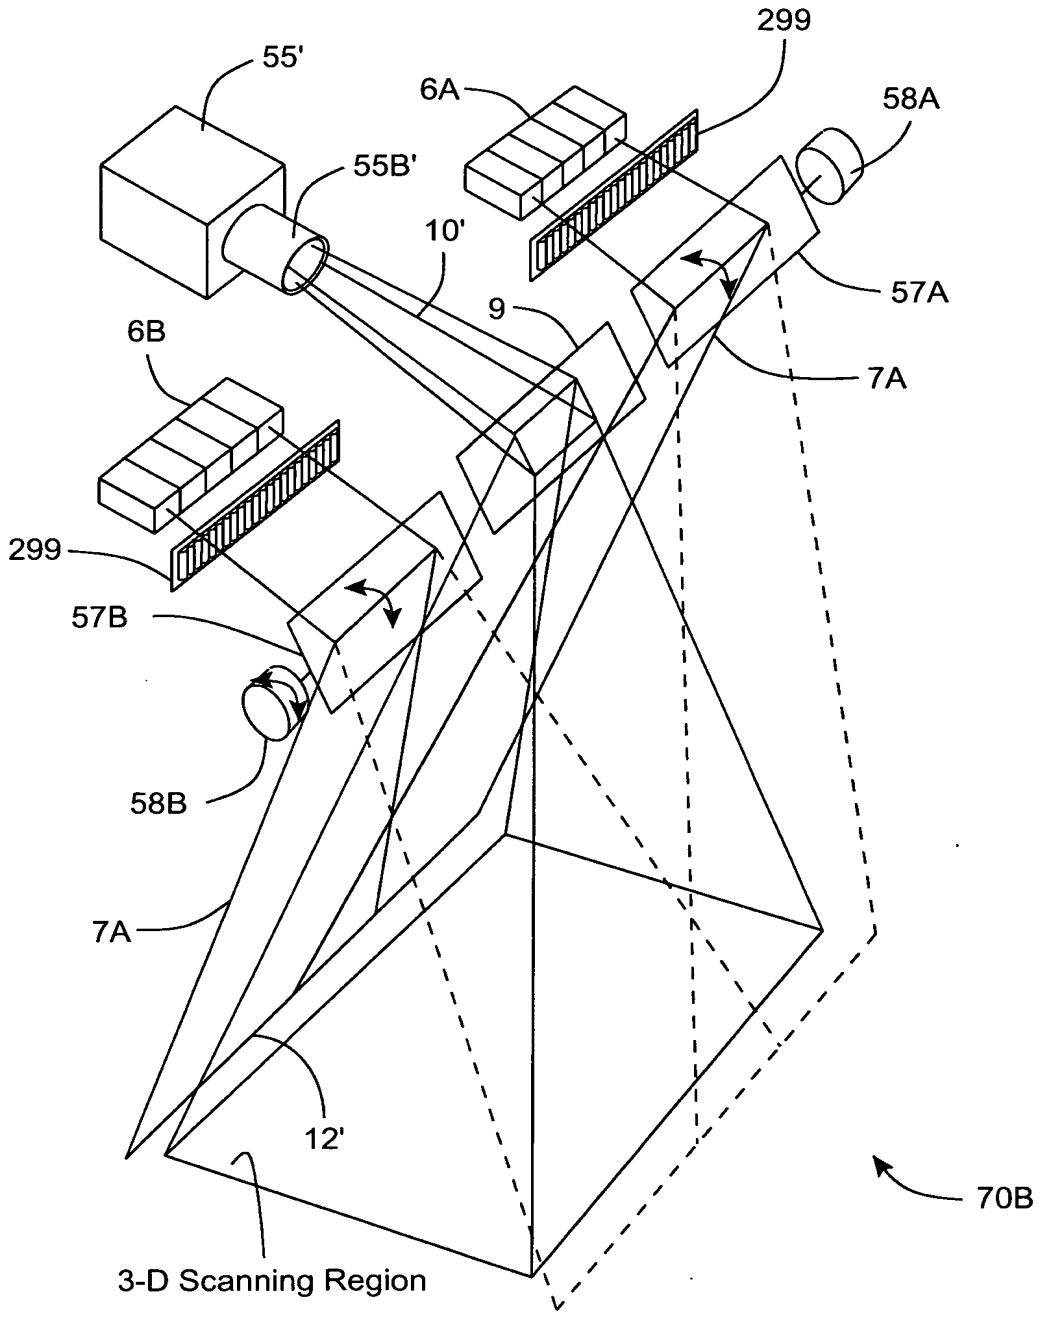
299
55'
6A
58A
55B'
10'
9
57A
6B
7A
299
57B
58B
7A
12'
70B
3-D Scanning Region

FIG. 5C1

(1) Variable Focal Length Camera Lens
(2) Fixed Focal Distance

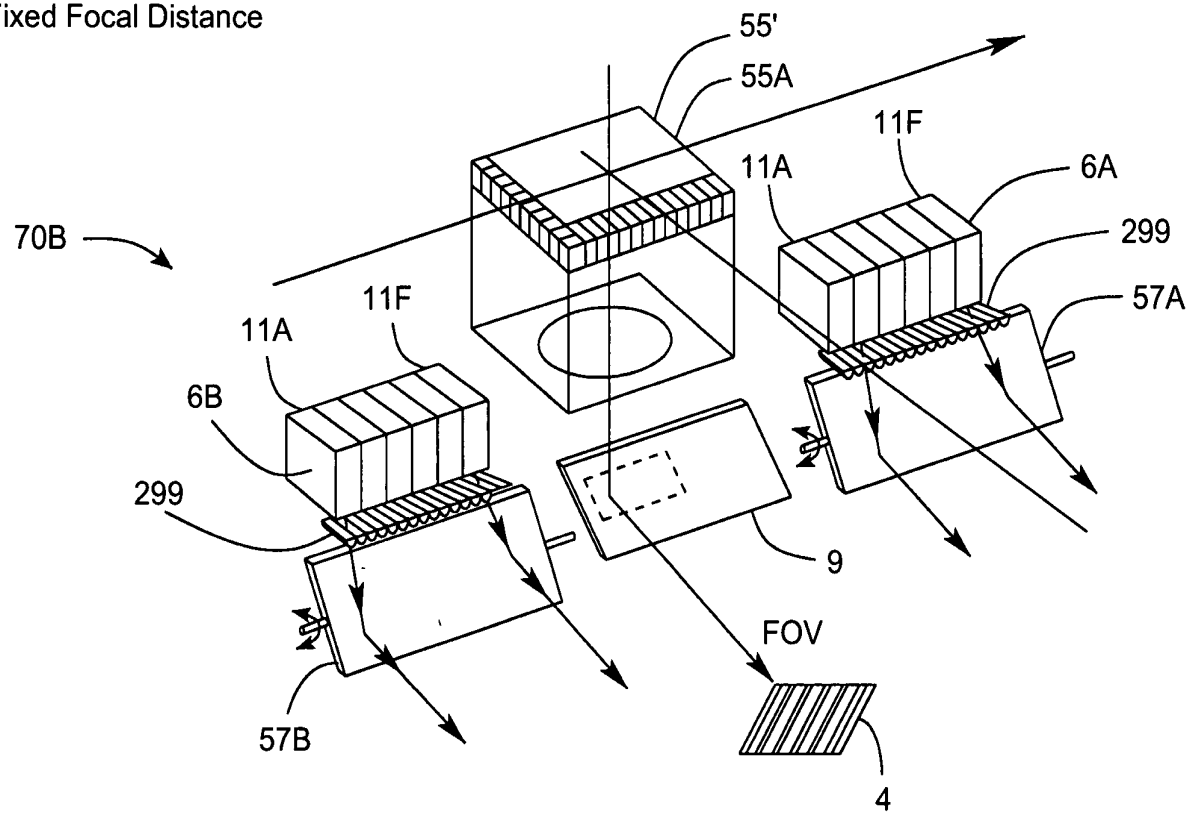

FIG. 5C2

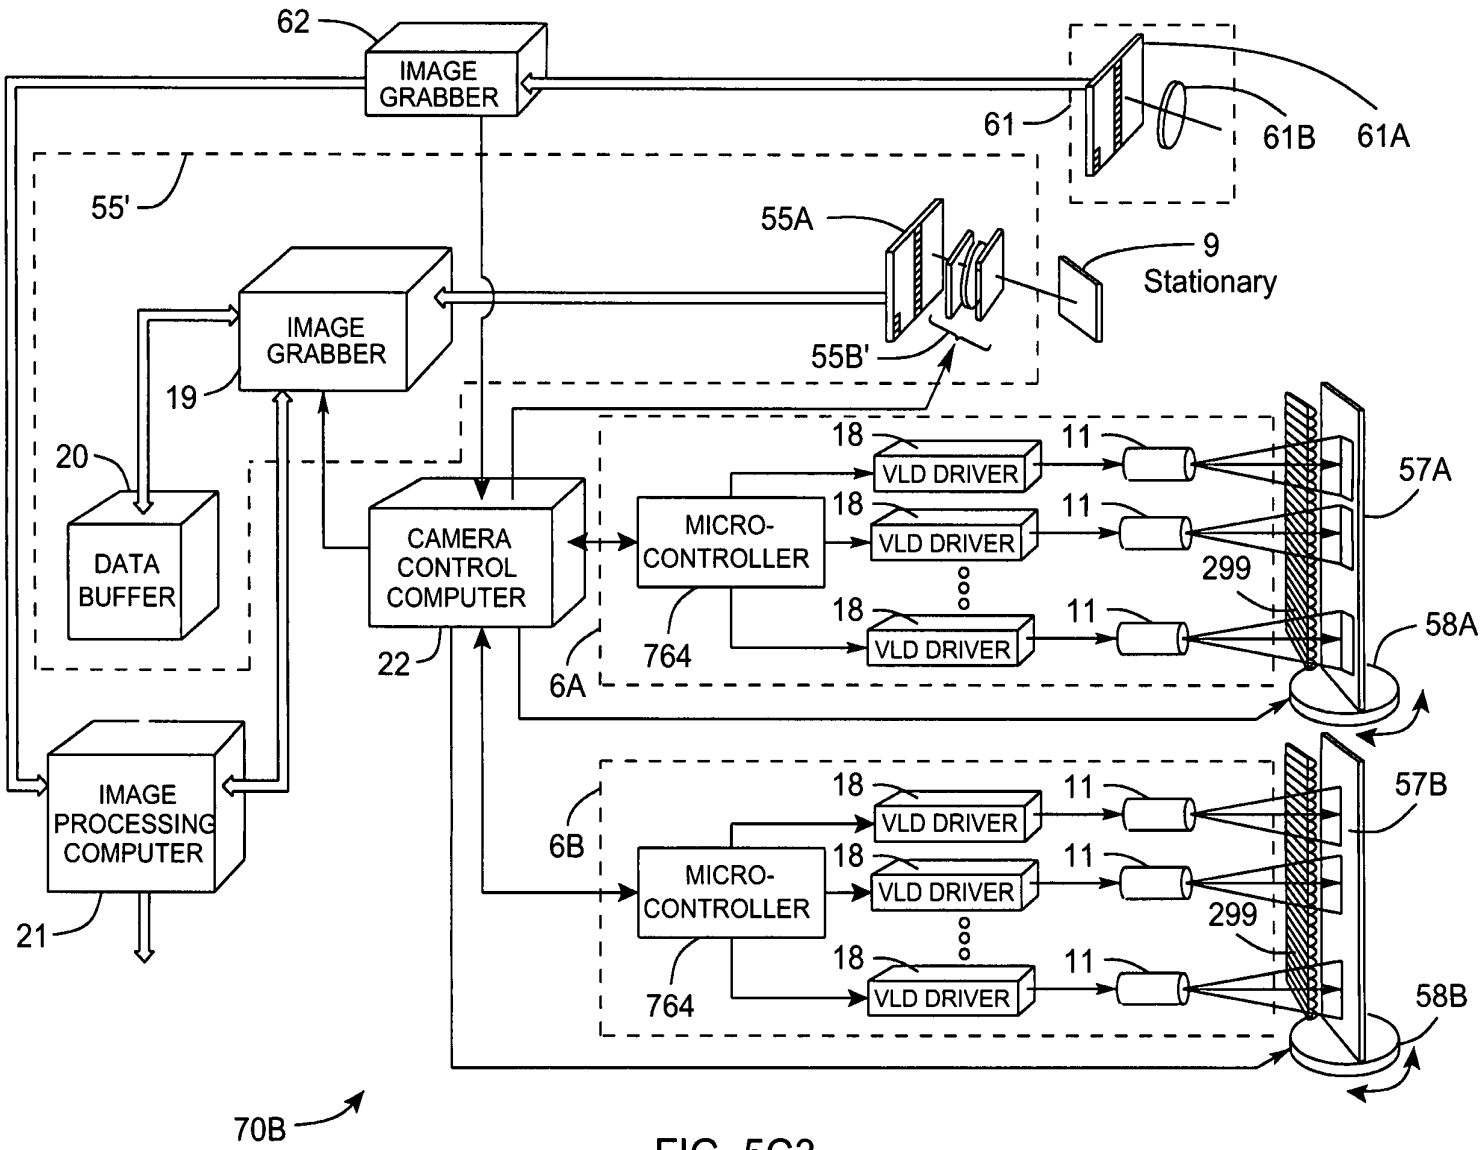
62
IMAGE GRABBER
61
61B
61A
55'
55A
9
Stationary
IMAGE GRABBER
55B'
19
20
DATA BUFFER
CAMERA CONTROL COMPUTER
22
6A
MICRO-CONTROLLER
764
18
VLD DRIVER
11
299
57A
58A
IMAGE PROCESSING COMPUTER
21
6B
57B
58B
70B

FIG. 5C3

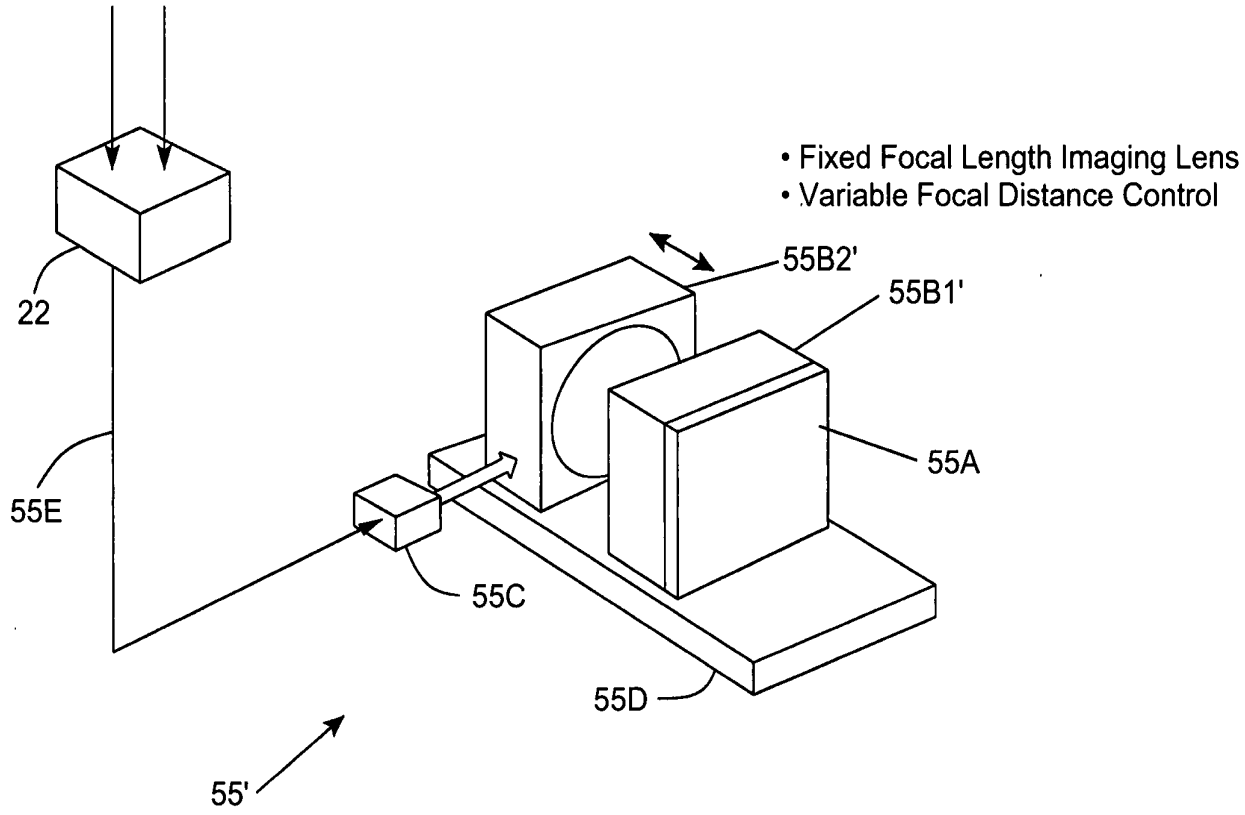
• Fixed Focal Length Imaging Lens
• Variable Focal Distance Control
22
55E
55B2'
55B1'
55A
55C
55D
55'

FIG. 5C4

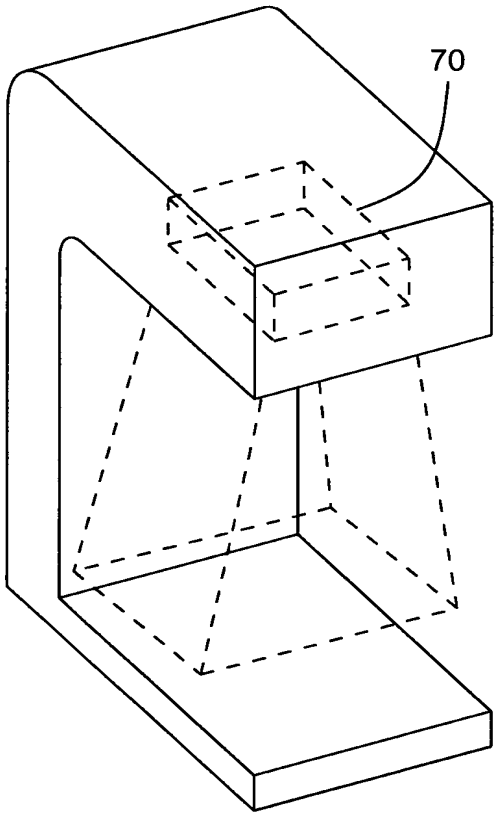

FIG. 5D

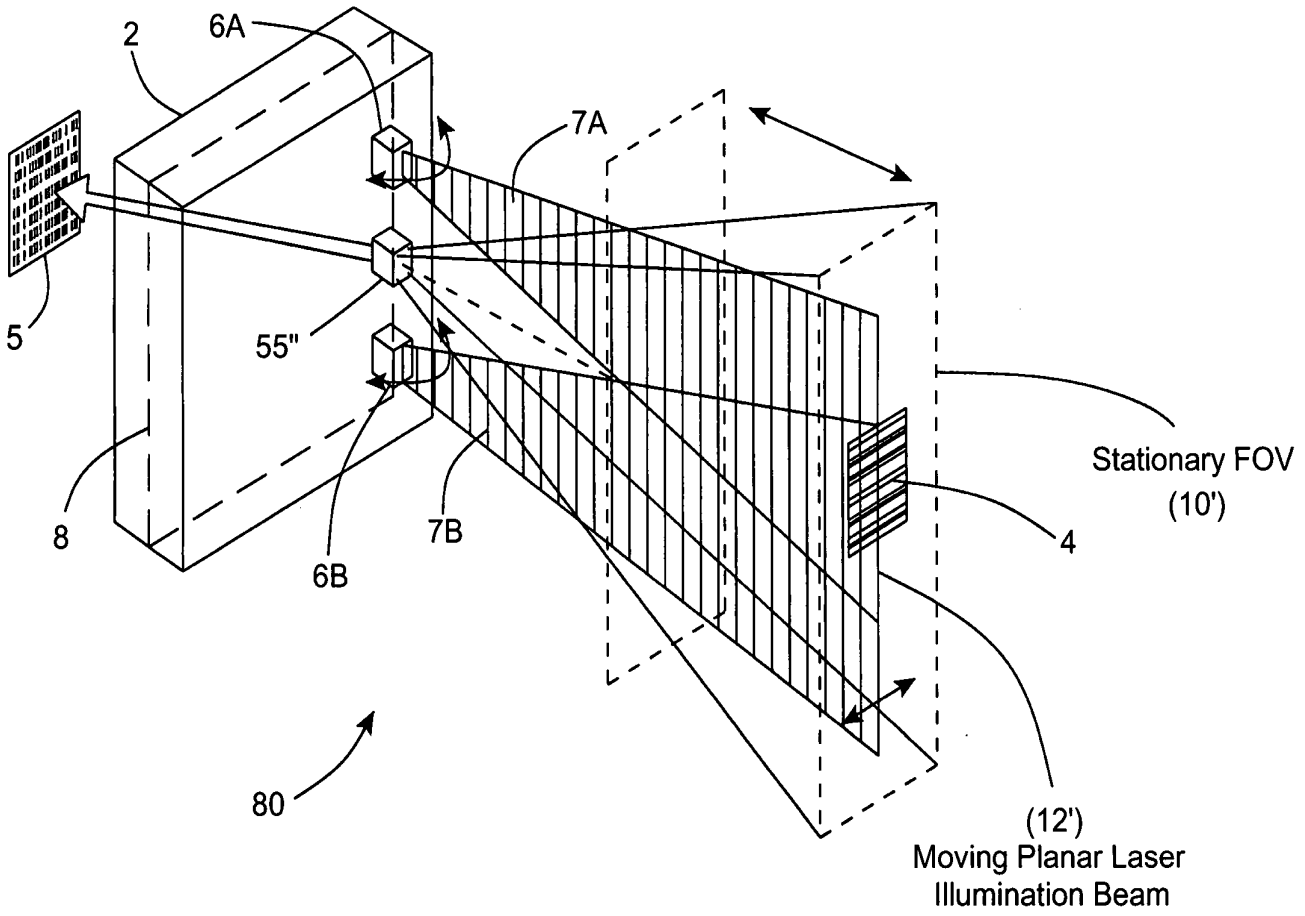
2
6A
7A
5
55"
8
6B
7B
4
Stationary FOV
(10')
80
(12')
Moving Planar Laser
Illumination Beam

FIG. 6A

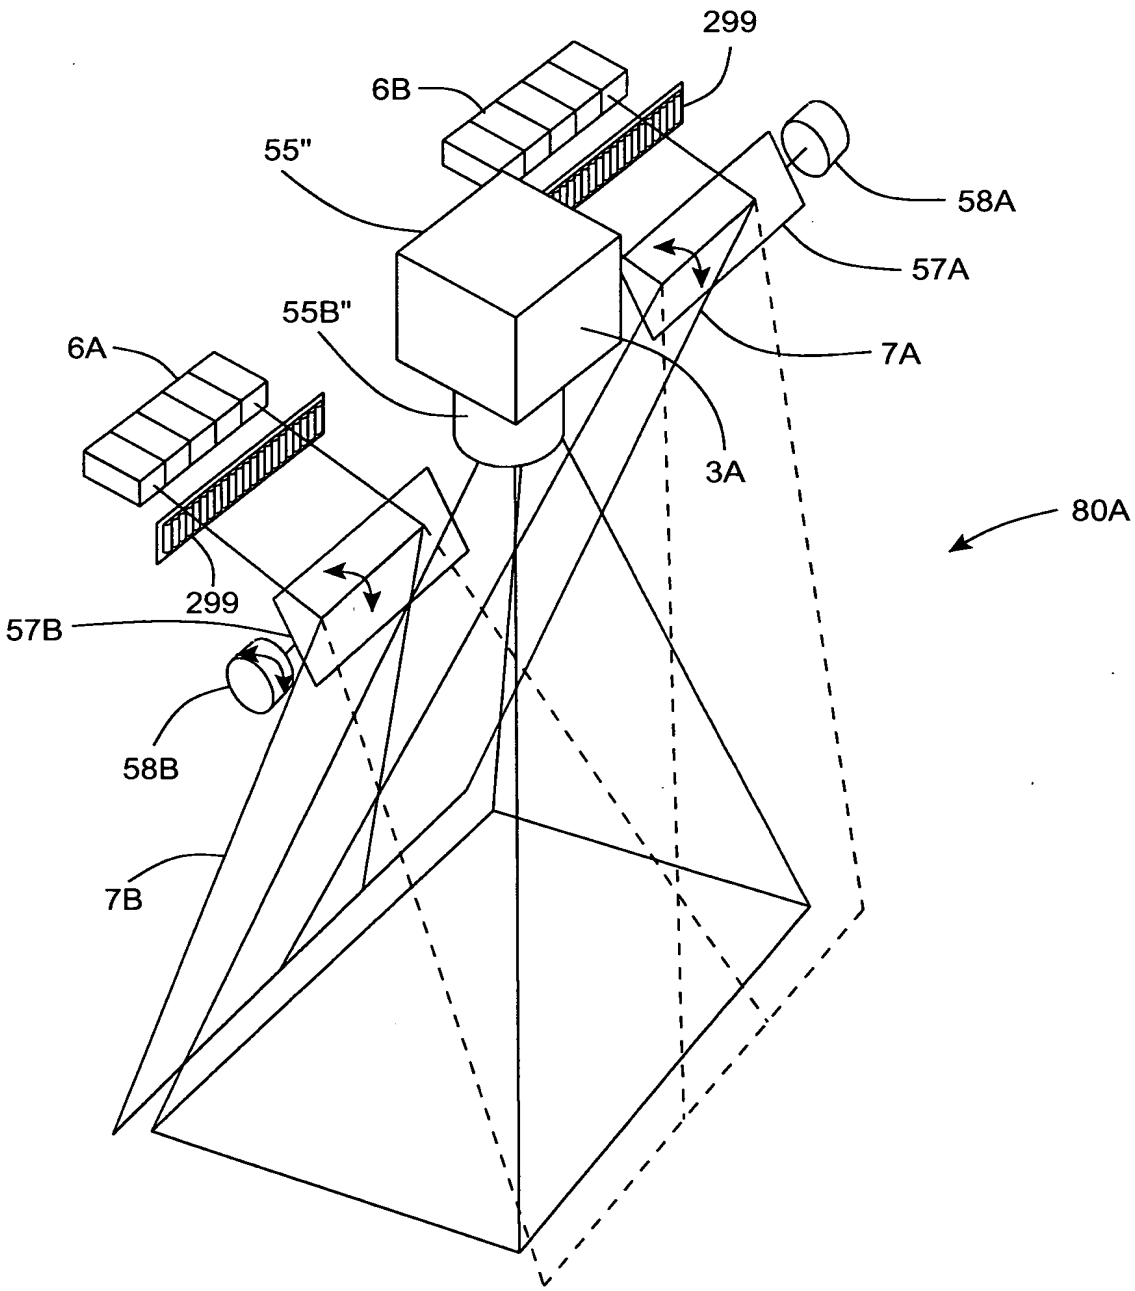

FIG. 6B1

(1) Variable Focal Length Camera Lens
(2) Variable Focal Distance

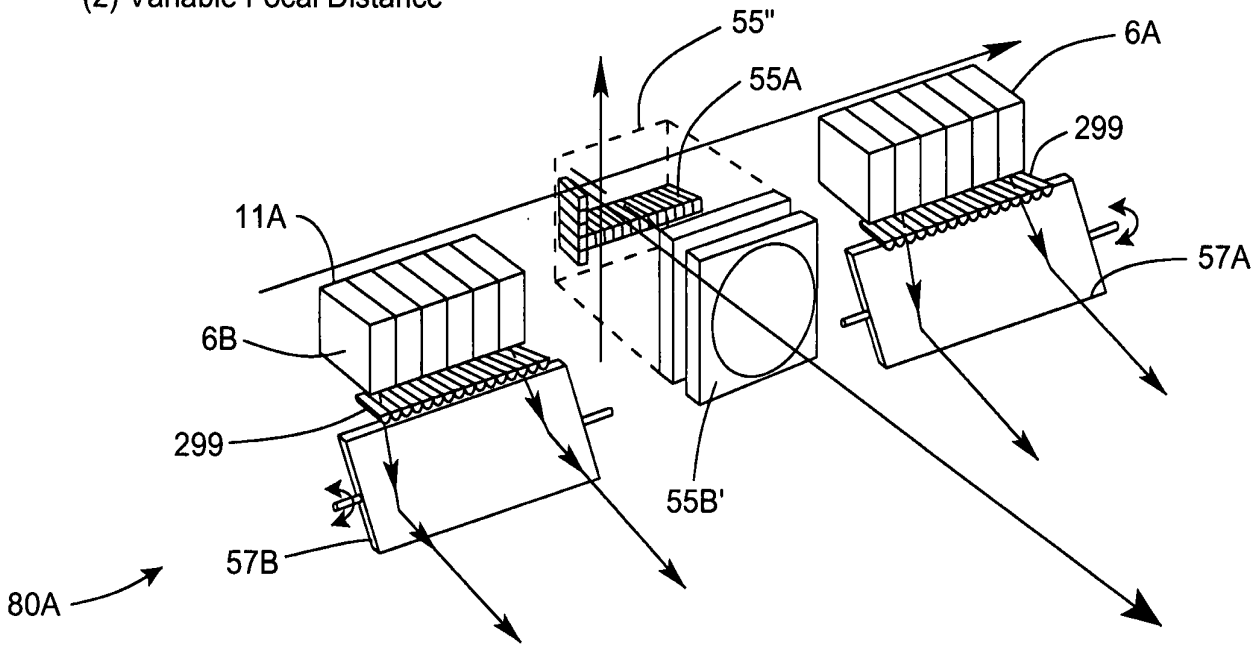

FIG. 6B2

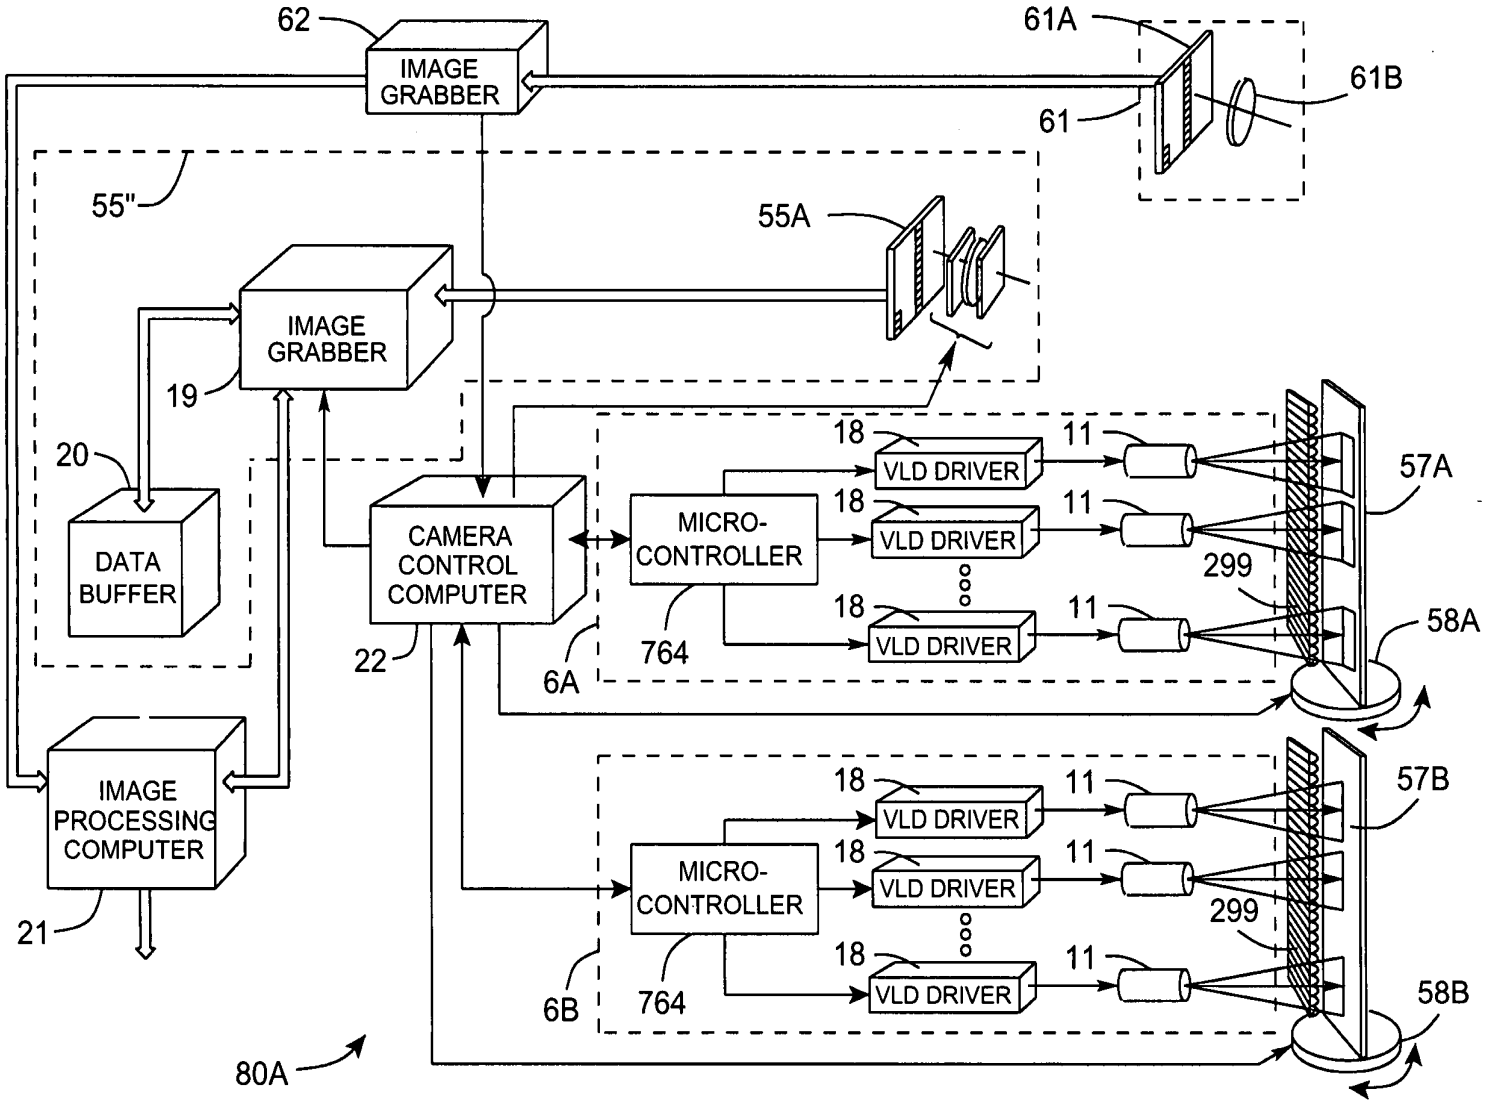
62
IMAGE GRABBER
61A
61B
61
55"
55A
IMAGE GRABBER
19
20
DATA BUFFER
CAMERA CONTROL COMPUTER
22
6A
MICRO-CONTROLLER
764
18
VLD DRIVER
11
299
57A
58A
IMAGE PROCESSING COMPUTER
21
6B
57B
58B
80A

FIG. 6B3

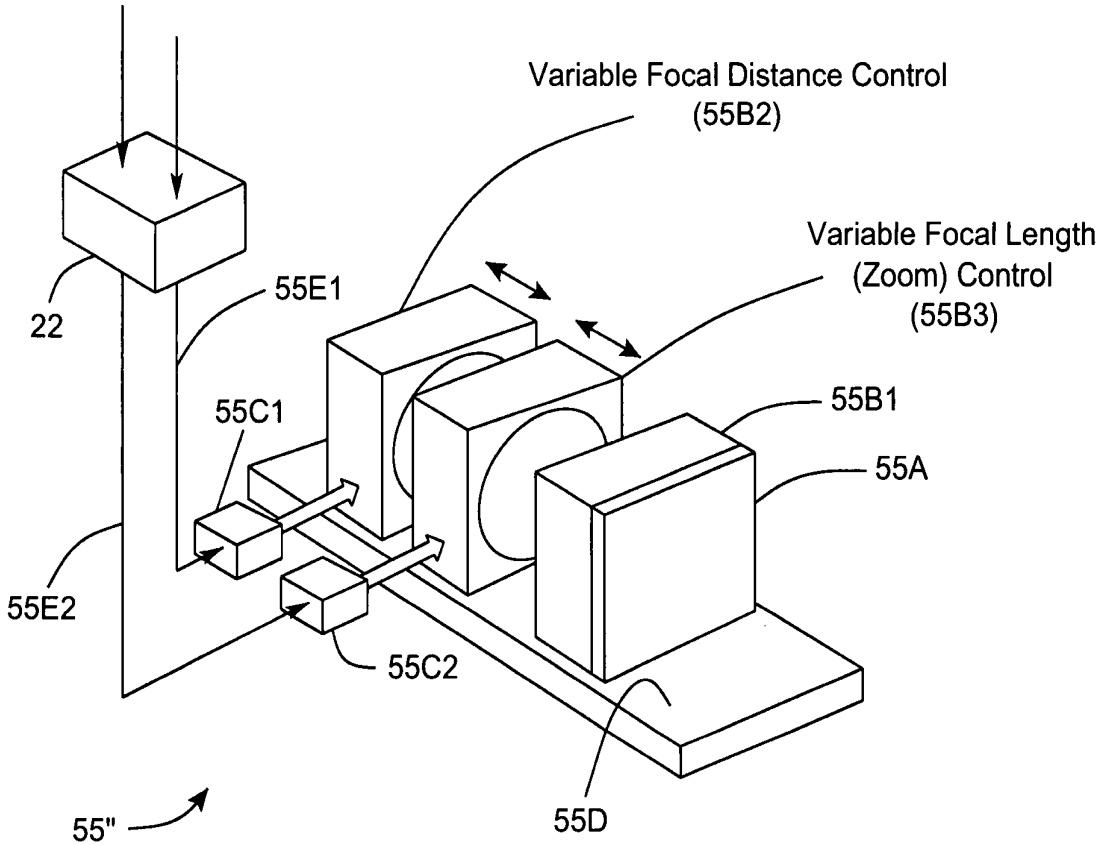
Variable Focal Distance Control
(55B2)
Variable Focal Length
(Zoom) Control
(55B3)
22
55E1
55C1
55B1
55A
55E2
55C2
55"
55D

FIG. 6B4

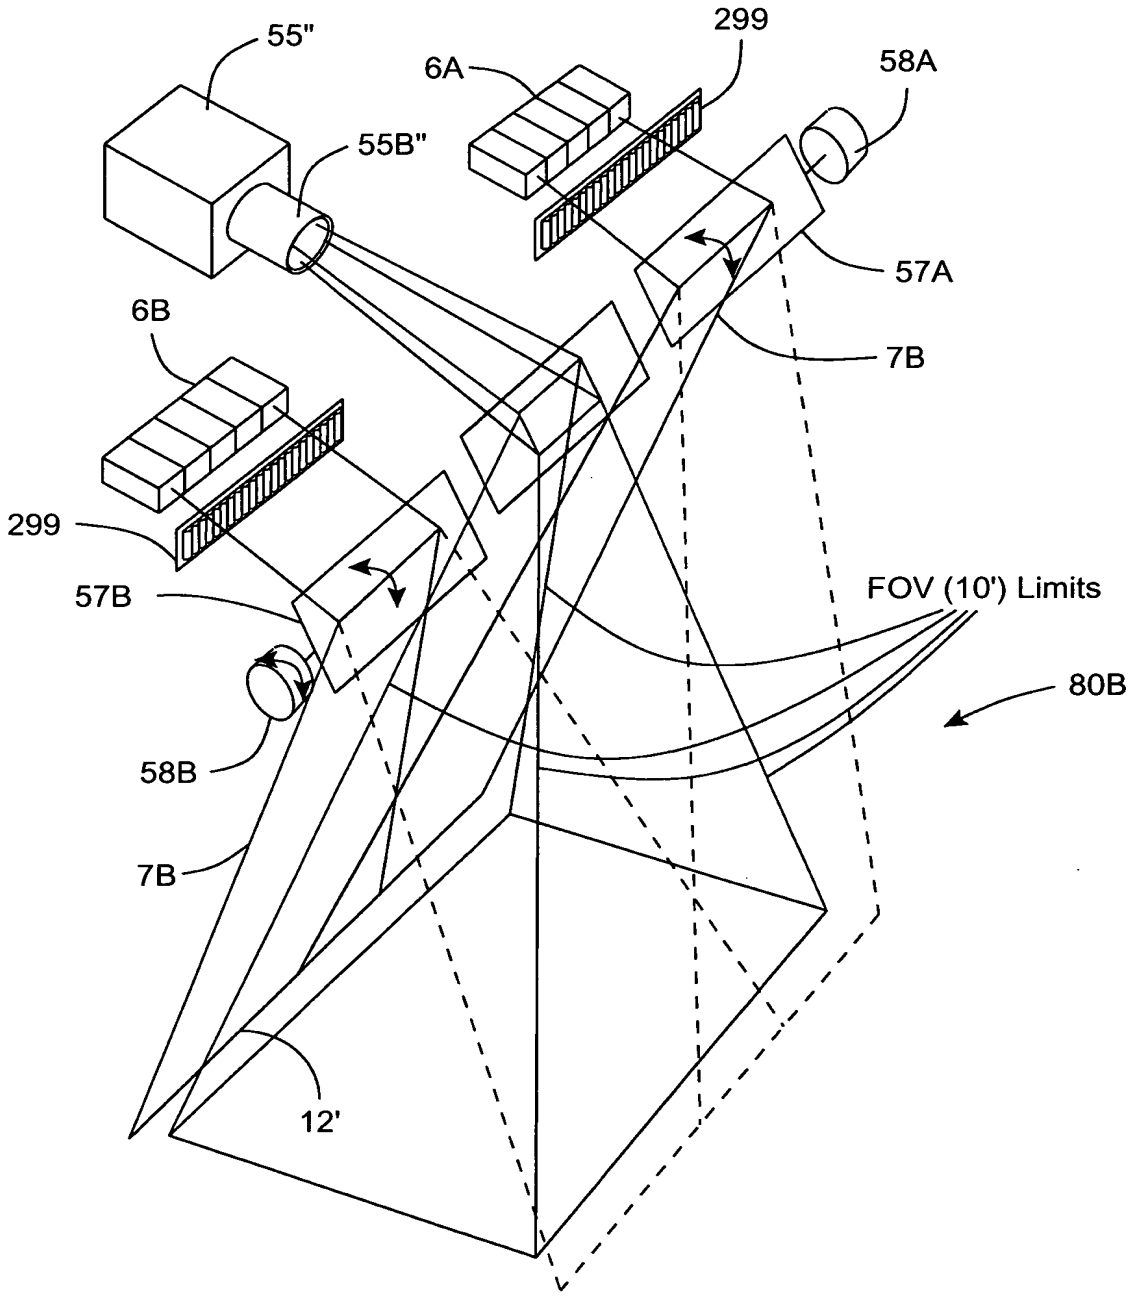

FIG. 6C1

(1) Variable Focal Length Camera Lens
(2) Variable Focal Distance

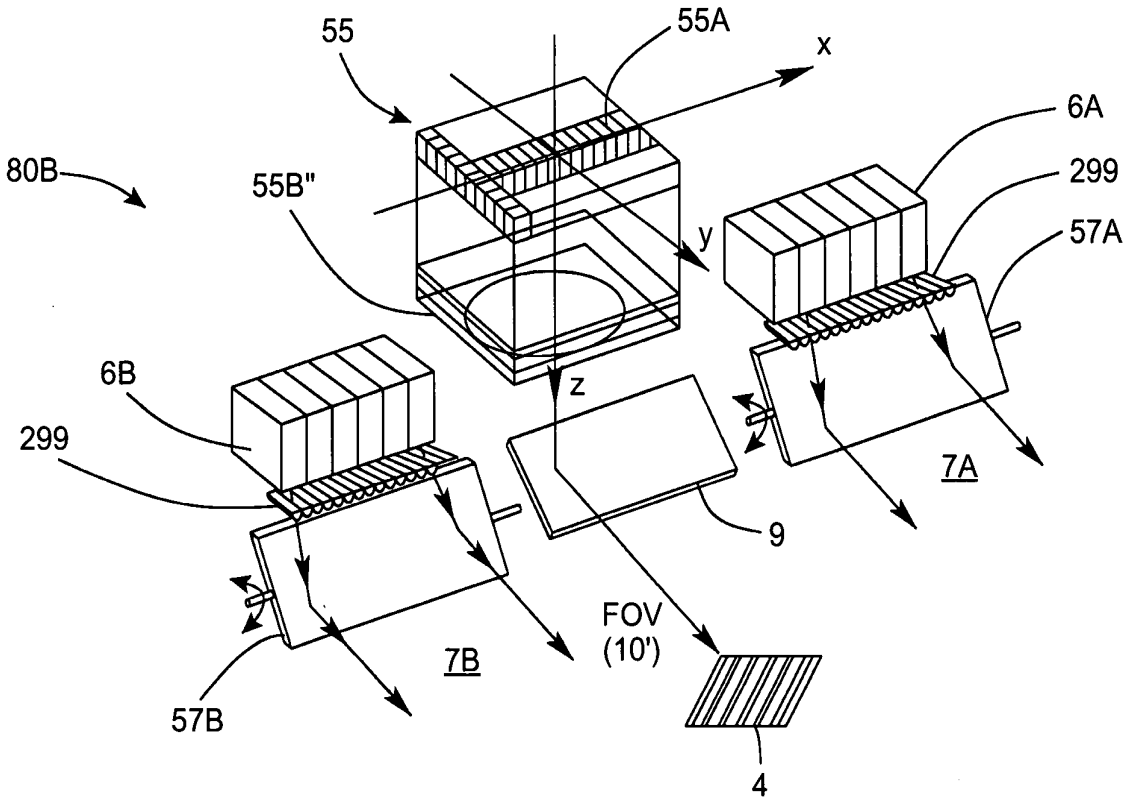

FIG. 6C2

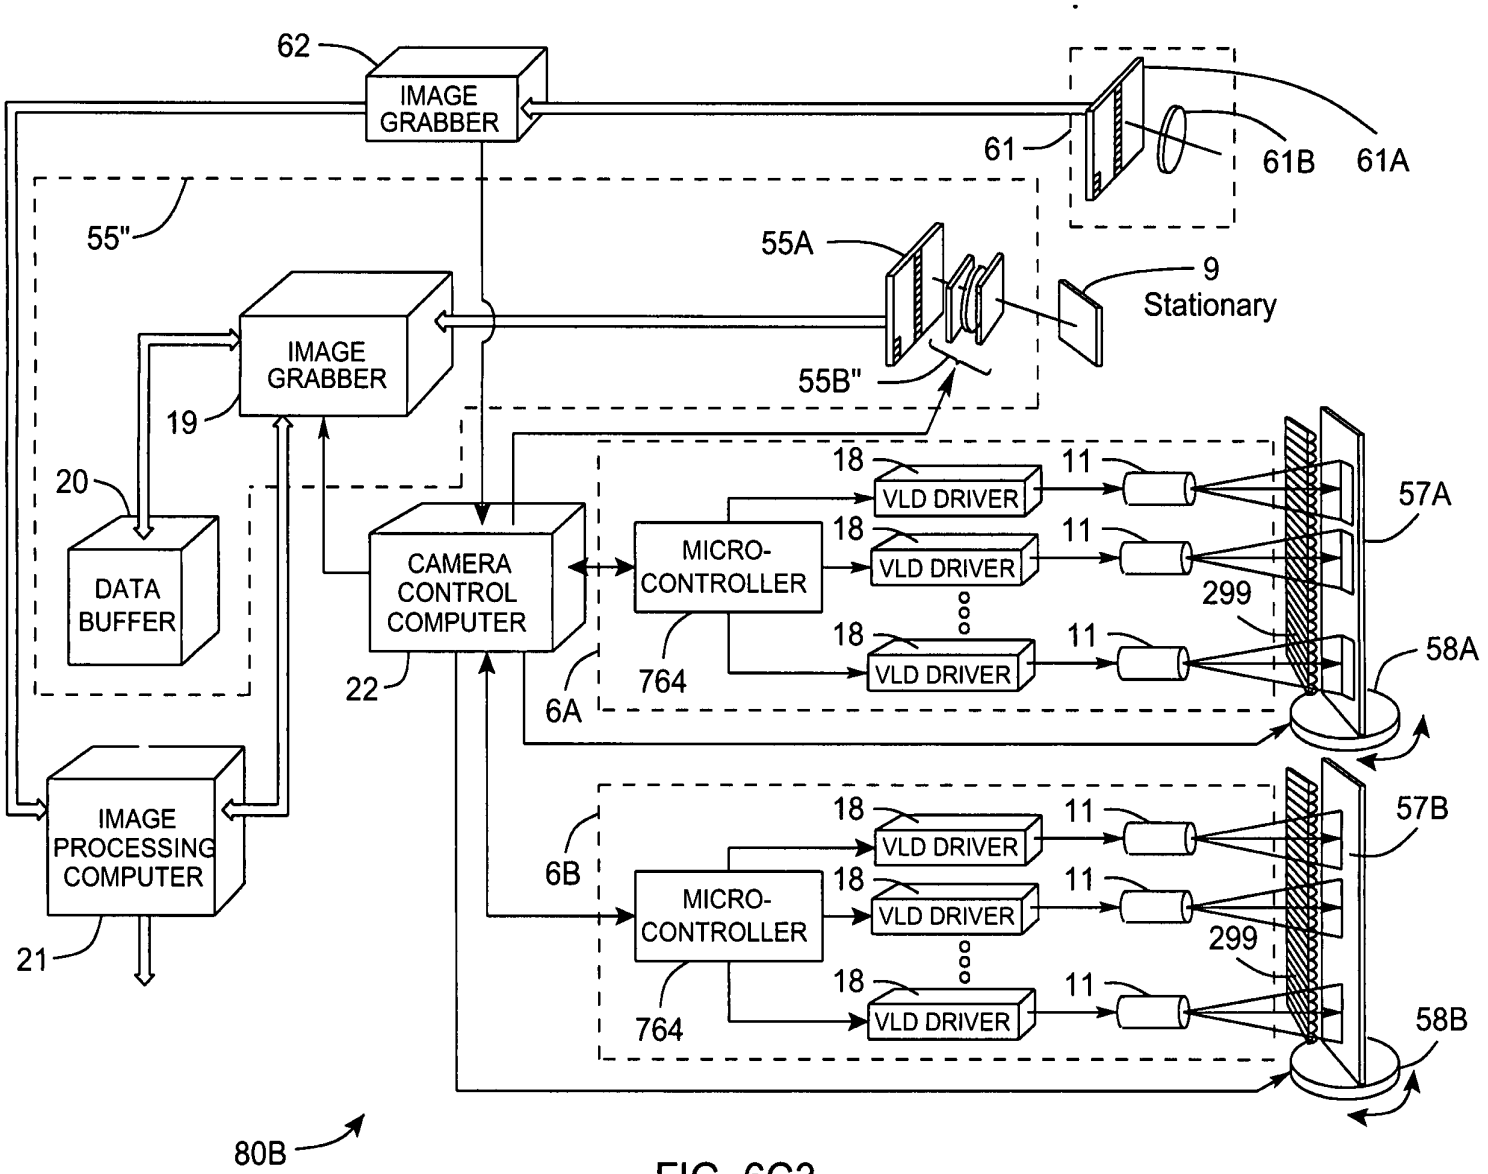
62
IMAGE GRABBER
61
61B
61A
55"
55A
9
Stationary
IMAGE GRABBER
55B"
19
20
DATA BUFFER
CAMERA CONTROL COMPUTER
22
6A
MICRO-CONTROLLER
764
18
VLD DRIVER
11
299
57A
58A
IMAGE PROCESSING COMPUTER
21
6B
57B
58B
80B

FIG. 6C3

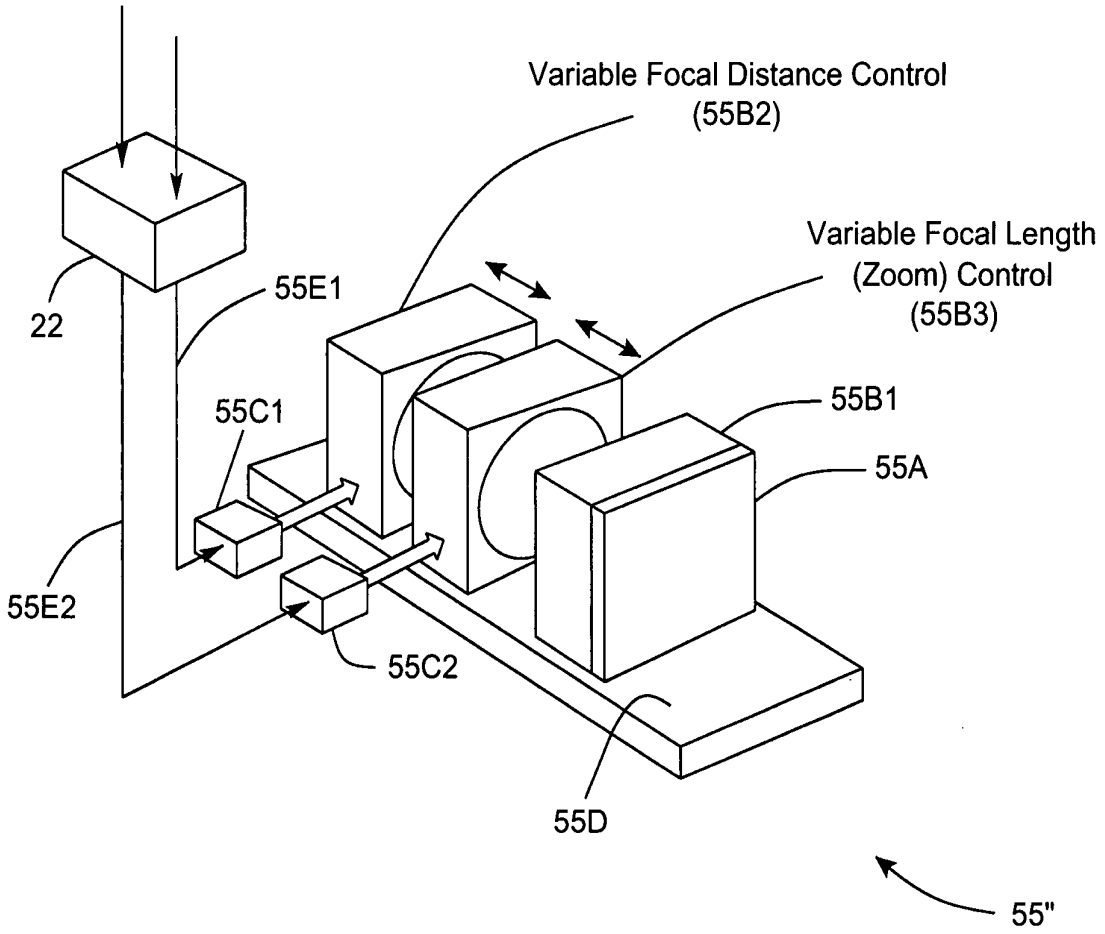
Variable Focal Distance Control
(55B2)
Variable Focal Length
(Zoom) Control
(55B3)
22
55E1
55C1
55B1
55A
55E2
55C2
55D
55"

FIG. 6C4

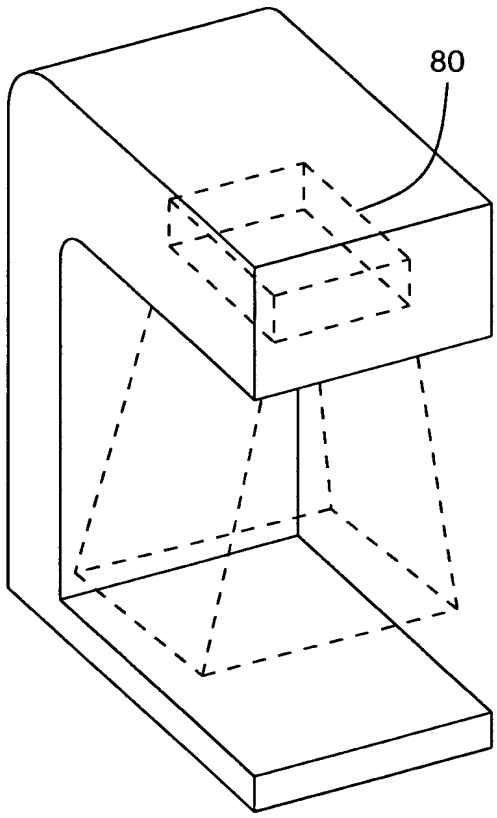

FIG. 6C5

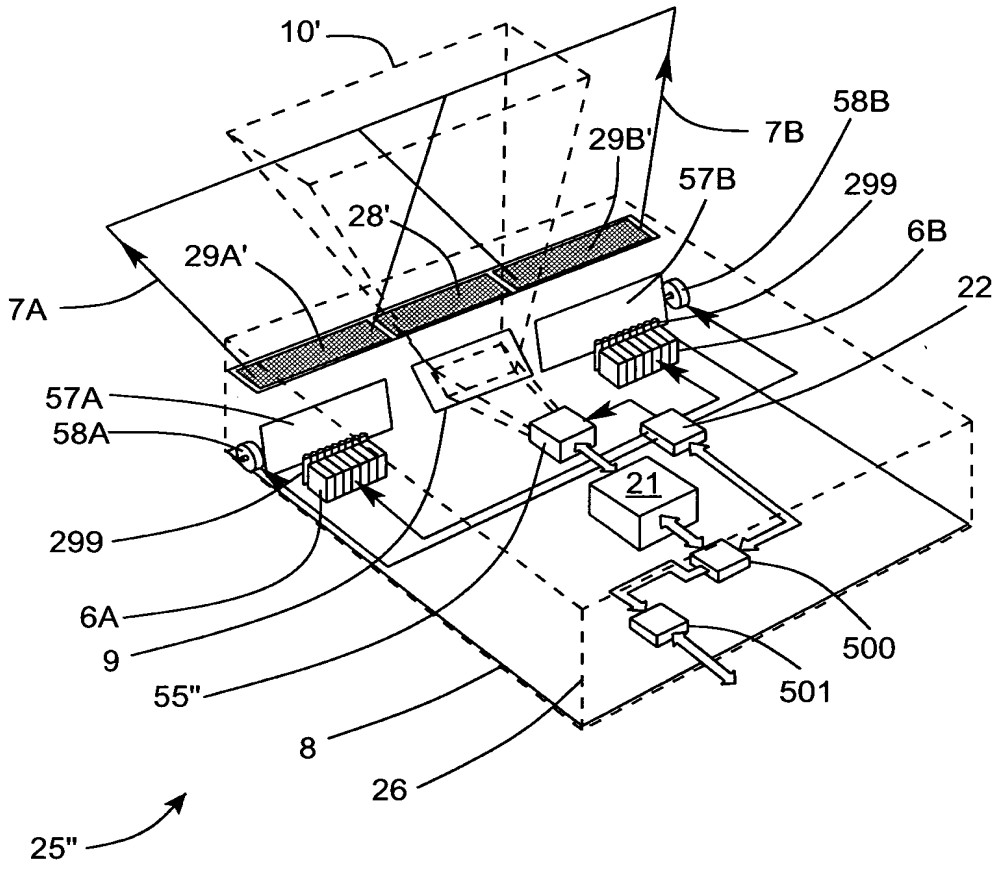
10'
7B
58B
29B'
57B
299
28'
6B
29A'
22
7A
57A
58A
21
299
6A
9
55"
500
501
8
26
25"

FIG. 6D1

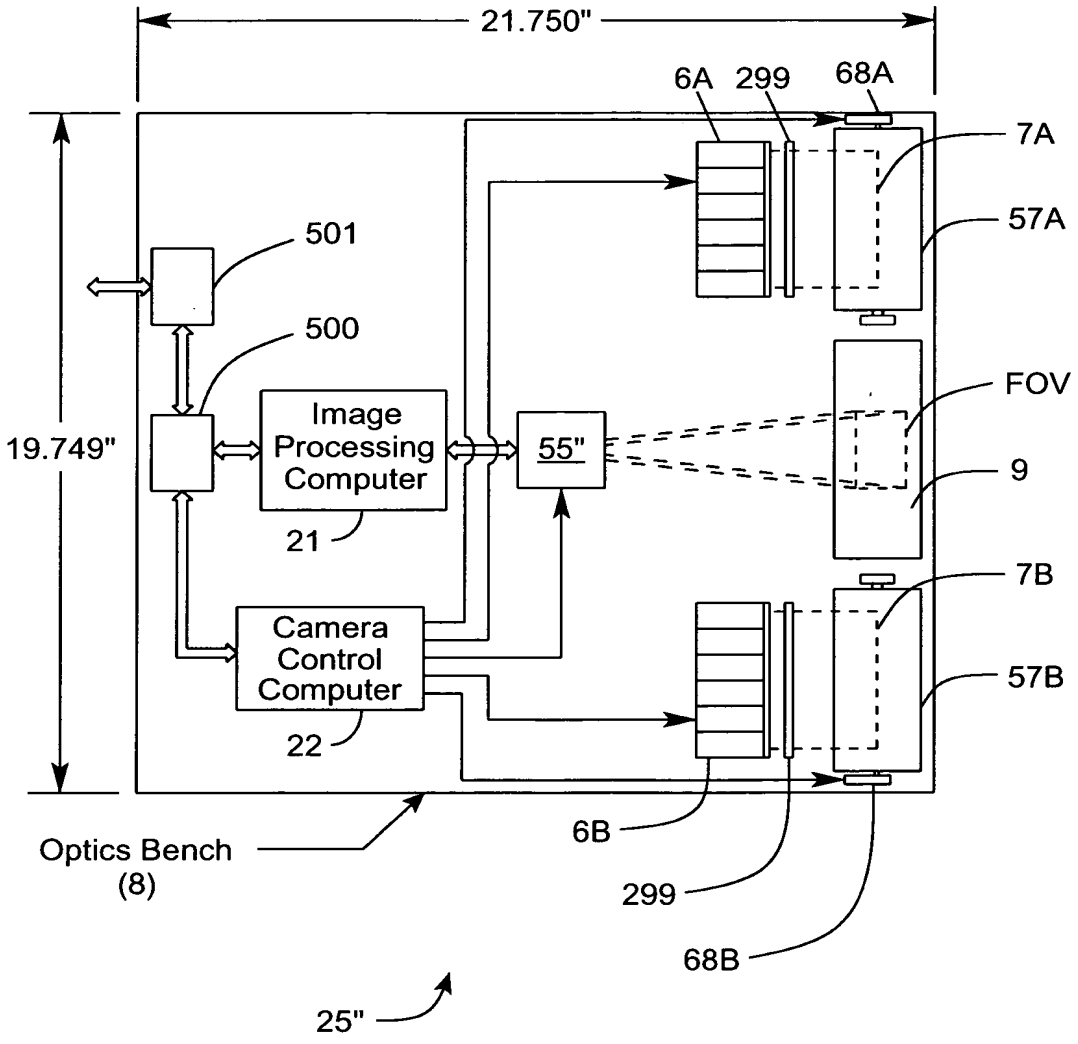
21.750"
6A
299
68A
7A
57A
501
500
Image Processing Computer
21
55"
FOV
9
19.749"
7B
57B
Camera Control Computer
22
Optics Bench (8)
6B
299
68B
25"

FIG. 6D2

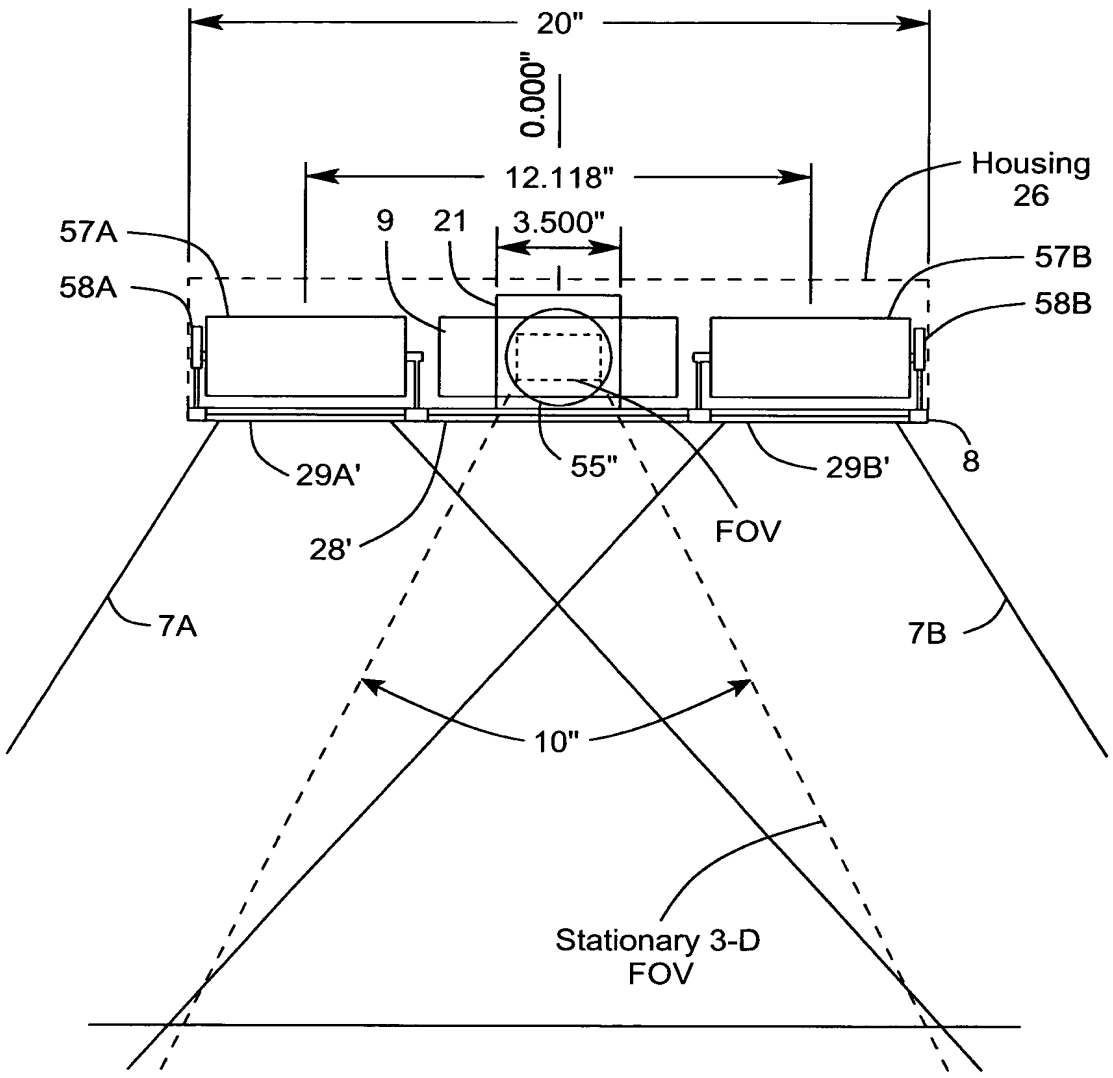
20"
0.000"
12.118"
3.500"
9
21
Housing
26
57A
58A
57B
58B
29A'
55"
29B'
8
28'
FOV
7A
7B
10"
Stationary 3-D
FOV

FIG. 6D3

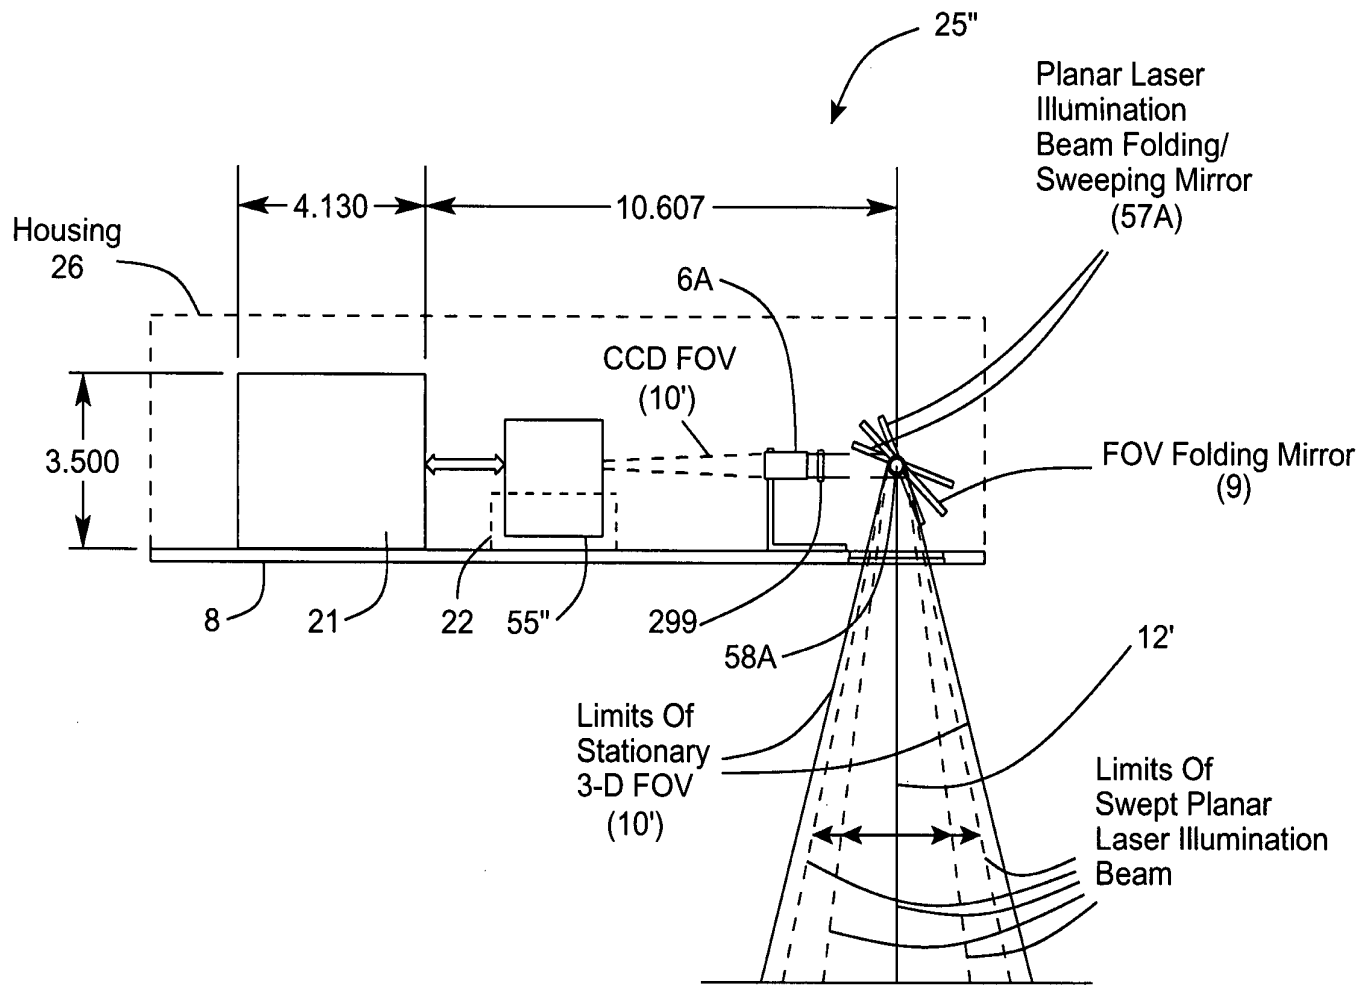
25"
Planar Laser
Illumination
Beam Folding/
Sweeping Mirror
(57A)
4.130
10.607
Housing
26
6A
CCD FOV
(10')
3.500
FOV Folding Mirror
(9)
8
21
22
55"
299
58A
12'
Limits Of
Stationary
3-D FOV
(10')
Limits Of
Swept Planar
Laser Illumination
Beam

FIG. 6D4

* Variable FOV

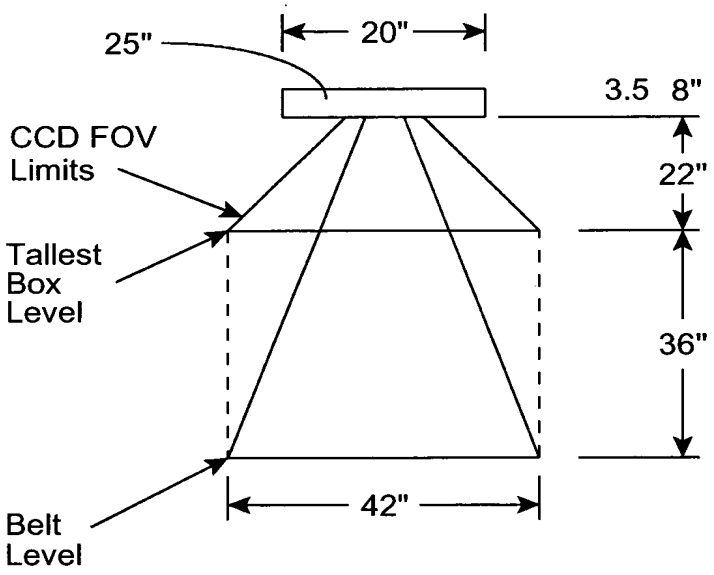

FIG. 6D5

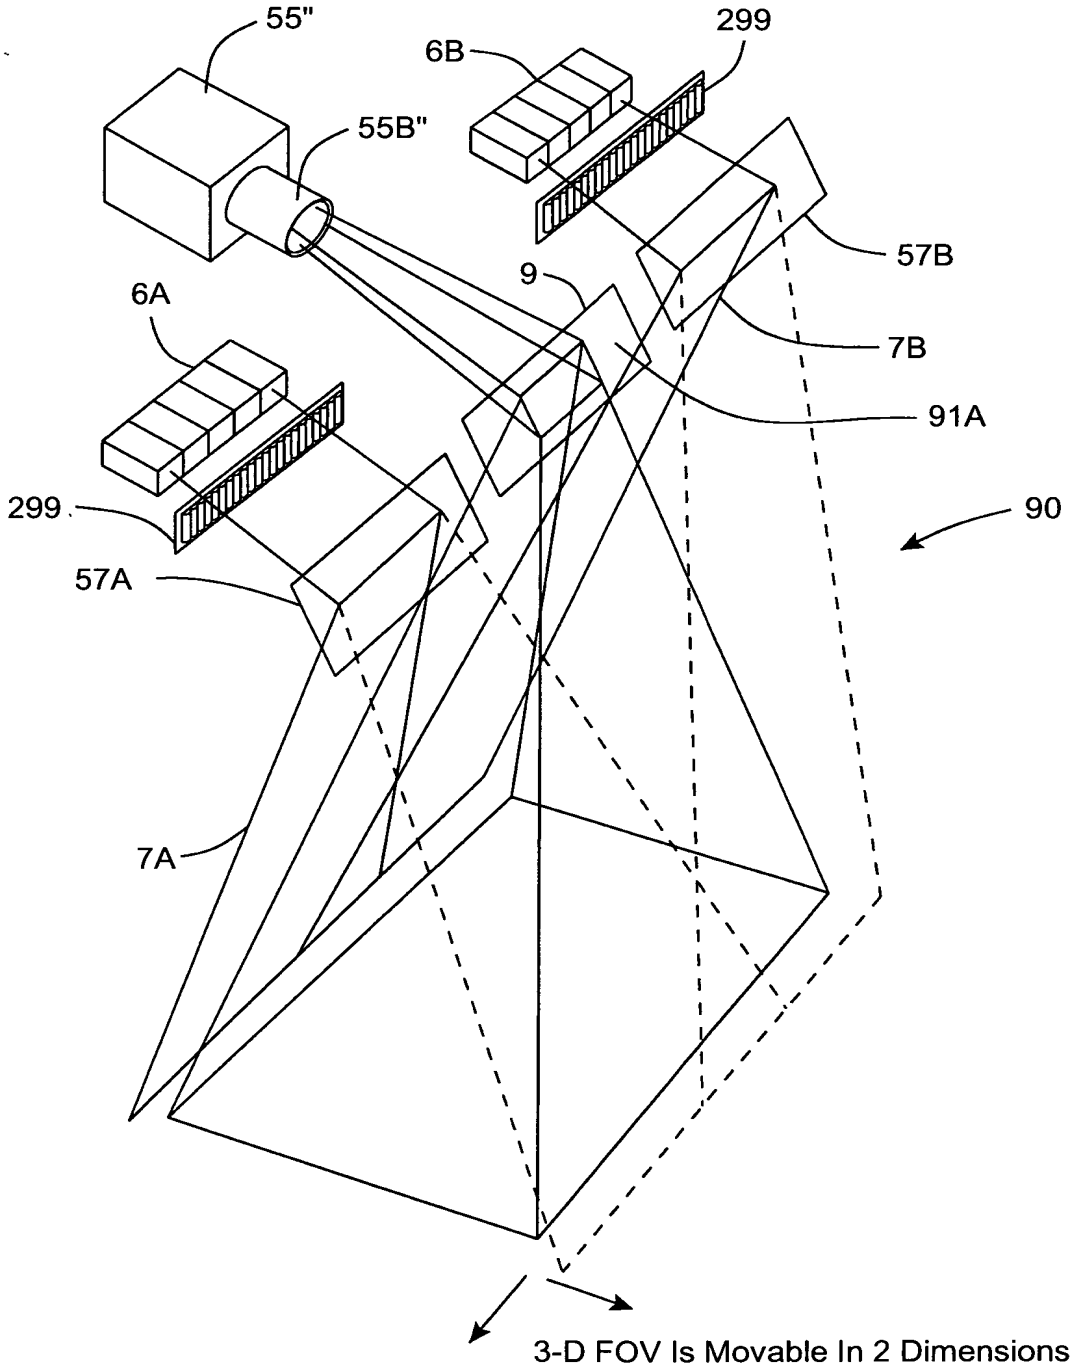
55"
6B
299
55B"
57B
9
6A
7B
91A
299
90
57A
7A
3-D FOV Is Movable In 2 Dimensions

FIG. 6E1

(1) Variable Focal Length Camera Lens
(2) Variable Focal Distance

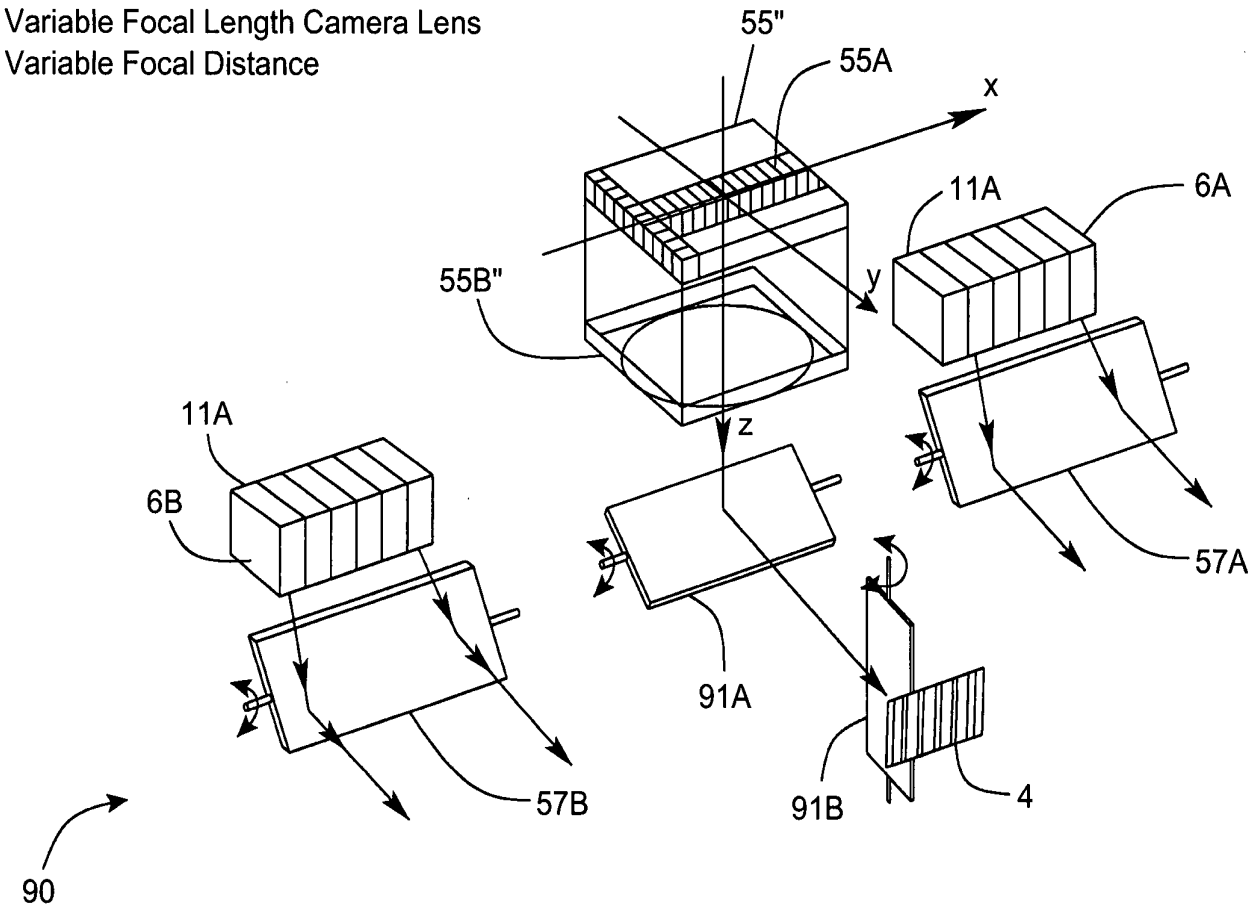

FIG. 6E2

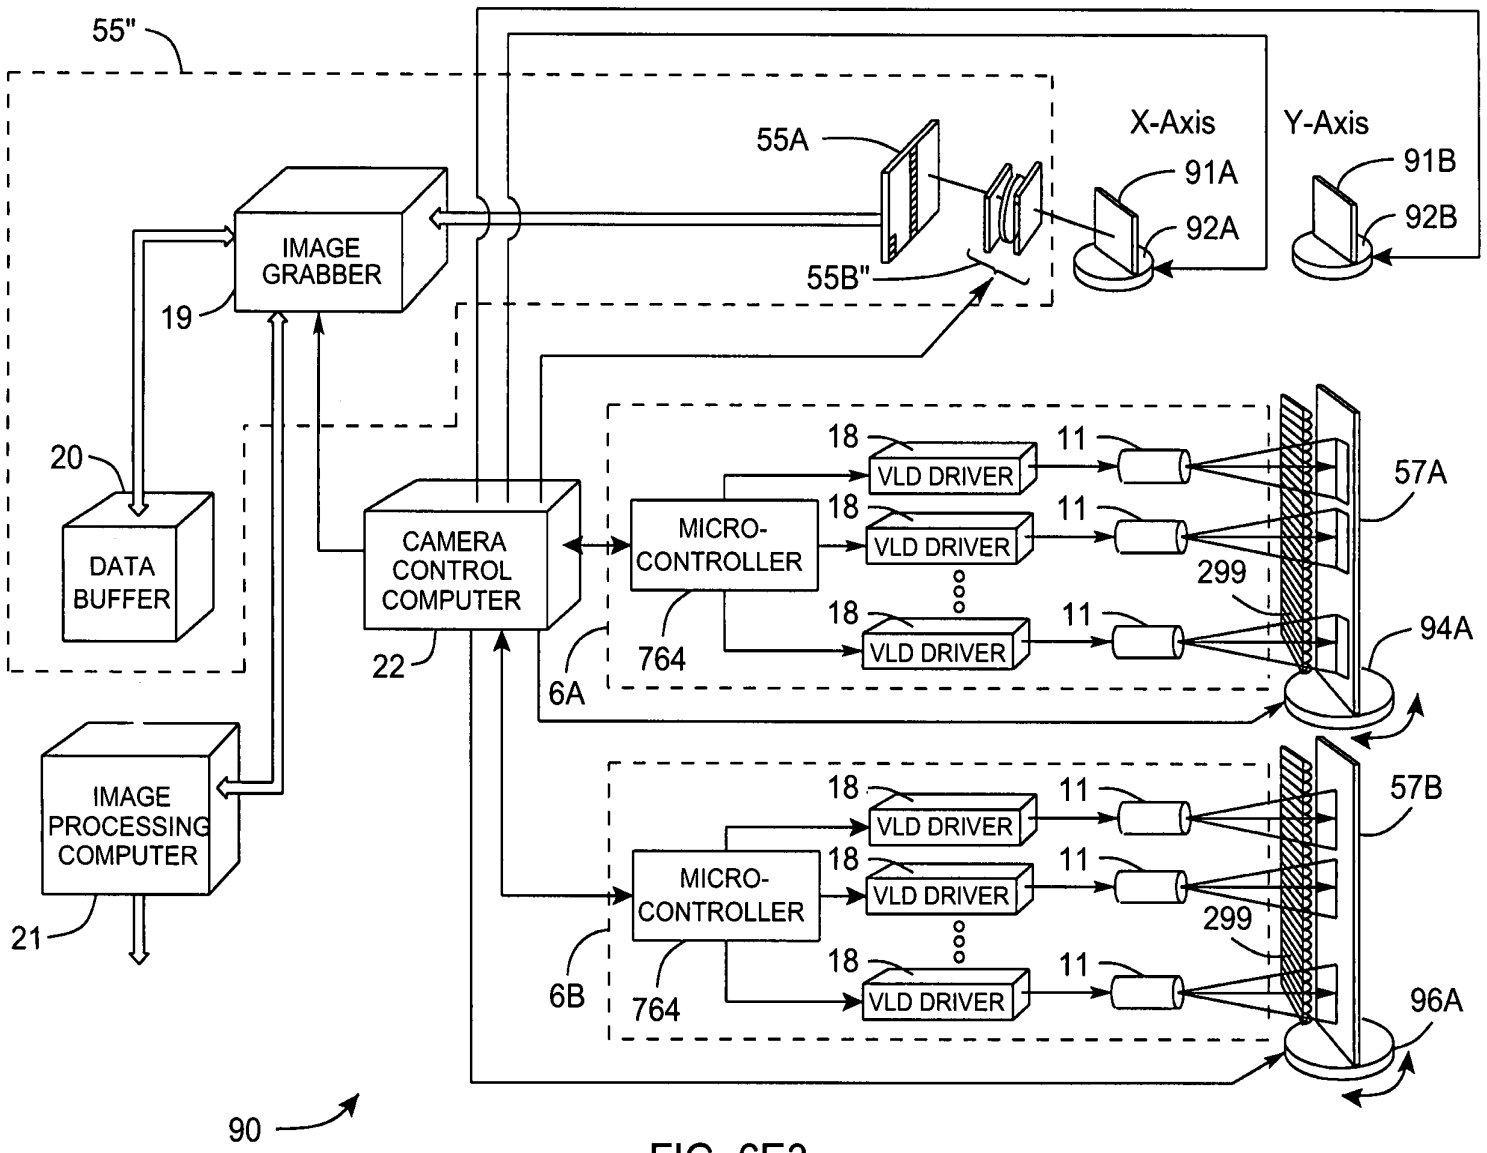
55"
55A
X-Axis
Y-Axis
91A
91B
92A
92B
55B"
IMAGE GRABBER
19
20
DATA BUFFER
CAMERA CONTROL COMPUTER
22
MICRO-CONTROLLER
764
6A
18
VLD DRIVER
11
299
57A
94A
IMAGE PROCESSING COMPUTER
21
6B
57B
96A
90

FIG. 6E3

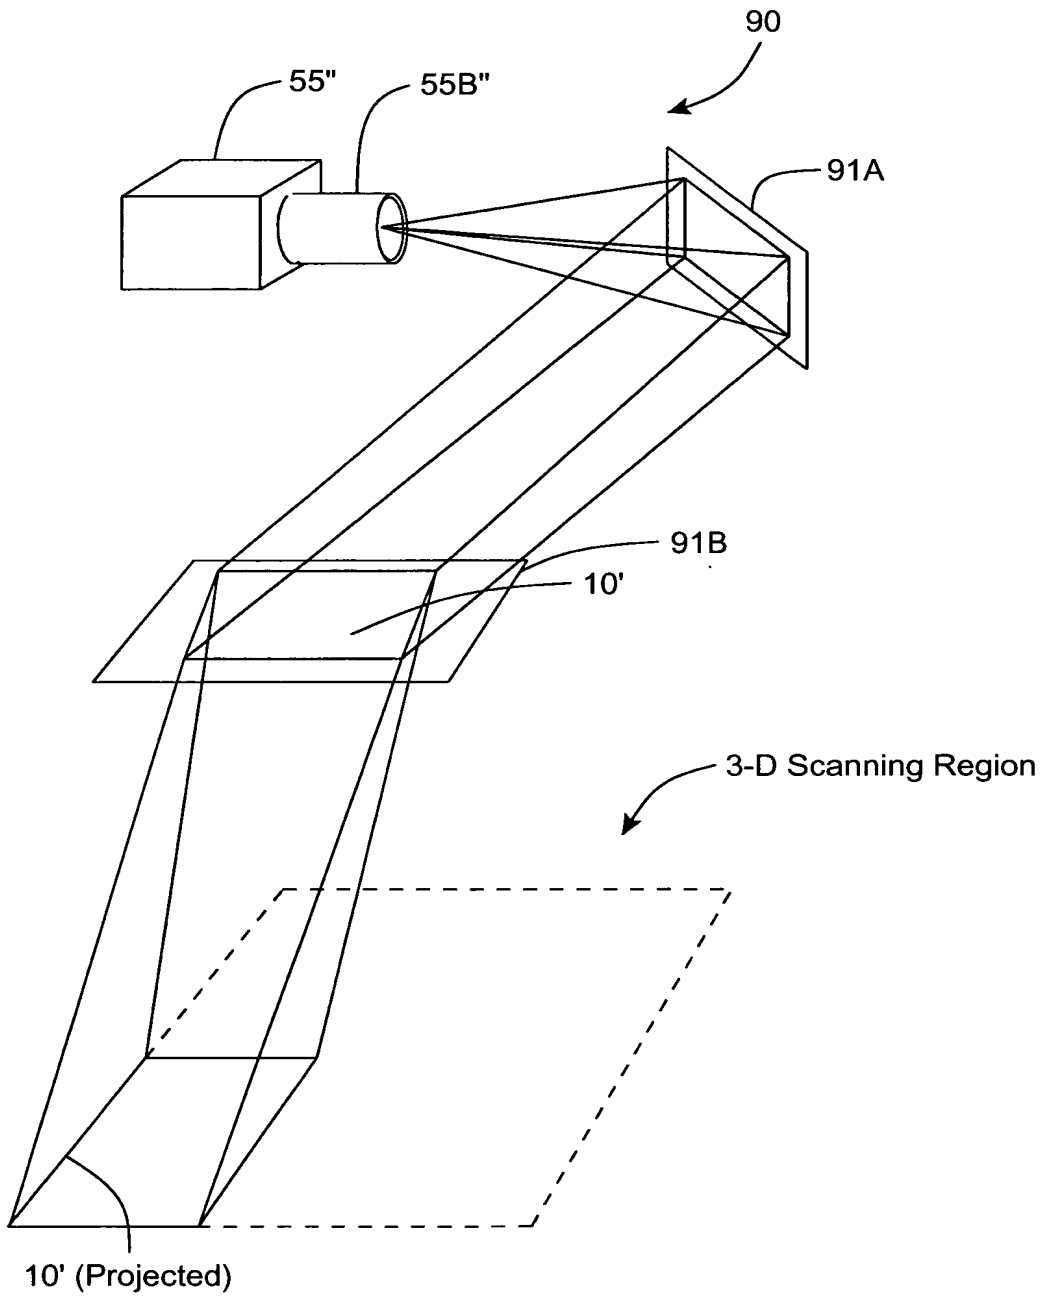

FIG. 6E4

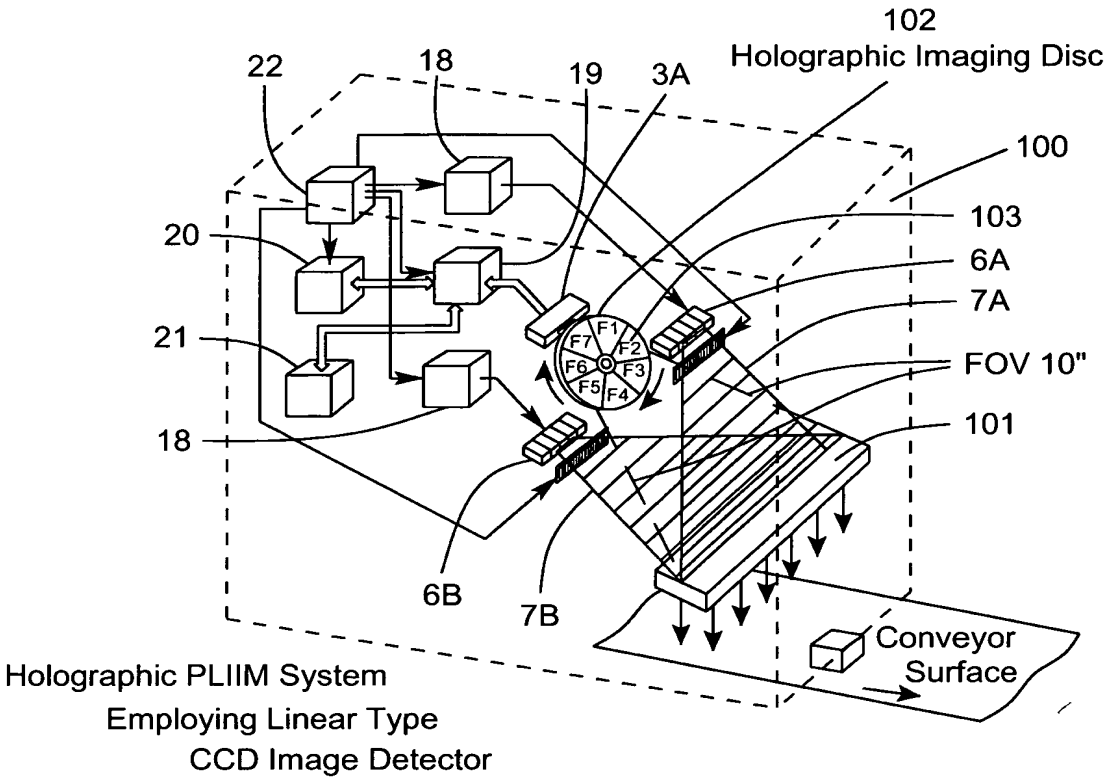
102
Holographic Imaging Disc
22
18
19
3A
100
103
20
6A
7A
21
F1
F2
F3
F4
F5
F6
F7
FOV 10"
18
101
6B
7B
Conveyor
Surface
Holographic PLIIM System
Employing Linear Type
CCD Image Detector

FIG. 7A

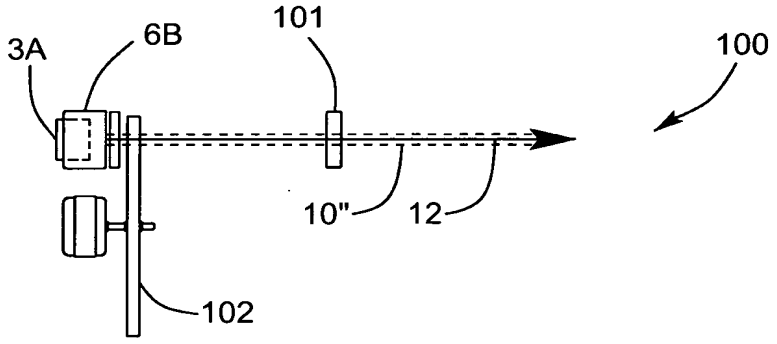
3A
6B
101
100
10"
12
102

FIG. 7B

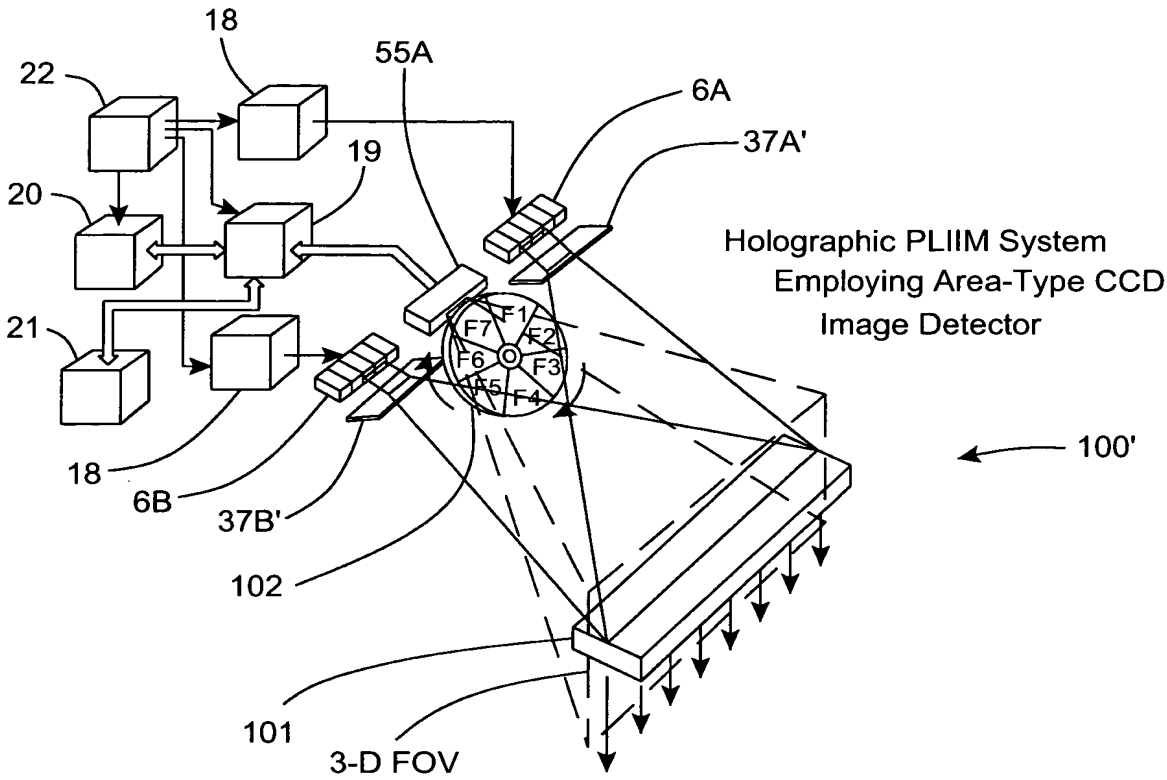
18
22
55A
6A
37A'
19
20
Holographic PLIIM System
Employing Area-Type CCD
Image Detector
21
F1
F2
F3
F4
F5
F6
F7
18
6B
37B'
102
100'
101
3-D FOV

FIG. 8A

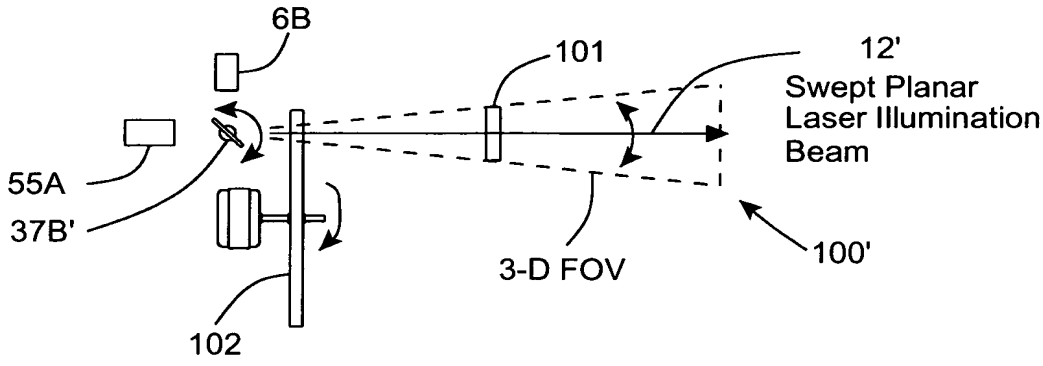
6B
101
12'
Swept Planar
Laser Illumination
Beam
55A
37B'
3-D FOV
100'
102

FIG. 8B

1-D Scanner Embodiment

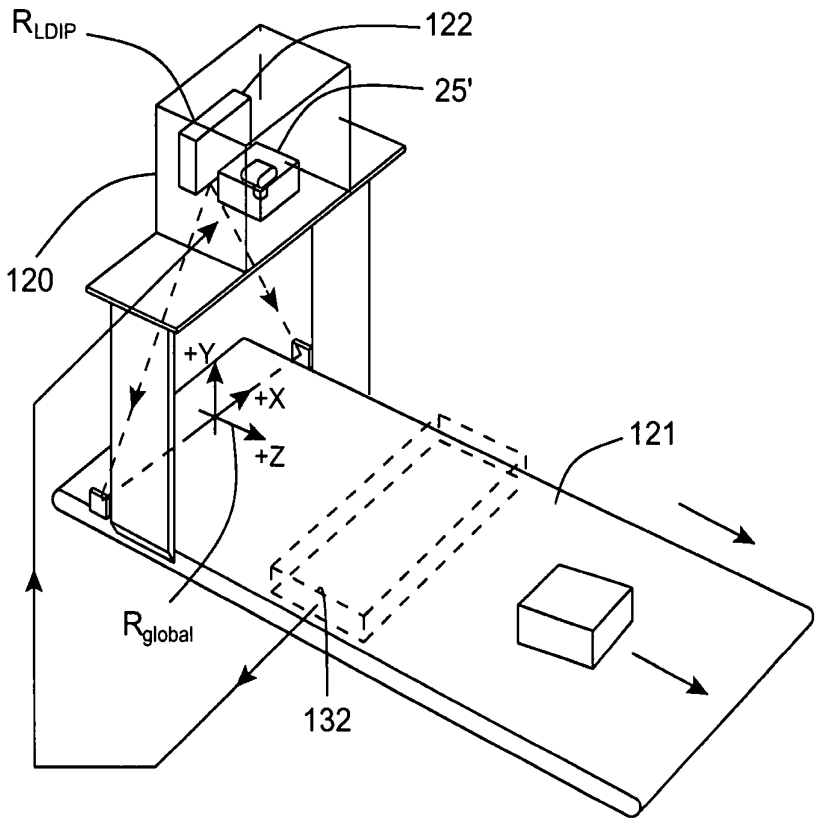

FIG. 9

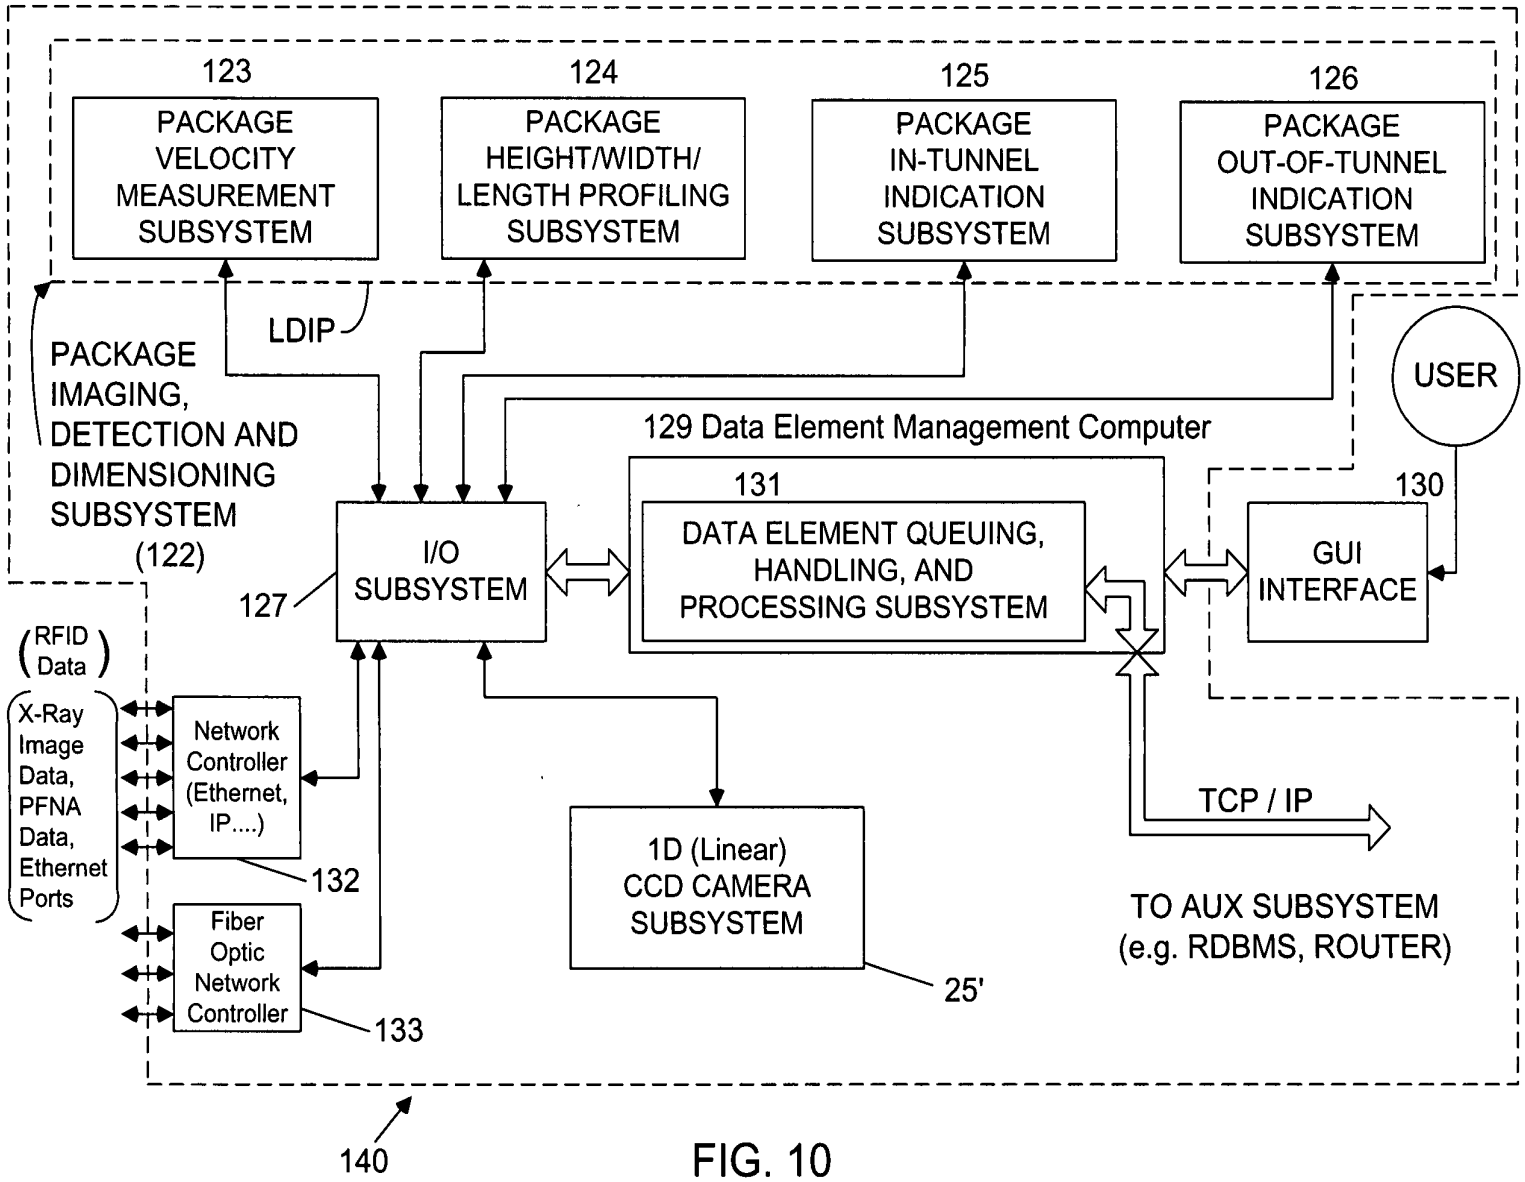
123
PACKAGE VELOCITY MEASUREMENT SUBSYSTEM
124
PACKAGE HEIGHT/WIDTH/ LENGTH PROFILING SUBSYSTEM
125
PACKAGE IN-TUNNEL INDICATION SUBSYSTEM
126
PACKAGE OUT-OF-TUNNEL INDICATION SUBSYSTEM
LDIP
PACKAGE IMAGING, DETECTION AND DIMENSIONING SUBSYSTEM (122)
USER
129 Data Element Management Computer
131
DATA ELEMENT QUEUING, HANDLING, AND PROCESSING SUBSYSTEM
130
GUI INTERFACE
127
I/O SUBSYSTEM
RFID Data
X-Ray Image Data, PFNA Data, Ethernet Ports
Network Controller (Ethernet, IP....)
132
Fiber Optic Network Controller
133
1D (Linear) CCD CAMERA SUBSYSTEM
25'
TCP / IP
TO AUX SUBSYSTEM (e.g. RDBMS, ROUTER)
140

FIG. 10

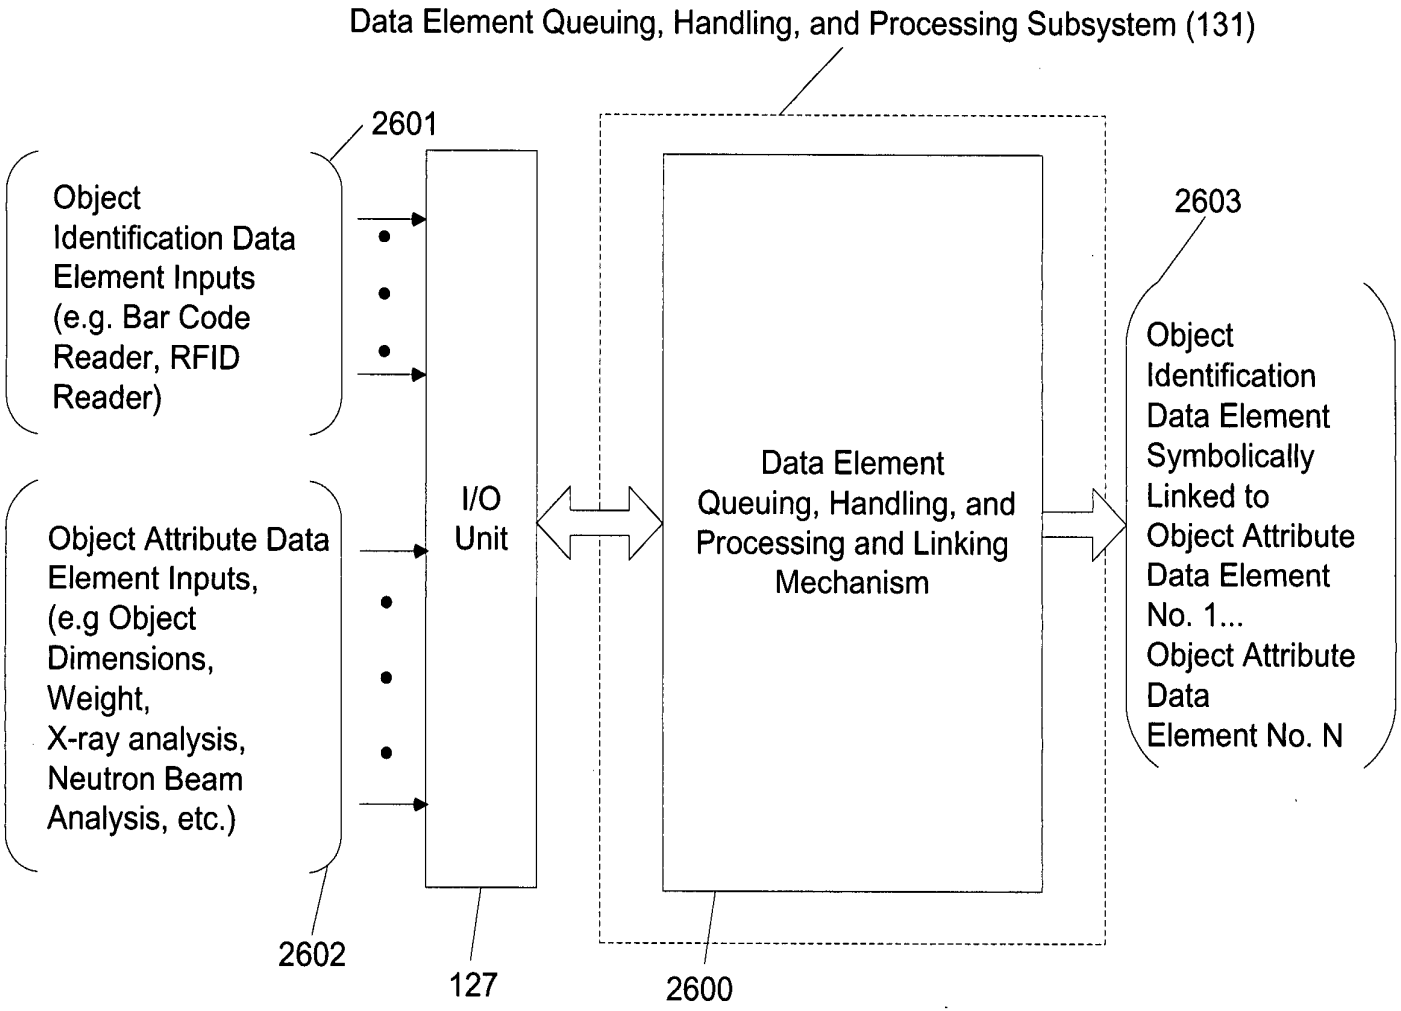
Data Element Queuing, Handling, and Processing Subsystem (131)
2601
Object Identification Data Element Inputs (e.g. Bar Code Reader, RFID Reader)
Object Attribute Data Element Inputs, (e.g Object Dimensions, Weight, X-ray analysis, Neutron Beam Analysis, etc.)
2602
I/O Unit
127
Data Element Queuing, Handling, and Processing and Linking Mechanism
2600
2603
Object Identification Data Element Symbolically Linked to Object Attribute Data Element No. 1...
Object Attribute Data Element No. N

FIG. 10A

Primary Network and/ or System Functions:

A. Specification of Object Detection and Tracking Capability of System

B. Specification of Object Identification Capability of System

C. Specification of Object Attribute Acquisition Capability of System

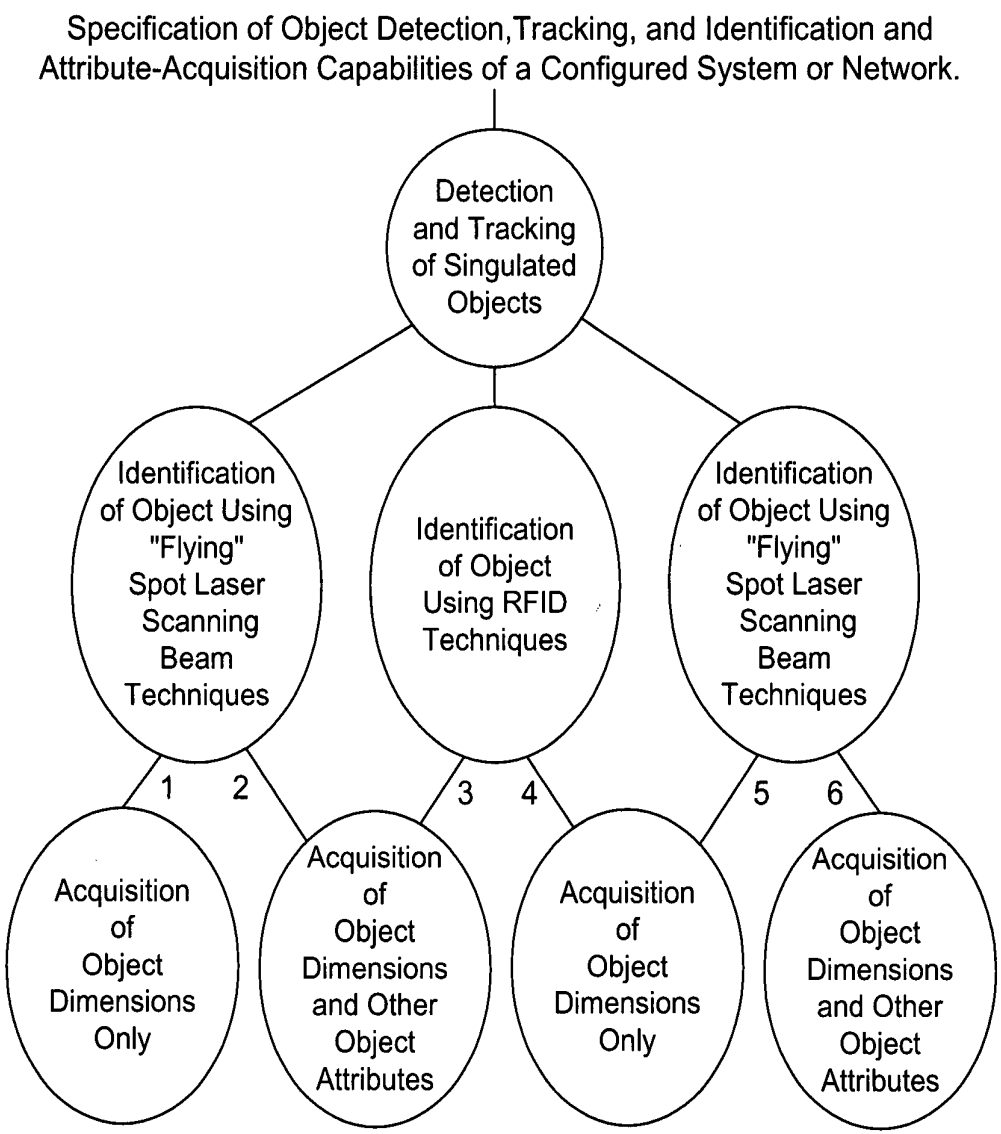

FIG. 10B-1

Primary Network and/ or System Functions:

A. Specification of Object Detection and Tracking Capability of System

B. Specification of Object Identification Capability of System

C. Specification of Object Attribute Acquisition Capability of System

Specification of Object Detection,Tracking, and Identification and Attribute-Acquisition Capabilities of a Configured System or Network.

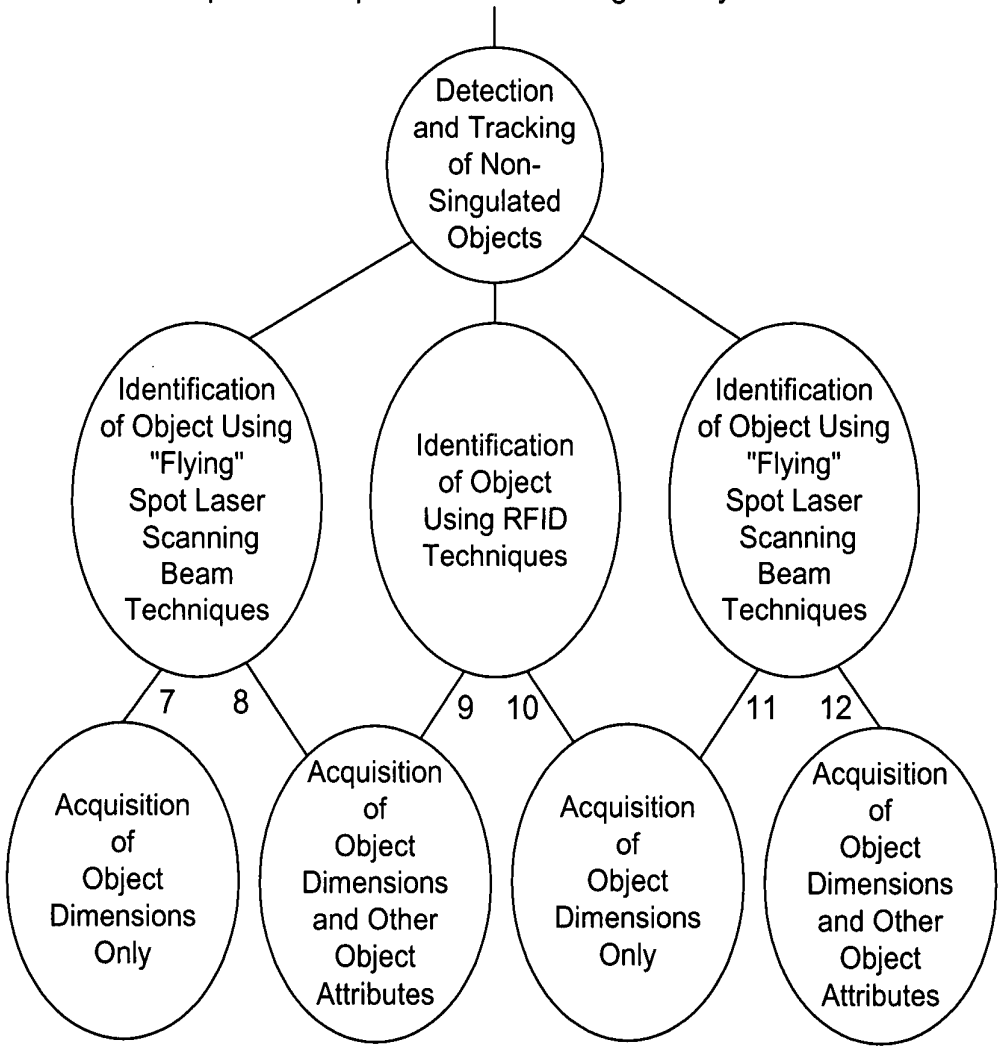

FIG. 10B-2

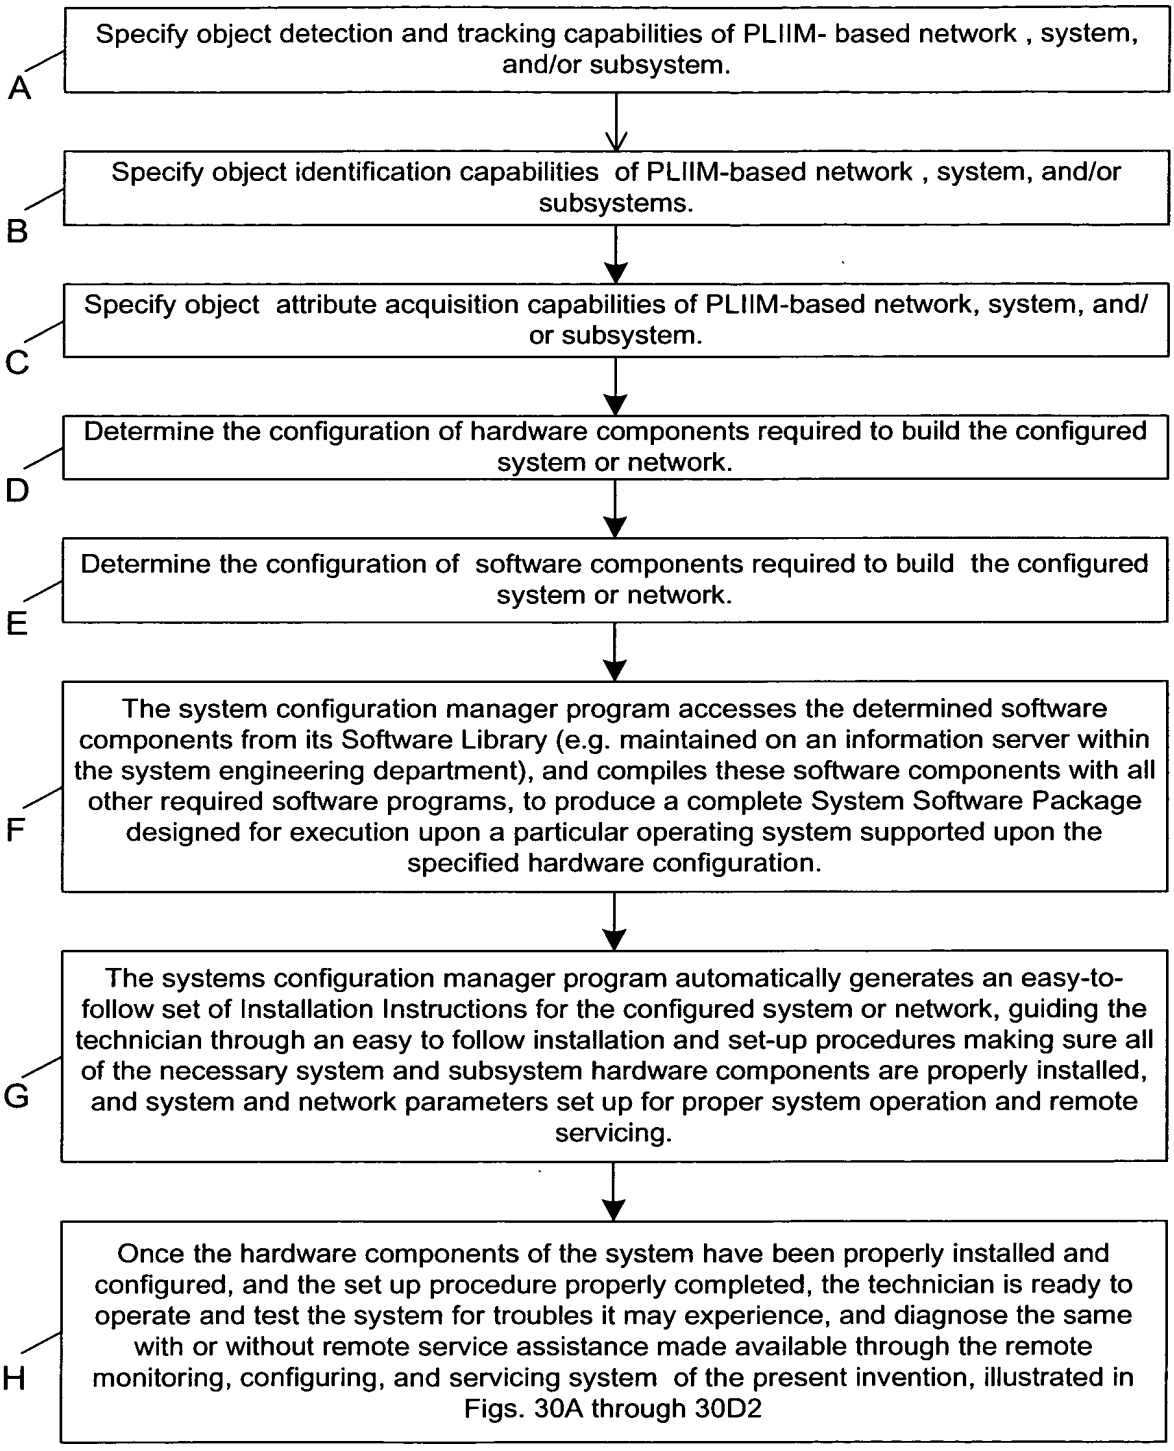
A
Specify object detection and tracking capabilities of PLIIM- based network , system, and/or subsystem.
B
Specify object identification capabilities of PLIIM-based network , system, and/or subsystems.
C
Specify object attribute acquisition capabilities of PLIIM-based network, system, and/or subsystem.
D
Determine the configuration of hardware components required to build the configured system or network.
E
Determine the configuration of software components required to build the configured system or network.
F
The system configuration manager program accesses the determined software components from its Software Library (e.g. maintained on an information server within the system engineering department), and compiles these software components with all other required software programs, to produce a complete System Software Package designed for execution upon a particular operating system supported upon the specified hardware configuration.
G
The systems configuration manager program automatically generates an easy-to-follow set of Installation Instructions for the configured system or network, guiding the technician through an easy to follow installation and set-up procedures making sure all of the necessary system and subsystem hardware components are properly installed, and system and network parameters set up for proper system operation and remote servicing.
H
Once the hardware components of the system have been properly installed and configured, and the set up procedure properly completed, the technician is ready to operate and test the system for troubles it may experience, and diagnose the same with or without remote service assistance made available through the remote monitoring, configuring, and servicing system of the present invention, illustrated in Figs. 30A through 30D2

FIG. 10C

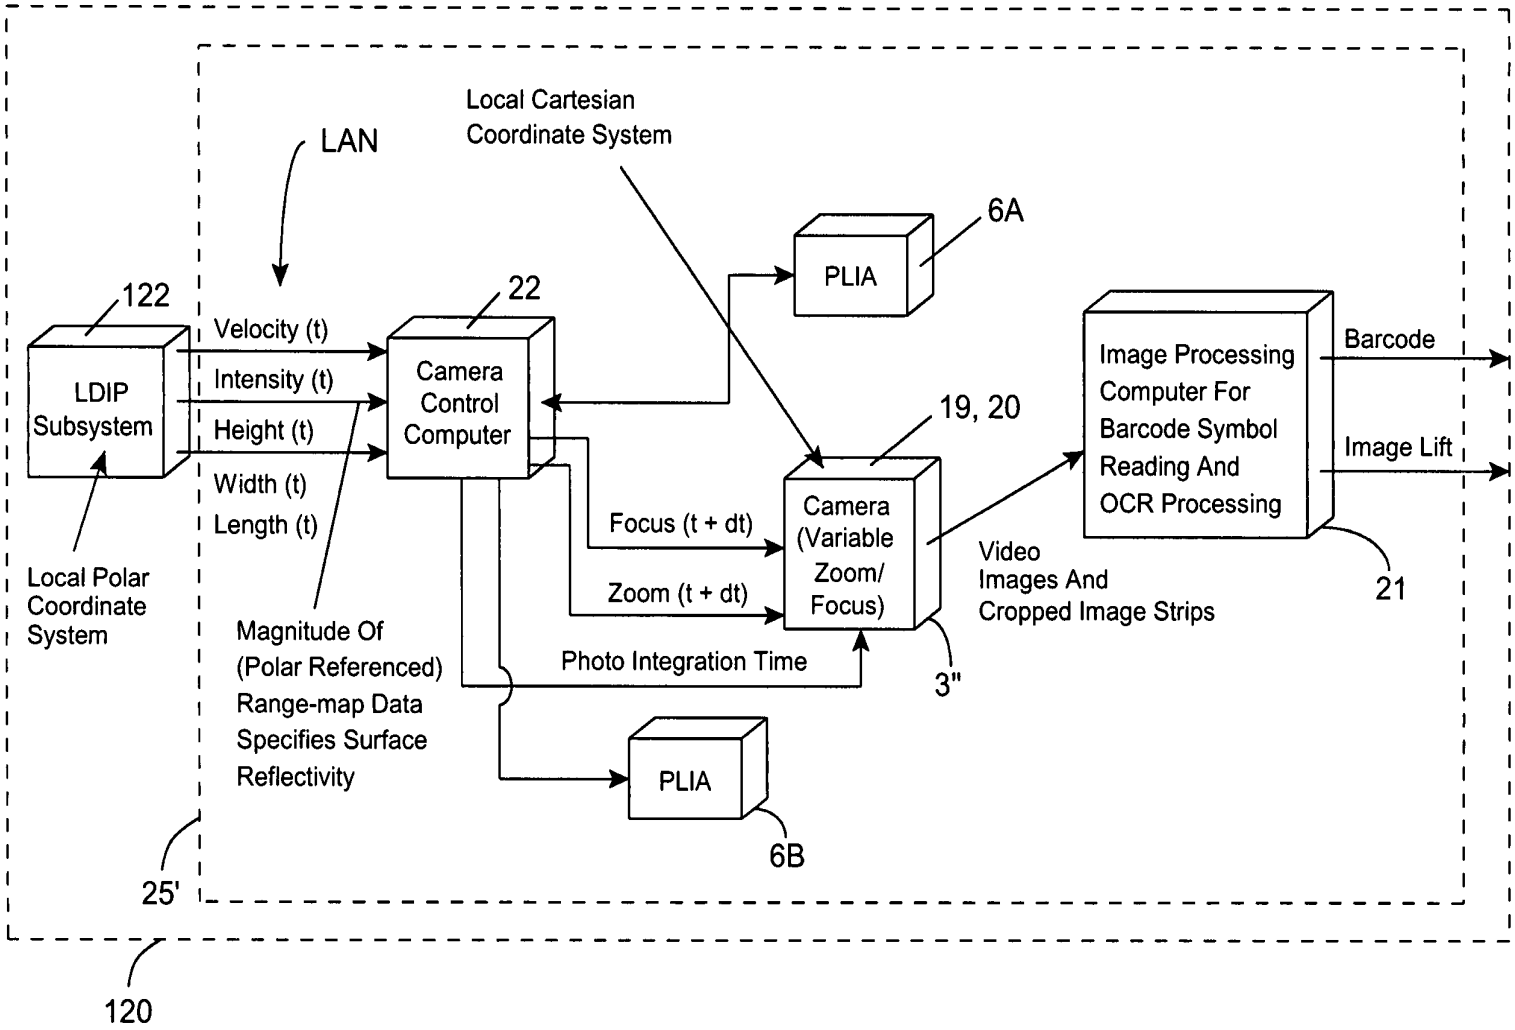
LAN
Local Cartesian
Coordinate System
6A
PLIA
122
22
LDIP
Subsystem
Velocity (t)
Intensity (t)
Height (t)
Width (t)
Length (t)
Camera
Control
Computer
19, 20
Camera
(Variable
Zoom/
Focus)
Image Processing
Computer For
Barcode Symbol
Reading And
OCR Processing
Barcode
Image Lift
Focus (t + dt)
Zoom (t + dt)
Photo Integration Time
Video
Images And
Cropped Image Strips
21
3"
Local Polar
Coordinate
System
Magnitude Of
(Polar Referenced)
Range-map Data
Specifies Surface
Reflectivity
PLIA
6B
25'
120

FIG. 11

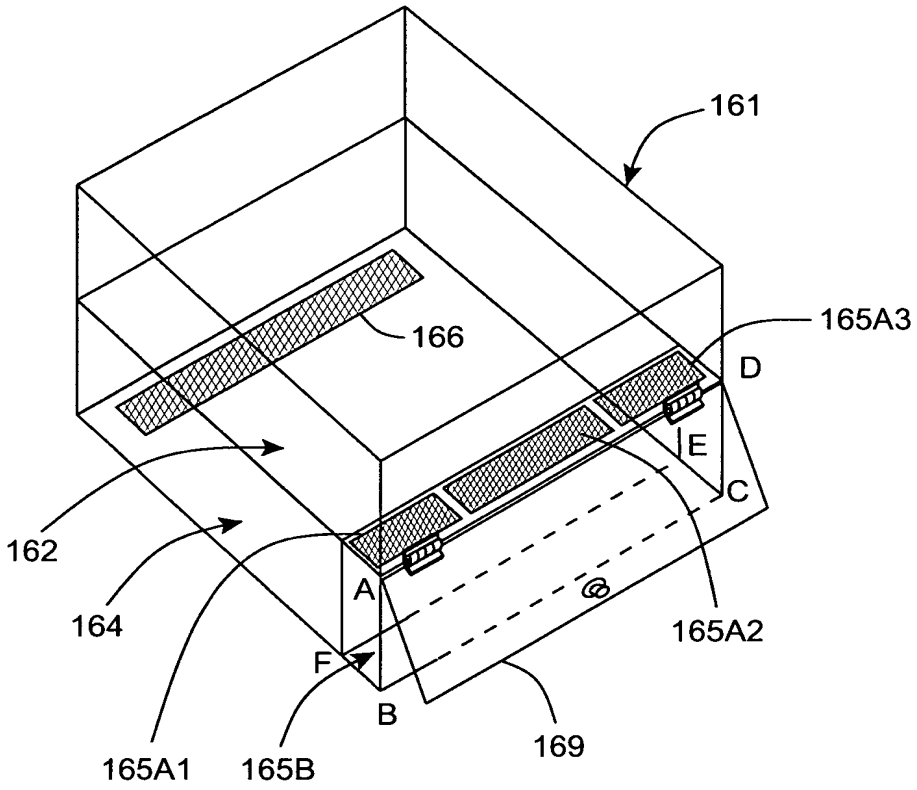

FIG. 12A

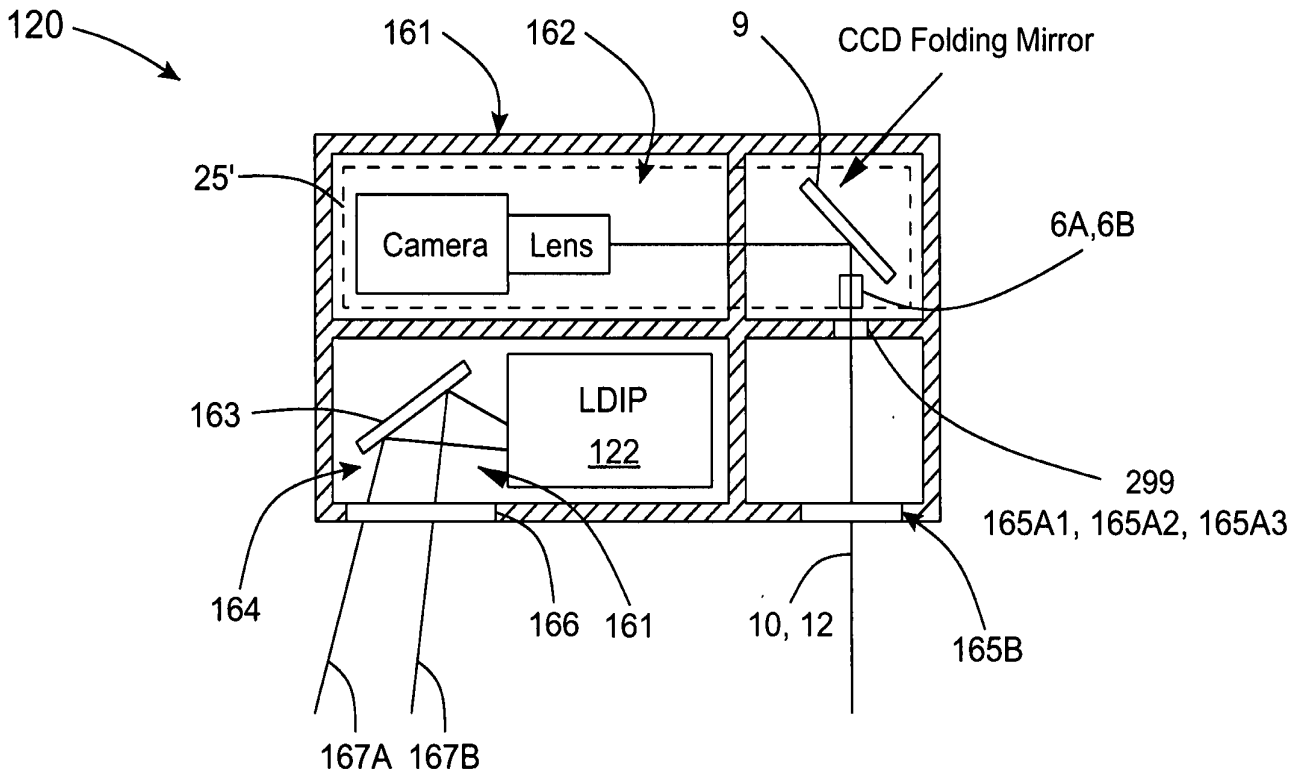
120
161
162
9
CCD Folding Mirror
25'
Camera
Lens
6A,6B
LDIP
122
163
299
165A1, 165A2, 165A3
164
166
161
10, 12
165B
167A
167B

FIG. 12B

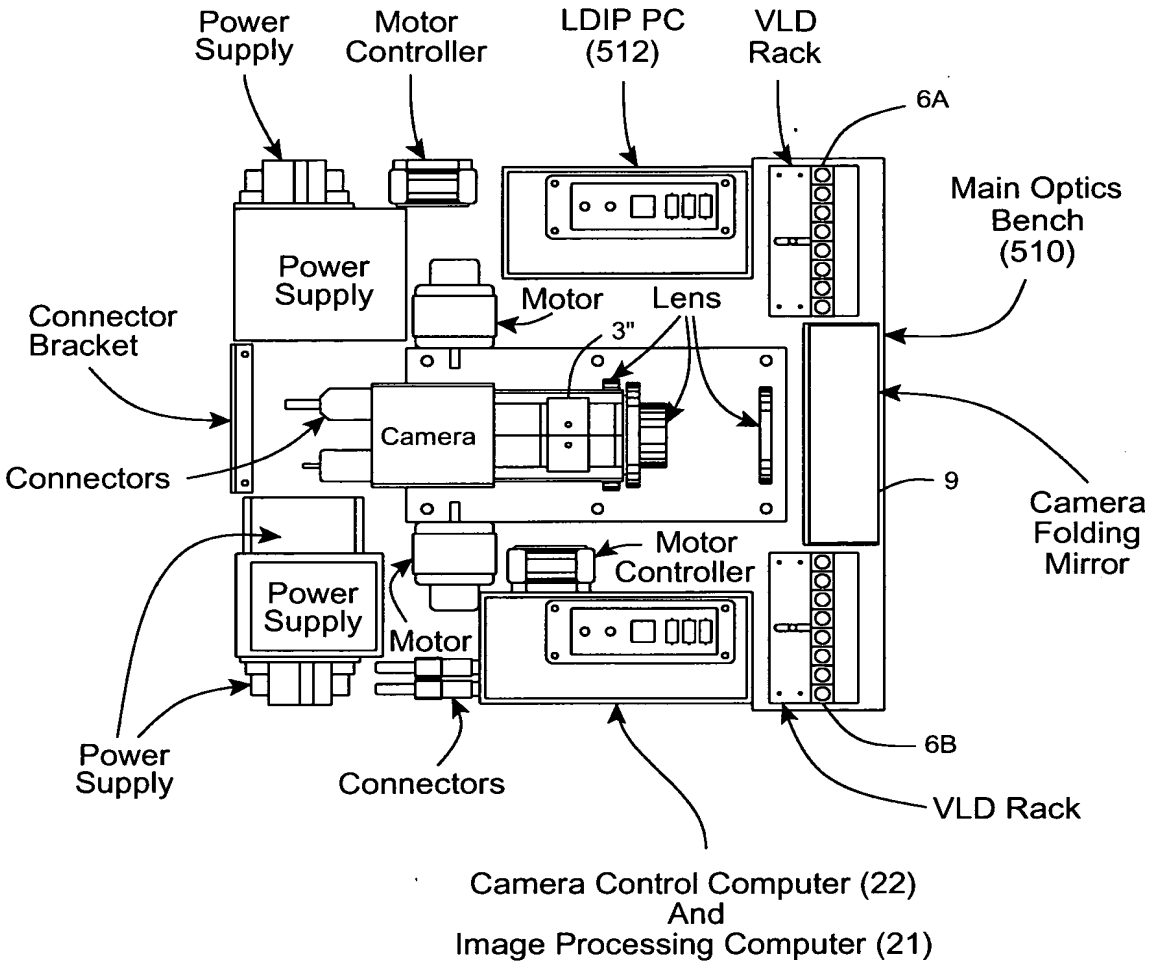
Power Supply
Motor Controller
LDIP PC (512)
VLD Rack
6A
Main Optics Bench (510)
Power Supply
Motor
Lens
3"
Connector Bracket
Camera
Connectors
9
Camera Folding Mirror
Motor Controller
Power Supply
Motor
Power Supply
Connectors
6B
VLD Rack
Camera Control Computer (22)
And
Image Processing Computer (21)

FIG. 12C

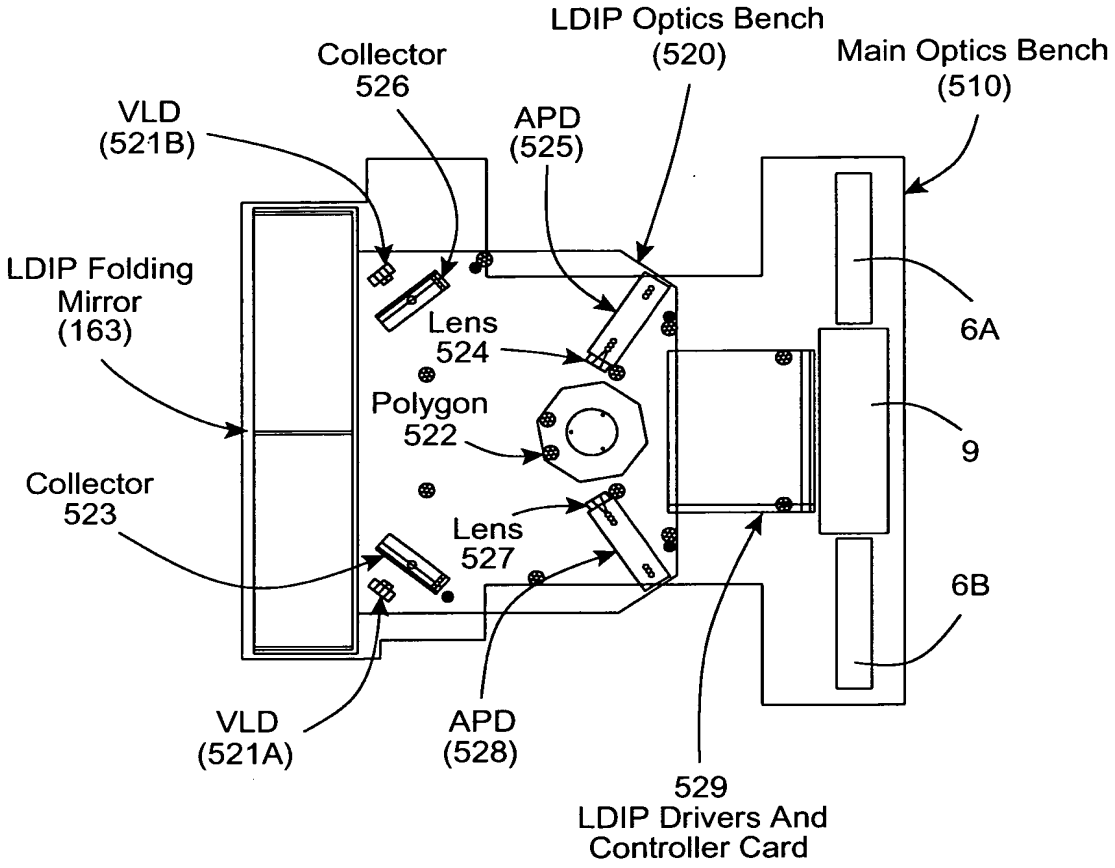
LDIP Optics Bench
(520)
Collector
526
Main Optics Bench
(510)
VLD
(521B)
APD
(525)
LDIP Folding
Mirror
(163)
Lens
524
6A
Polygon
522
9
Collector
523
Lens
527
6B
VLD
(521A)
APD
(528)
529
LDIP Drivers And
Controller Card

FIG. 12D

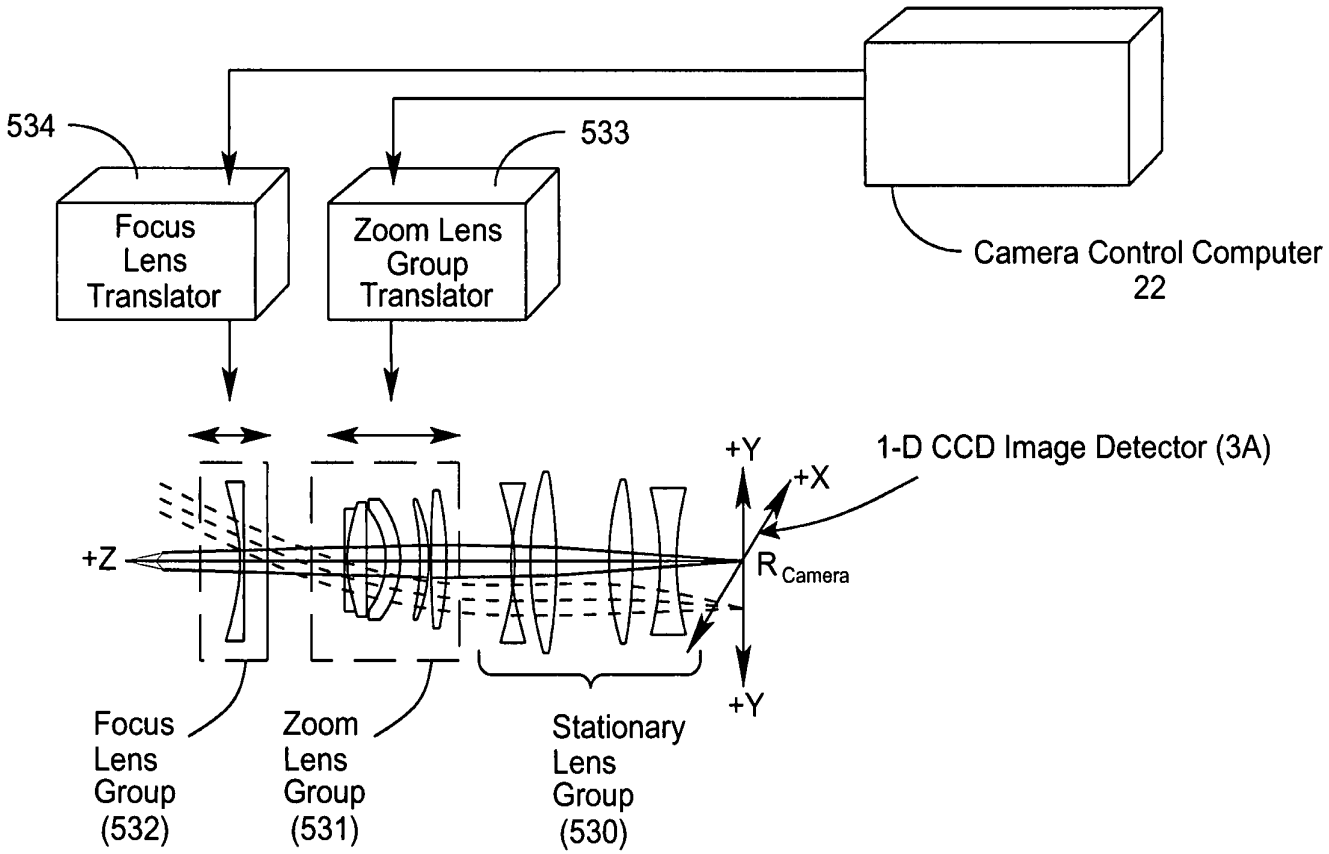
534
533
Focus Lens Translator
Zoom Lens Group Translator
Camera Control Computer 22
1-D CCD Image Detector (3A)
+Y
+X
+Z
R Camera
+Y
Focus Lens Group (532)
Zoom Lens Group (531)
Stationary Lens Group (530)
Main Optics Lens Groups

FIG. 12E

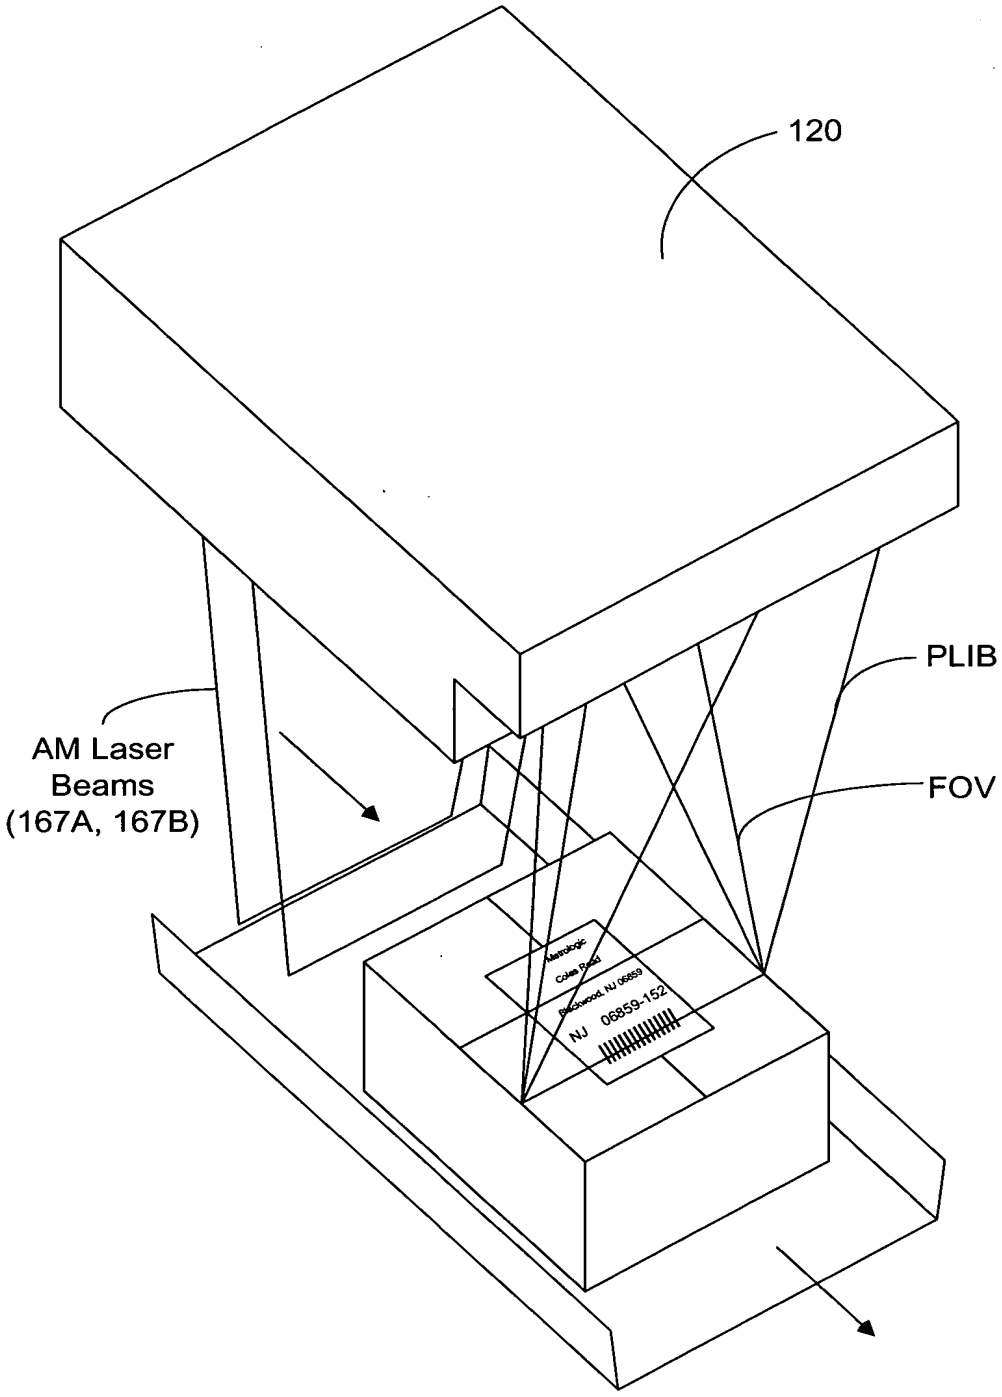
120
PLIB
FOV
AM Laser
Beams
(167A, 167B)
Metrologic
Color Plaid
Richmond, NJ 06859
NJ 06859-152

FIG. 13A

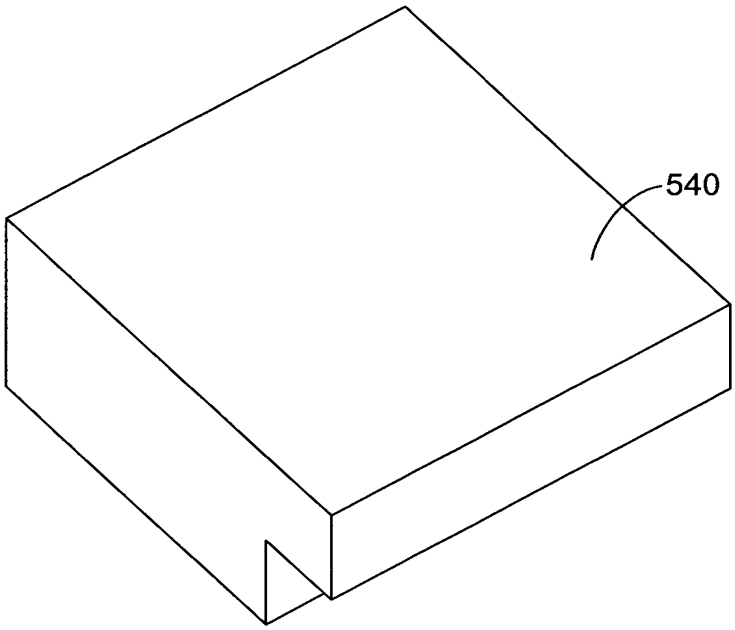

FIG. 13B

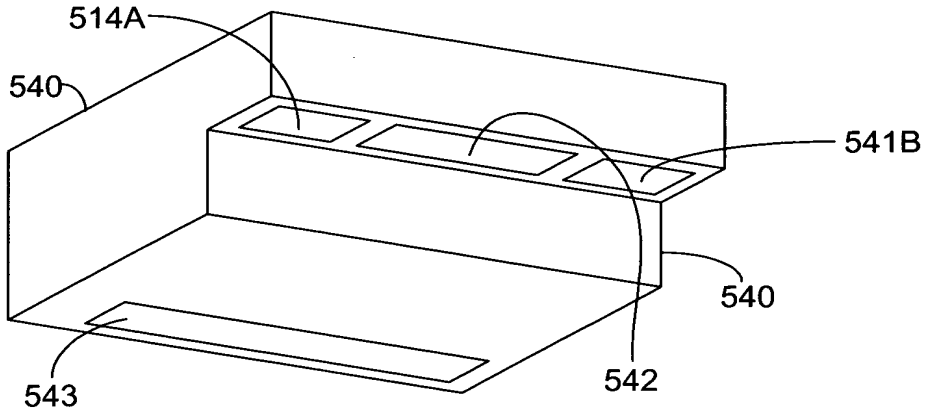

FIG. 13C

PLIIM-BASED PACKAGE IDENTIFICATION AND DIMENSIONING (PID) SYSTEM

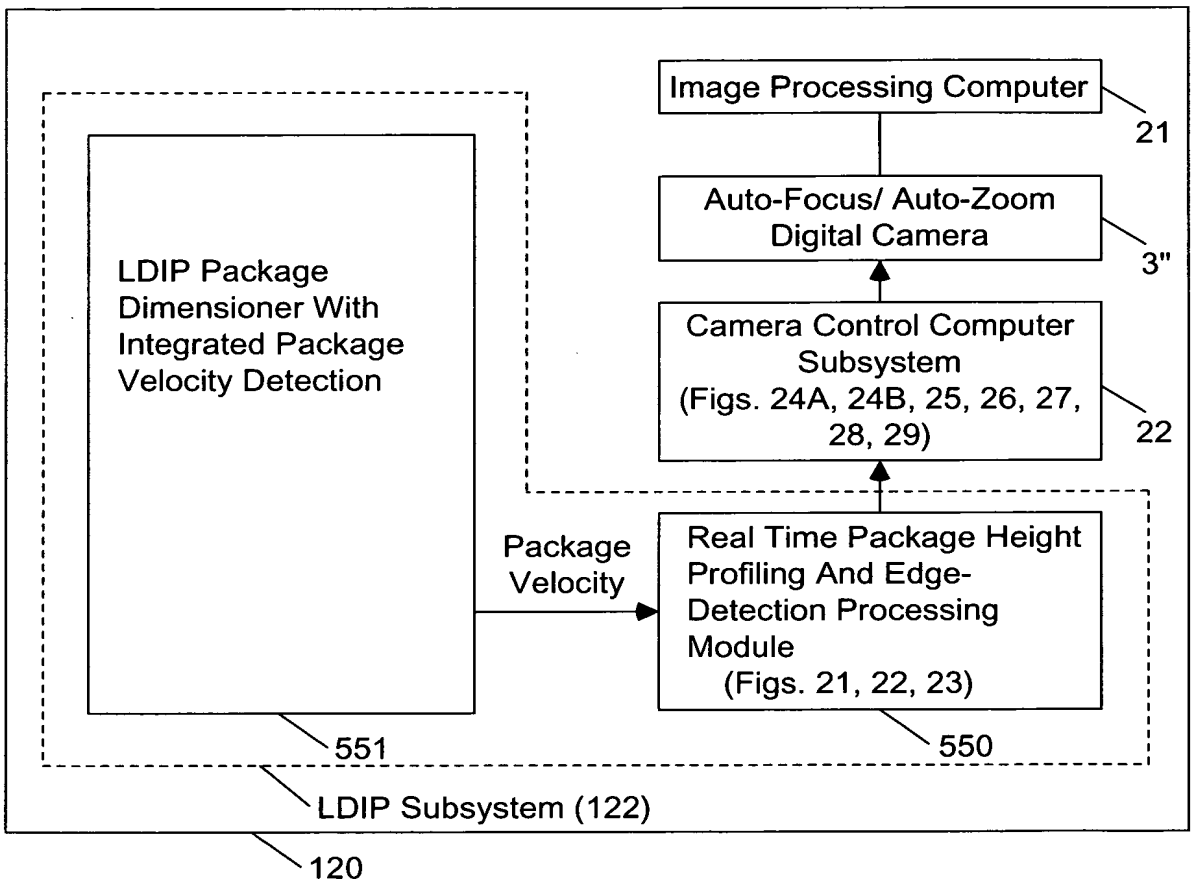

FIG. 14

LDIP REAL-TIME PACKAGE HEIGHT PROFILE AND EDGE DETECTION METHOD

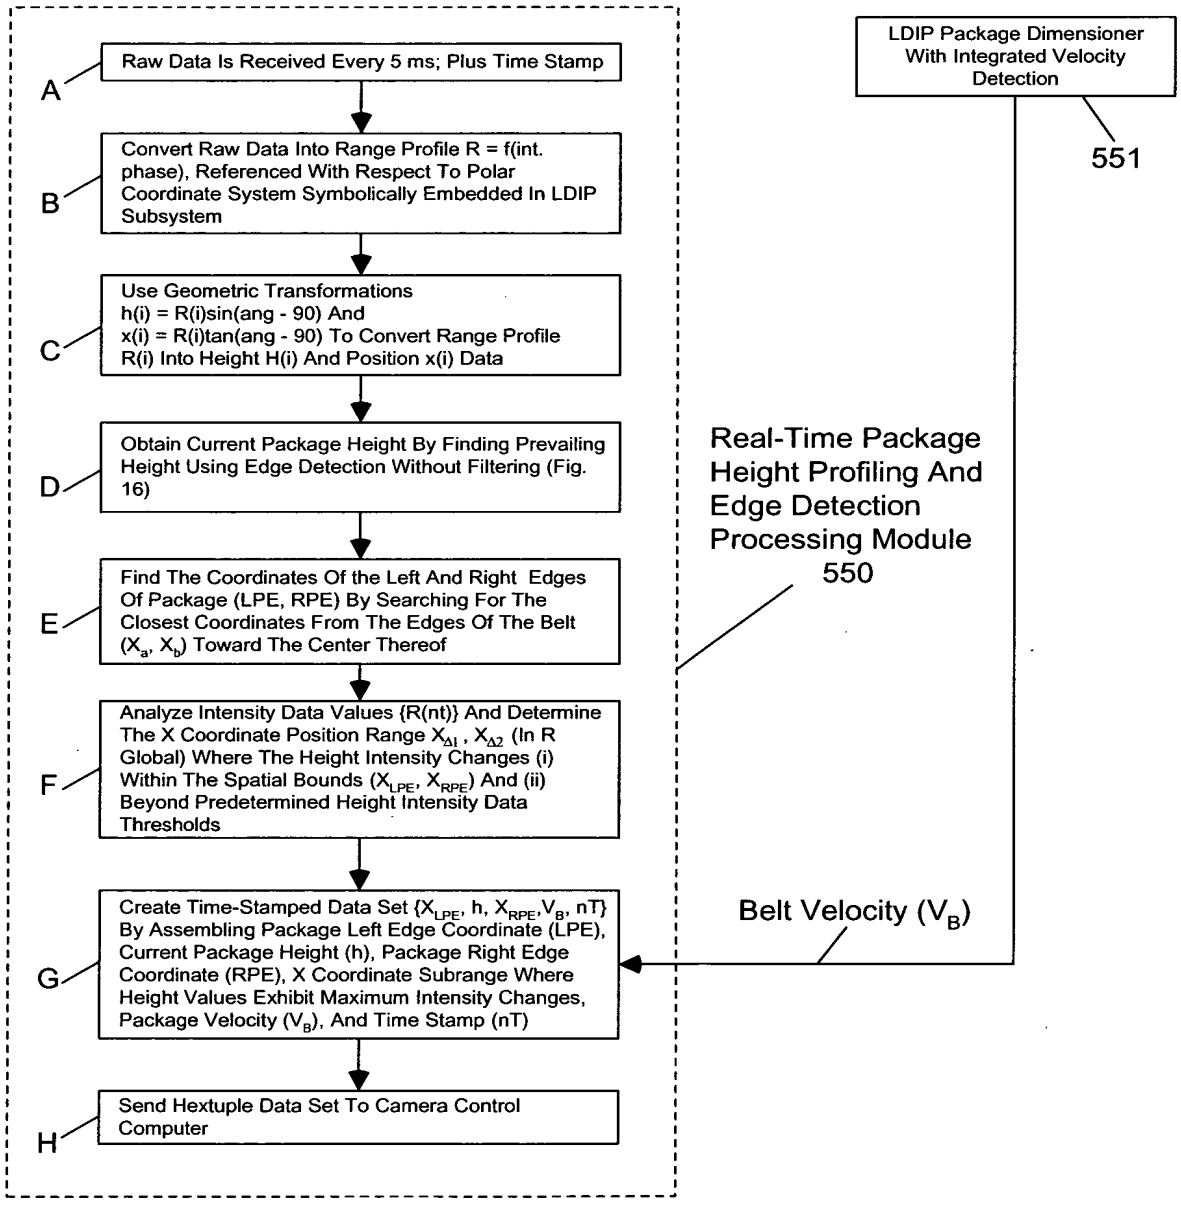

FIG. 15

LDIP REAL-TIME PACKAGE EDGE DETECTION

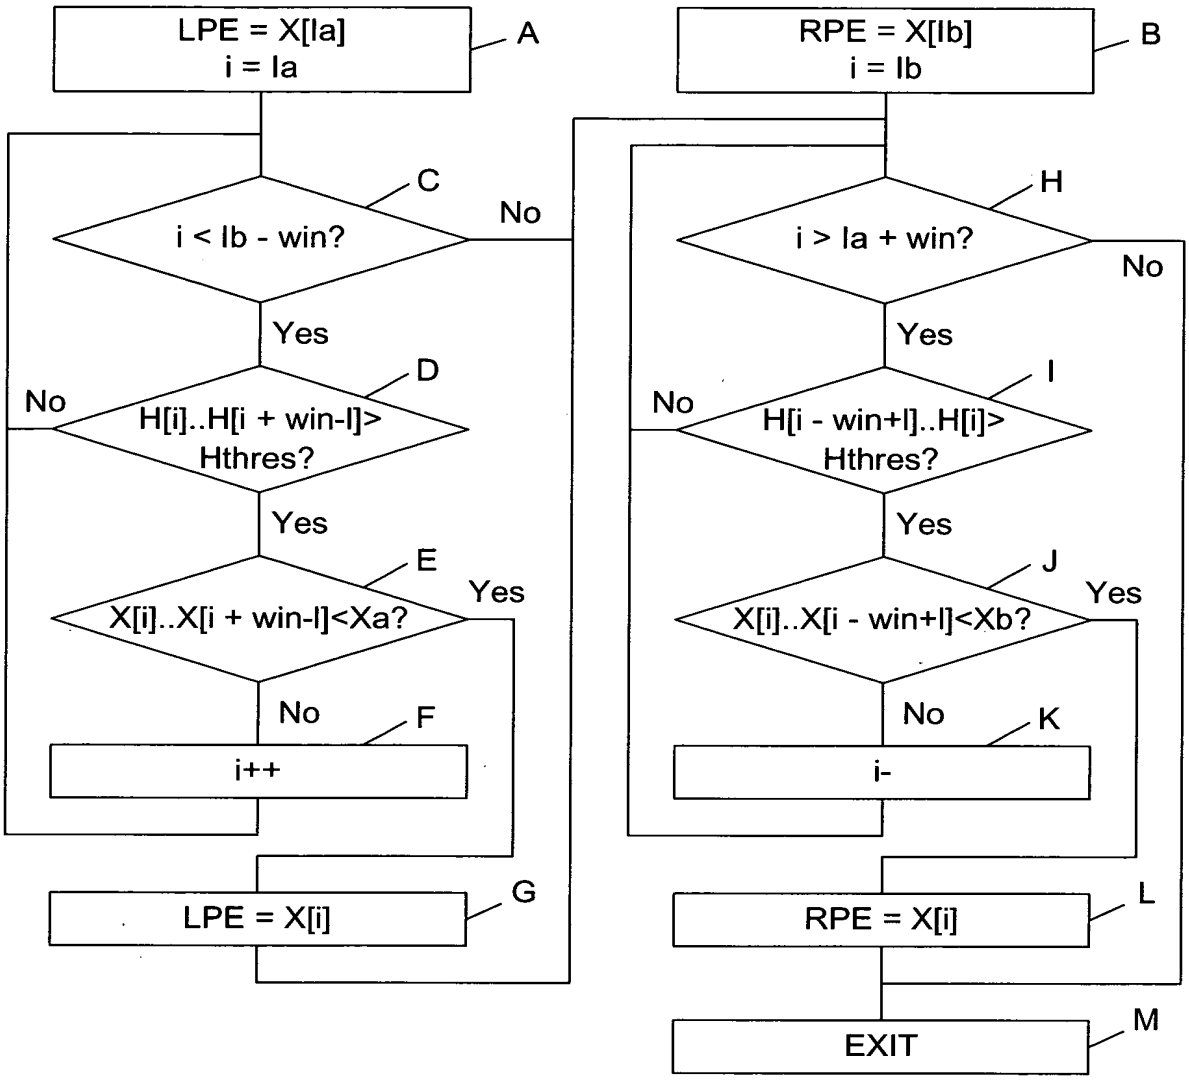

Xa = Location Of Belt Left Edge; Xb = Location Of Belt Right Edge
la = Belt Left Edge Pixel; lb = Belt Right Edge Pixel
LPE = Left package Edge; RPE = Right Package Edge
H[] = Pixel Height Array; X[] = Pixel Location Array
win = Package detection Window

FIG. 16

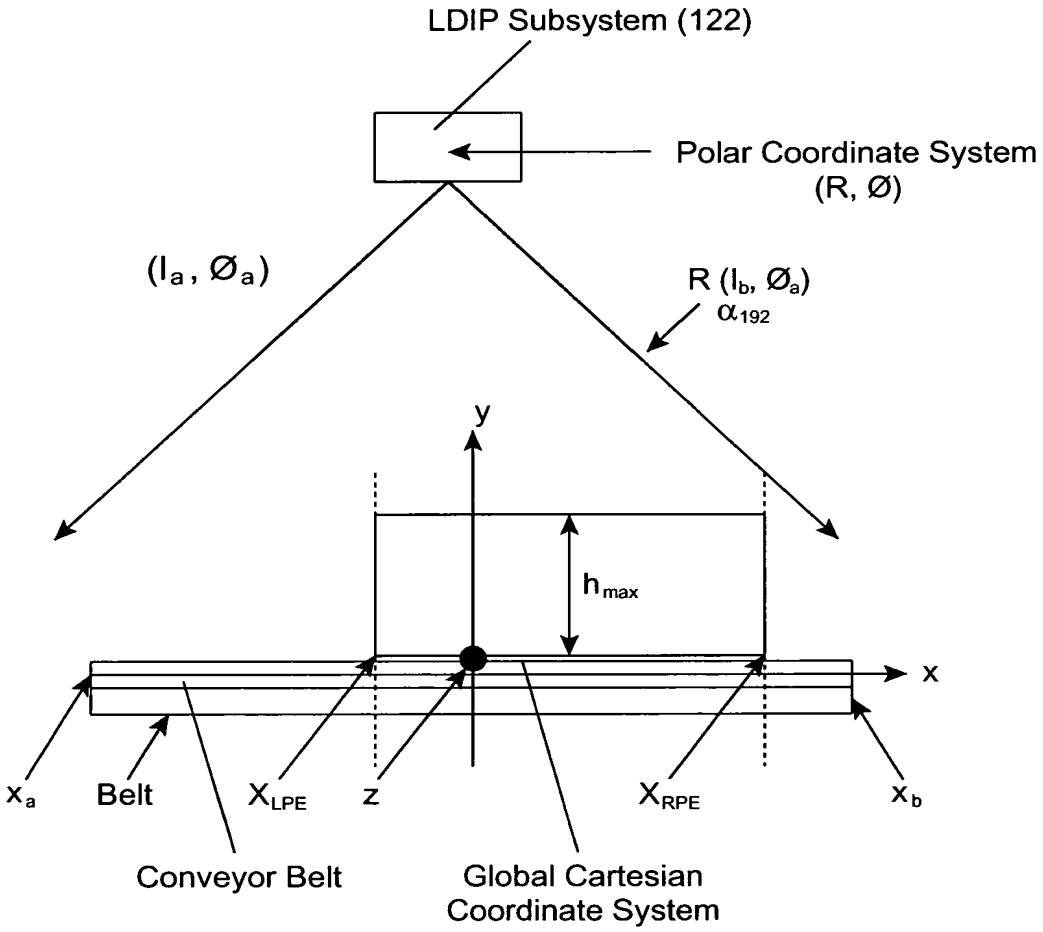
LDIP Subsystem (122)
Polar Coordinate System
(R, Ø)
(la , Øa)
R (lb, Øa)
α192
y
hmax
x
xa
Belt
XLPE
z
XRPE
xb
Conveyor Belt
Global Cartesian
Coordinate System

FIG. 17

Information Measured At Scan Angles Before Coordinate Transformations

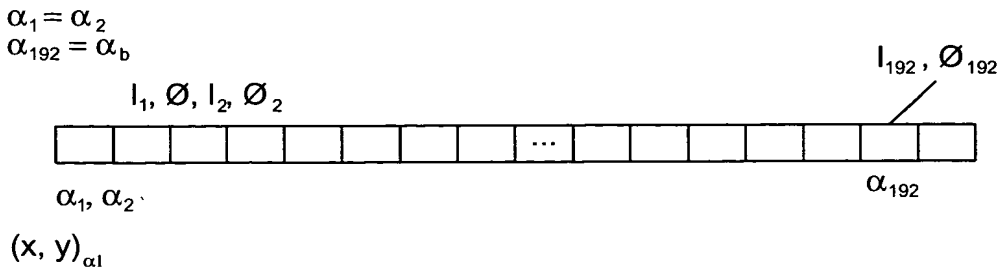

FIG. 17A

Range And Polar Angle Measures Taken At Scan Angle α Before Coordinate Transforms



FIG. 17B

Measured Package Height And Position Values After Coordinate Transforms

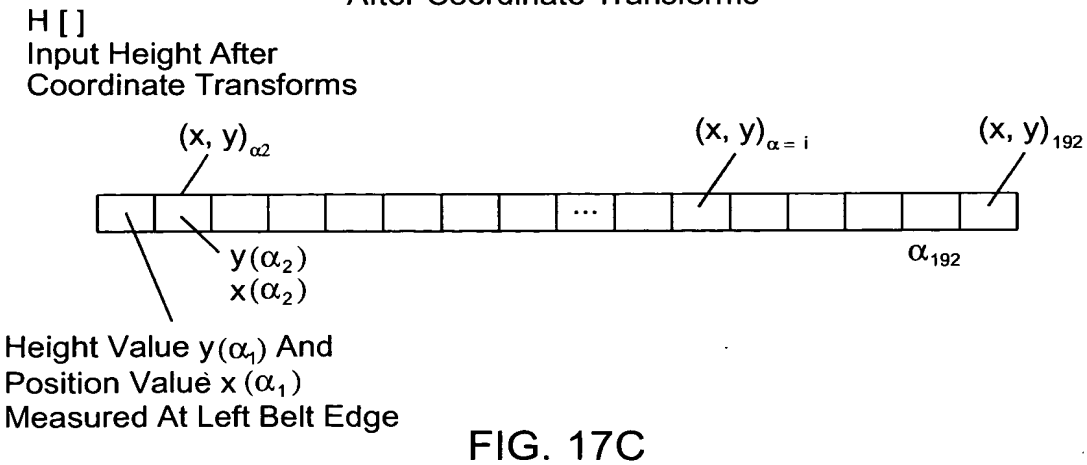

FIG. 17C

CAMERA CONTROL PROCESS CARRIED OUT WITHIN THE CAMERA CONTROL SUBSYSTEM OF EACH OBJECT IDENTIFICATION AND ATTRIBUTE ACQUISITION SYSTEM OF PRESENT INVENTION

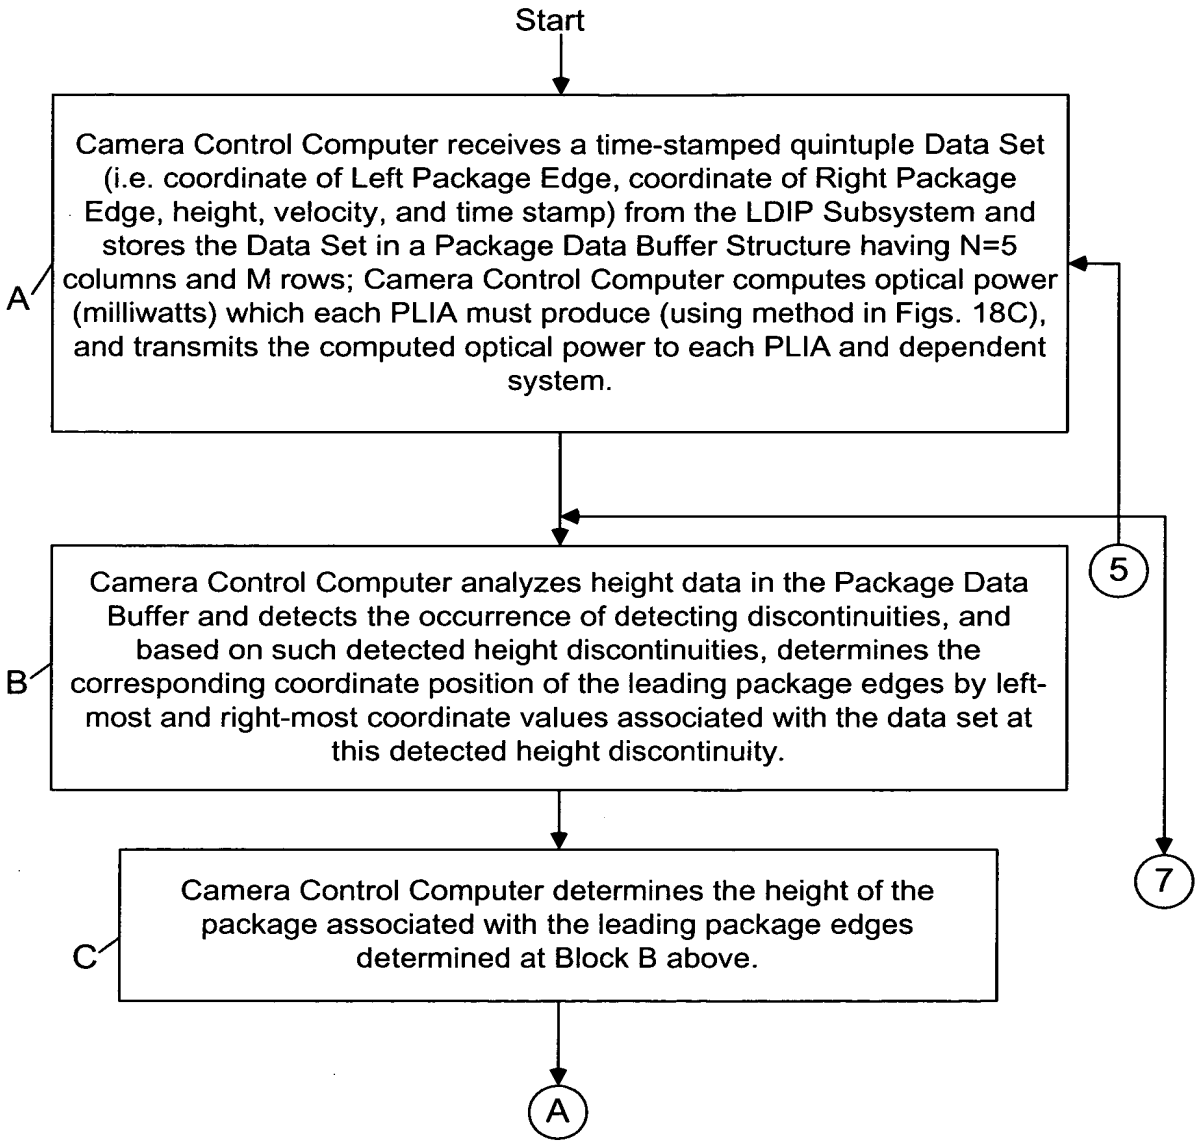

FIG. 18A-1

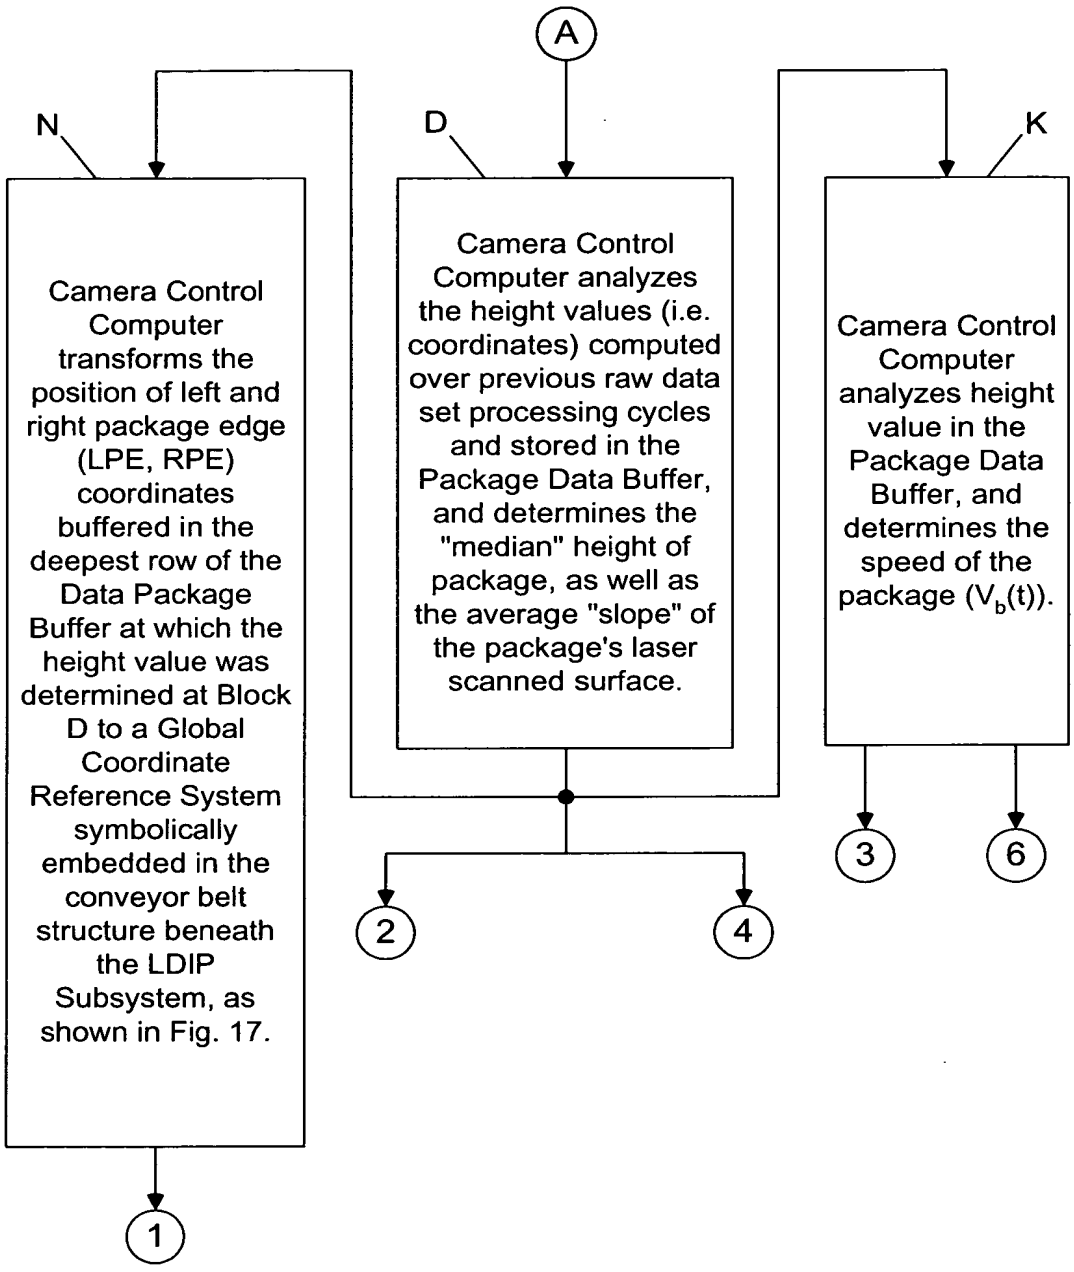
A
N
D
K
Camera Control Computer transforms the position of left and right package edge (LPE, RPE) coordinates buffered in the deepest row of the Data Package Buffer at which the height value was determined at Block D to a Global Coordinate Reference System symbolically embedded in the conveyor belt structure beneath the LDIP Subsystem, as shown in Fig. 17.
Camera Control Computer analyzes the height values (i.e. coordinates) computed over previous raw data set processing cycles and stored in the Package Data Buffer, and determines the "median" height of package, as well as the average "slope" of the package's laser scanned surface.
Camera Control Computer analyzes height value in the Package Data Buffer, and determines the speed of the package ($V_b(t)$).
1
2
3
4
6

FIG. 18A-2

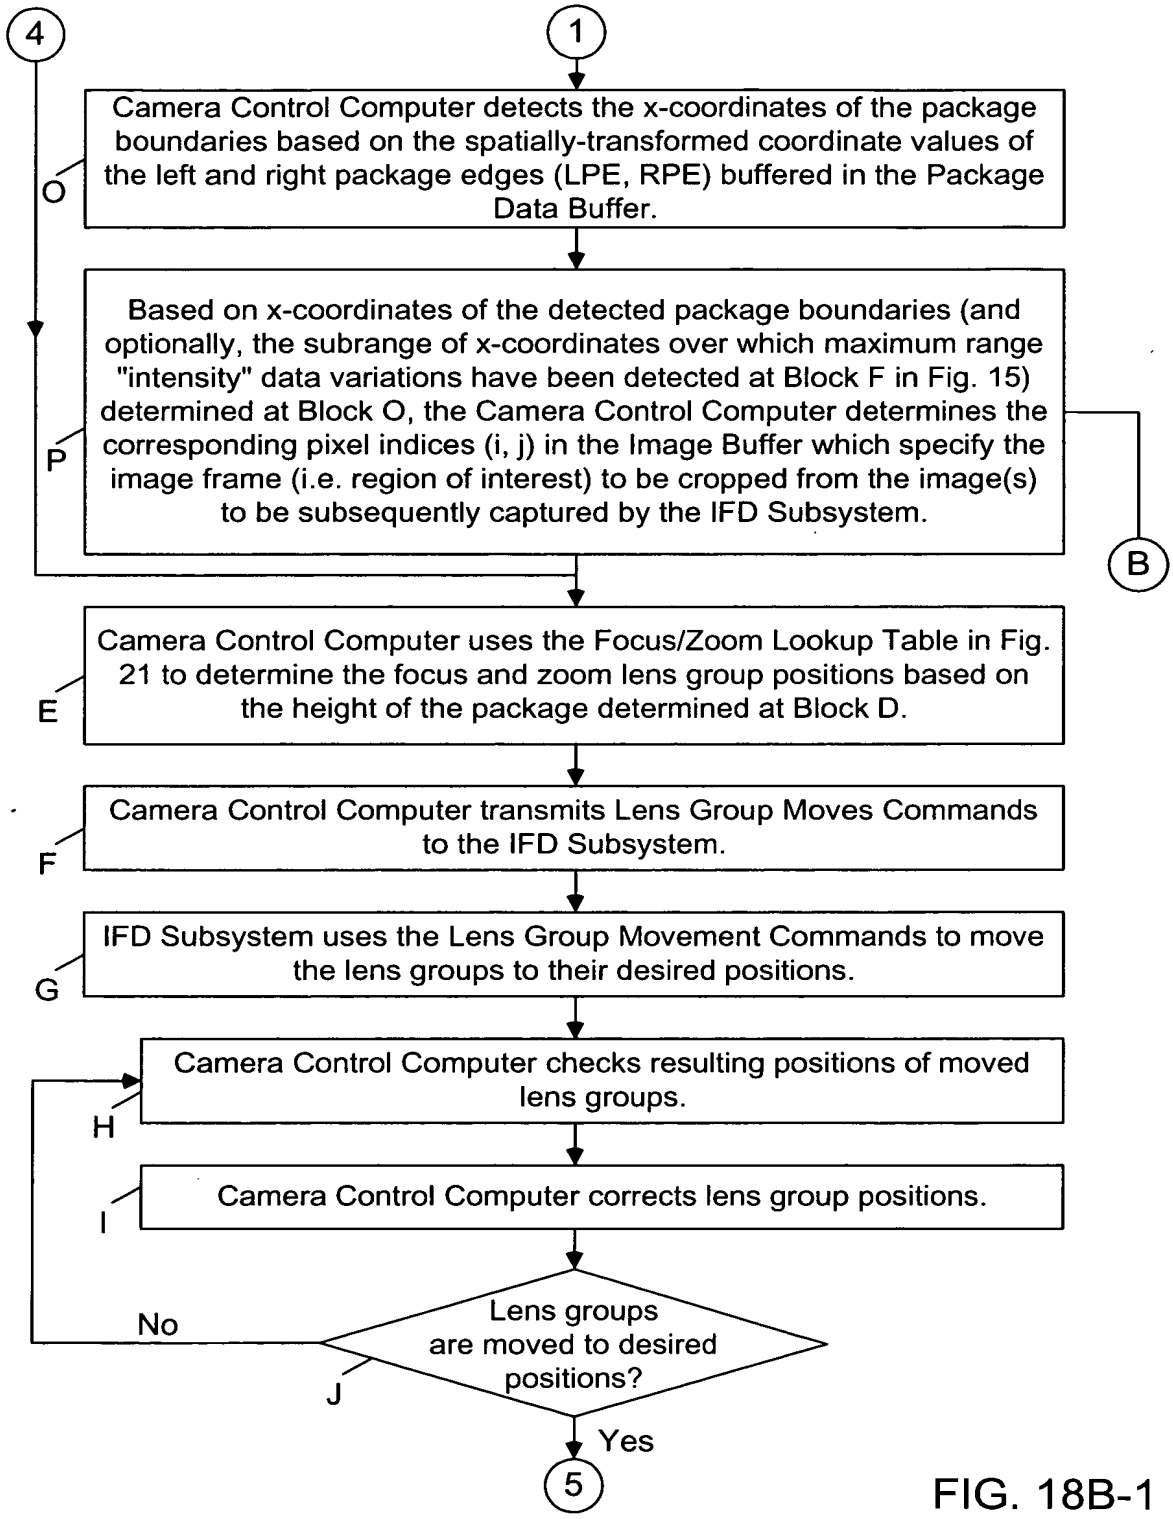
4
1
Camera Control Computer detects the x-coordinates of the package boundaries based on the spatially-transformed coordinate values of the left and right package edges (LPE, RPE) buffered in the Package Data Buffer.
O
Based on x-coordinates of the detected package boundaries (and optionally, the subrange of x-coordinates over which maximum range "intensity" data variations have been detected at Block F in Fig. 15) determined at Block O, the Camera Control Computer determines the corresponding pixel indices (i, j) in the Image Buffer which specify the image frame (i.e. region of interest) to be cropped from the image(s) to be subsequently captured by the IFD Subsystem.
P
B
Camera Control Computer uses the Focus/Zoom Lookup Table in Fig. 21 to determine the focus and zoom lens group positions based on the height of the package determined at Block D.
E
Camera Control Computer transmits Lens Group Moves Commands to the IFD Subsystem.
F
IFD Subsystem uses the Lens Group Movement Commands to move the lens groups to their desired positions.
G
Camera Control Computer checks resulting positions of moved lens groups.
H
Camera Control Computer corrects lens group positions.
I
Lens groups are moved to desired positions?
J
No
Yes
5

FIG. 18B-1

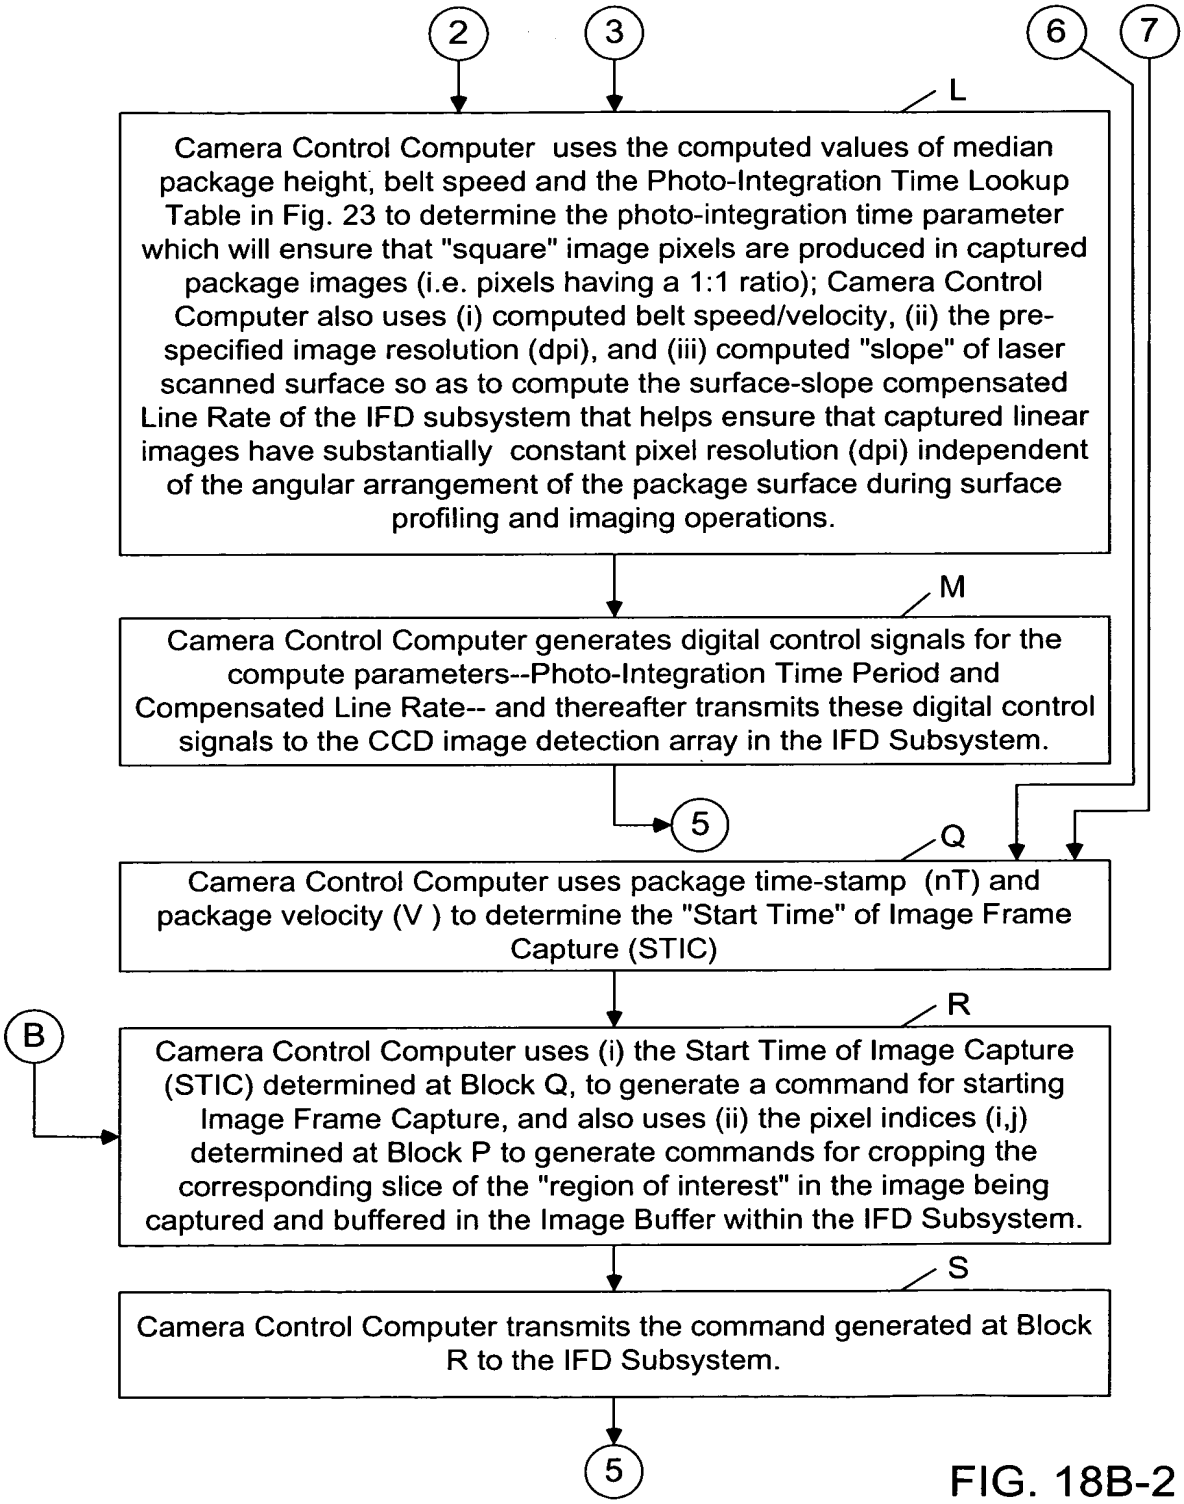
2
3
6
7
L
Camera Control Computer uses the computed values of median package height, belt speed and the Photo-Integration Time Lookup Table in Fig. 23 to determine the photo-integration time parameter which will ensure that "square" image pixels are produced in captured package images (i.e. pixels having a 1:1 ratio); Camera Control Computer also uses (i) computed belt speed/velocity, (ii) the pre-specified image resolution (dpi), and (iii) computed "slope" of laser scanned surface so as to compute the surface-slope compensated Line Rate of the IFD subsystem that helps ensure that captured linear images have substantially constant pixel resolution (dpi) independent of the angular arrangement of the package surface during surface profiling and imaging operations.
M
Camera Control Computer generates digital control signals for the compute parameters--Photo-Integration Time Period and Compensated Line Rate-- and thereafter transmits these digital control signals to the CCD image detection array in the IFD Subsystem.
5
Q
Camera Control Computer uses package time-stamp (nT) and package velocity (V) to determine the "Start Time" of Image Frame Capture (STIC)
B
R
Camera Control Computer uses (i) the Start Time of Image Capture (STIC) determined at Block Q, to generate a command for starting Image Frame Capture, and also uses (ii) the pixel indices (i,j) determined at Block P to generate commands for cropping the corresponding slice of the "region of interest" in the image being captured and buffered in the Image Buffer within the IFD Subsystem.
S
Camera Control Computer transmits the command generated at Block R to the IFD Subsystem.
5

FIG. 18B-2

METHOD OF COMPUTING OPTICAL OUTPUT POWER FROM LASER DIODES IN A PLANAR LASER ILUMINATION ARRAY (PLIA) FOR CONTROLLING THE CONSTANT WHITE-LEVEL IN IMAGE PIXELS CAPTURED BY A PLIIM-BASED LINEAR IMAGER

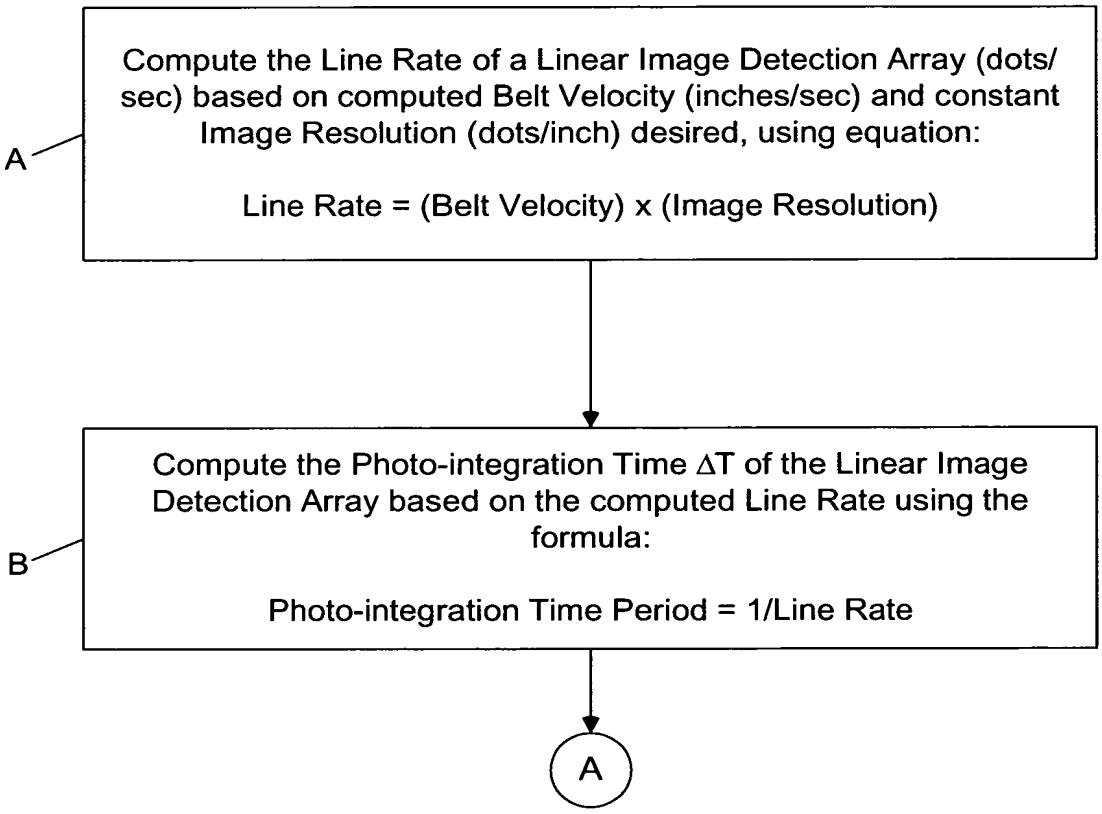

FIG. 18C1

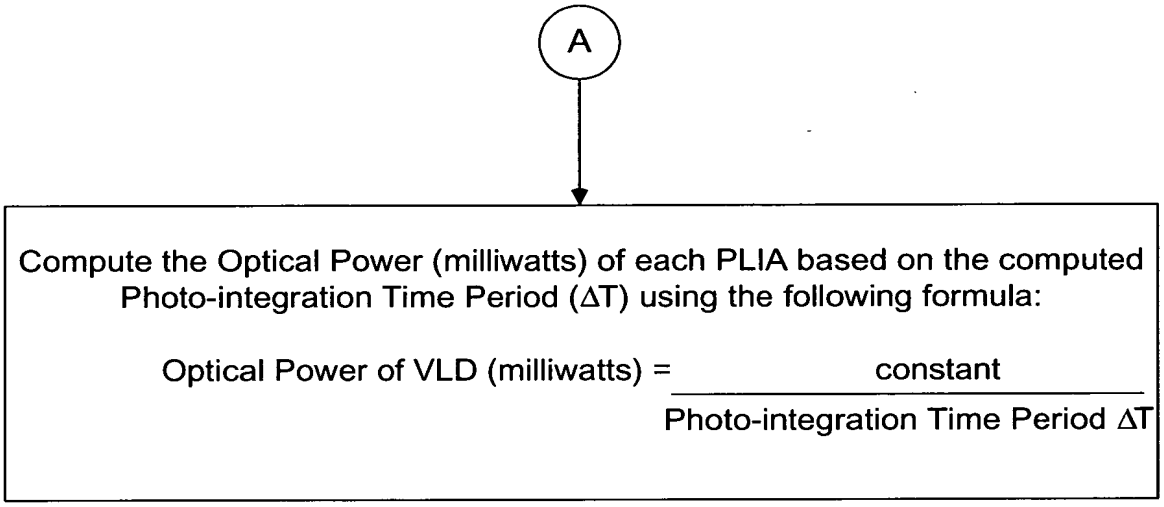
A
Compute the Optical Power (milliwatts) of each PLIA based on the computed Photo-integration Time Period (ΔT) using the following formula:
Optical Power of VLD (milliwatts) = constant / Photo-integration Time Period ΔT

FIG. 18C2

METHOD OF COMPUTING COMPENSATED LINE RATE FOR CORRECTING VIEWING-ANGLE DISTORTION OCCURING IN IMAGES OF OBJECT SURFACES CAPTURED AS OBJECT SURFACES MOVE PAST A PLIIM-BASED LINEAR IMAGER AT NON-ZERO SKEWED ANGLE

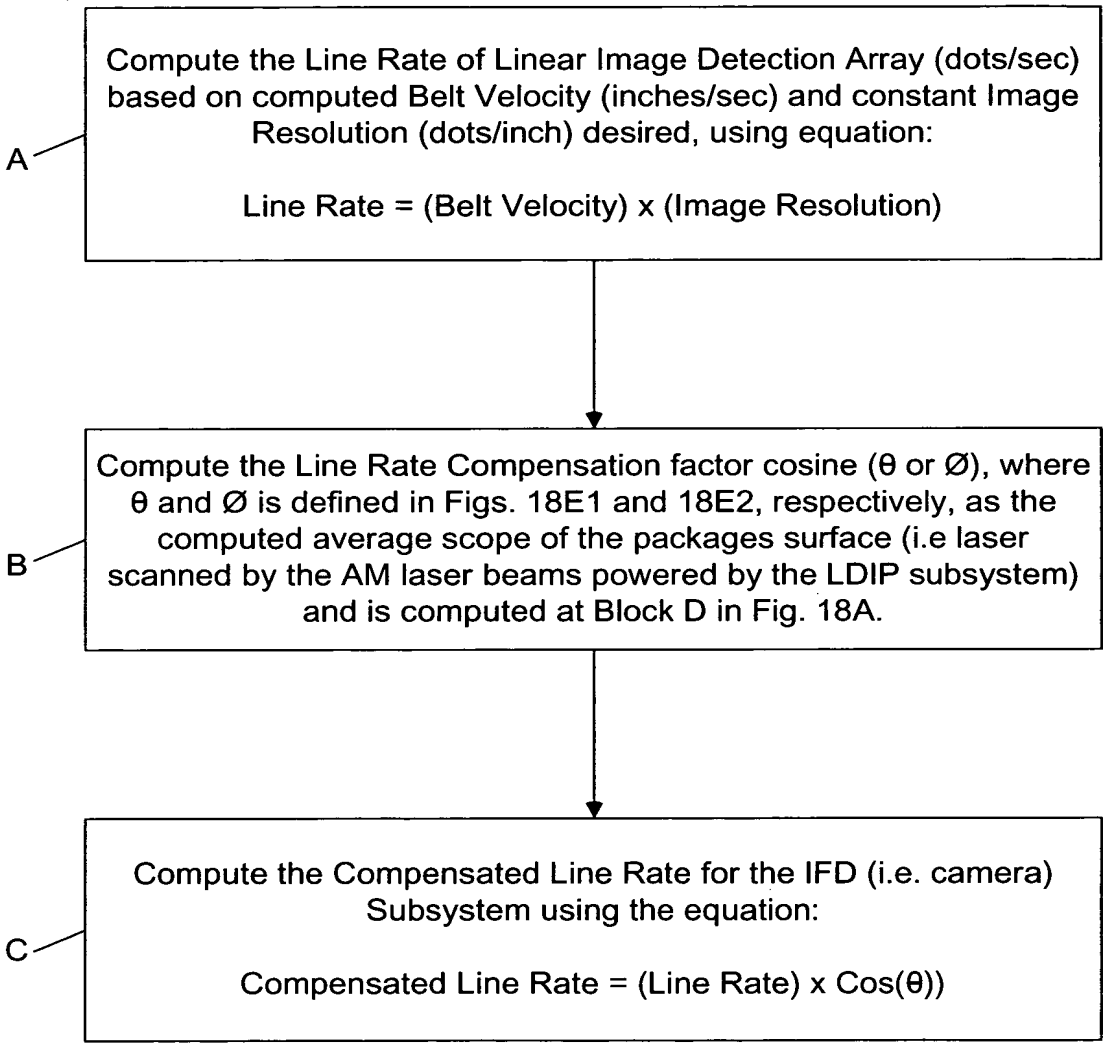

FIG. 18D

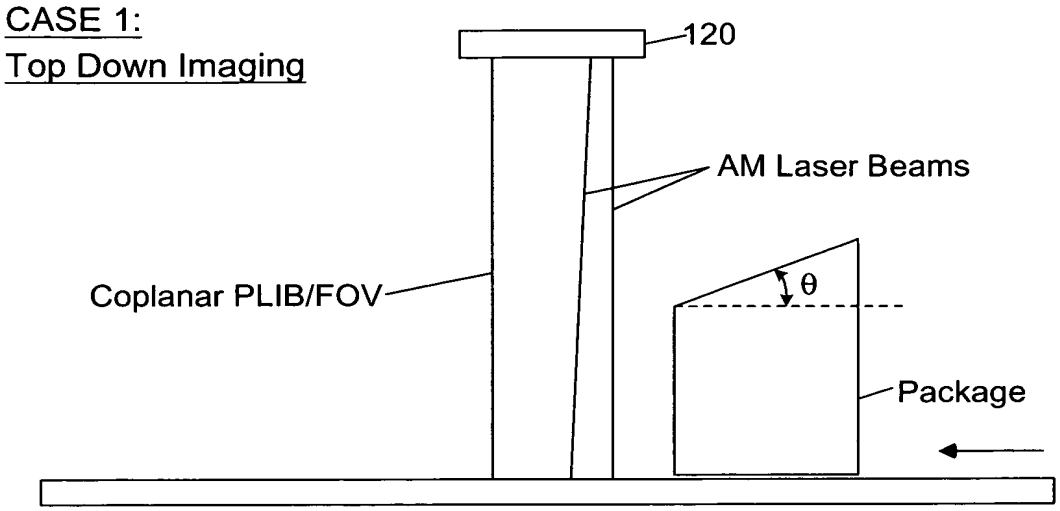

FIG. 18E1

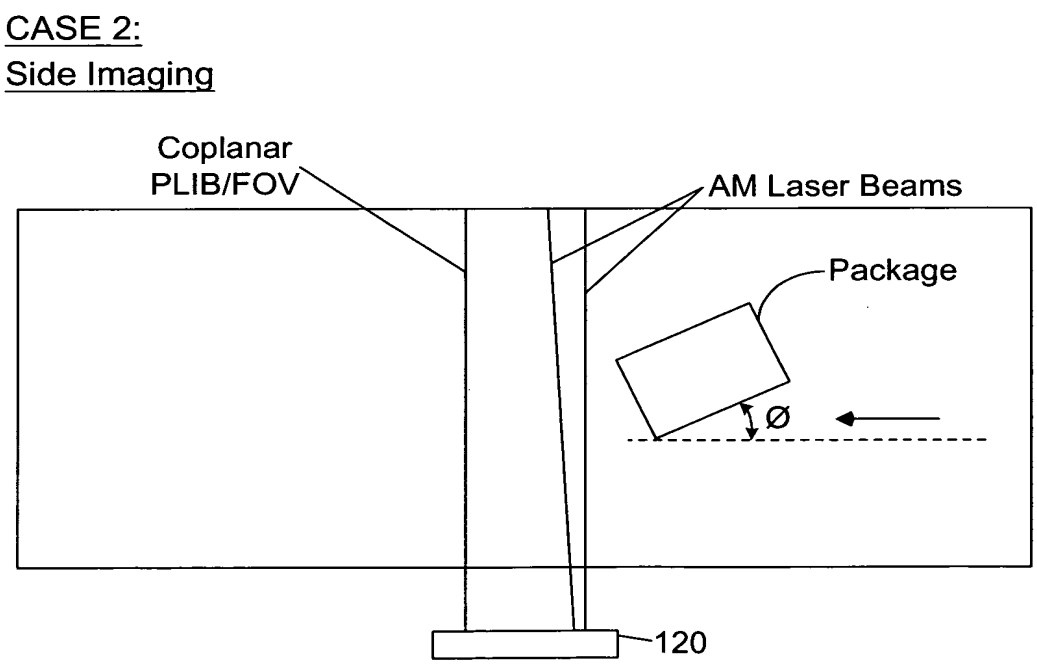

FIG. 18E2

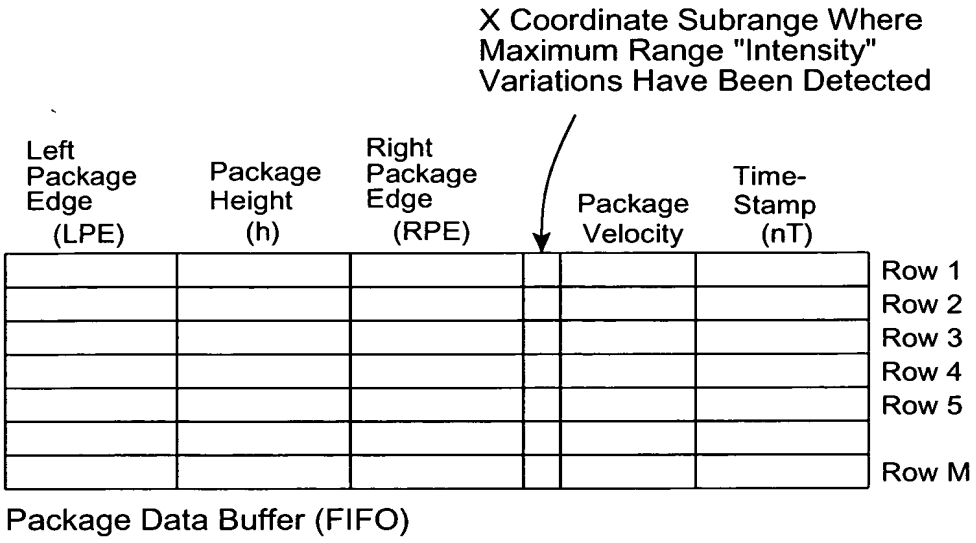
X Coordinate Subrange Where
Maximum Range "Intensity"
Variations Have Been Detected
Left
Package
Edge
(LPE)
Package
Height
(h)
Right
Package
Edge
(RPE)
Package
Velocity
Time-
Stamp
(nT)
Row 1
Row 2
Row 3
Row 4
Row 5
Row M
Package Data Buffer (FIFO)

FIG. 19

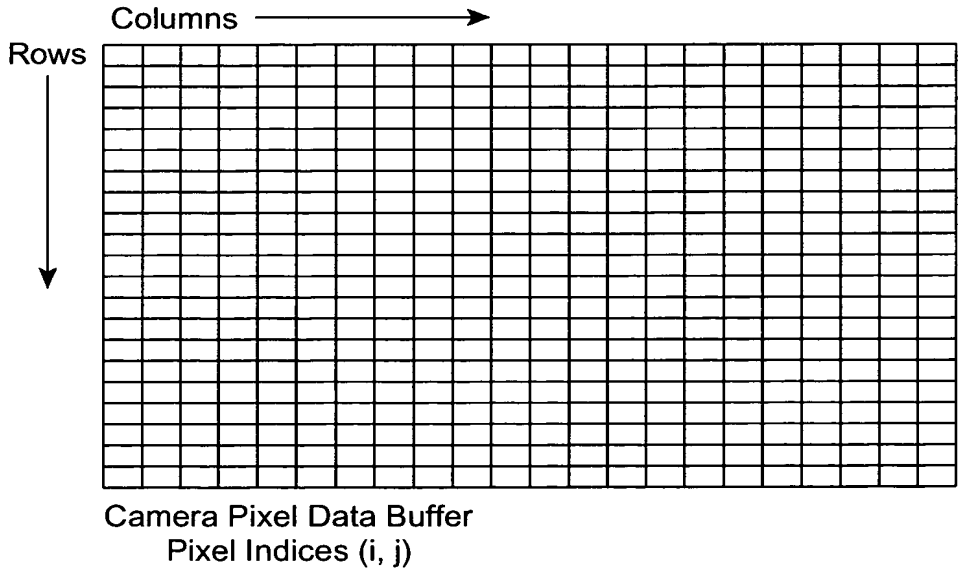
Columns
Rows
Camera Pixel Data Buffer
Pixel Indices (i, j)

FIG. 20

Zoom And Focus Lens Group Position

Look-Up Table

Distance From Camera H (mm)	Zoom Group Distance (mm) Y (Zoom)	Focus Group Distance (mm) Y (Focus)
1000	21.57489228	2.47E-05
1100	19.38089696	10.99009783
1200	17.10673434	20.65783177
1300	14.77137314	29.10917002
(Use Interpolation Techniques For Working Distances Between Listed Points In Table) 1400	12.39153565	36.47312595
1500	9.979114358	42.87845436
1600	7.540639114	48.44003358
1700	5.078794775	53.25495831
1800	2.595989366	57.40834303
1900	0.099972739	60.98883615

FIG. 21

* Note: The focal distance and zoom (eff. focal length) of camera lens are coupled (inter-dependant) in this commercial embodiment.

Camera Has A Fixed Aperture F56

Focus And Zoom Lens Movement vs. Working Distances

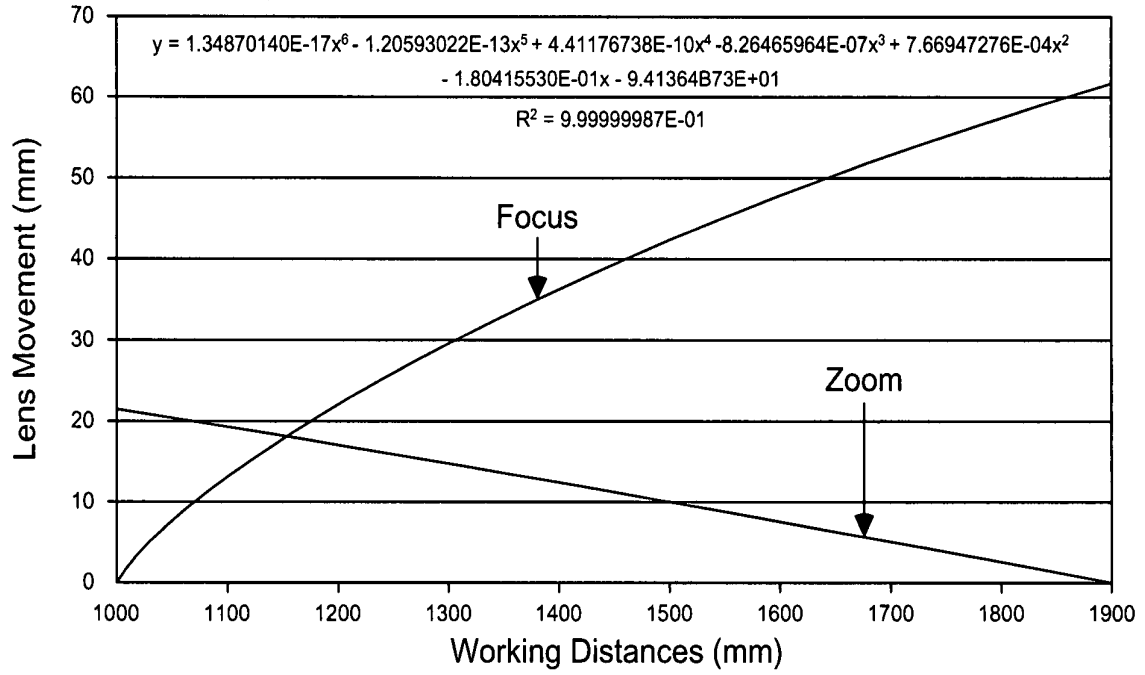

$y = 2.84791608E-18x^6 - 2.35121571E-14x^5 + 7.847795370E-11x^4 - 1.33426085E-07x^3 + 1.16929778E-04x^2$
$6.85049995E-02x + 4.87609108E+01$
$R^2 = 9.99999989E-01$

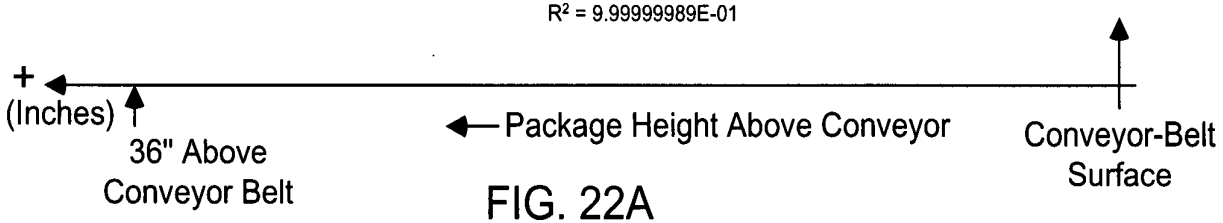

FIG. 22A

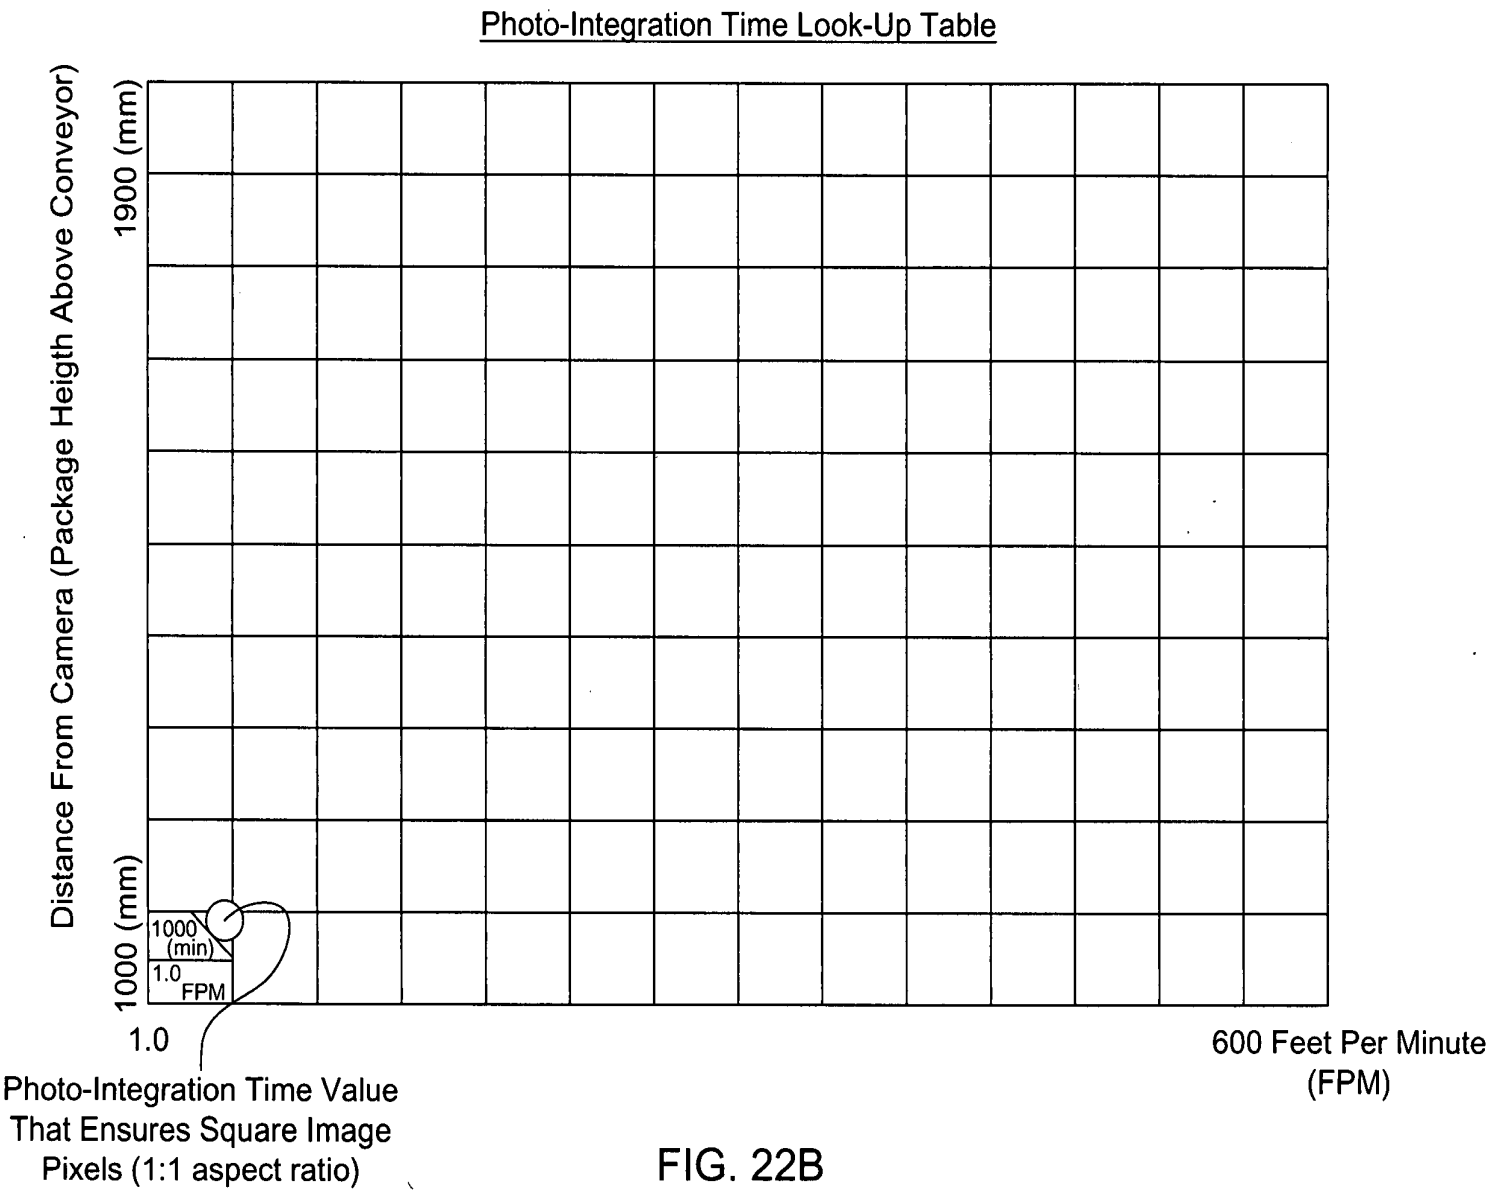
Photo-Integration Time Look-Up Table
Distance From Camera (Package Heigth Above Conveyor)
1900 (mm)
1000 (mm)
1000 (min)
1.0 FPM
1.0
600 Feet Per Minute (FPM)
Photo-Integration Time Value That Ensures Square Image Pixels (1:1 aspect ratio)

FIG. 22B

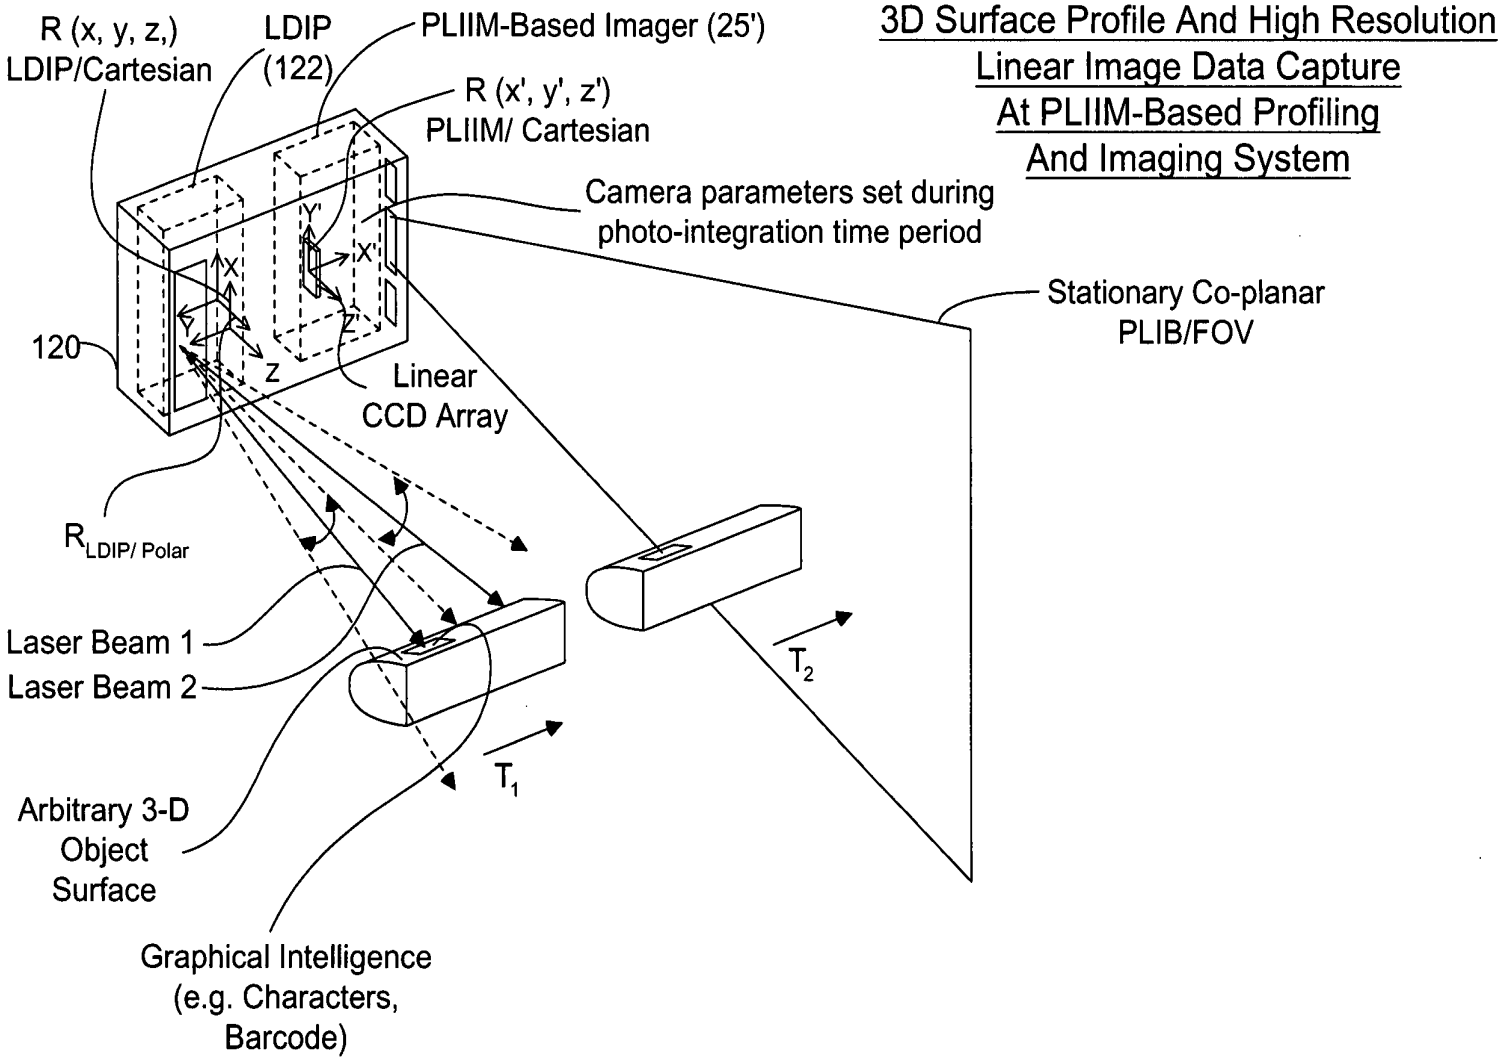
3D Surface Profile And High Resolution
Linear Image Data Capture
At PLIIM-Based Profiling
And Imaging System
R (x, y, z,)
LDIP/Cartesian
LDIP
(122)
PLIIM-Based Imager (25')
R (x', y', z')
PLIIM/ Cartesian
Camera parameters set during
photo-integration time period
Stationary Co-planar
PLIB/FOV
120
Linear
CCD Array
$R_{LDIP/\ Polar}$
Laser Beam 1
Laser Beam 2
T_2
T_1
Arbitrary 3-D
Object
Surface
Graphical Intelligence
(e.g. Characters,
Barcode)

FIG. 23A

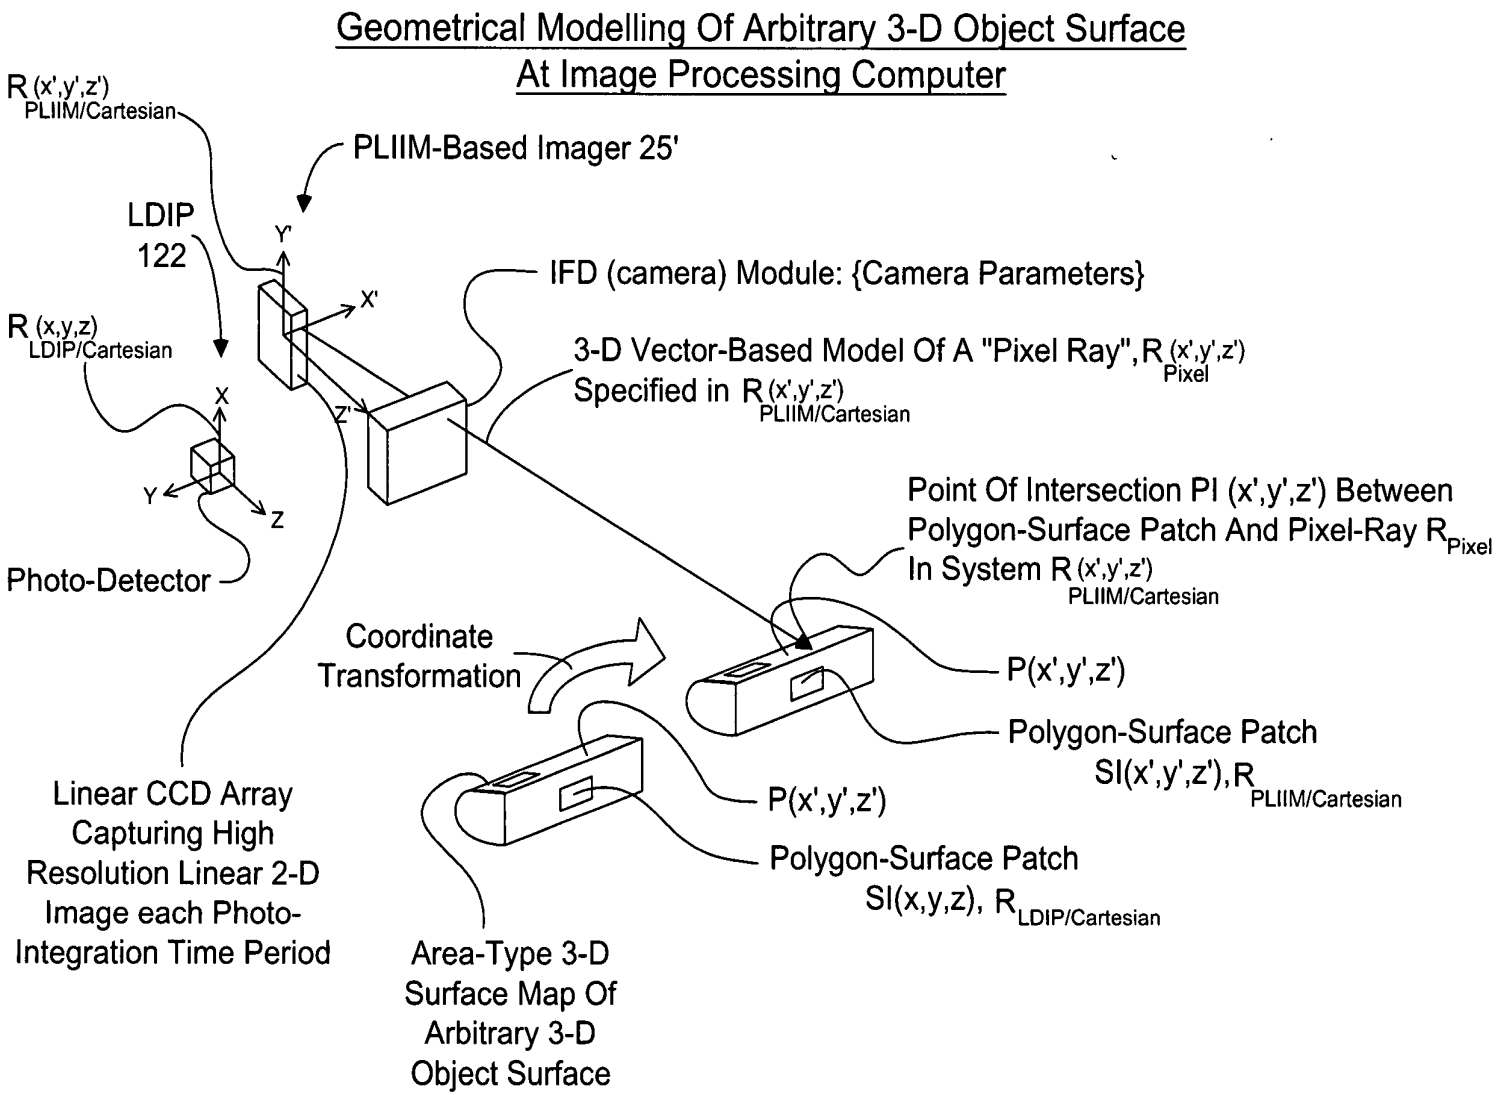
Geometrical Modelling Of Arbitrary 3-D Object Surface
At Image Processing Computer
R (x',y',z') PLIIM/Cartesian
PLIIM-Based Imager 25'
LDIP 122
Y'
X'
Z'
IFD (camera) Module: {Camera Parameters}
R (x,y,z) LDIP/Cartesian
X
Y
Z
3-D Vector-Based Model Of A "Pixel Ray", R (x',y',z') Pixel
Specified in R (x',y',z') PLIIM/Cartesian
Point Of Intersection PI (x',y',z') Between
Polygon-Surface Patch And Pixel-Ray R Pixel
In System R (x',y',z') PLIIM/Cartesian
Photo-Detector
Coordinate Transformation
P(x',y',z')
Polygon-Surface Patch
SI(x',y',z'),R PLIIM/Cartesian
Linear CCD Array Capturing High Resolution Linear 2-D Image each Photo-Integration Time Period
P(x',y',z')
Polygon-Surface Patch
SI(x,y,z), R LDIP/Cartesian
Area-Type 3-D Surface Map Of Arbitrary 3-D Object Surface

FIG. 23B

METHOD OF AND APPARATUS FOR PERFORMING AUTOMATIC RECOGNITION OF GRAPHICAL INTELLIGENCE CONTAINED IN 2-D IMAGES CAPTURED FROM ARBITARY 3-D OBJECT SURFACES

STEP 1: At the unitary PLIIM-based object imaging and profiling system, use the laser doppler imaging and profiling (LDIP) subsystem employed therein to (i) consecutively capture a series of linear 3-D surface profile maps on a targeted arbitrary (e.g. non-planar or planar) 3-D object surface bearing forms of graphical intelligence and (ii) measure the velocity of the arbitrary 3-D object surface, wherein the polar coordinates of each point in the captured linear 3-D surface profile map are specified in a local polar coordinate system $R_{LDIP/polar}$, symbolically embedded within the LDIP subsystem. — A

STEP 2: At the unitary PLIIM-based object imaging and profiling system, use coordinate transforms to automatically convert the polar coordinates of each point $p(\alpha, R)$ in the captured linear 3-D surface profile map into x,y, z Cartesian coordinates specified as p(x,y,z) in a local Cartesian coordinate system $R_{LDIP/Cartesian}$, symbolically embedded within the LDIP subsystem. — B

STEP 3: At the unitary PLIIM-based object imaging and profiling system, use the PLIIM-based imager employed therein to consecutively capture high-resolution linear 2-D images of the arbitrary 3-D object surface bearing forms of graphical intelligence (e.g. symbol character strings), wherein (i) the x', y' coordinates of each pixel in each said captured high-resolution linear 2-D image is specified in local Cartesian coordinate system $R_{PLIIM/Cartesian}$ symbolically embedded within the PLIIM-based imager, and (ii) the intensity value of the pixel I(x',y') is associated with the x', y' Cartesian coordinates of the image detection element in the linear image detection array at which the pixel is detected, and (iii) wherein also the planar laser illumination beam (PLIB) of the PLIIM-based imager is spaced from the amplitude modulated (AM) laser scanning beam of the LDIP subsystem is about D centimeters. — C

(A)

FIG. 23C1

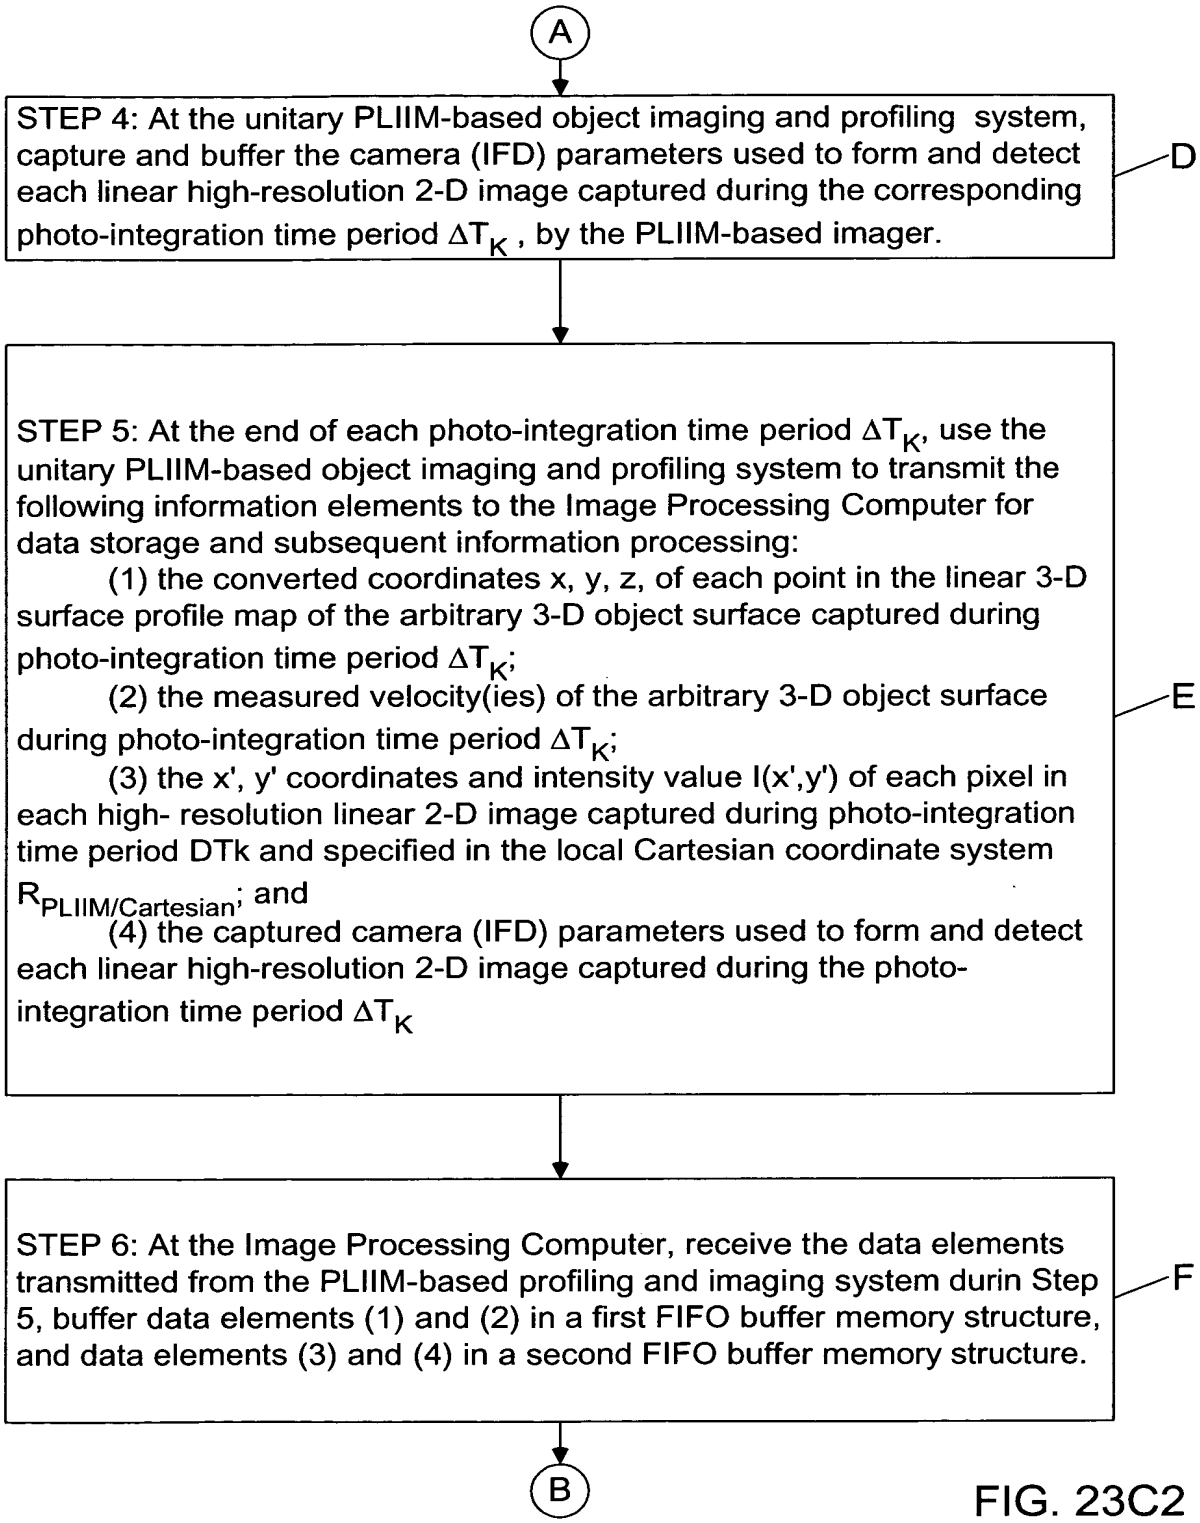
A
STEP 4: At the unitary PLIIM-based object imaging and profiling system, capture and buffer the camera (IFD) parameters used to form and detect each linear high-resolution 2-D image captured during the corresponding photo-integration time period ΔT_K , by the PLIIM-based imager.
D
STEP 5: At the end of each photo-integration time period ΔT_K, use the unitary PLIIM-based object imaging and profiling system to transmit the following information elements to the Image Processing Computer for data storage and subsequent information processing:
(1) the converted coordinates x, y, z, of each point in the linear 3-D surface profile map of the arbitrary 3-D object surface captured during photo-integration time period ΔT_K;
(2) the measured velocity(ies) of the arbitrary 3-D object surface during photo-integration time period ΔT_K;
(3) the x', y' coordinates and intensity value I(x',y') of each pixel in each high- resolution linear 2-D image captured during photo-integration time period DTk and specified in the local Cartesian coordinate system $R_{PLIIM/Cartesian}$; and
(4) the captured camera (IFD) parameters used to form and detect each linear high-resolution 2-D image captured during the photo-integration time period ΔT_K
E
STEP 6: At the Image Processing Computer, receive the data elements transmitted from the PLIIM-based profiling and imaging system durin Step 5, buffer data elements (1) and (2) in a first FIFO buffer memory structure, and data elements (3) and (4) in a second FIFO buffer memory structure.
F
B

FIG. 23C2

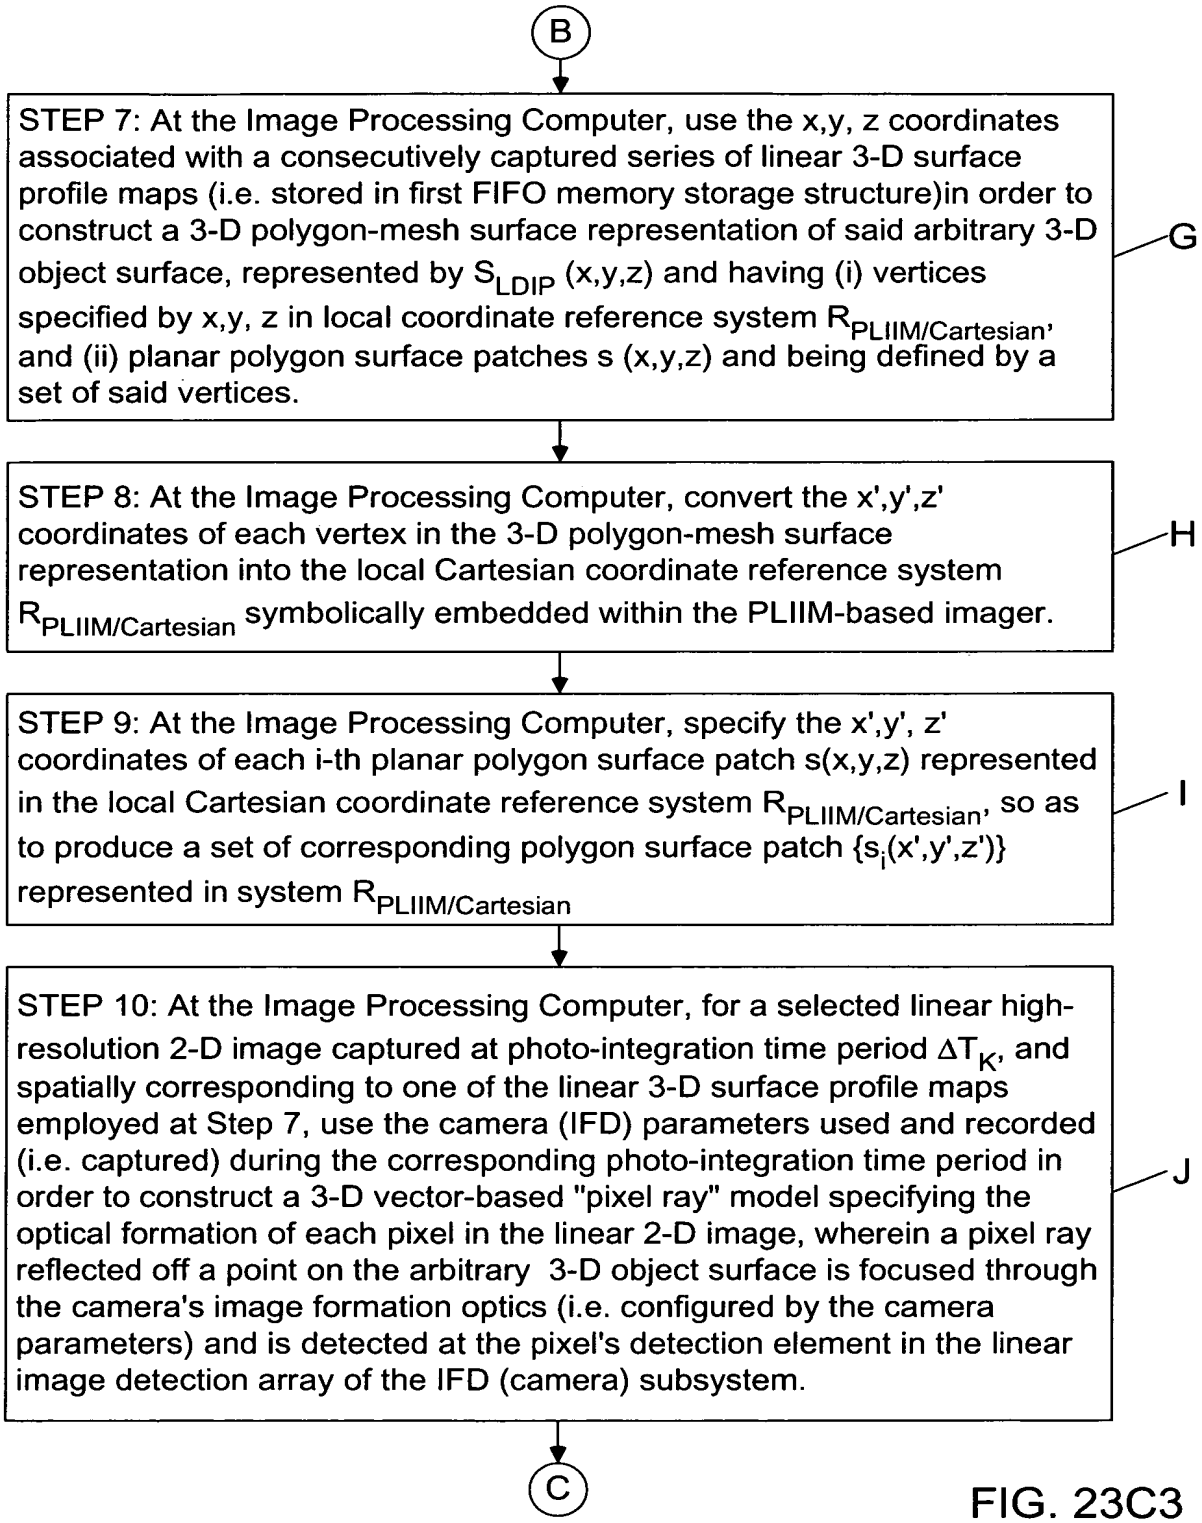
B
STEP 7: At the Image Processing Computer, use the x,y, z coordinates associated with a consecutively captured series of linear 3-D surface profile maps (i.e. stored in first FIFO memory storage structure)in order to construct a 3-D polygon-mesh surface representation of said arbitrary 3-D object surface, represented by S_{LDIP} (x,y,z) and having (i) vertices specified by x,y, z in local coordinate reference system $R_{PLIIM/Cartesian}$, and (ii) planar polygon surface patches s (x,y,z) and being defined by a set of said vertices.
G
STEP 8: At the Image Processing Computer, convert the x',y',z' coordinates of each vertex in the 3-D polygon-mesh surface representation into the local Cartesian coordinate reference system $R_{PLIIM/Cartesian}$ symbolically embedded within the PLIIM-based imager.
H
STEP 9: At the Image Processing Computer, specify the x',y', z' coordinates of each i-th planar polygon surface patch s(x,y,z) represented in the local Cartesian coordinate reference system $R_{PLIIM/Cartesian}$, so as to produce a set of corresponding polygon surface patch $\{s_i(x',y',z')\}$ represented in system $R_{PLIIM/Cartesian}$
I
STEP 10: At the Image Processing Computer, for a selected linear high-resolution 2-D image captured at photo-integration time period ΔT_K, and spatially corresponding to one of the linear 3-D surface profile maps employed at Step 7, use the camera (IFD) parameters used and recorded (i.e. captured) during the corresponding photo-integration time period in order to construct a 3-D vector-based "pixel ray" model specifying the optical formation of each pixel in the linear 2-D image, wherein a pixel ray reflected off a point on the arbitrary 3-D object surface is focused through the camera's image formation optics (i.e. configured by the camera parameters) and is detected at the pixel's detection element in the linear image detection array of the IFD (camera) subsystem.
J
C

FIG. 23C3

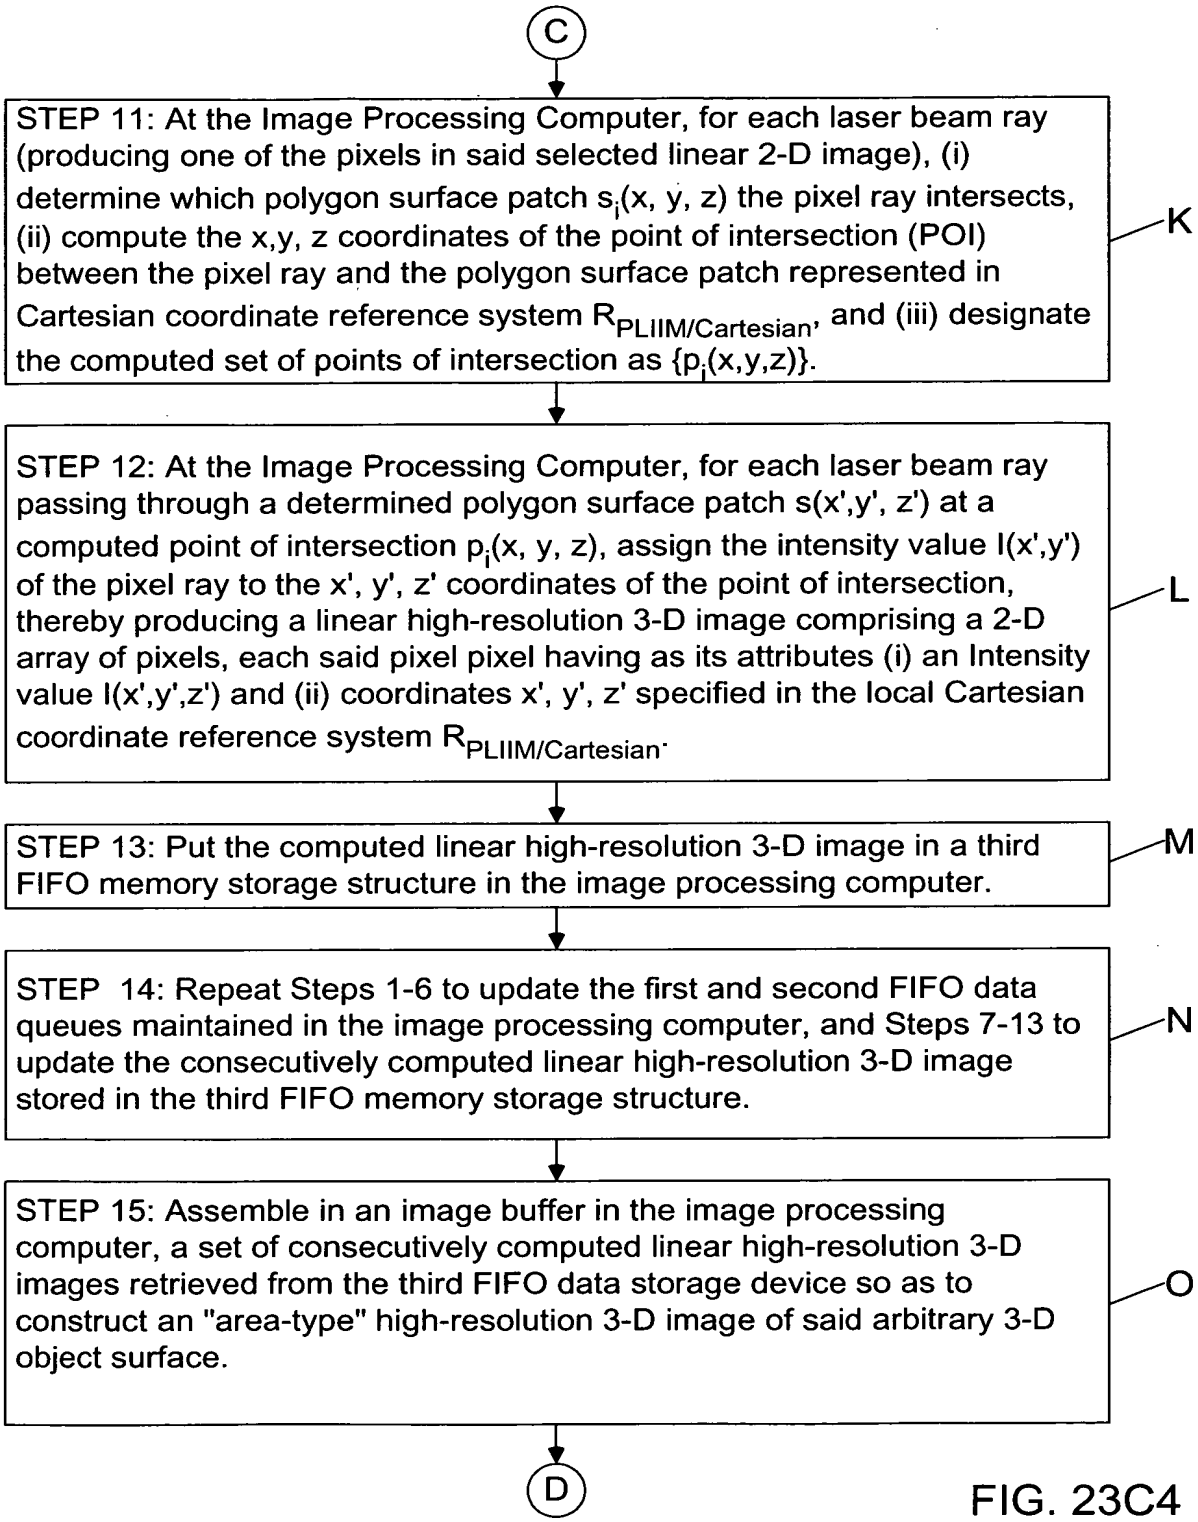
C
STEP 11: At the Image Processing Computer, for each laser beam ray (producing one of the pixels in said selected linear 2-D image), (i) determine which polygon surface patch $s_i(x, y, z)$ the pixel ray intersects, (ii) compute the x,y, z coordinates of the point of intersection (POI) between the pixel ray and the polygon surface patch represented in Cartesian coordinate reference system $R_{PLIIM/Cartesian}$, and (iii) designate the computed set of points of intersection as $\{p_i(x,y,z)\}$.
K
STEP 12: At the Image Processing Computer, for each laser beam ray passing through a determined polygon surface patch s(x',y', z') at a computed point of intersection $p_i(x, y, z)$, assign the intensity value I(x',y') of the pixel ray to the x', y', z' coordinates of the point of intersection, thereby producing a linear high-resolution 3-D image comprising a 2-D array of pixels, each said pixel pixel having as its attributes (i) an Intensity value I(x',y',z') and (ii) coordinates x', y', z' specified in the local Cartesian coordinate reference system $R_{PLIIM/Cartesian}$.
L
STEP 13: Put the computed linear high-resolution 3-D image in a third FIFO memory storage structure in the image processing computer.
M
STEP 14: Repeat Steps 1-6 to update the first and second FIFO data queues maintained in the image processing computer, and Steps 7-13 to update the consecutively computed linear high-resolution 3-D image stored in the third FIFO memory storage structure.
N
STEP 15: Assemble in an image buffer in the image processing computer, a set of consecutively computed linear high-resolution 3-D images retrieved from the third FIFO data storage device so as to construct an "area-type" high-resolution 3-D image of said arbitrary 3-D object surface.
O
D

FIG. 23C4

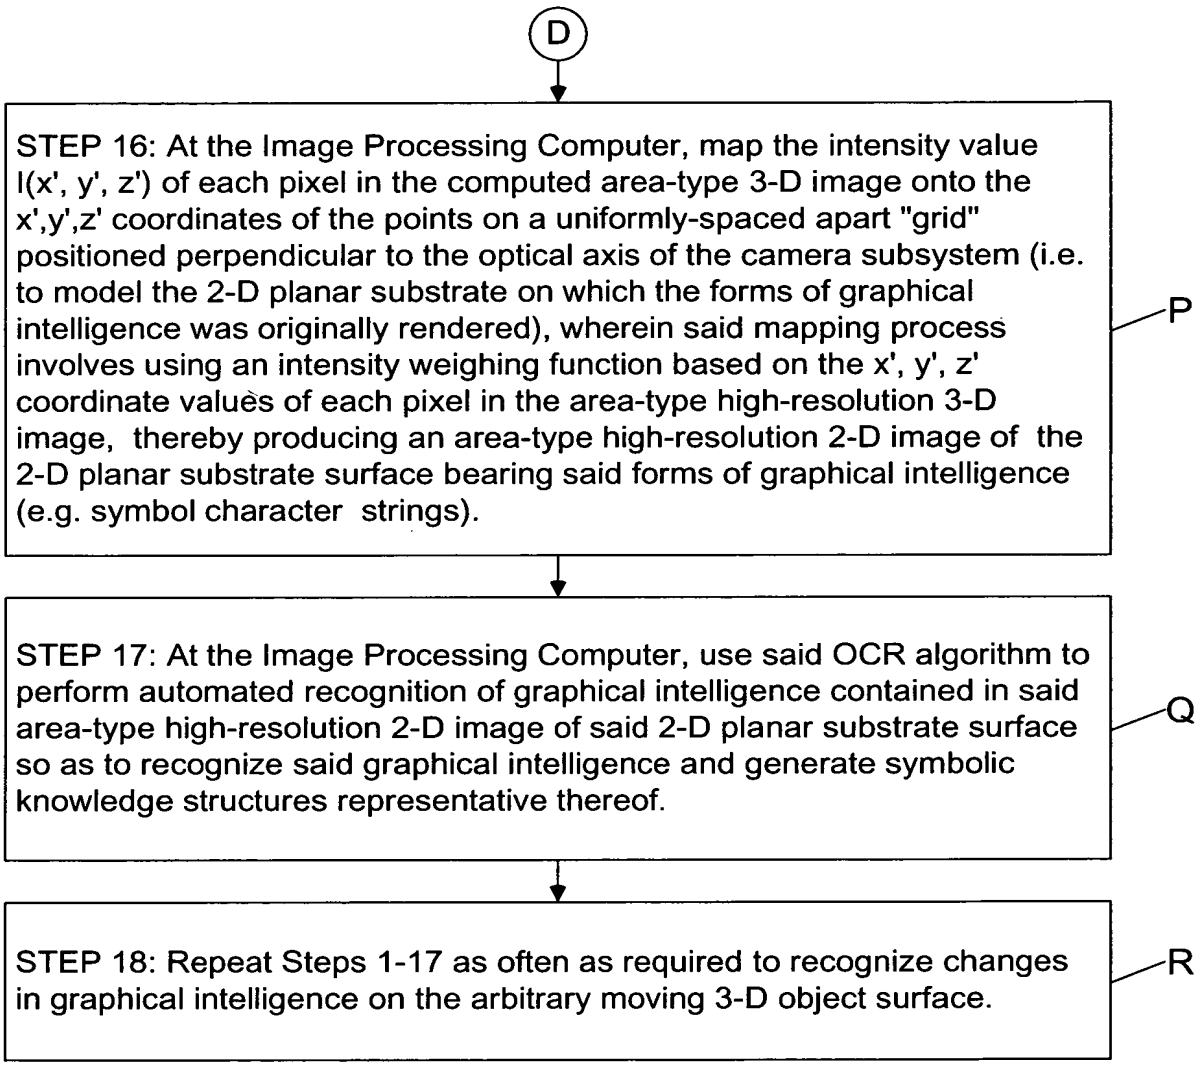
D
STEP 16: At the Image Processing Computer, map the intensity value I(x', y', z') of each pixel in the computed area-type 3-D image onto the x',y',z' coordinates of the points on a uniformly-spaced apart "grid" positioned perpendicular to the optical axis of the camera subsystem (i.e. to model the 2-D planar substrate on which the forms of graphical intelligence was originally rendered), wherein said mapping process involves using an intensity weighing function based on the x', y', z' coordinate values of each pixel in the area-type high-resolution 3-D image, thereby producing an area-type high-resolution 2-D image of the 2-D planar substrate surface bearing said forms of graphical intelligence (e.g. symbol character strings).
P
STEP 17: At the Image Processing Computer, use said OCR algorithm to perform automated recognition of graphical intelligence contained in said area-type high-resolution 2-D image of said 2-D planar substrate surface so as to recognize said graphical intelligence and generate symbolic knowledge structures representative thereof.
Q
STEP 18: Repeat Steps 1-17 as often as required to recognize changes in graphical intelligence on the arbitrary moving 3-D object surface.
R

FIG. 23C5

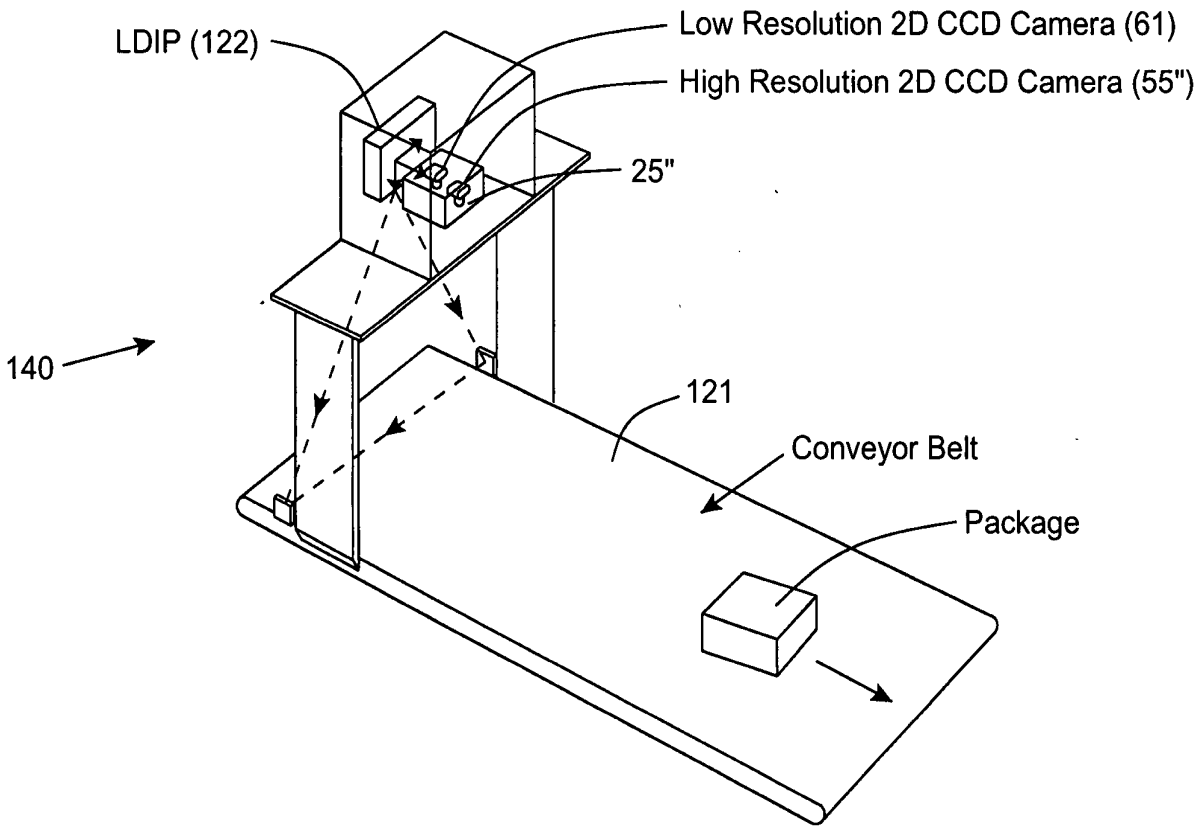
LDIP (122)
Low Resolution 2D CCD Camera (61)
High Resolution 2D CCD Camera (55")
25"
140
121
Conveyor Belt
Package

FIG. 24

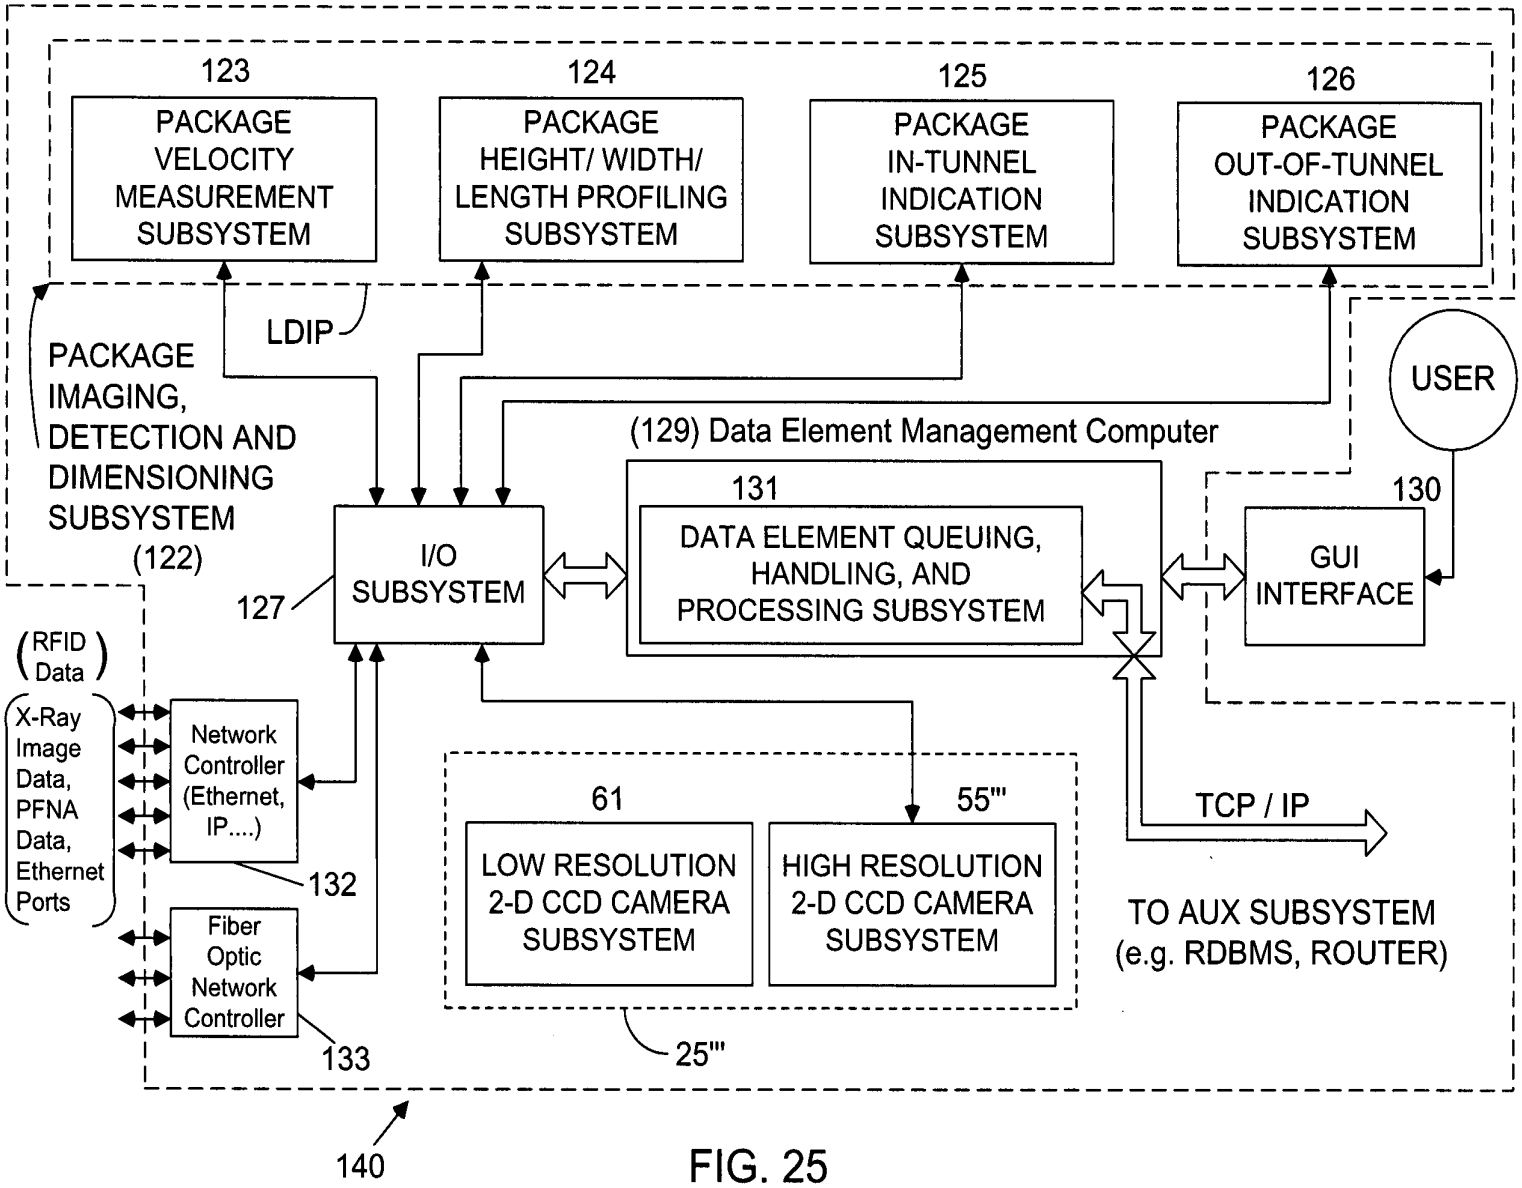
123
PACKAGE VELOCITY MEASUREMENT SUBSYSTEM
124
PACKAGE HEIGHT/ WIDTH/ LENGTH PROFILING SUBSYSTEM
125
PACKAGE IN-TUNNEL INDICATION SUBSYSTEM
126
PACKAGE OUT-OF-TUNNEL INDICATION SUBSYSTEM
LDIP
PACKAGE IMAGING, DETECTION AND DIMENSIONING SUBSYSTEM (122)
USER
(129) Data Element Management Computer
131
DATA ELEMENT QUEUING, HANDLING, AND PROCESSING SUBSYSTEM
130
GUI INTERFACE
127
I/O SUBSYSTEM
(RFID Data)
X-Ray Image Data, PFNA Data, Ethernet Ports
Network Controller (Ethernet, IP....)
132
Fiber Optic Network Controller
133
61
LOW RESOLUTION 2-D CCD CAMERA SUBSYSTEM
55'''
HIGH RESOLUTION 2-D CCD CAMERA SUBSYSTEM
25'''
TCP / IP
TO AUX SUBSYSTEM (e.g. RDBMS, ROUTER)
140

FIG. 25

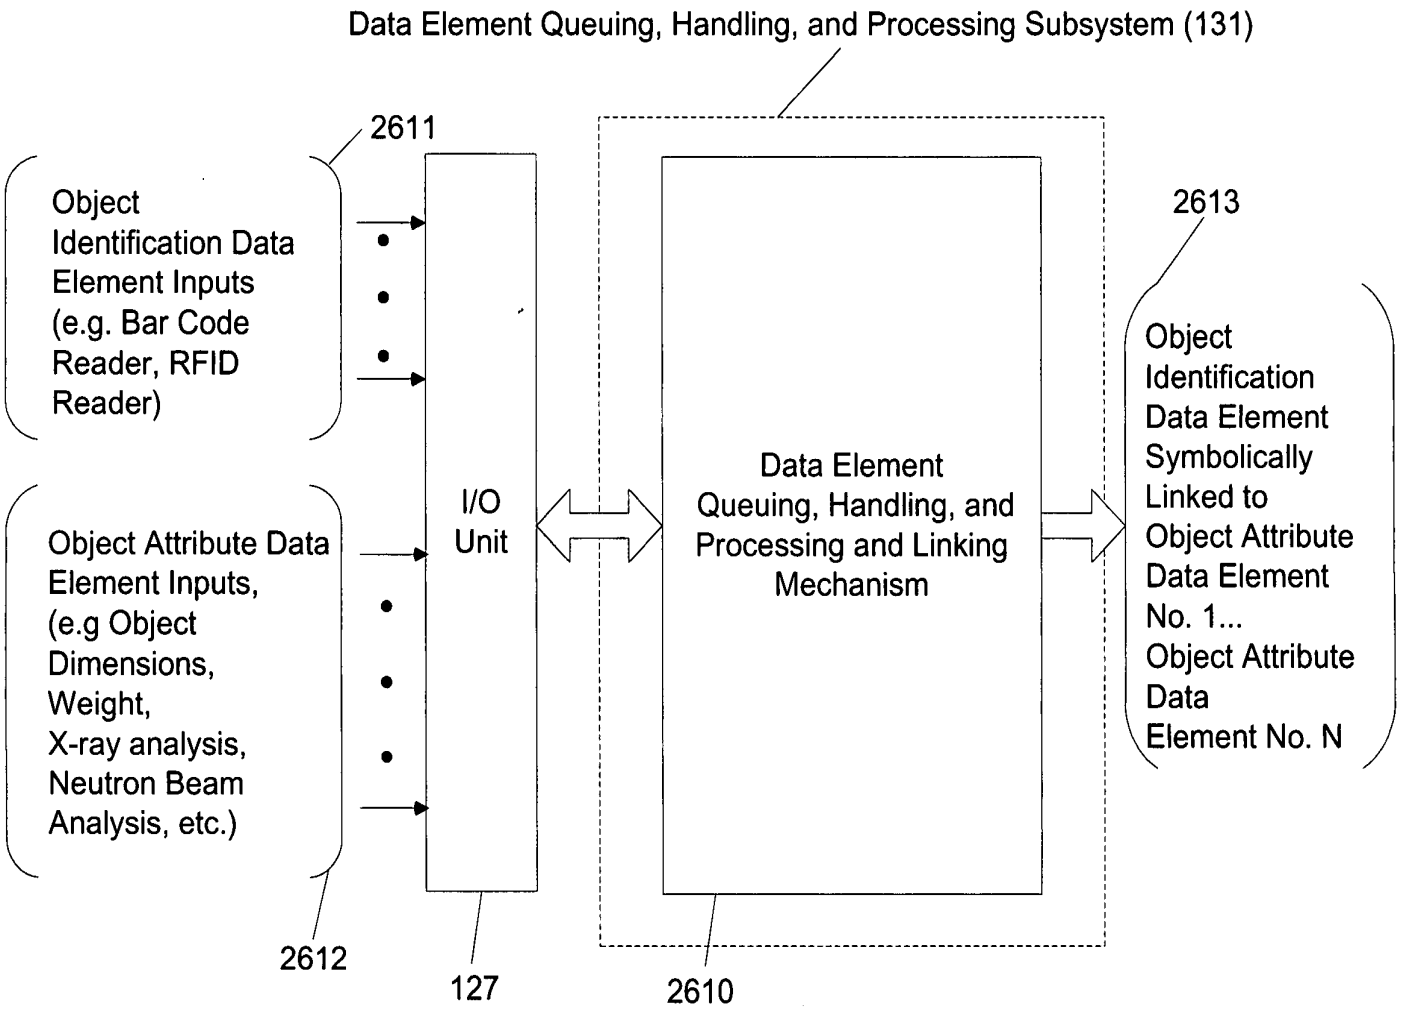
Data Element Queuing, Handling, and Processing Subsystem (131)
2611
Object Identification Data Element Inputs (e.g. Bar Code Reader, RFID Reader)
Object Attribute Data Element Inputs, (e.g Object Dimensions, Weight, X-ray analysis, Neutron Beam Analysis, etc.)
2612
I/O Unit
127
Data Element Queuing, Handling, and Processing and Linking Mechanism
2610
2613
Object Identification Data Element Symbolically Linked to Object Attribute Data Element No. 1...
Object Attribute Data Element No. N

FIG. 25A

Primary Network and/ or System Functions:

A. Specification of Object Detection and Tracking Capability of System

B. Specification of Object Identification Capability of System

C. Specification of Object Attribute Acquisition Capability of System

Specification of Object Detection,Tracking, and Identification and Attribute-Acquisition Capabilities of a Configured System or Network.

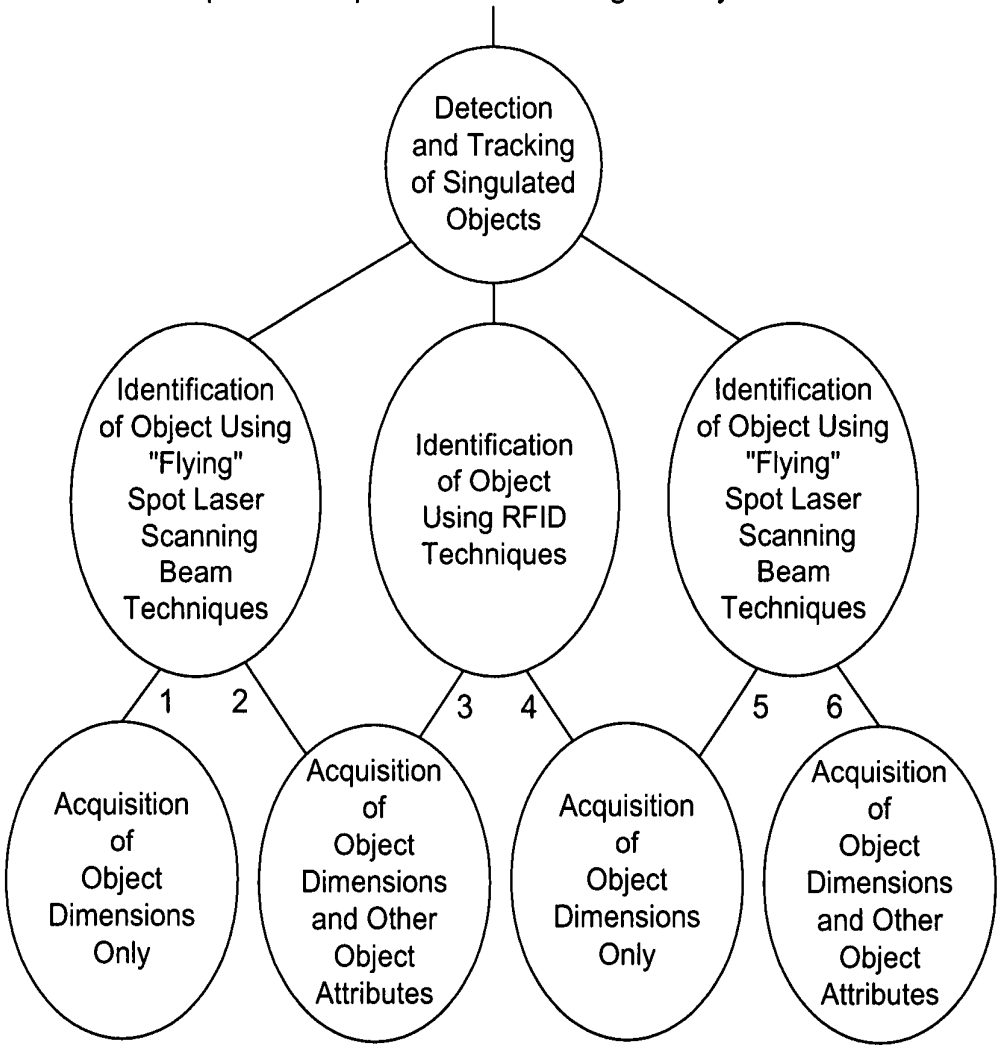

FIG. 25B-1

Primary Network and/ or System Functions:

A. Specification of Object Detection and Tracking Capability of System

B. Specification of Object Identification Capability of System

C. Specification of Object Attribute Acquisition Capability of System

Specification of Object Detection,Tracking, and Identification and Attribute-Acquisition Capabilities of a Configured System or Network.

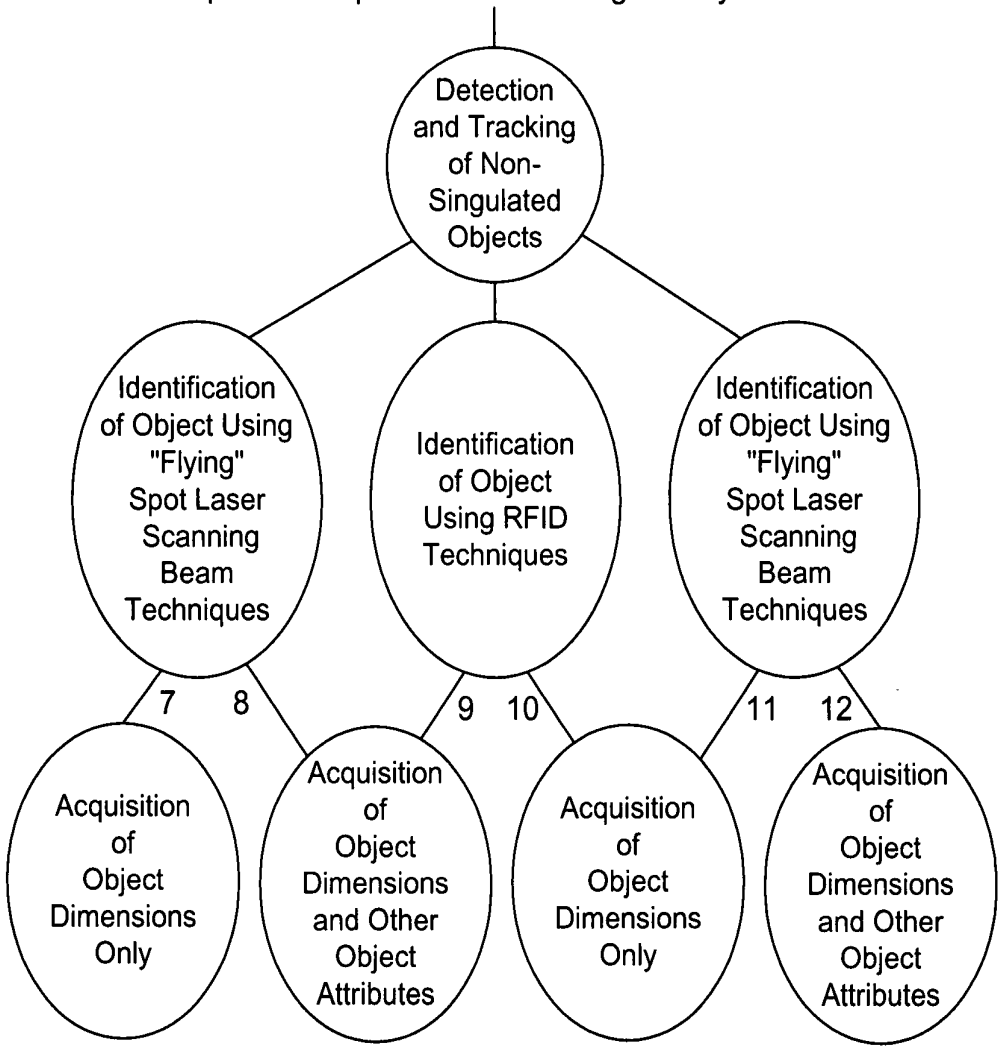

FIG. 25B-2

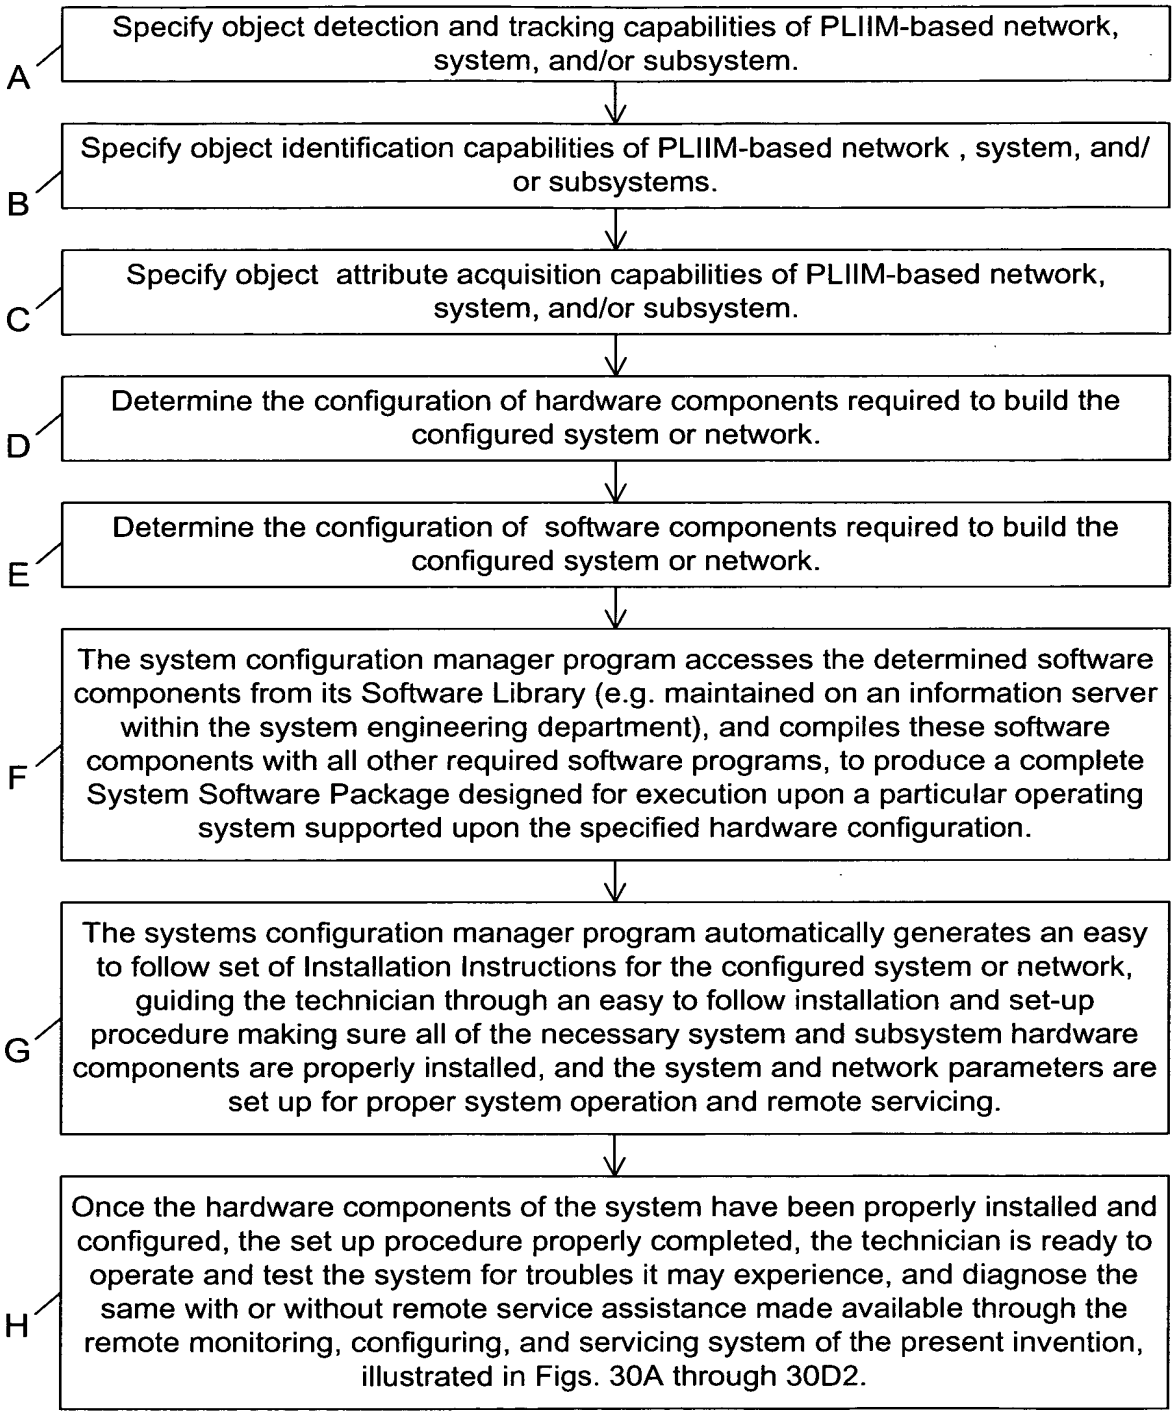
A
Specify object detection and tracking capabilities of PLIIM-based network, system, and/or subsystem.
B
Specify object identification capabilities of PLIIM-based network , system, and/ or subsystems.
C
Specify object attribute acquisition capabilities of PLIIM-based network, system, and/or subsystem.
D
Determine the configuration of hardware components required to build the configured system or network.
E
Determine the configuration of software components required to build the configured system or network.
F
The system configuration manager program accesses the determined software components from its Software Library (e.g. maintained on an information server within the system engineering department), and compiles these software components with all other required software programs, to produce a complete System Software Package designed for execution upon a particular operating system supported upon the specified hardware configuration.
G
The systems configuration manager program automatically generates an easy to follow set of Installation Instructions for the configured system or network, guiding the technician through an easy to follow installation and set-up procedure making sure all of the necessary system and subsystem hardware components are properly installed, and the system and network parameters are set up for proper system operation and remote servicing.
H
Once the hardware components of the system have been properly installed and configured, the set up procedure properly completed, the technician is ready to operate and test the system for troubles it may experience, and diagnose the same with or without remote service assistance made available through the remote monitoring, configuring, and servicing system of the present invention, illustrated in Figs. 30A through 30D2.

FIG. 25C

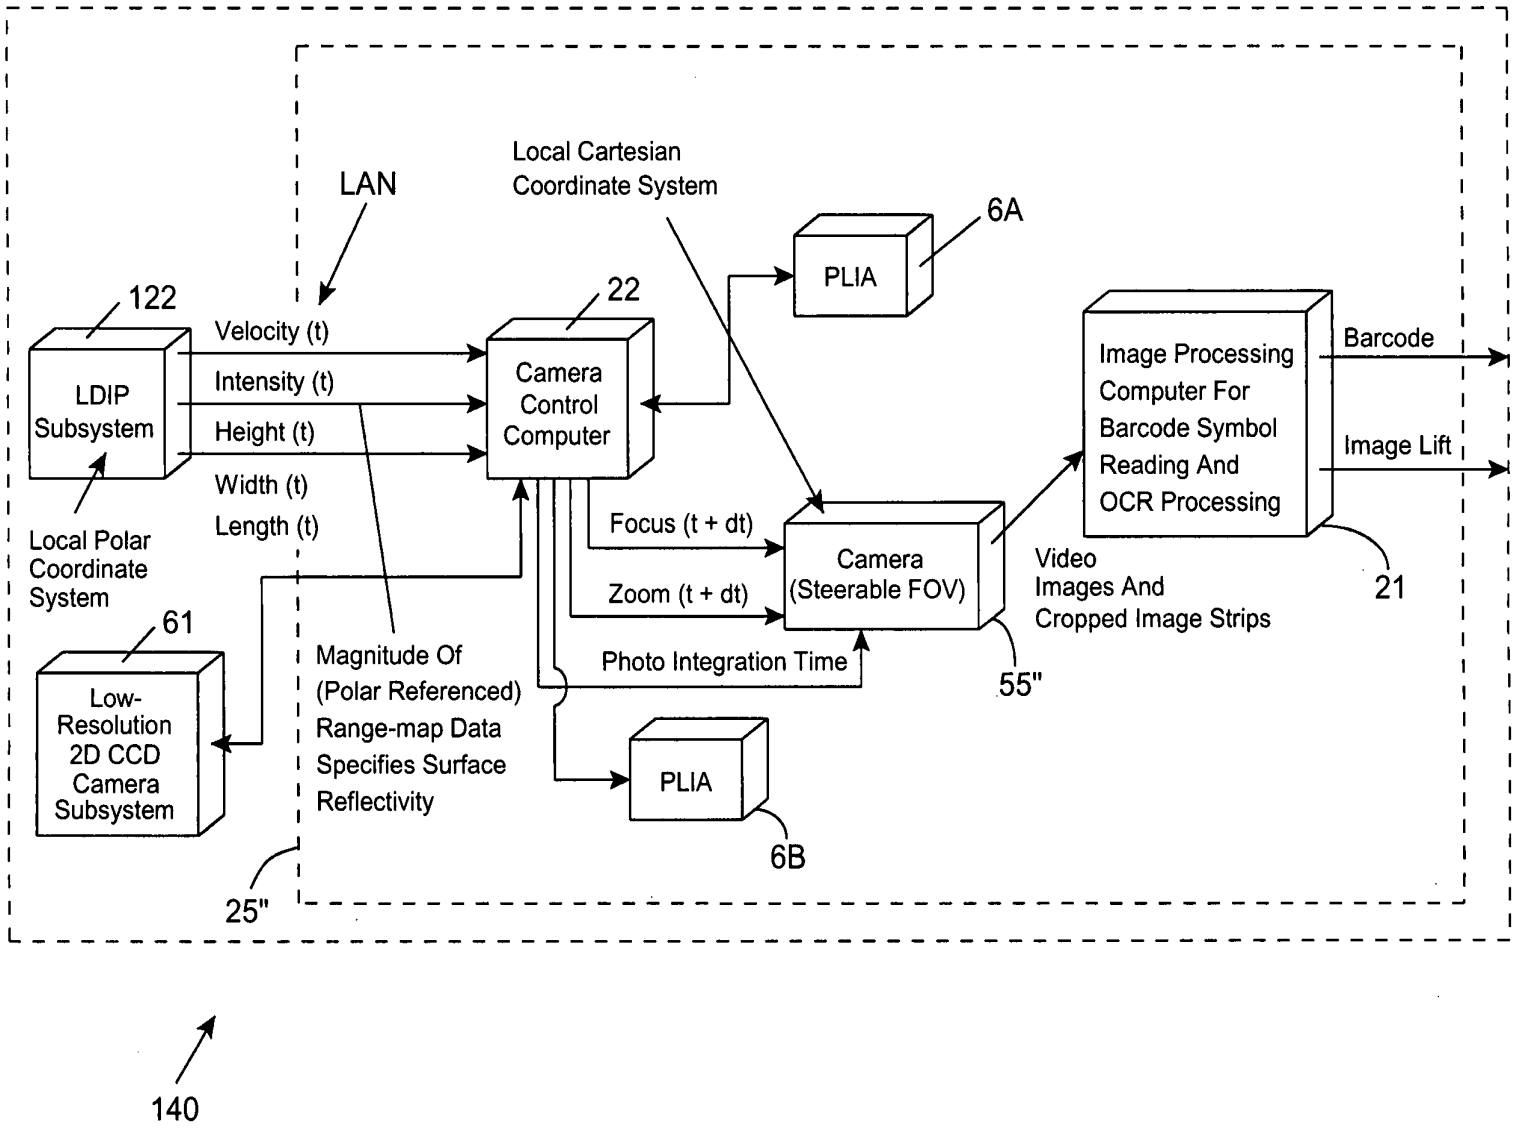
LAN
Local Cartesian
Coordinate System
6A
PLIA
122
22
LDIP
Subsystem
Velocity (t)
Intensity (t)
Height (t)
Width (t)
Length (t)
Camera
Control
Computer
Image Processing
Computer For
Barcode Symbol
Reading And
OCR Processing
Barcode
Image Lift
Local Polar
Coordinate
System
Focus (t + dt)
Zoom (t + dt)
Photo Integration Time
Camera
(Steerable FOV)
Video
Images And
Cropped Image Strips
21
55"
61
Low-
Resolution
2D CCD
Camera
Subsystem
Magnitude Of
(Polar Referenced)
Range-map Data
Specifies Surface
Reflectivity
PLIA
6B
25"
140

FIG. 26

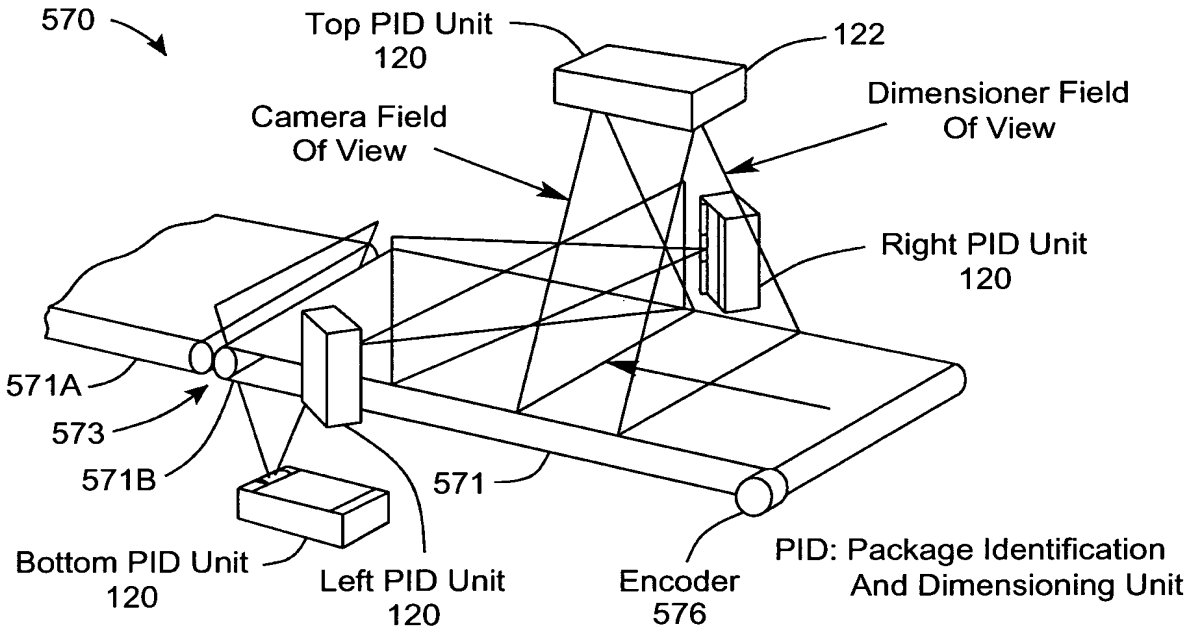
570
Top PID Unit
120
122
Camera Field
Of View
Dimensioner Field
Of View
Right PID Unit
120
571A
573
571B
571
Bottom PID Unit
120
Left PID Unit
120
Encoder
576
PID: Package Identification
And Dimensioning Unit

FIG. 27

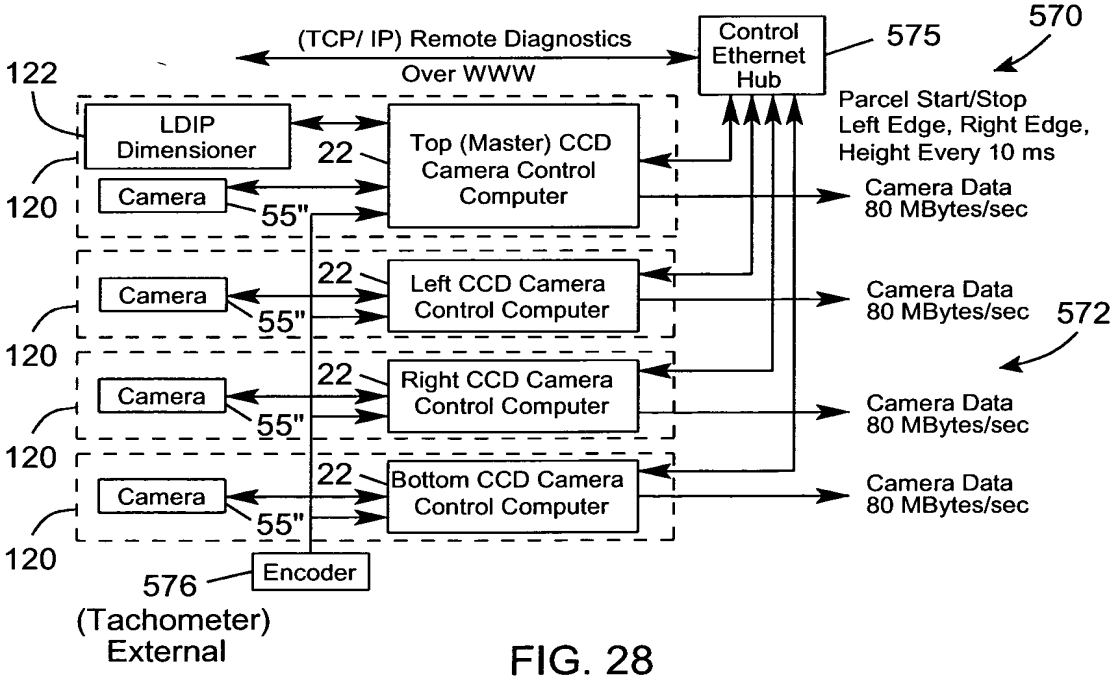
(TCP/ IP) Remote Diagnostics
Over WWW
Control
Ethernet
Hub
575
570
122
LDIP
Dimensioner
22
Top (Master) CCD
Camera Control
Computer
Parcel Start/Stop
Left Edge, Right Edge,
Height Every 10 ms
120
Camera
55"
Camera Data
80 MBytes/sec
Left CCD Camera
Control Computer
Right CCD Camera
Control Computer
Bottom CCD Camera
Control Computer
572
576
Encoder
(Tachometer)
External

FIG. 28

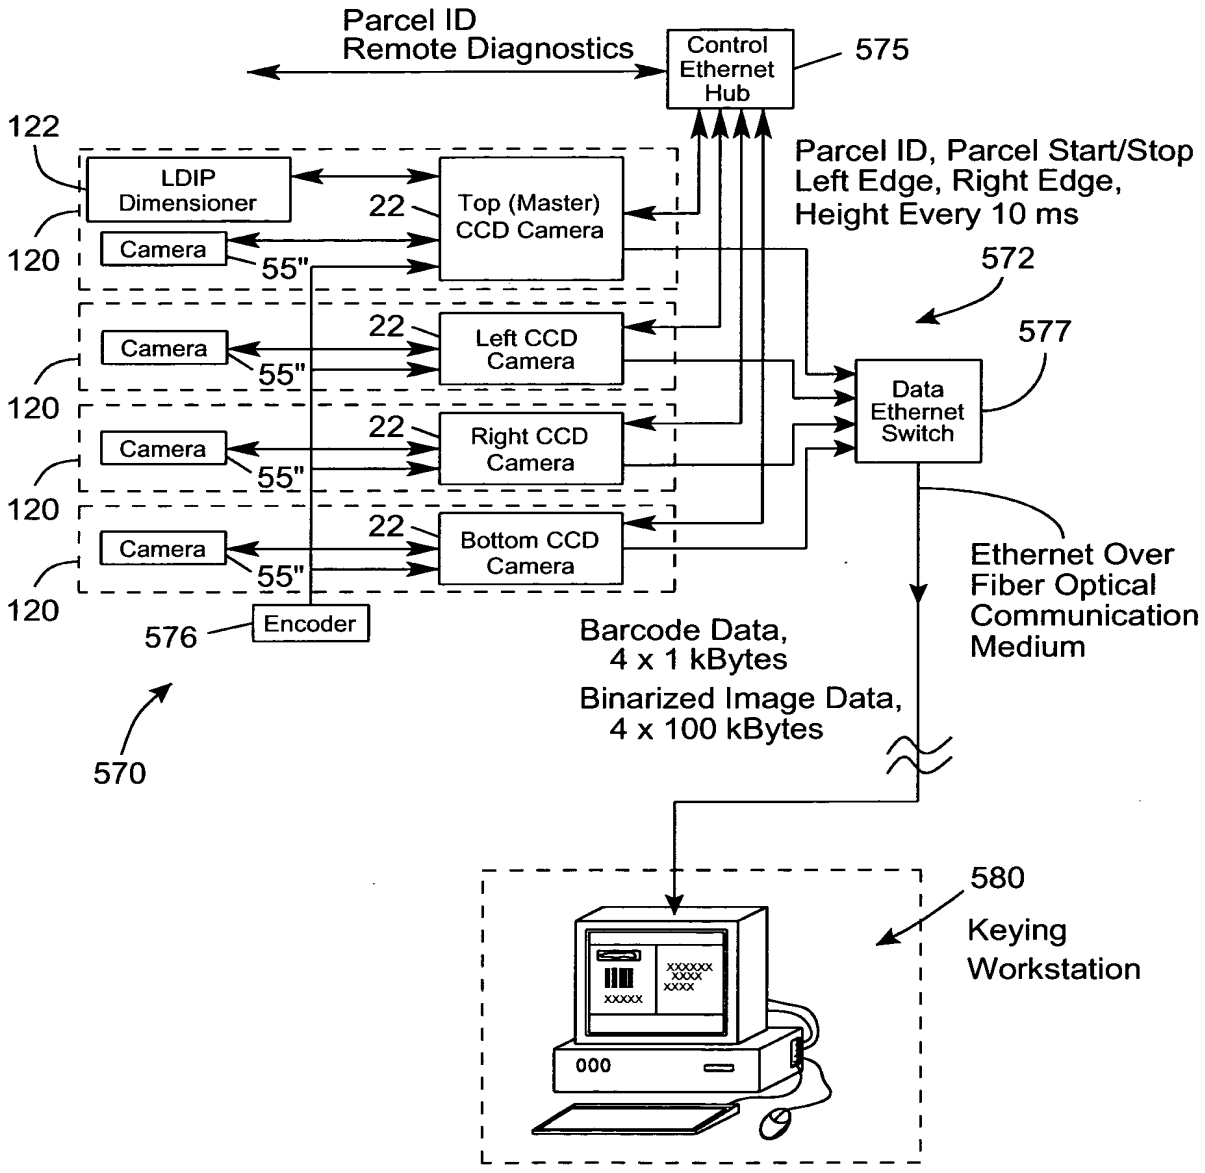
Parcel ID
Remote Diagnostics
Control Ethernet Hub
575
122
LDIP Dimensioner
22
Top (Master) CCD Camera
Parcel ID, Parcel Start/Stop
Left Edge, Right Edge,
Height Every 10 ms
120
Camera
55"
572
Left CCD Camera
577
Right CCD Camera
Data Ethernet Switch
Bottom CCD Camera
Ethernet Over Fiber Optical Communication Medium
576
Encoder
Barcode Data,
4 x 1 kBytes
Binarized Image Data,
4 x 100 kBytes
570
580
Keying Workstation

FIG. 29

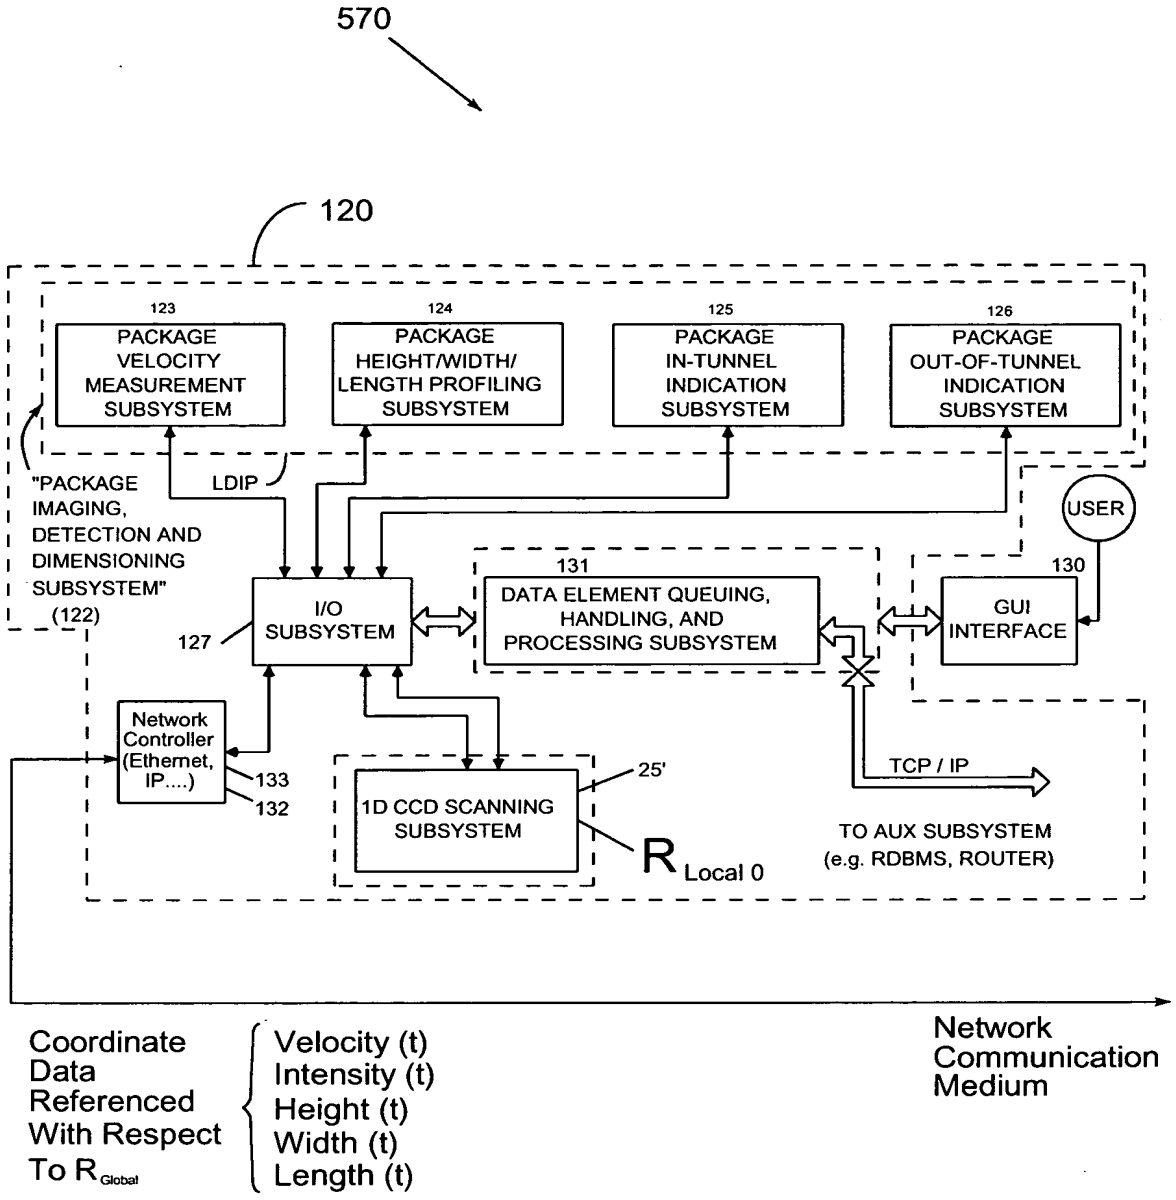
570
120
123
PACKAGE VELOCITY MEASUREMENT SUBSYSTEM
124
PACKAGE HEIGHT/WIDTH/ LENGTH PROFILING SUBSYSTEM
125
PACKAGE IN-TUNNEL INDICATION SUBSYSTEM
126
PACKAGE OUT-OF-TUNNEL INDICATION SUBSYSTEM
"PACKAGE IMAGING, DETECTION AND DIMENSIONING SUBSYSTEM" (122)
LDIP
USER
131
DATA ELEMENT QUEUING, HANDLING, AND PROCESSING SUBSYSTEM
130
GUI INTERFACE
127
I/O SUBSYSTEM
Network Controller (Ethernet, IP....)
133
132
1D CCD SCANNING SUBSYSTEM
25'
R Local 0
TCP / IP
TO AUX SUBSYSTEM (e.g. RDBMS, ROUTER)
Coordinate Data Referenced With Respect To R Global
Velocity (t)
Intensity (t)
Height (t)
Width (t)
Length (t)
Network Communication Medium

FIG. 30-1

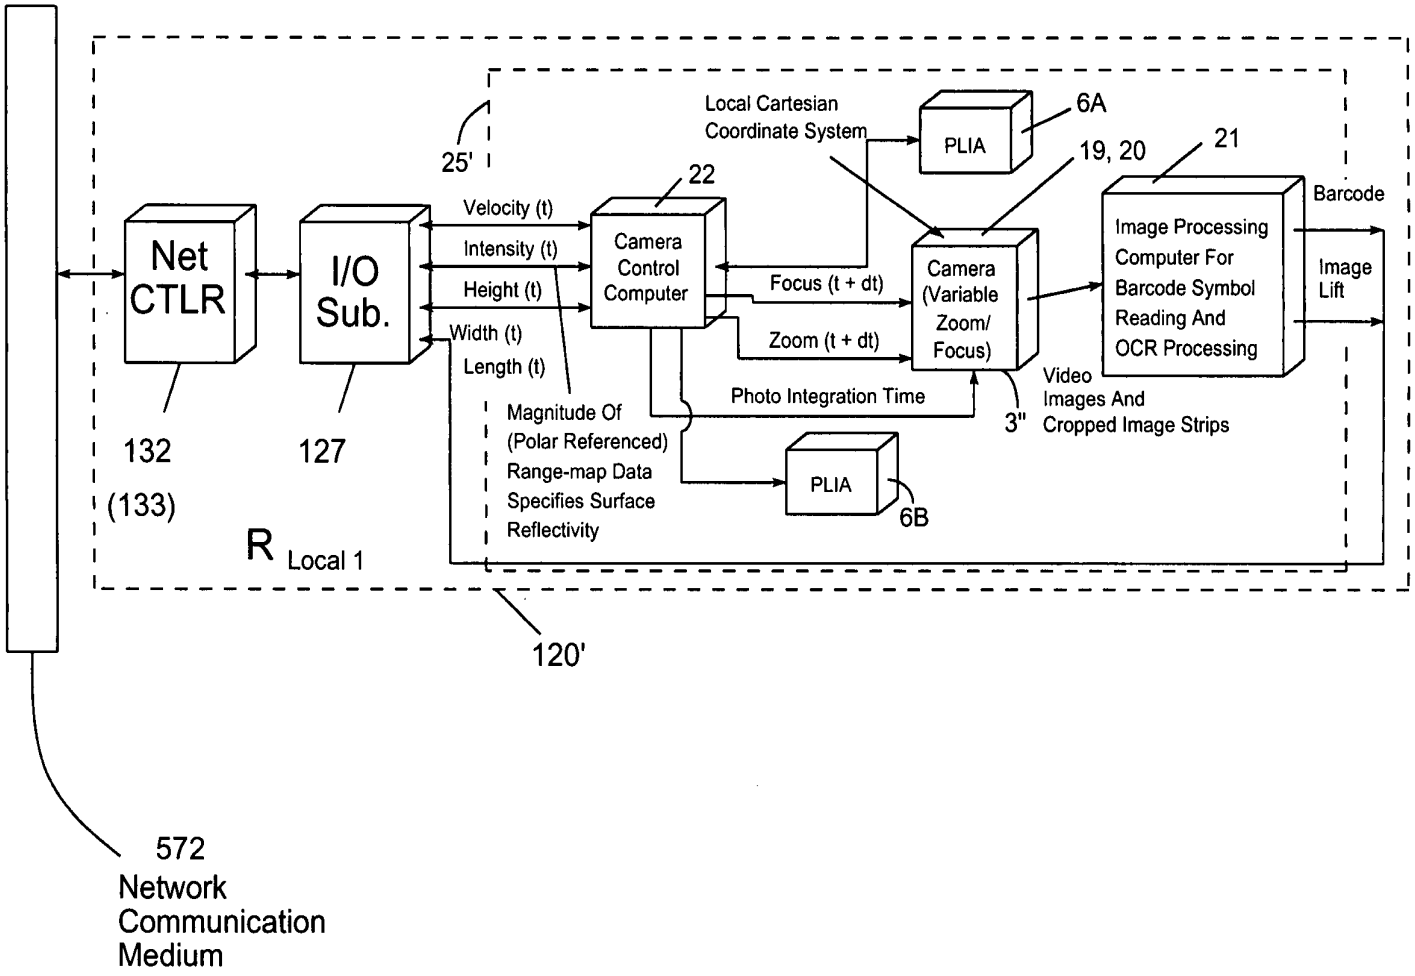
Net CTLR
I/O Sub.
25'
22
Local Cartesian Coordinate System
PLIA
6A
19, 20
21
Barcode
Image Lift
Image Processing Computer For Barcode Symbol Reading And OCR Processing
Camera Control Computer
Camera (Variable Zoom/ Focus)
Velocity (t)
Intensity (t)
Height (t)
Width (t)
Length (t)
Focus (t + dt)
Zoom (t + dt)
Photo Integration Time
Video Images And Cropped Image Strips
3"
Magnitude Of (Polar Referenced) Range-map Data Specifies Surface Reflectivity
PLIA
6B
132
(133)
127
R Local 1
120'
572
Network Communication Medium

FIG. 30-2

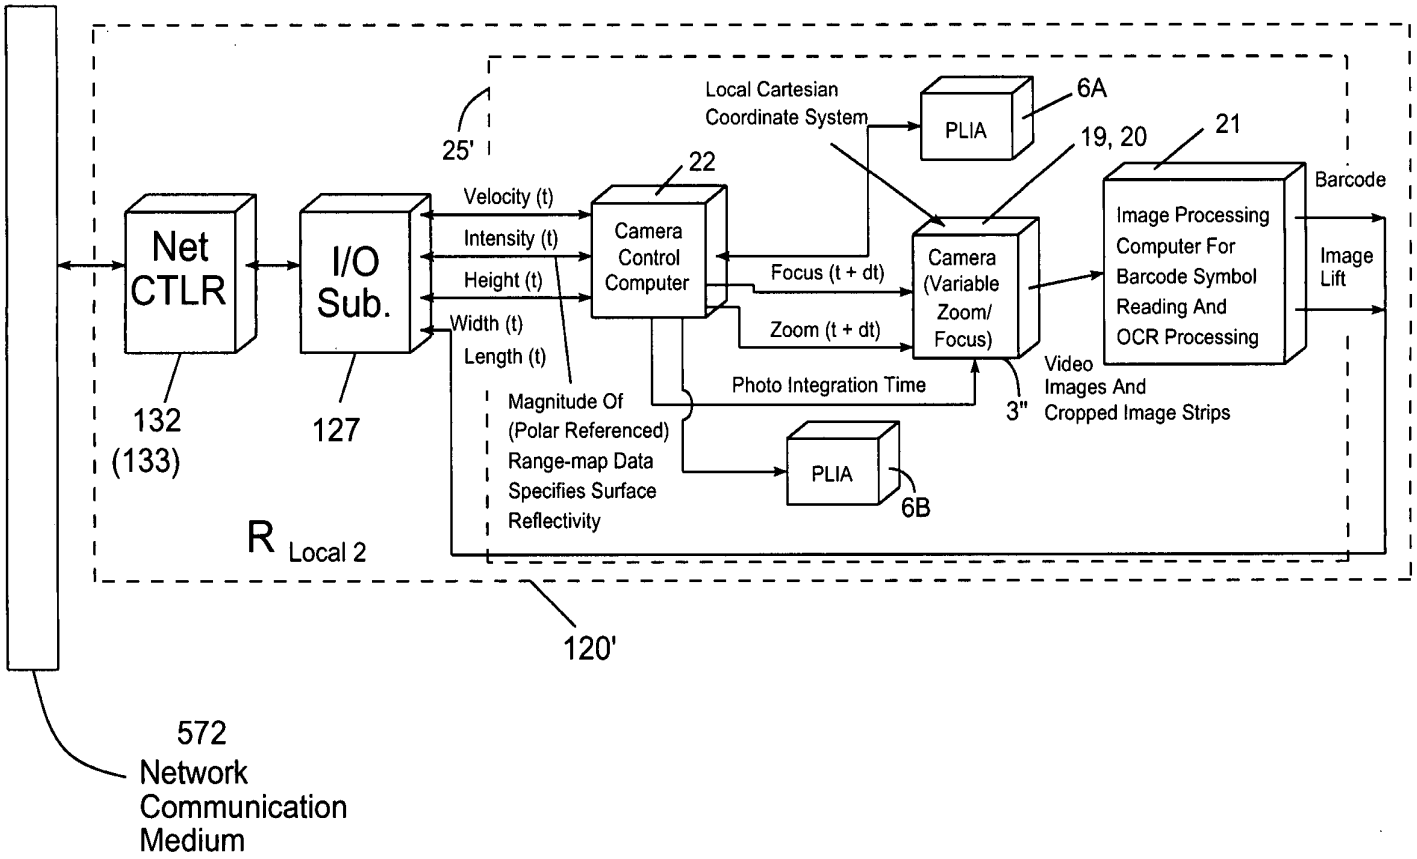
25'
Local Cartesian
Coordinate System
PLIA
6A
19, 20
21
22
Barcode
Net
CTLR
I/O
Sub.
Velocity (t)
Intensity (t)
Height (t)
Width (t)
Length (t)
Camera
Control
Computer
Focus (t + dt)
Zoom (t + dt)
Camera
(Variable
Zoom/
Focus)
Image Processing
Computer For
Barcode Symbol
Reading And
OCR Processing
Image
Lift
Photo Integration Time
Video
Images And
Cropped Image Strips
3"
132
(133)
127
Magnitude Of
(Polar Referenced)
Range-map Data
Specifies Surface
Reflectivity
PLIA
6B
R Local 2
120'
572
Network
Communication
Medium

FIG. 30-3

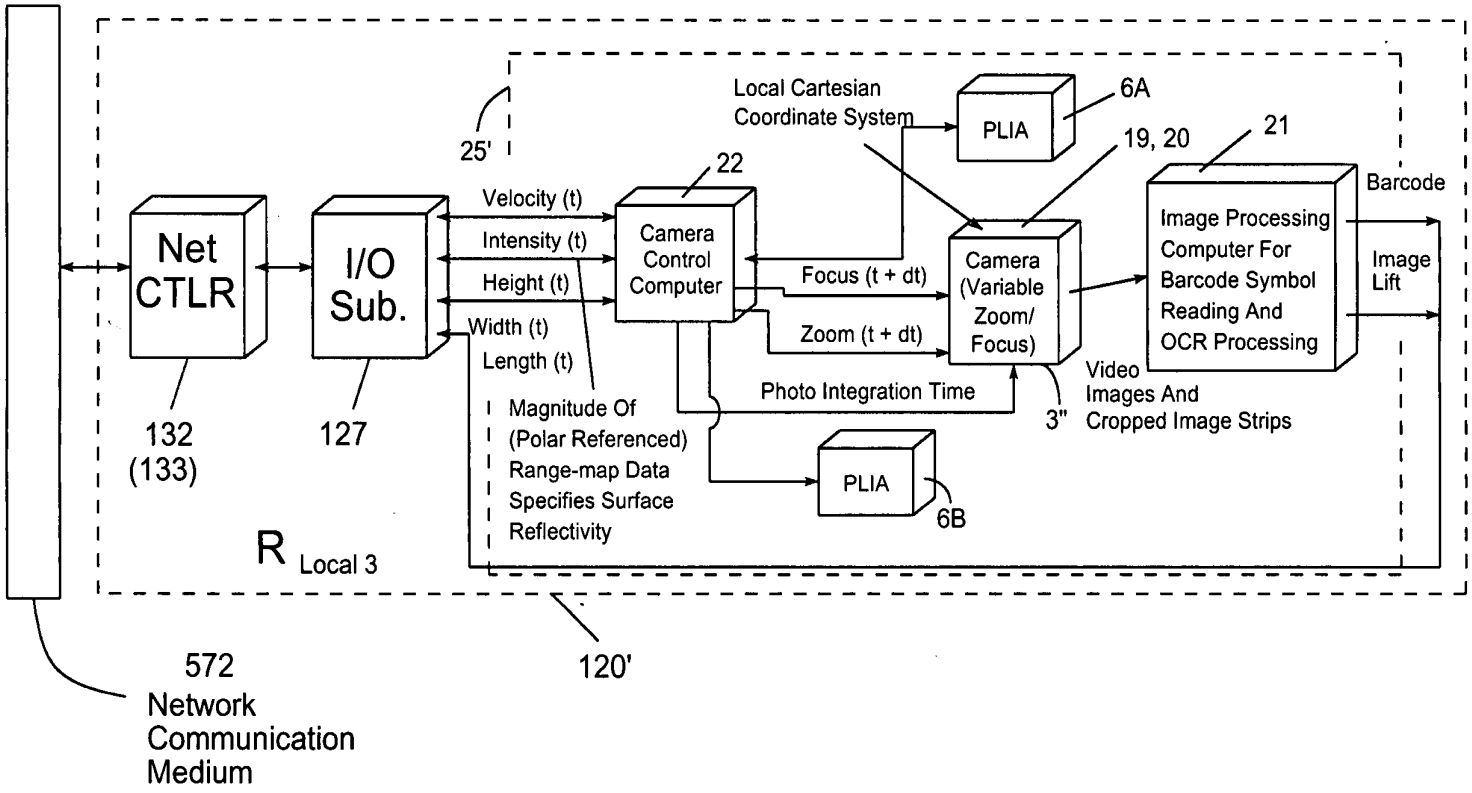
Net CTLR
I/O Sub.
132 (133)
127
25'
Velocity (t)
Intensity (t)
Height (t)
Width (t)
Length (t)
Magnitude Of (Polar Referenced) Range-map Data Specifies Surface Reflectivity
22
Camera Control Computer
Local Cartesian Coordinate System
PLIA
6A
Focus (t + dt)
Zoom (t + dt)
Photo Integration Time
PLIA
6B
19, 20
Camera (Variable Zoom/ Focus)
3"
21
Image Processing Computer For Barcode Symbol Reading And OCR Processing
Barcode
Image Lift
Video Images And Cropped Image Strips
R Local 3
120'
572
Network Communication Medium

FIG. 30-4

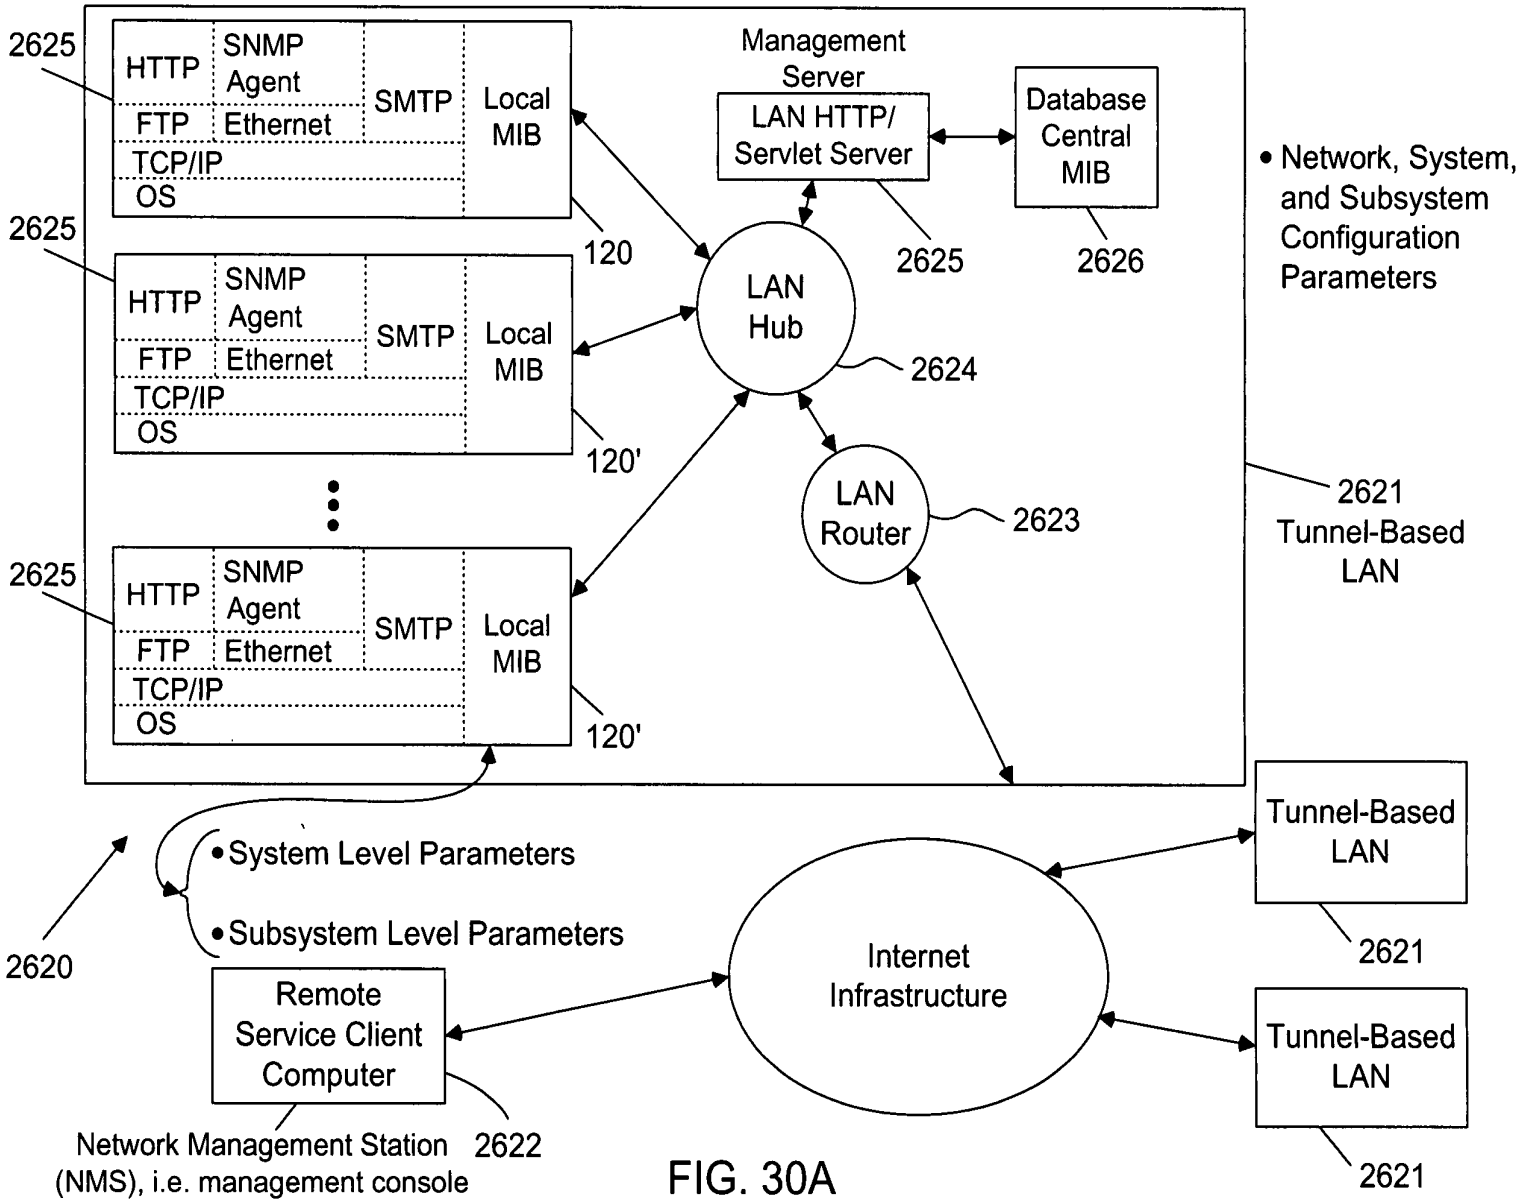
2625
HTTP
SNMP Agent
SMTP
Local MIB
FTP
Ethernet
TCP/IP
OS
120
120'
Management Server
LAN HTTP/ Servlet Server
Database Central MIB
2625
2626
LAN Hub
2624
LAN Router
2623
• Network, System, and Subsystem Configuration Parameters
2621 Tunnel-Based LAN
• System Level Parameters
• Subsystem Level Parameters
2620
Remote Service Client Computer
Network Management Station (NMS), i.e. management console
2622
Internet Infrastructure
Tunnel-Based LAN
2621

FIG. 30A

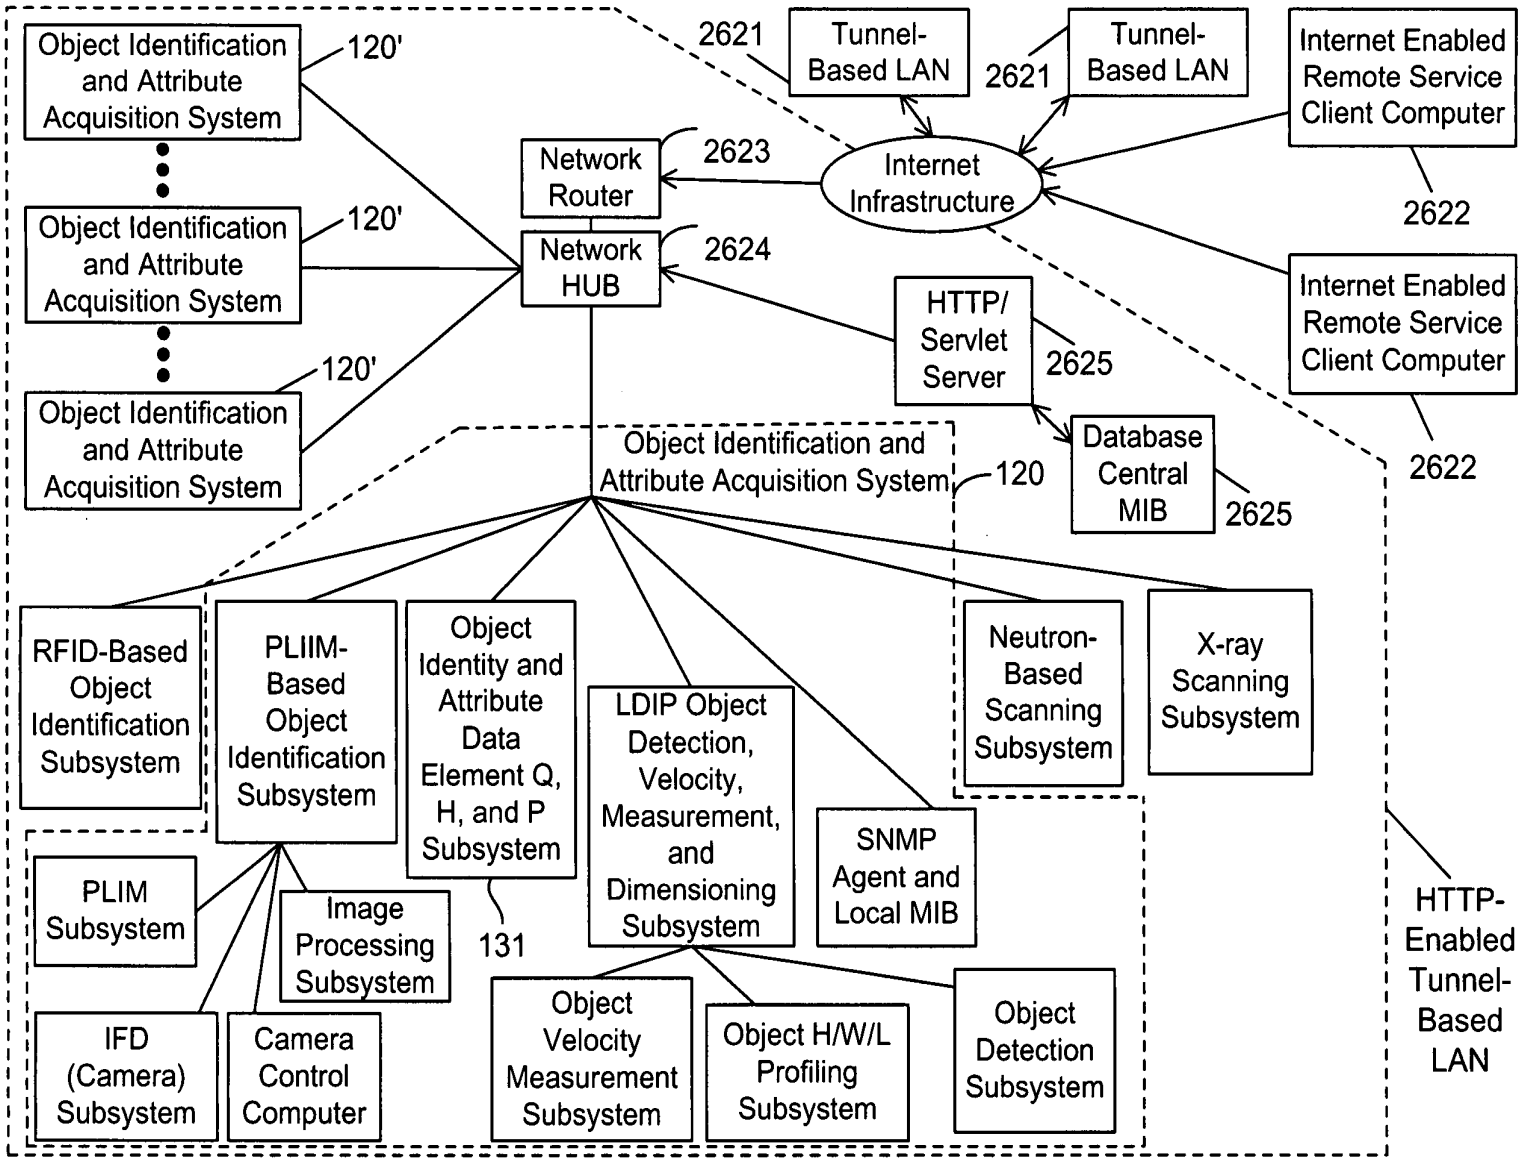
Object Identification and Attribute Acquisition System
120'
Object Identification and Attribute Acquisition System
120'
Object Identification and Attribute Acquisition System
120'
2621
Tunnel-Based LAN
2621
Tunnel-Based LAN
Internet Enabled Remote Service Client Computer
2622
Network Router
2623
Internet Infrastructure
Network HUB
2624
HTTP/ Servlet Server
2625
Internet Enabled Remote Service Client Computer
2622
Database Central MIB
2625
Object Identification and Attribute Acquisition System
120
RFID-Based Object Identification Subsystem
PLIIM-Based Object Identification Subsystem
Object Identity and Attribute Data Element Q, H, and P Subsystem
LDIP Object Detection, Velocity, Measurement, and Dimensioning Subsystem
Neutron-Based Scanning Subsystem
X-ray Scanning Subsystem
SNMP Agent and Local MIB
PLIM Subsystem
Image Processing Subsystem
131
IFD (Camera) Subsystem
Camera Control Computer
Object Velocity Measurement Subsystem
Object H/W/L Profiling Subsystem
Object Detection Subsystem
HTTP-Enabled Tunnel-Based LAN

FIG. 30B

Network Configuration Parameters:

[Router IP address; no. of nodes (i.e. systems) in LAN; passwords, LAN location; name of customer facility; technical contact; phone no.; domain name; object identity codes; object attribute acquisition codes;.....]

System Configuration Parameters:

[System IP Address; passwords; object identity codes; object attribute acquisition codes;....]

These subsystems generate object identity parameters

This system links object attribute data element parameters(i.e. object identity data element) to corresponding object identity parameters (i.e. object atrribute data element)

These subsystems generate object attribute parameters

Monitorable and/or Configurable Parameters for Subsystems Within Each System:

- PLIIM-based object identification subsystem: [object identity code; object attribute acquisition codes;....]
  - PLIM Subsystem: [VLD status; power VLD; TIM function; temp.;....]
  - IFD (Camera) Subsystem: [sensor temp; .....]
  - Image Processing Subsystem (Computer): [processor load history; system up time; # of frames (pgs); barcode read rate; current line rate;....]
  - Camera Contact Subsystem (Computer): [number of frames dropped; number of focused zoom commands; number and kinds of motor control errors;....]
- RFID-based object identification subsystem: [....]
- Object identity and attribute data element queuing, handling and processing subsystem: [....]
- LDIP object identification, velocity-measurement, and dimensioning subsystem: [....]
  - Object velocity measurement subsystem: [polygon RPM; polygon laser output X; channel X drift; channel X noise; trigger error events; instant lock reference drift; temperature]
  - Object H/W/L profiling subsystem
  - Object detection subsystem: [non- singulation/ singulation code;....]
- X-ray scanning subsystem: [....]
- Neutron-beam scanning subsystem: [....]

FIG. 30C

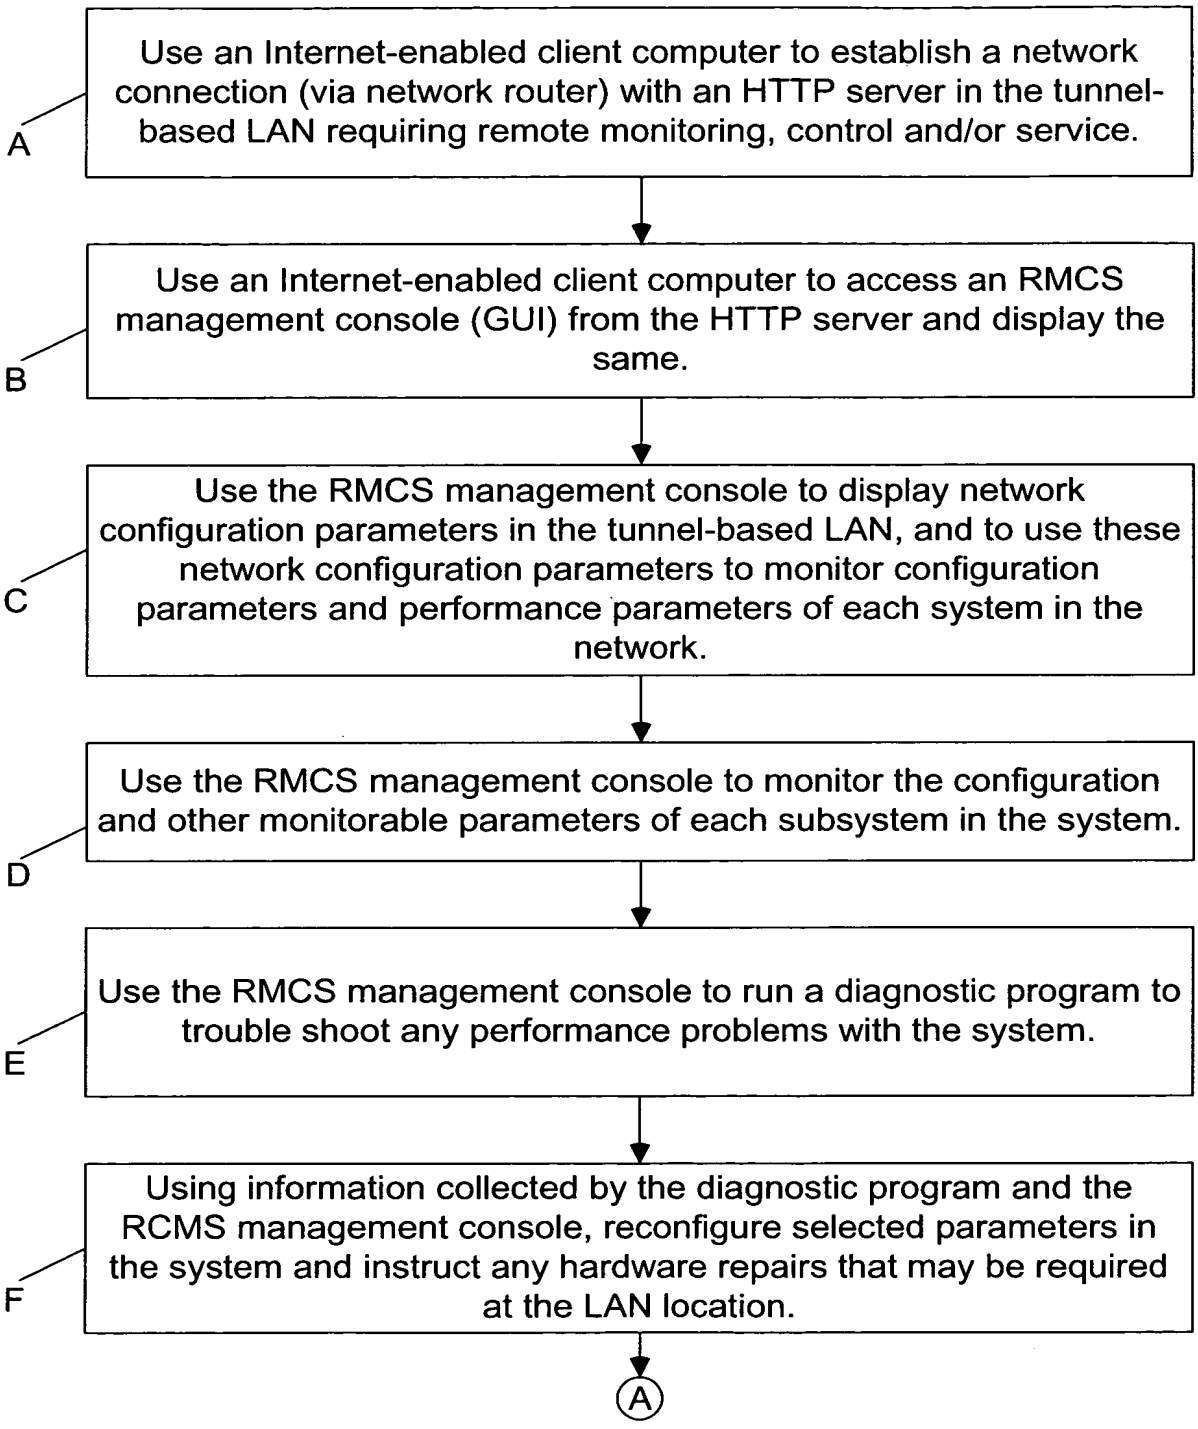
A
Use an Internet-enabled client computer to establish a network connection (via network router) with an HTTP server in the tunnel-based LAN requiring remote monitoring, control and/or service.
B
Use an Internet-enabled client computer to access an RMCS management console (GUI) from the HTTP server and display the same.
C
Use the RMCS management console to display network configuration parameters in the tunnel-based LAN, and to use these network configuration parameters to monitor configuration parameters and performance parameters of each system in the network.
D
Use the RMCS management console to monitor the configuration and other monitorable parameters of each subsystem in the system.
E
Use the RMCS management console to run a diagnostic program to trouble shoot any performance problems with the system.
F
Using information collected by the diagnostic program and the RCMS management console, reconfigure selected parameters in the system and instruct any hardware repairs that may be required at the LAN location.
A

FIG. 30D1

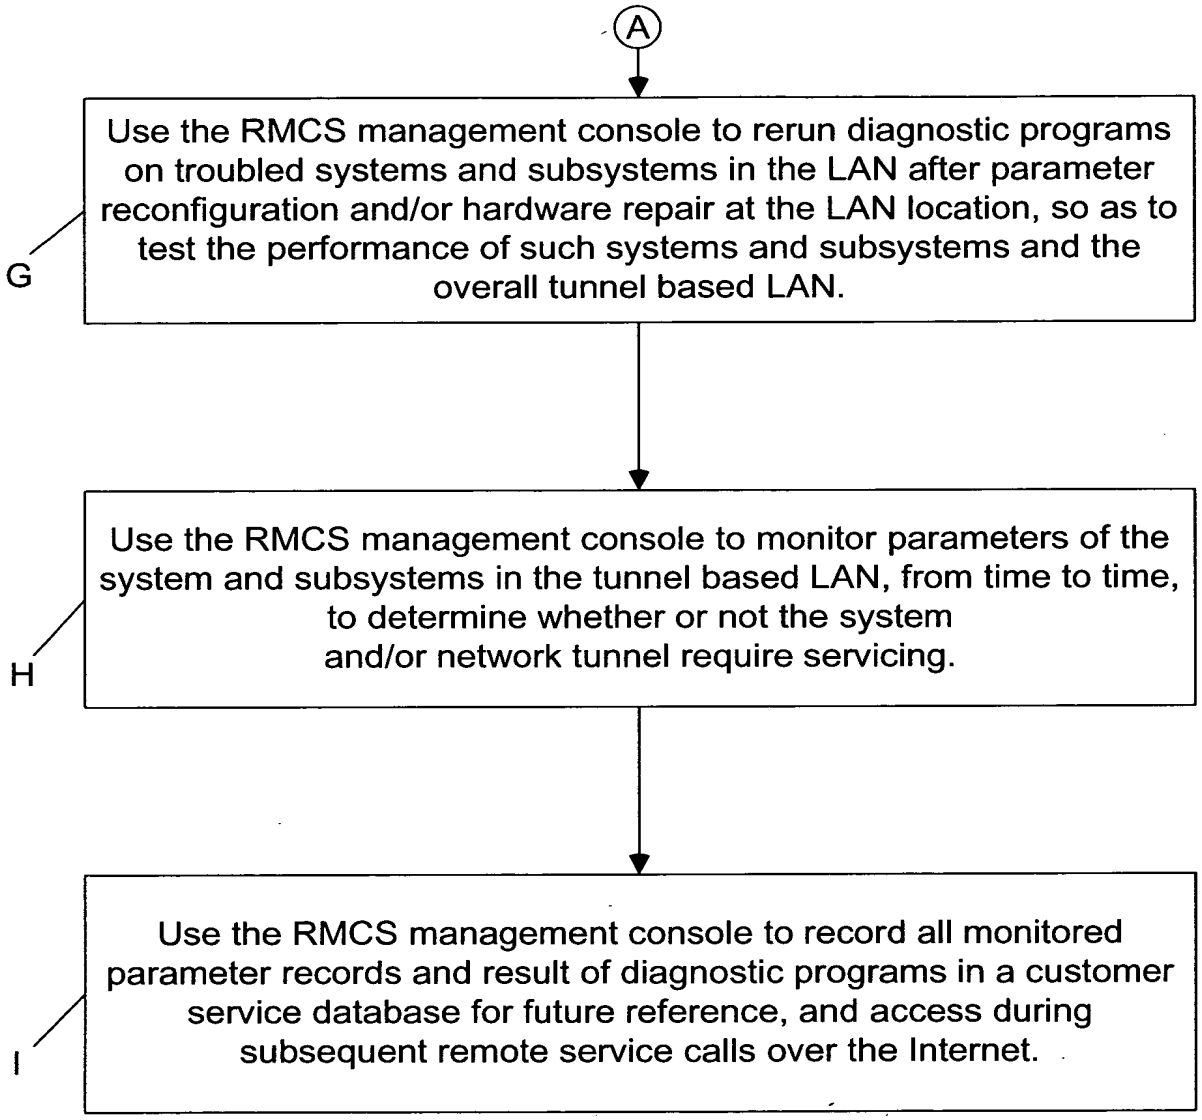
A
Use the RMCS management console to rerun diagnostic programs on troubled systems and subsystems in the LAN after parameter reconfiguration and/or hardware repair at the LAN location, so as to test the performance of such systems and subsystems and the overall tunnel based LAN.
G
Use the RMCS management console to monitor parameters of the system and subsystems in the tunnel based LAN, from time to time, to determine whether or not the system and/or network tunnel require servicing.
H
Use the RMCS management console to record all monitored parameter records and result of diagnostic programs in a customer service database for future reference, and access during subsequent remote service calls over the Internet.
I

FIG. 30D2

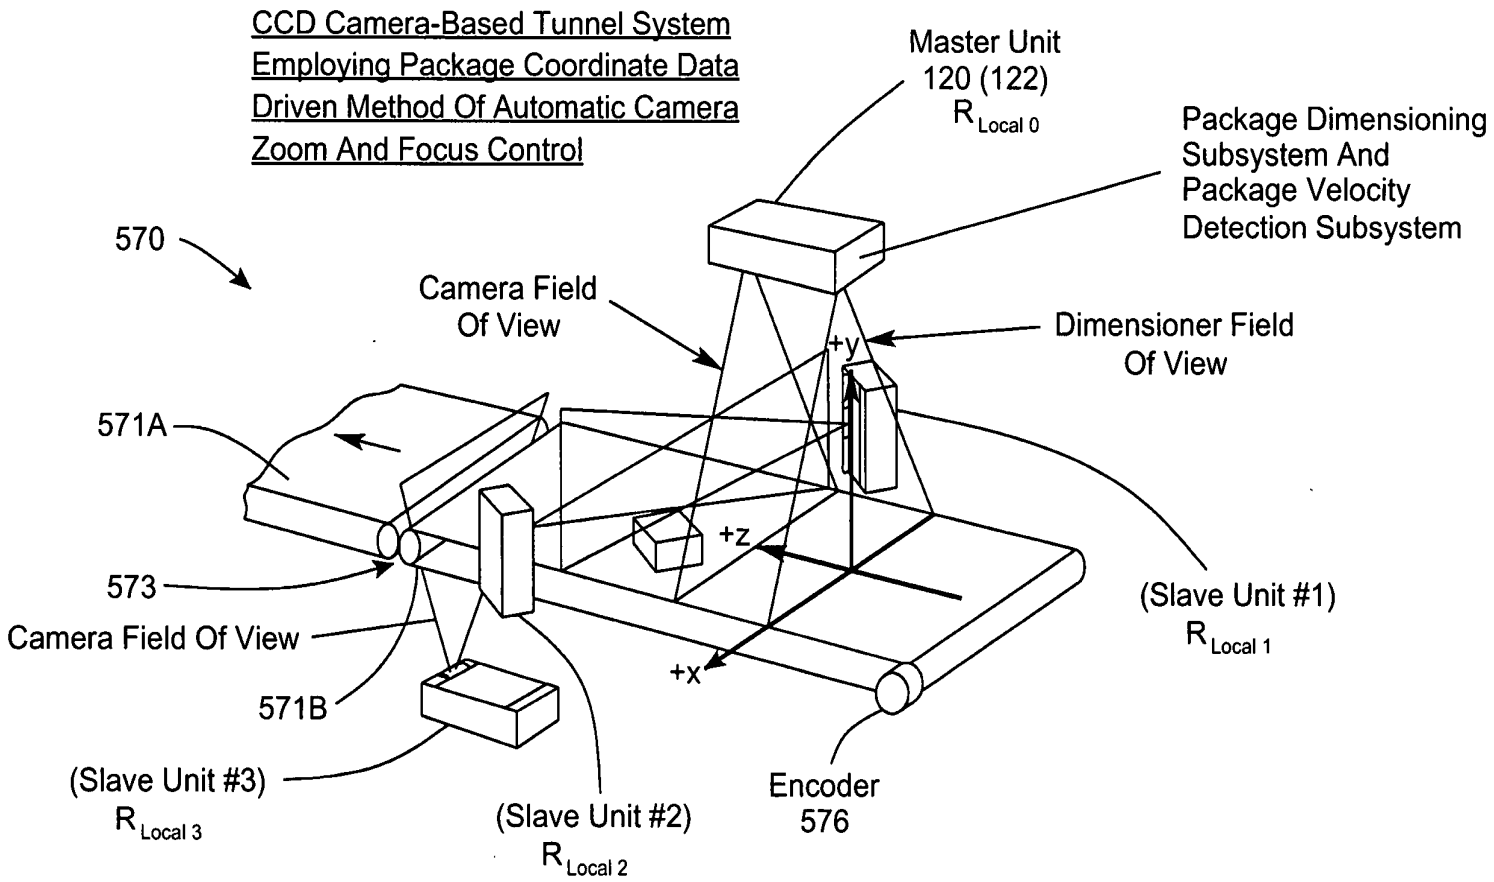

$$\text{Package Coordinate Data} \,||_{R_{Global}} \xrightarrow{HG} \text{Package Coordinate Data} \,||_{R_{Local\ i}}$$

FIG. 31

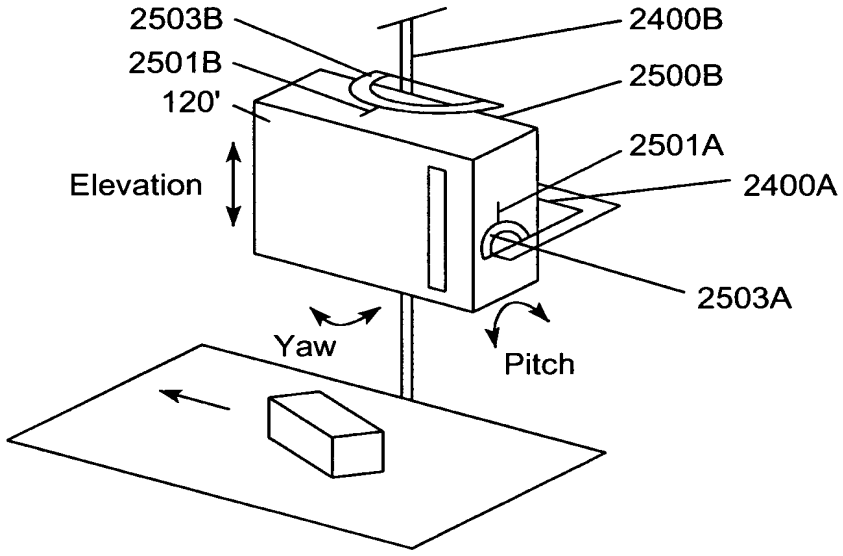
2503B
2501B
120'
Elevation
2400B
2500B
2501A
2400A
2503A
Yaw
Pitch

FIG. 31A

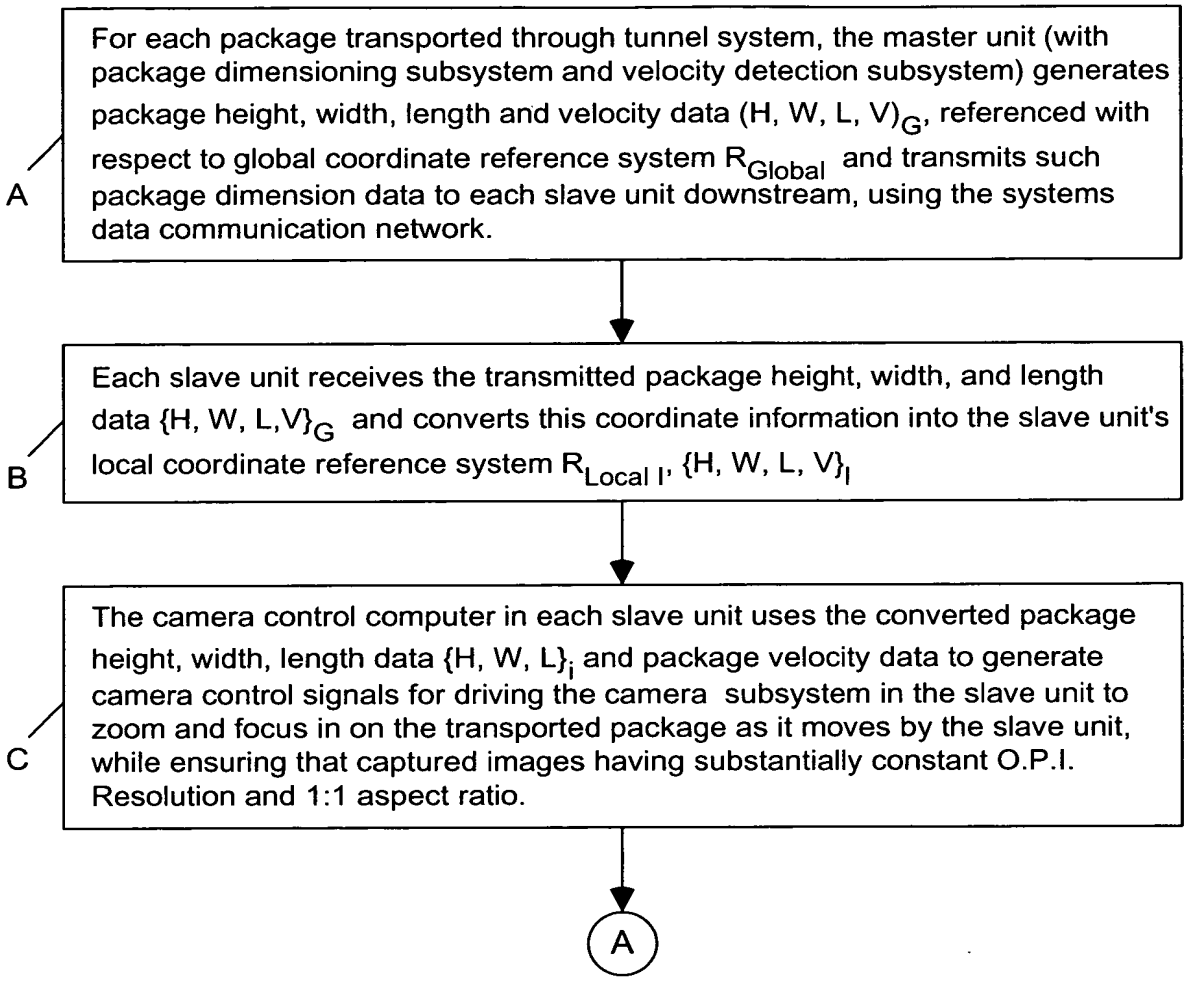
A
For each package transported through tunnel system, the master unit (with package dimensioning subsystem and velocity detection subsystem) generates package height, width, length and velocity data (H, W, L, V)$_G$, referenced with respect to global coordinate reference system R_{Global} and transmits such package dimension data to each slave unit downstream, using the systems data communication network.
B
Each slave unit receives the transmitted package height, width, and length data {H, W, L,V}$_G$ and converts this coordinate information into the slave unit's local coordinate reference system $R_{Local\ I}$, {H, W, L, V}$_I$
C
The camera control computer in each slave unit uses the converted package height, width, length data {H, W, L}$_i$ and package velocity data to generate camera control signals for driving the camera subsystem in the slave unit to zoom and focus in on the transported package as it moves by the slave unit, while ensuring that captured images having substantially constant O.P.I. Resolution and 1:1 aspect ratio.
A

FIG. 32A

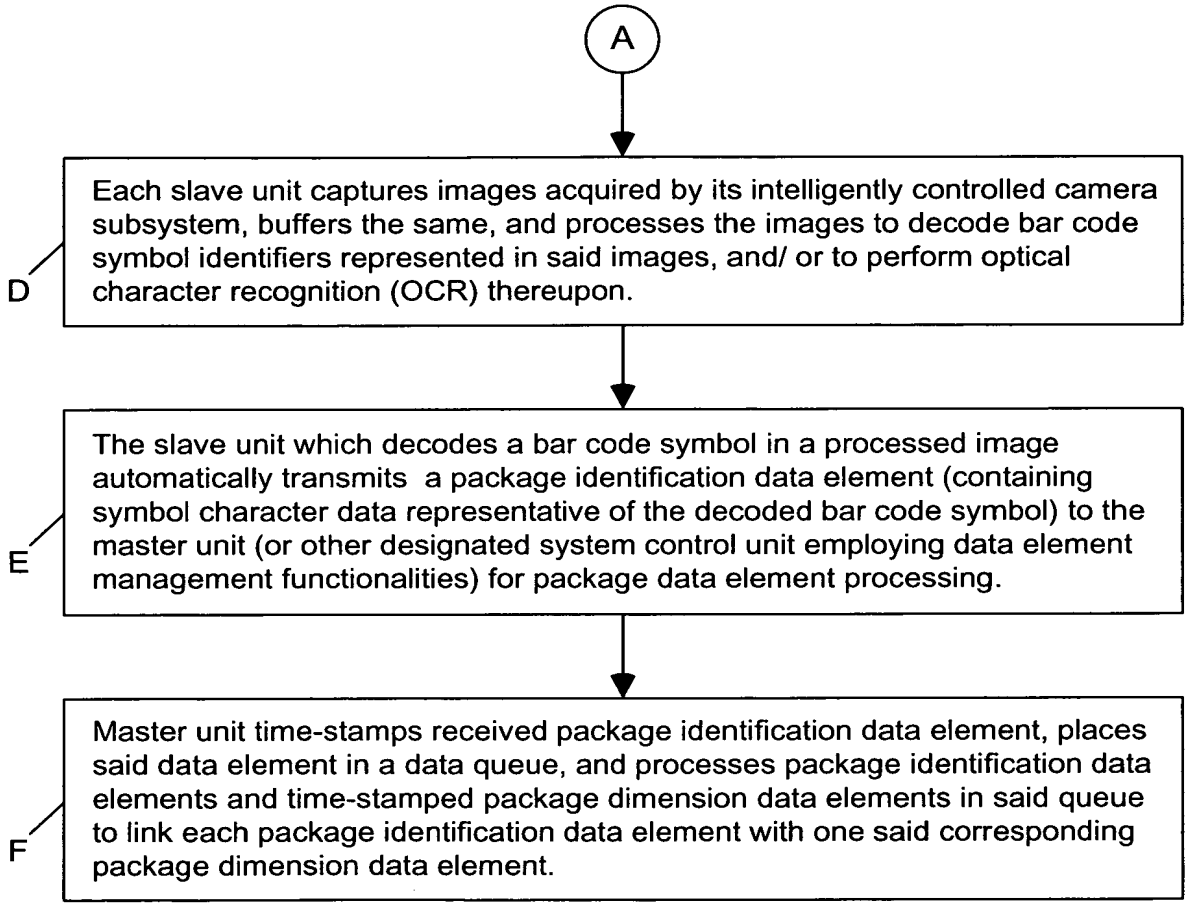
A
D
Each slave unit captures images acquired by its intelligently controlled camera subsystem, buffers the same, and processes the images to decode bar code symbol identifiers represented in said images, and/ or to perform optical character recognition (OCR) thereupon.
E
The slave unit which decodes a bar code symbol in a processed image automatically transmits a package identification data element (containing symbol character data representative of the decoded bar code symbol) to the master unit (or other designated system control unit employing data element management functionalities) for package data element processing.
F
Master unit time-stamps received package identification data element, places said data element in a data queue, and processes package identification data elements and time-stamped package dimension data elements in said queue to link each package identification data element with one said corresponding package dimension data element.

FIG. 32B

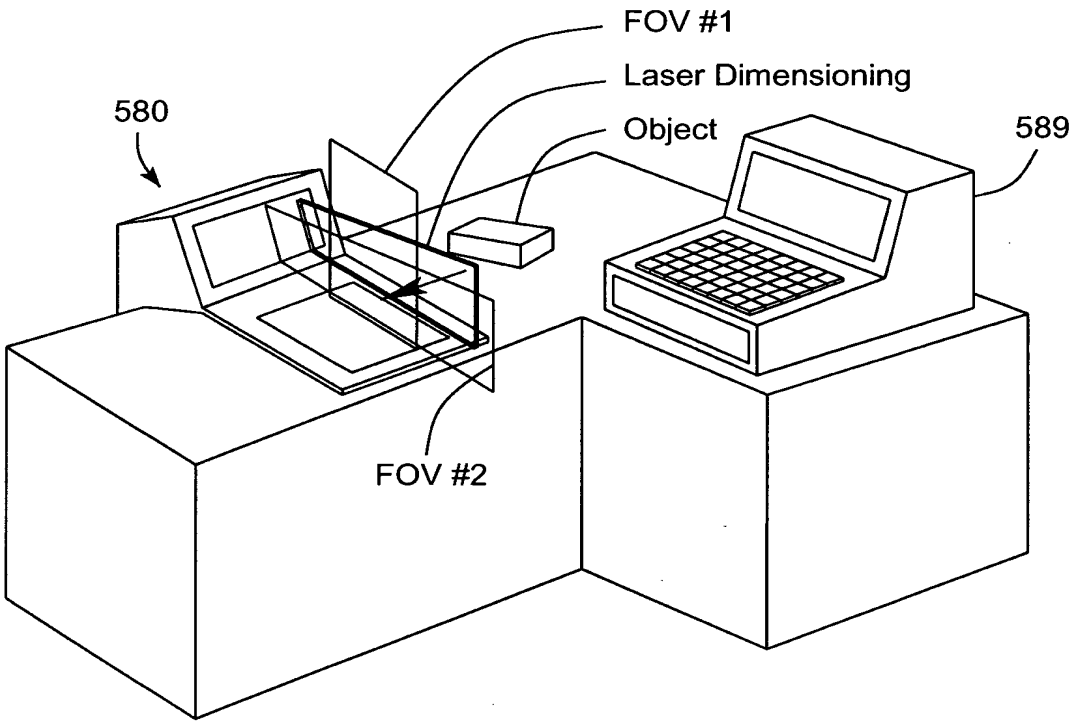

FIG. 33A

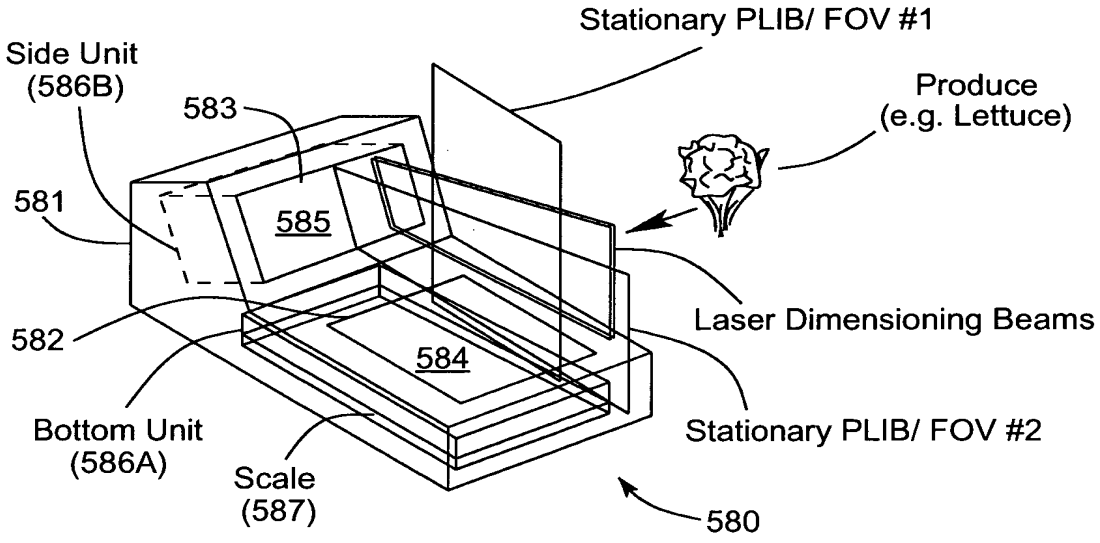

FIG. 33B

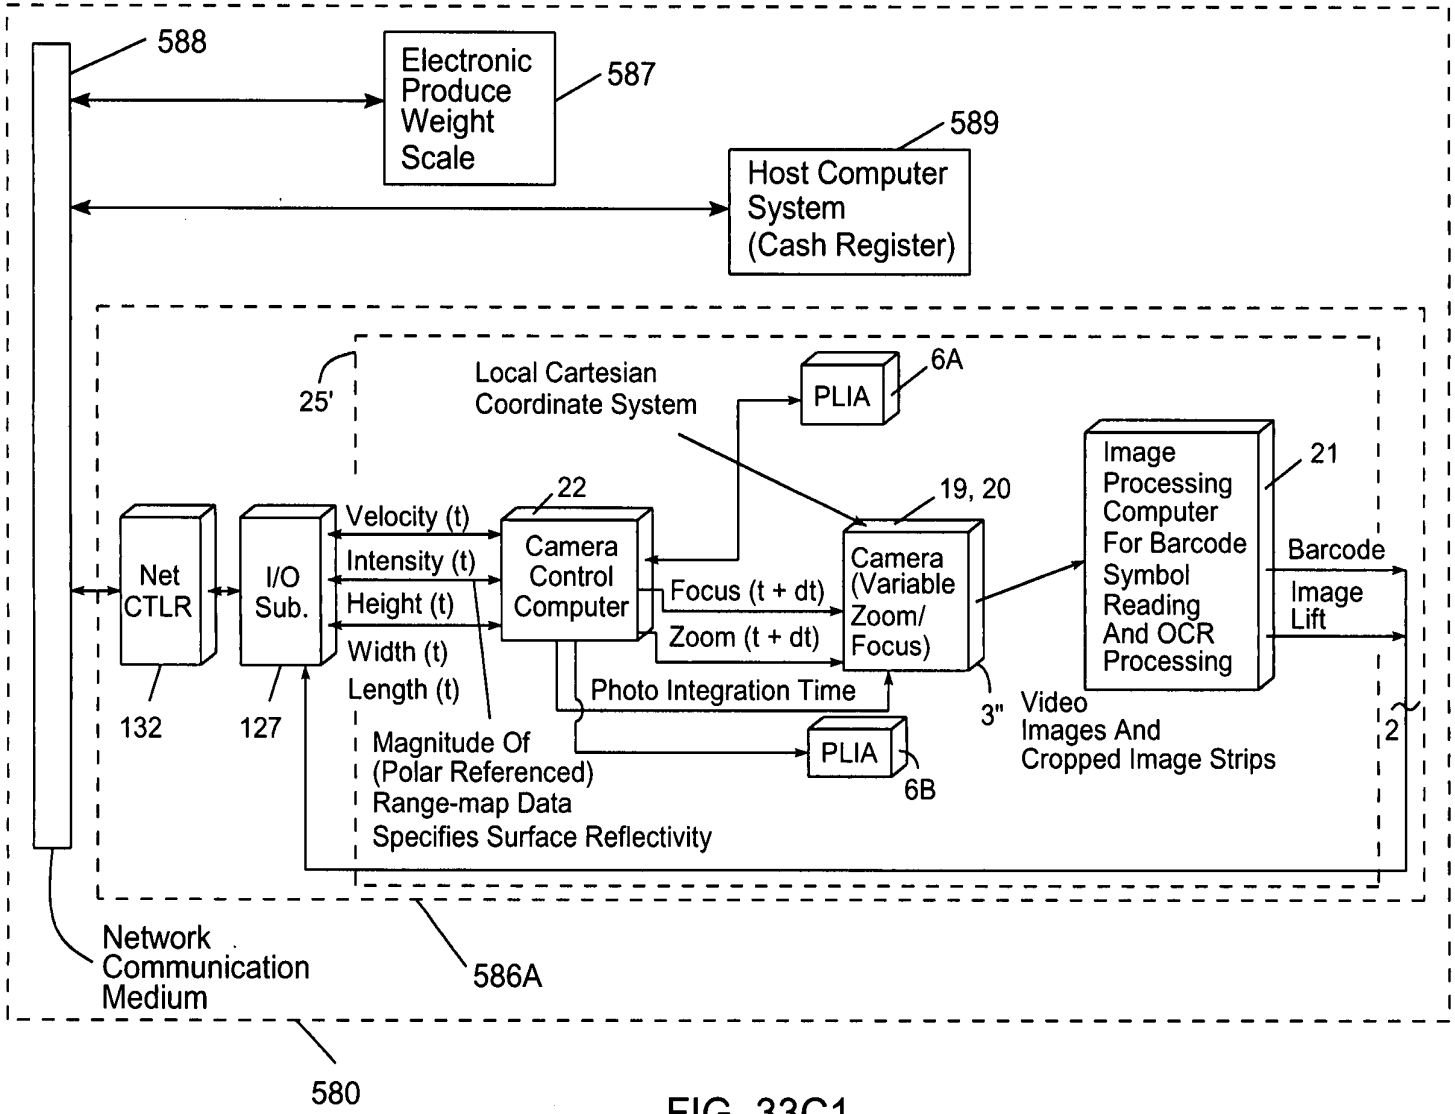
588
Electronic Produce Weight Scale
587
589
Host Computer System (Cash Register)
25'
Local Cartesian Coordinate System
PLIA
6A
Image Processing Computer For Barcode Symbol Reading And OCR Processing
21
22
19, 20
Net CTLR
I/O Sub.
Velocity (t)
Intensity (t)
Height (t)
Width (t)
Length (t)
Camera Control Computer
Focus (t + dt)
Zoom (t + dt)
Camera (Variable Zoom/ Focus)
Barcode
Image Lift
Photo Integration Time
3"
Video Images And Cropped Image Strips
2
132
127
Magnitude Of (Polar Referenced) Range-map Data Specifies Surface Reflectivity
PLIA
6B
Network Communication Medium
586A
580

FIG. 33C1

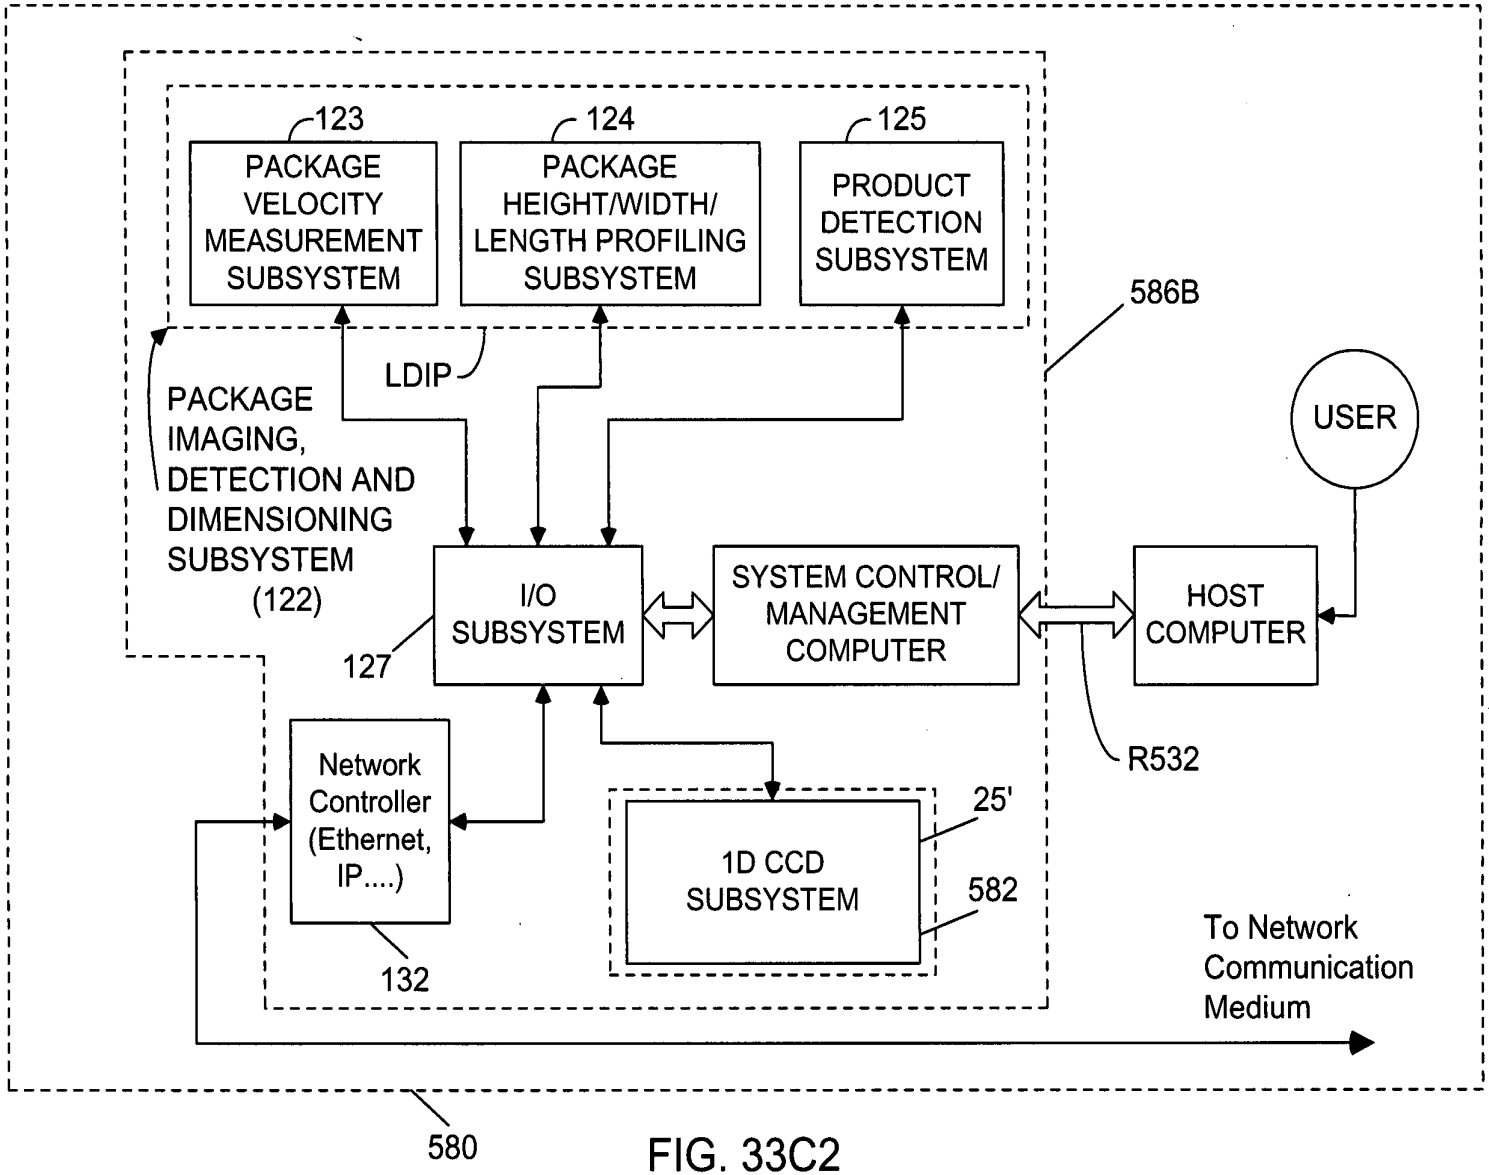
123
124
125
PACKAGE VELOCITY MEASUREMENT SUBSYSTEM
PACKAGE HEIGHT/WIDTH/ LENGTH PROFILING SUBSYSTEM
PRODUCT DETECTION SUBSYSTEM
586B
LDIP
PACKAGE IMAGING, DETECTION AND DIMENSIONING SUBSYSTEM (122)
USER
I/O SUBSYSTEM
127
SYSTEM CONTROL/ MANAGEMENT COMPUTER
HOST COMPUTER
R532
Network Controller (Ethernet, IP....)
25'
1D CCD SUBSYSTEM
582
132
To Network Communication Medium
580

FIG. 33C2

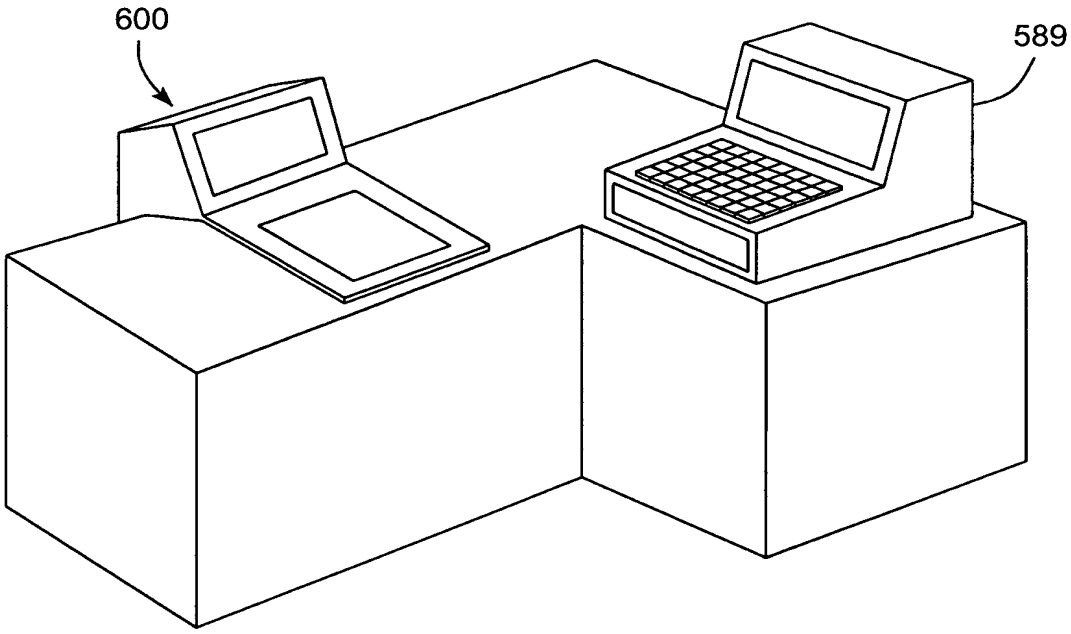

FIG. 34A

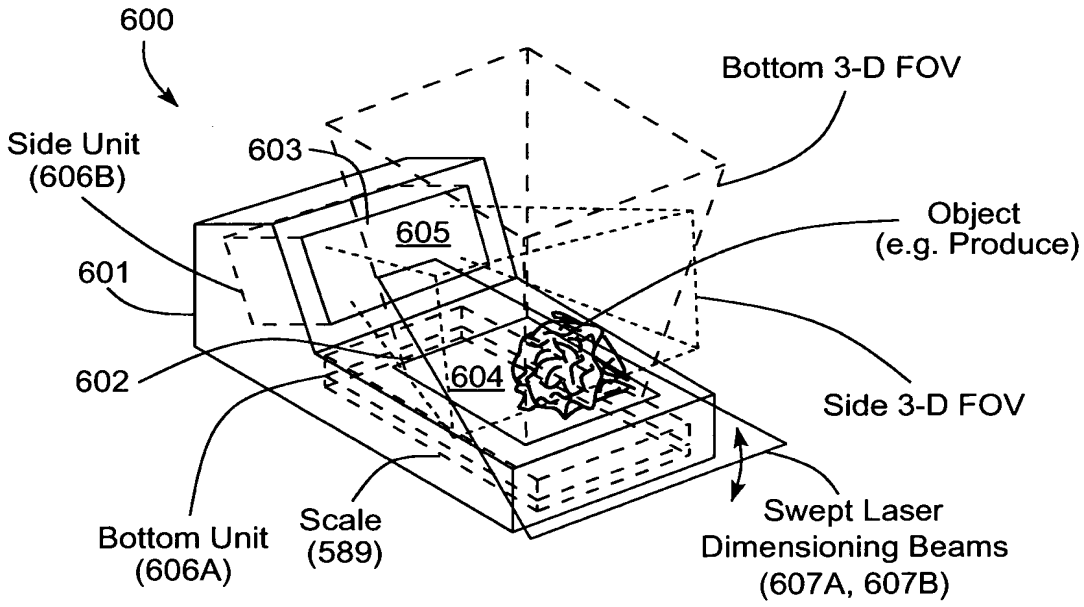

FIG. 34B

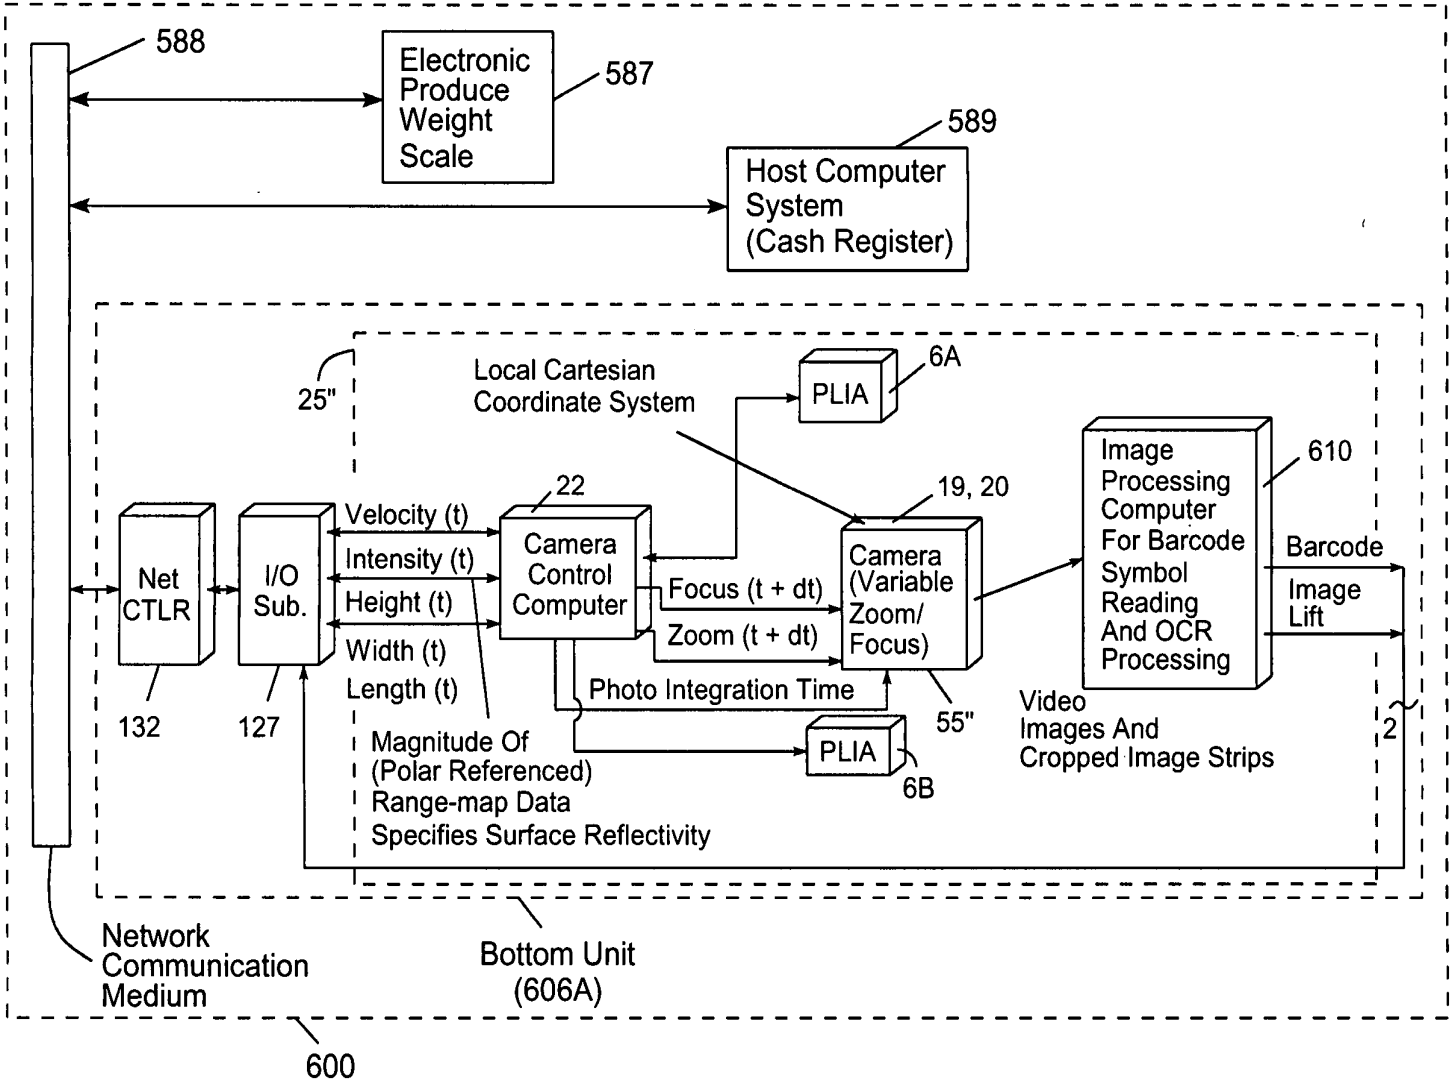
588
Electronic Produce Weight Scale
587
589
Host Computer System (Cash Register)
25"
Local Cartesian Coordinate System
PLIA
6A
Image Processing Computer For Barcode Symbol Reading And OCR Processing
610
22
19, 20
Net CTLR
I/O Sub.
Velocity (t)
Intensity (t)
Height (t)
Width (t)
Length (t)
Camera Control Computer
Focus (t + dt)
Zoom (t + dt)
Camera (Variable Zoom/ Focus)
Barcode
Image Lift
Photo Integration Time
132
127
55"
Video Images And Cropped Image Strips
2
Magnitude Of (Polar Referenced) Range-map Data Specifies Surface Reflectivity
PLIA
6B
Network Communication Medium
Bottom Unit (606A)
600

FIG. 34C1

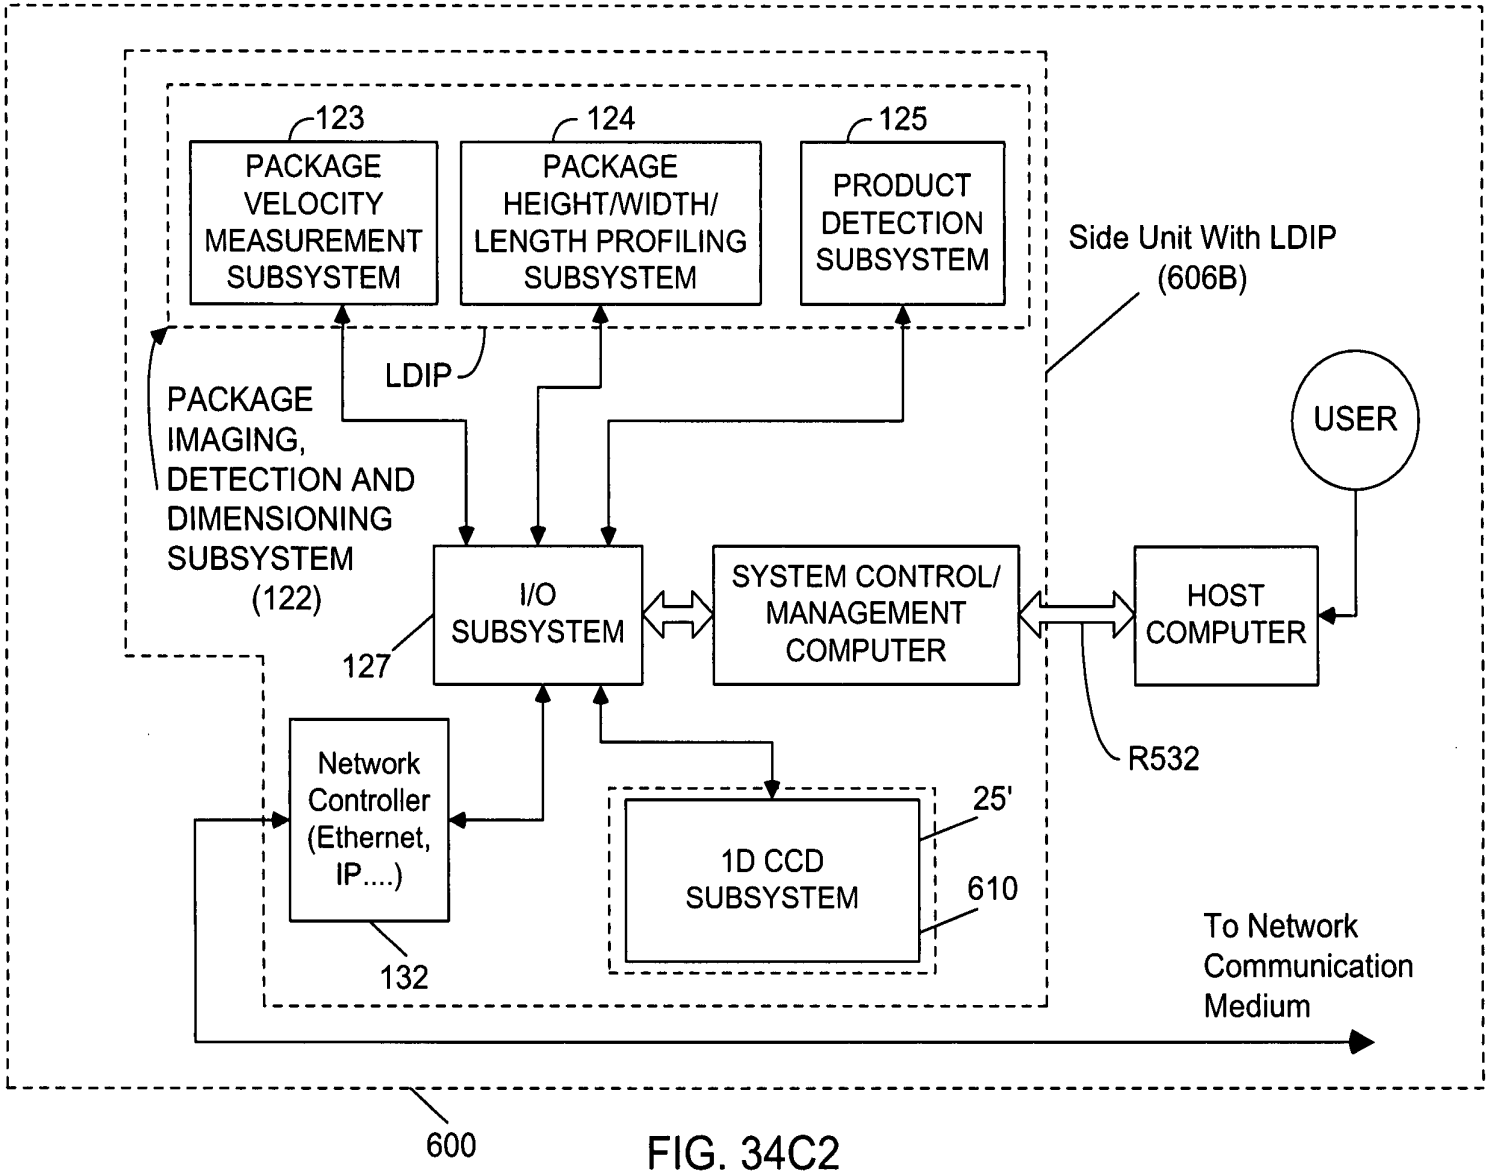
123
PACKAGE VELOCITY MEASUREMENT SUBSYSTEM
124
PACKAGE HEIGHT/WIDTH/ LENGTH PROFILING SUBSYSTEM
125
PRODUCT DETECTION SUBSYSTEM
Side Unit With LDIP (606B)
LDIP
PACKAGE IMAGING, DETECTION AND DIMENSIONING SUBSYSTEM (122)
USER
I/O SUBSYSTEM
127
SYSTEM CONTROL/ MANAGEMENT COMPUTER
HOST COMPUTER
R532
Network Controller (Ethernet, IP....)
132
1D CCD SUBSYSTEM
25'
610
To Network Communication Medium
600

FIG. 34C2

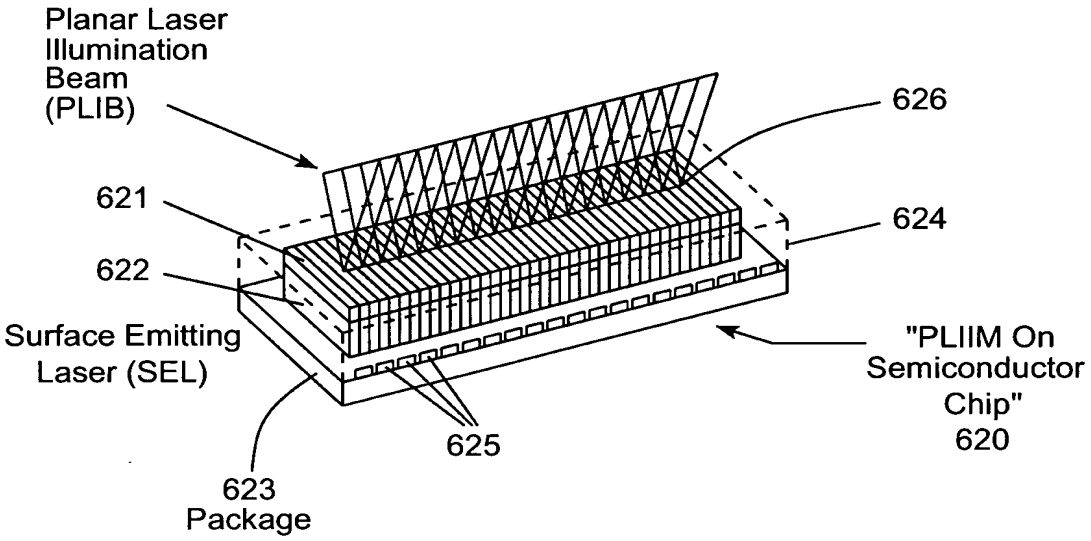

FIG. 35A

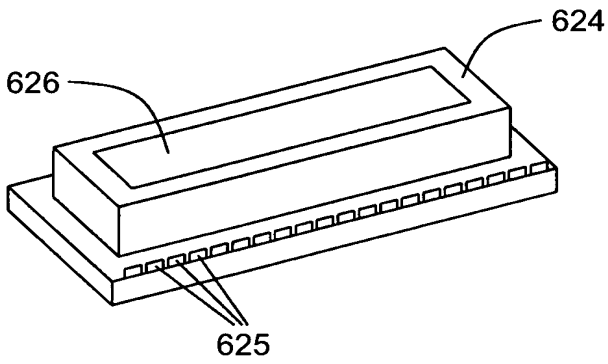

FIG. 35B

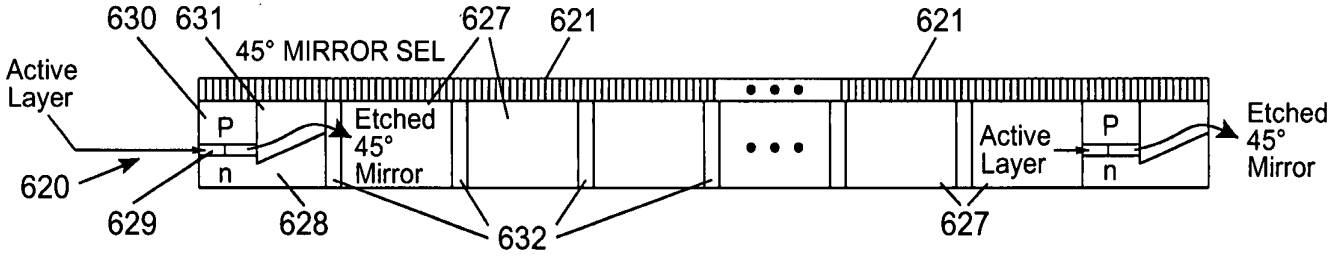

FIG. 36A

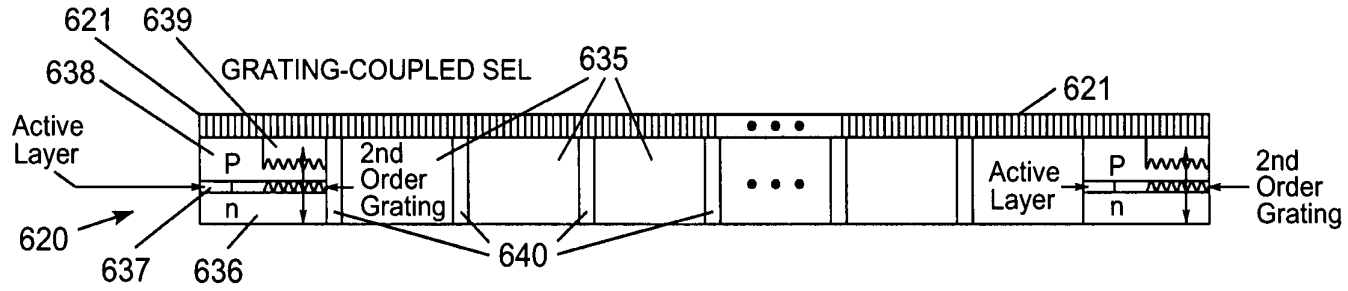

FIG. 36B

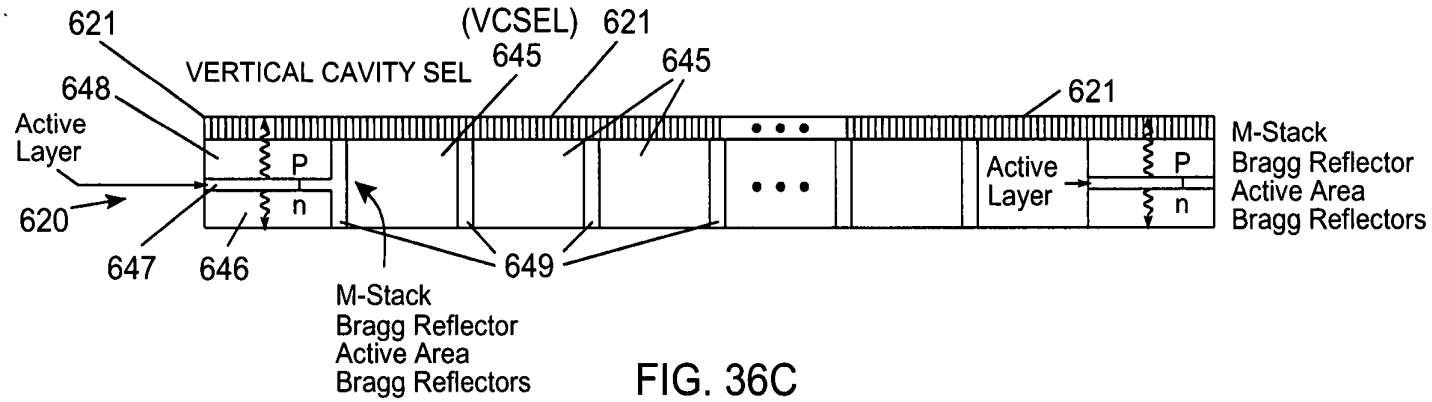

FIG. 36C

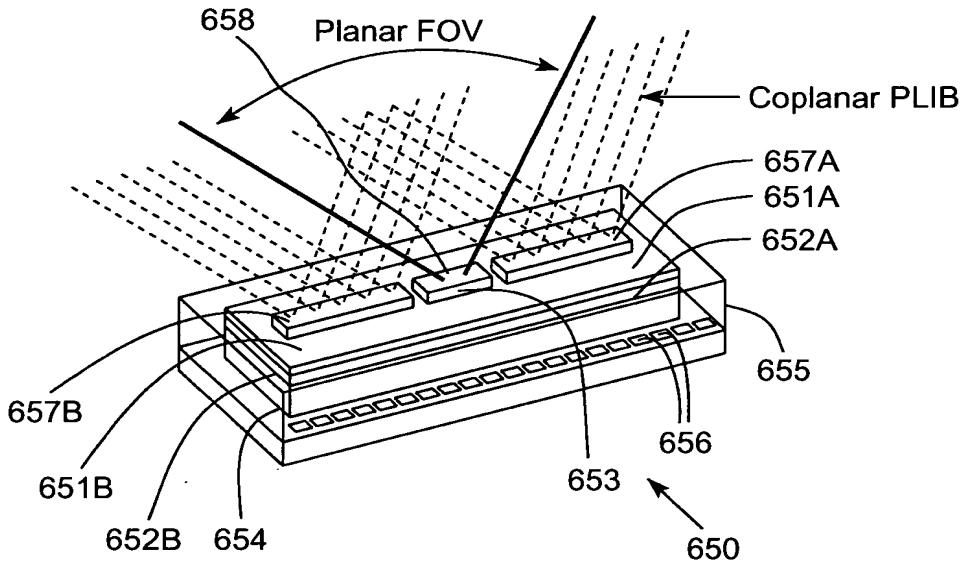
658
Planar FOV
Coplanar PLIB
657A
651A
652A
655
657B
651B
652B
654
653
656
650

FIG. 37

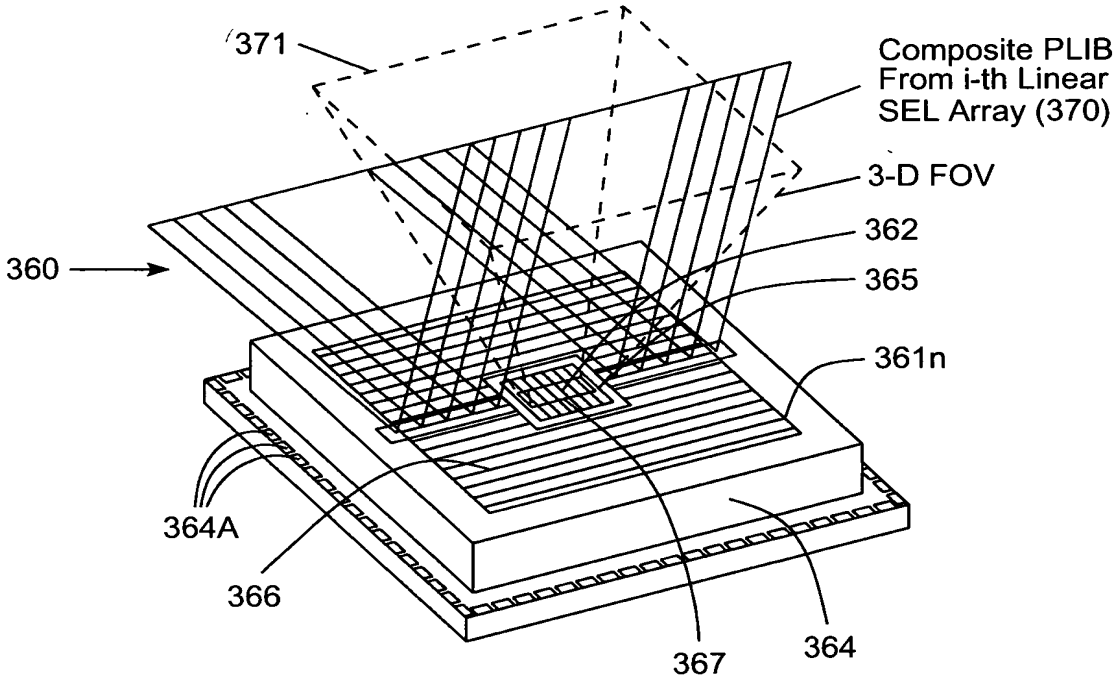

FIG. 38A

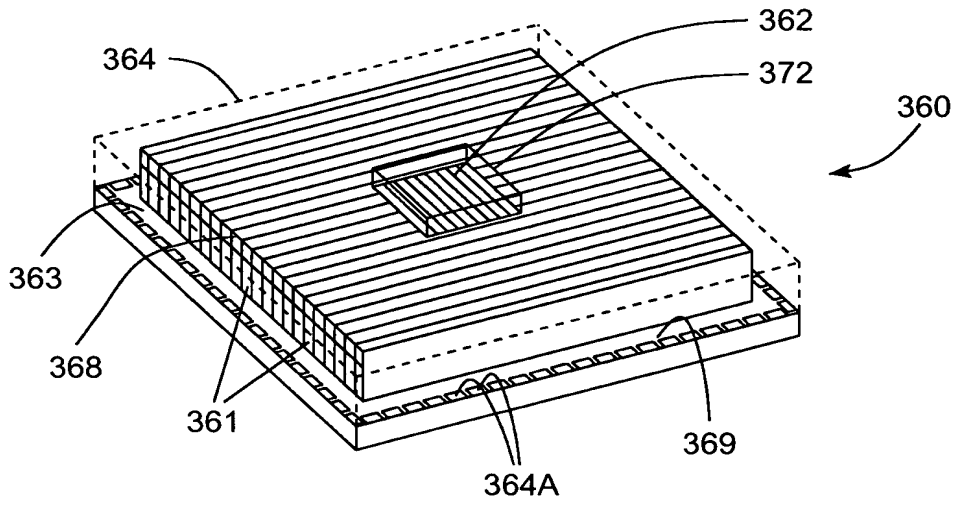

FIG. 38B

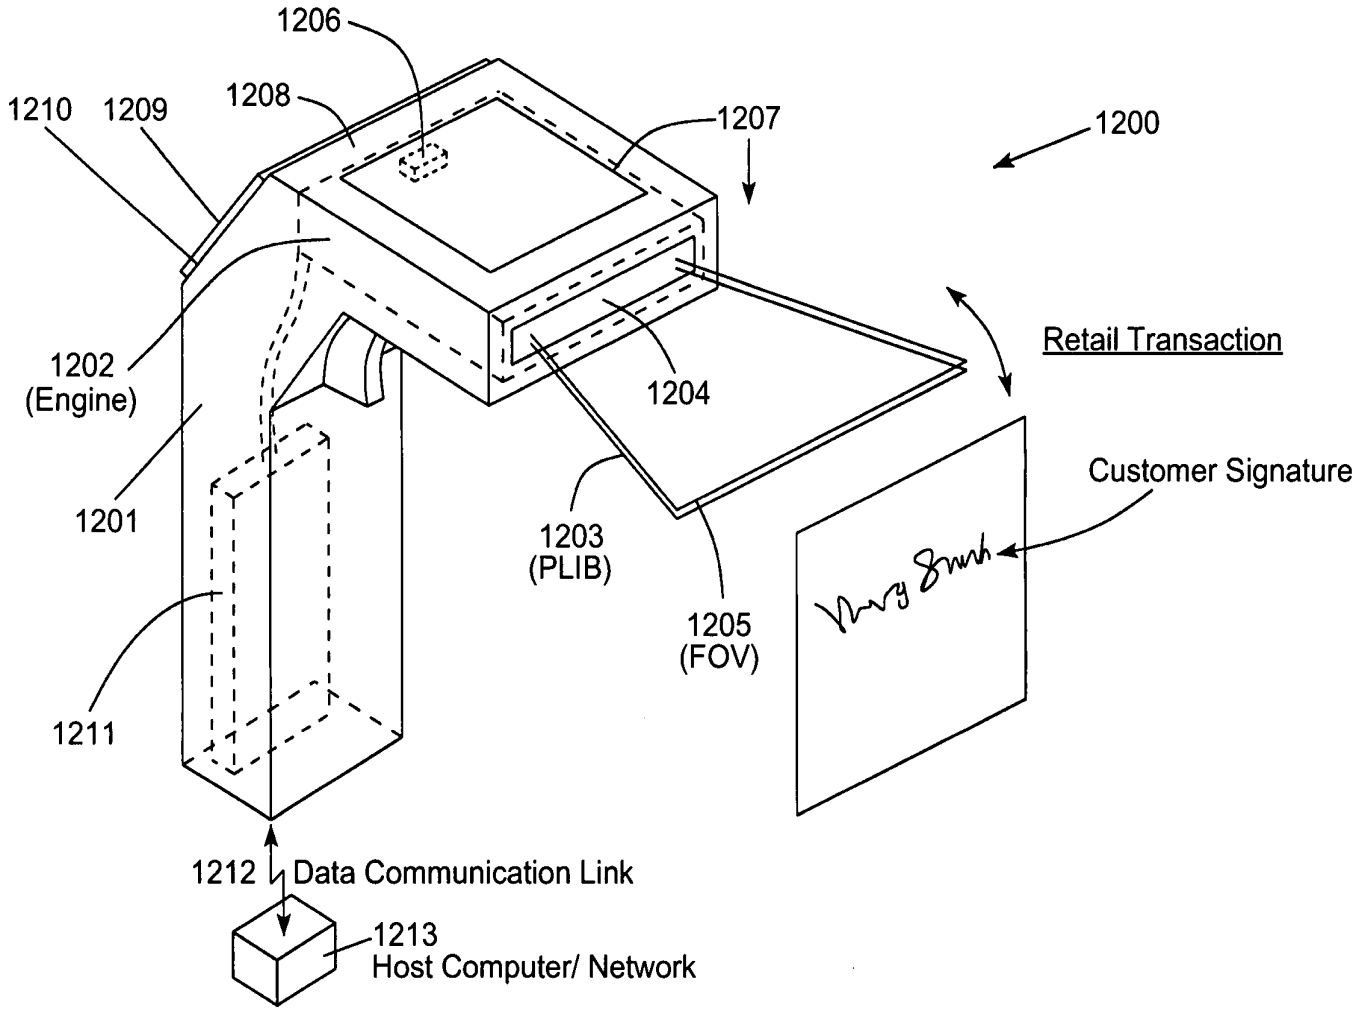
1206
1210
1209
1208
1207
1200
Retail Transaction
1202
(Engine)
1204
Customer Signature
1201
1203
(PLIB)
1205
(FOV)
1211
1212
Data Communication Link
1213
Host Computer/ Network

FIG. 39A

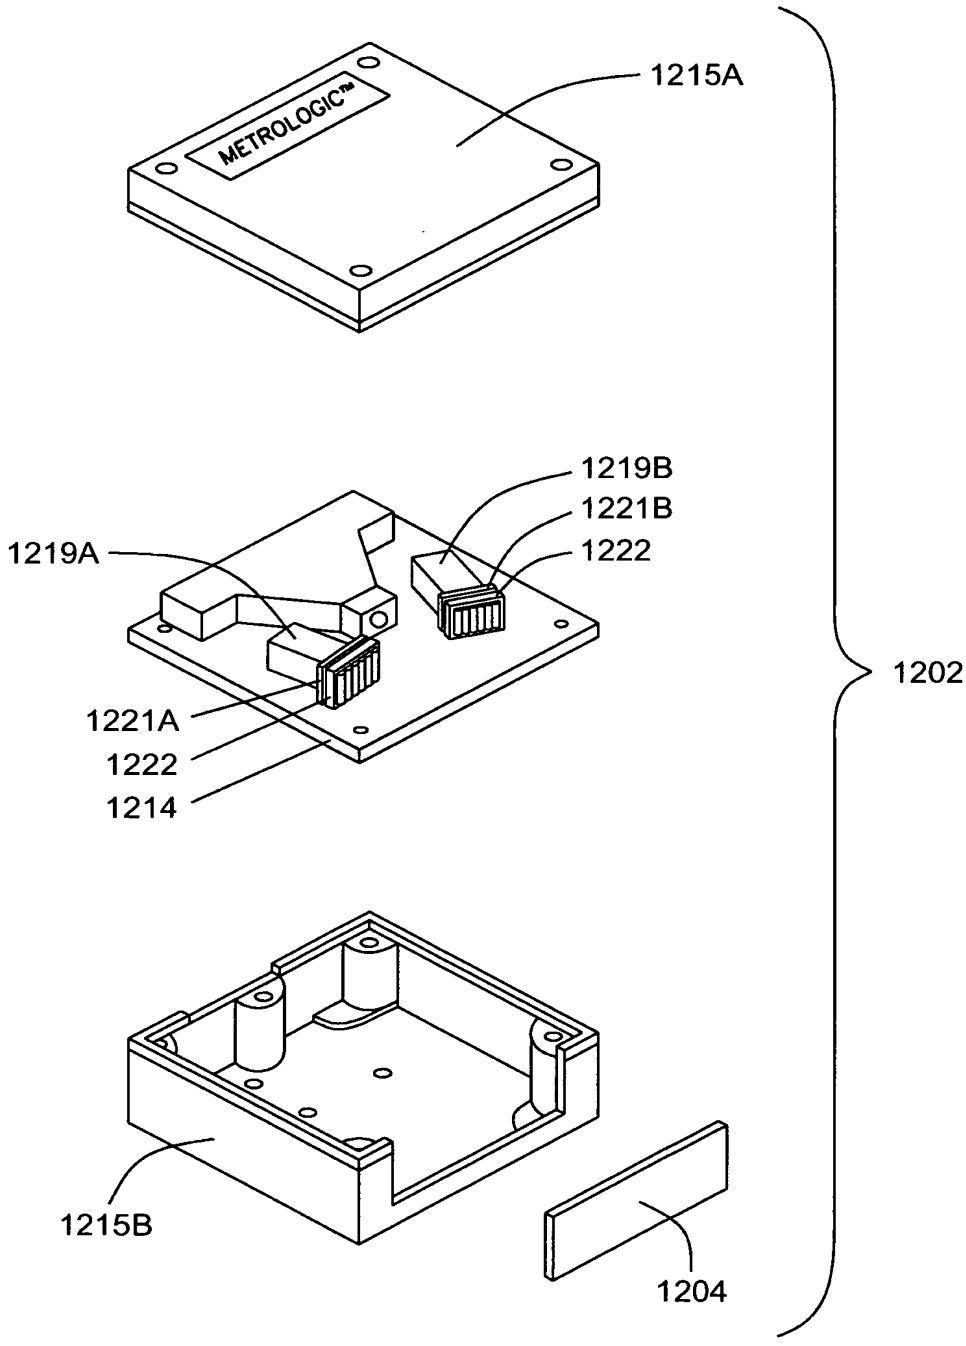
METROLOGIC™
1215A
1219B
1221B
1222
1219A
1221A
1222
1214
1202
1215B
1204

FIG. 39B

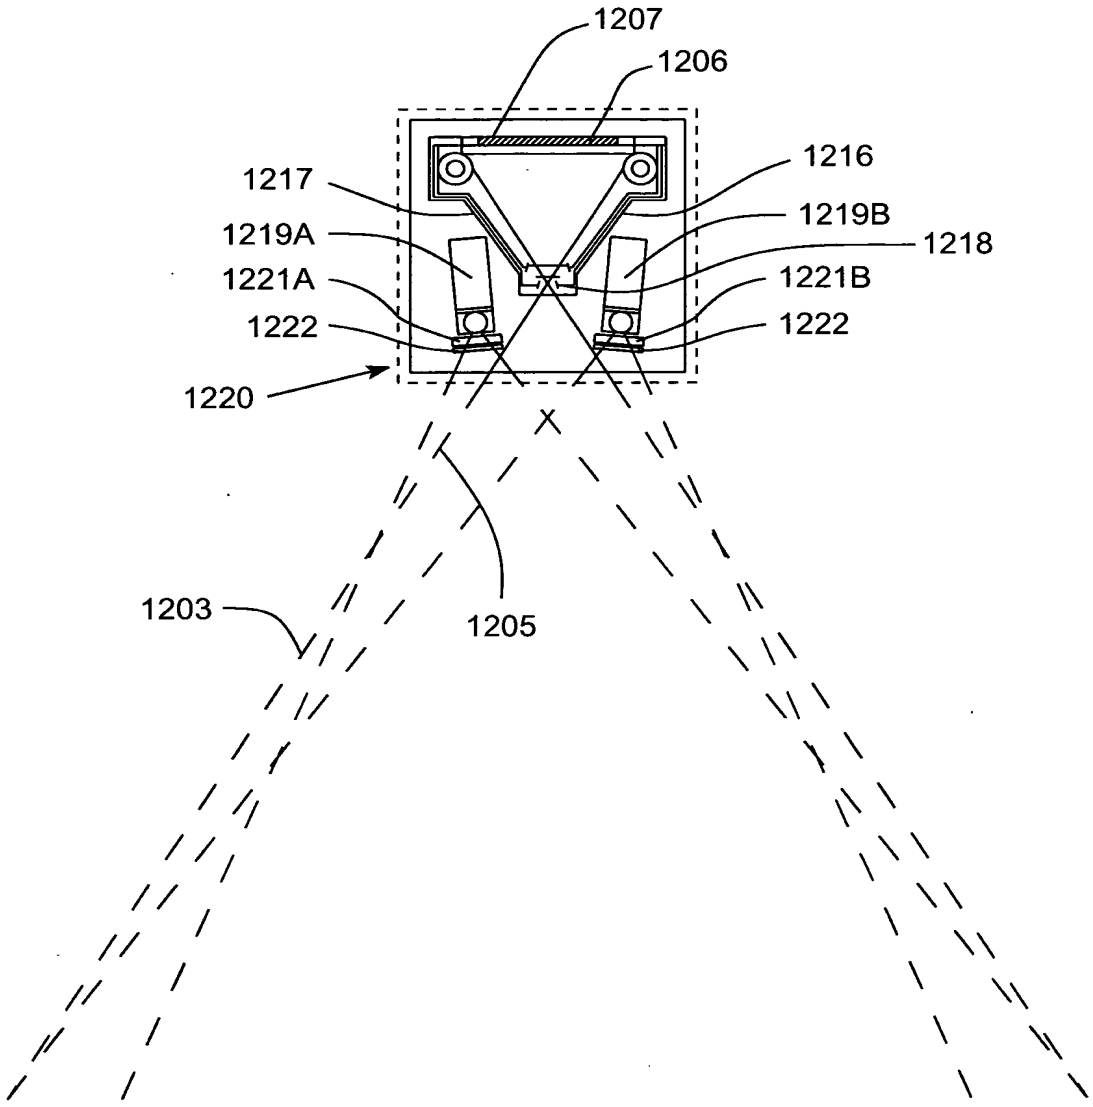
1207
1206
1217
1216
1219A
1219B
1218
1221A
1221B
1222
1222
1220
1203
1205

FIG. 39C

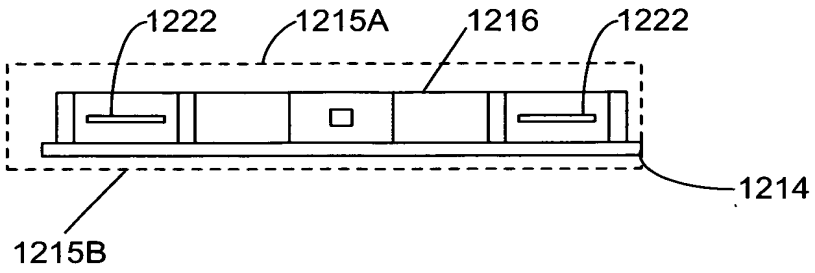

FIG. 39D

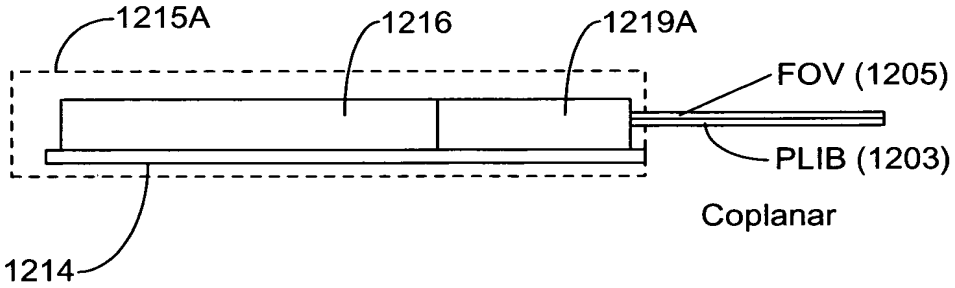

FIG. 39E

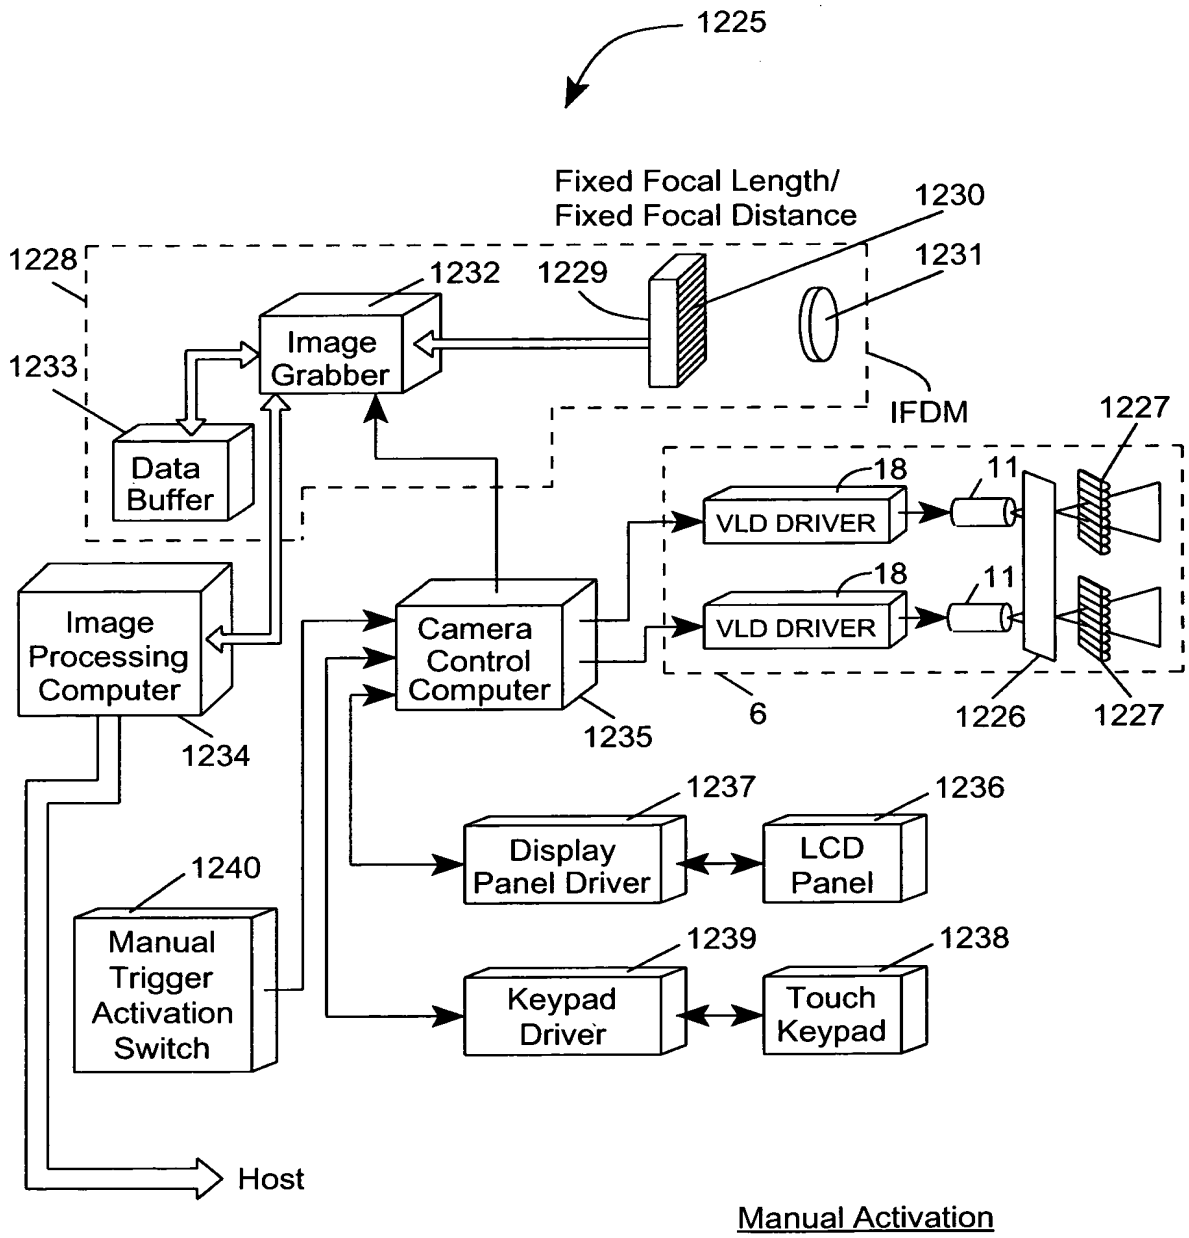
1225
Fixed Focal Length/
Fixed Focal Distance
1230
1231
1228
1232
1229
1233
Image
Grabber
IFDM
1227
Data
Buffer
18
11
VLD DRIVER
18
11
VLD DRIVER
Image
Processing
Computer
Camera
Control
Computer
6
1226
1227
1234
1235
1237
1236
Display
Panel Driver
LCD
Panel
1240
1239
1238
Manual
Trigger
Activation
Switch
Keypad
Driver
Touch
Keypad
Host
Manual Activation

FIG. 40A1

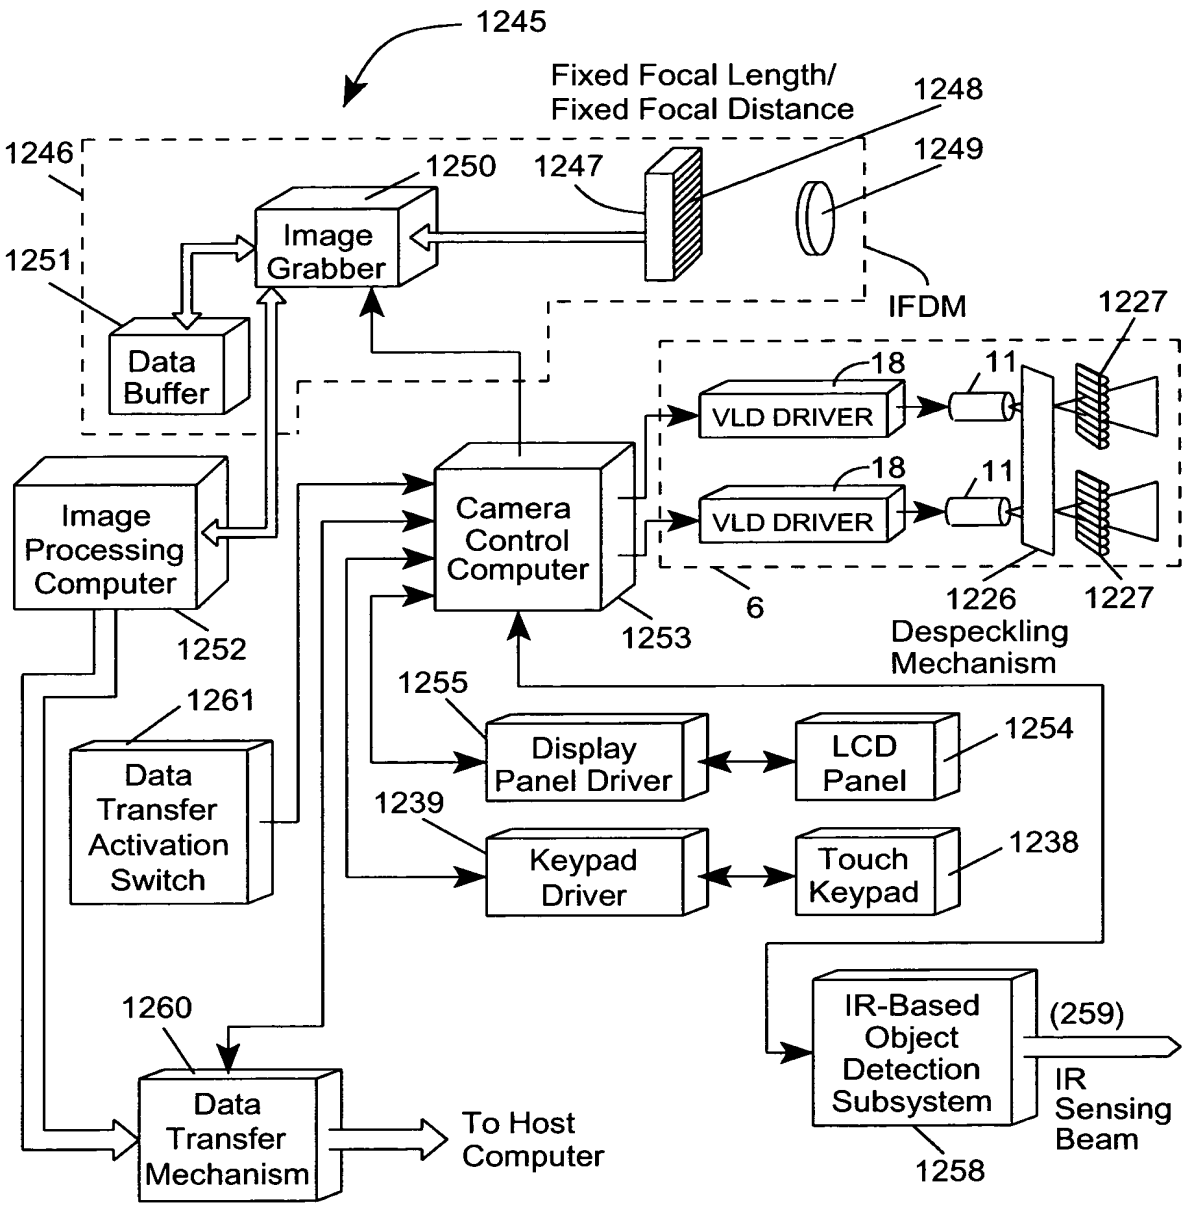

Automatic with IR Object Detection

FIG. 40A2

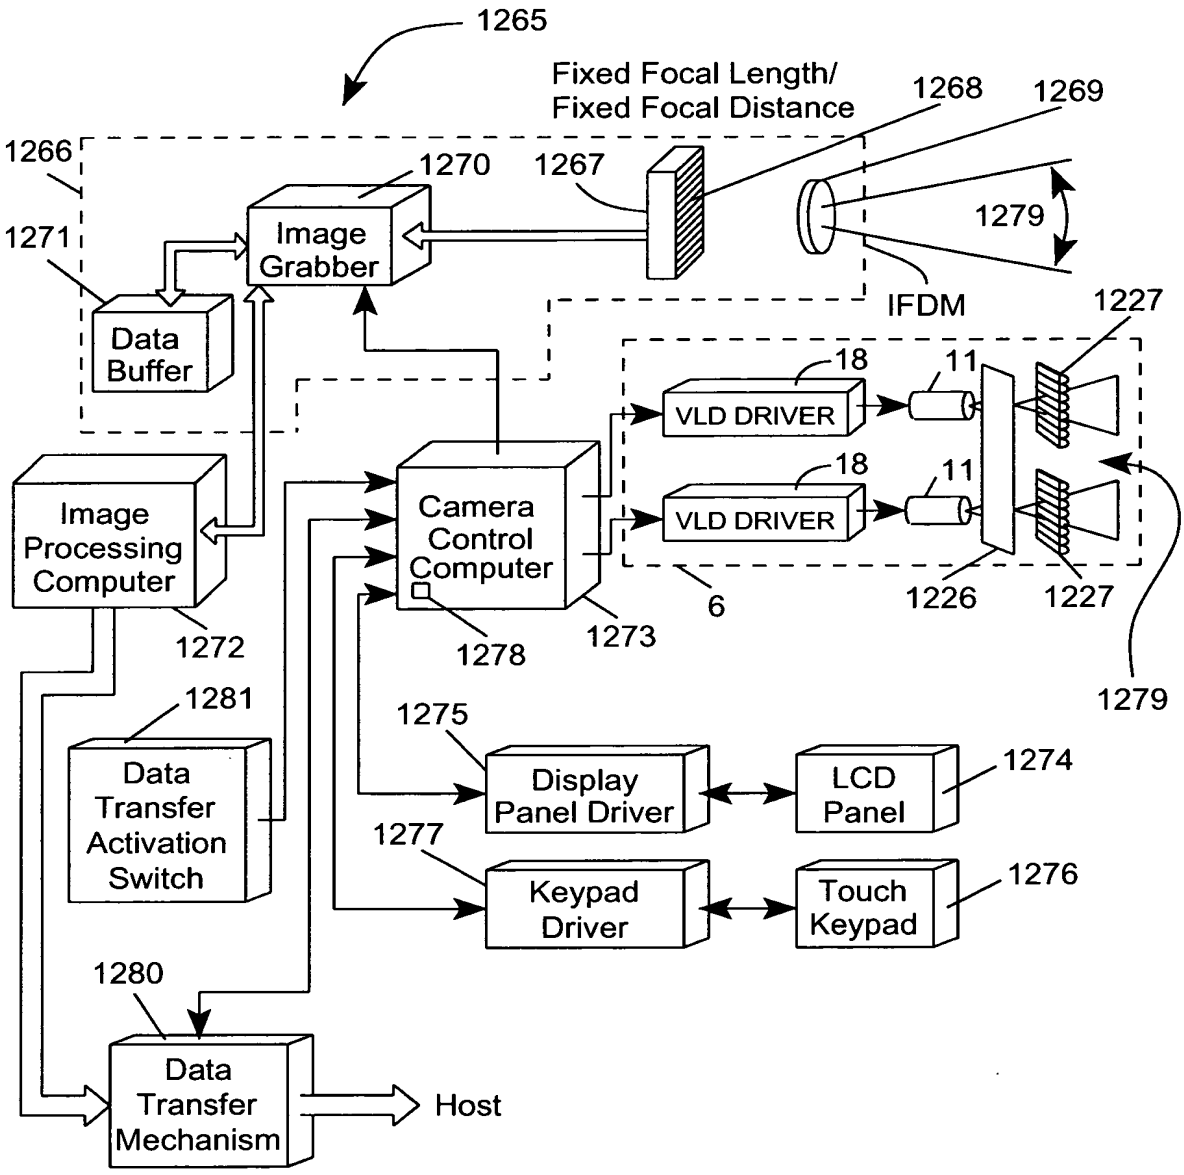

Automatic with Laser Based Object Detection

FIG. 40A3

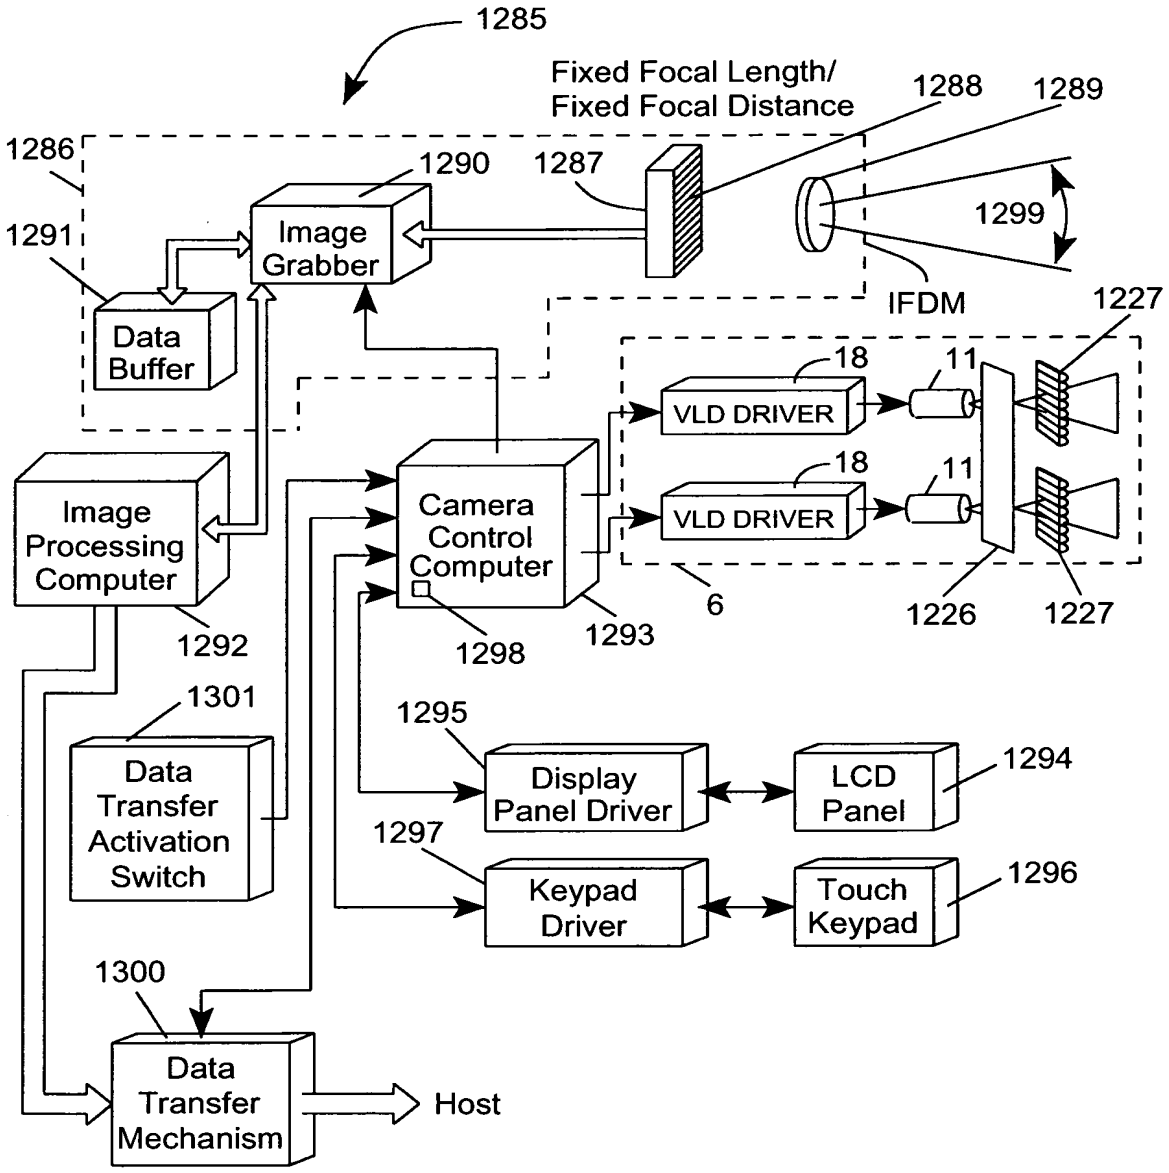

Automatic with Passive CCD
Based Object Detection

FIG. 40A4

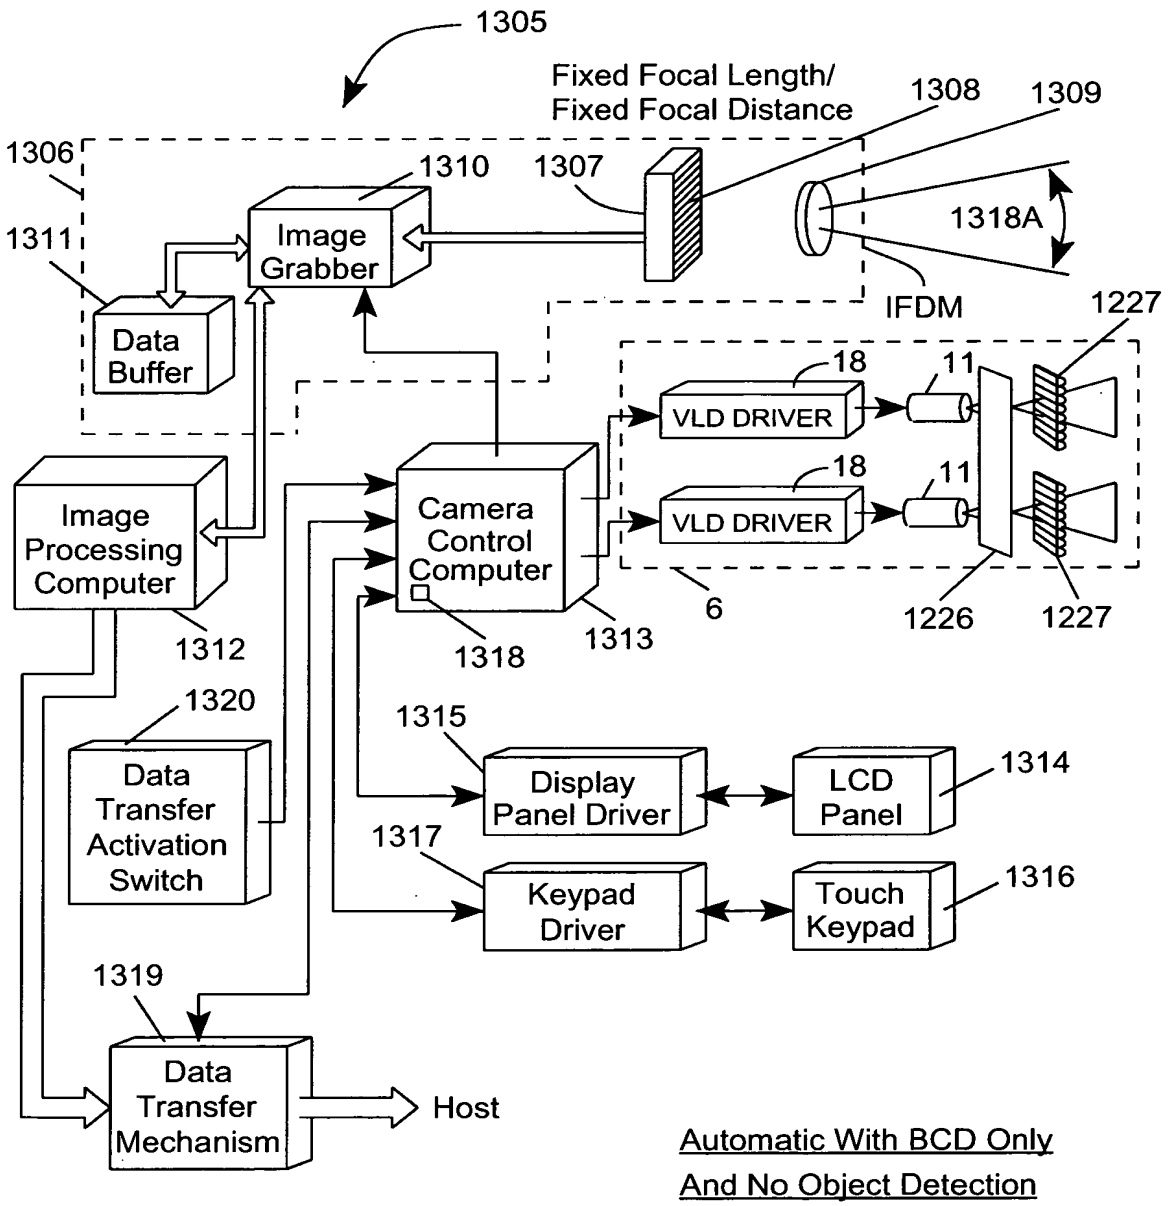
1305
Fixed Focal Length/
Fixed Focal Distance
1308
1309
1306
1310
1307
1318A
1311
Image
Grabber
IFDM
1227
Data
Buffer
18
11
VLD DRIVER
18
11
VLD DRIVER
Image
Processing
Computer
Camera
Control
Computer
6
1226
1227
1312
1318
1313
1320
1315
Data
Transfer
Activation
Switch
Display
Panel Driver
LCD
Panel
1314
1317
Keypad
Driver
Touch
Keypad
1316
1319
Data
Transfer
Mechanism
Host
Automatic With BCD Only
And No Object Detection

FIG. 40A5

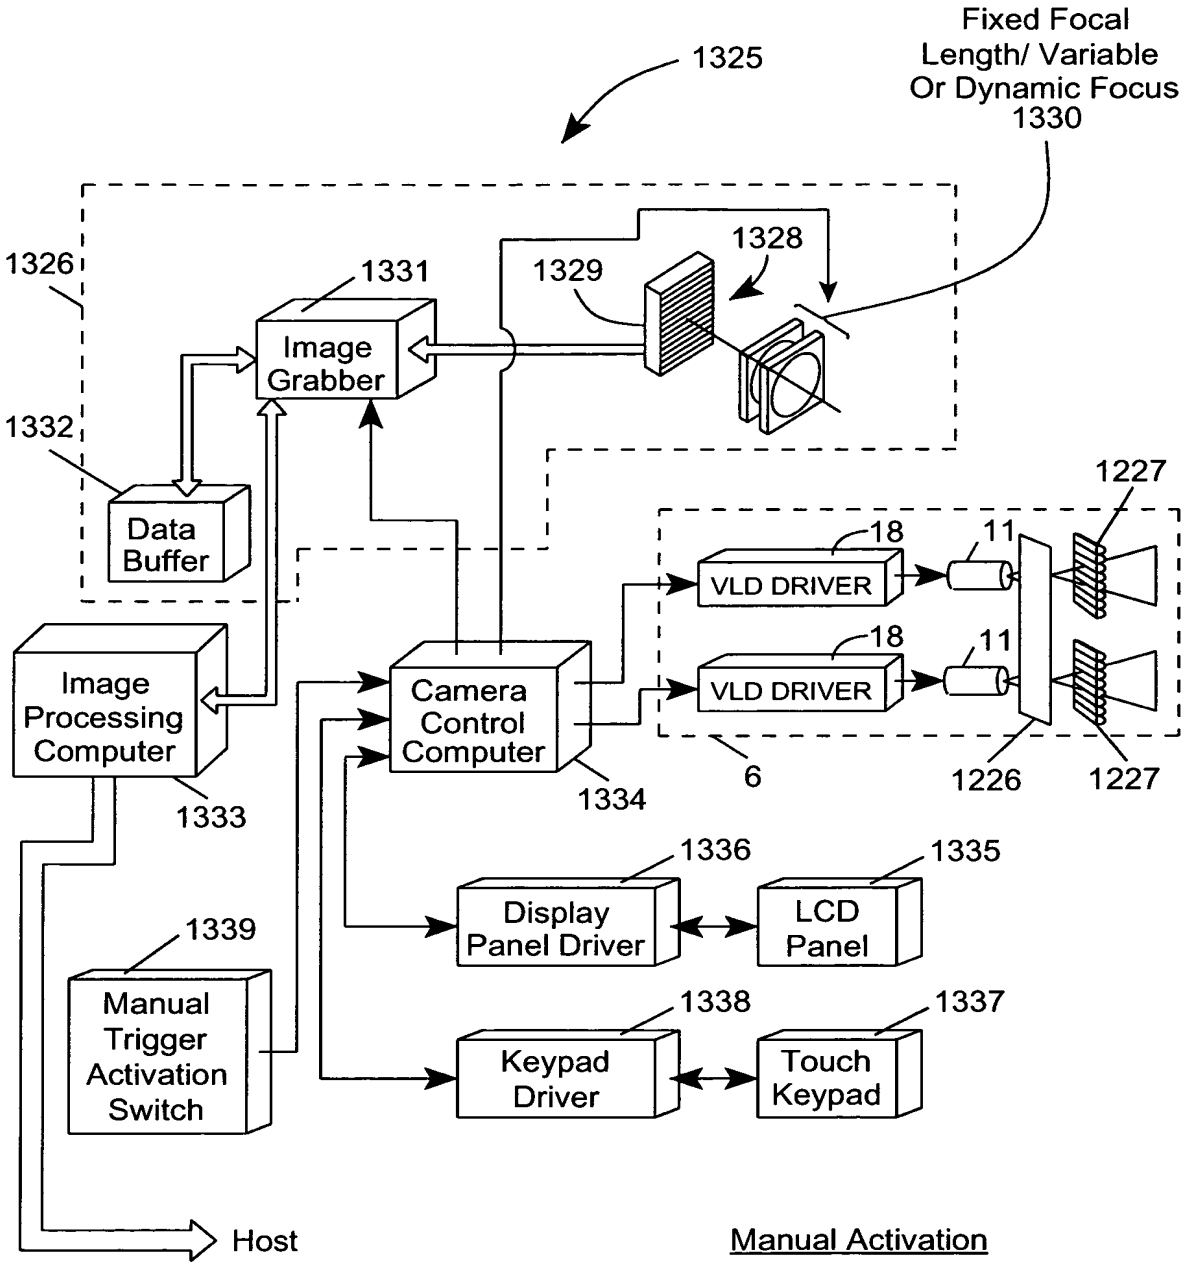
1325
Fixed Focal Length/ Variable Or Dynamic Focus
1330
1326
1331
1329
1328
Image Grabber
1332
Data Buffer
1227
18
11
VLD DRIVER
18
11
VLD DRIVER
Image Processing Computer
Camera Control Computer
1333
1334
6
1226
1227
1336
1335
Display Panel Driver
LCD Panel
1339
Manual Trigger Activation Switch
1338
1337
Keypad Driver
Touch Keypad
Host
Manual Activation

FIG. 40B1

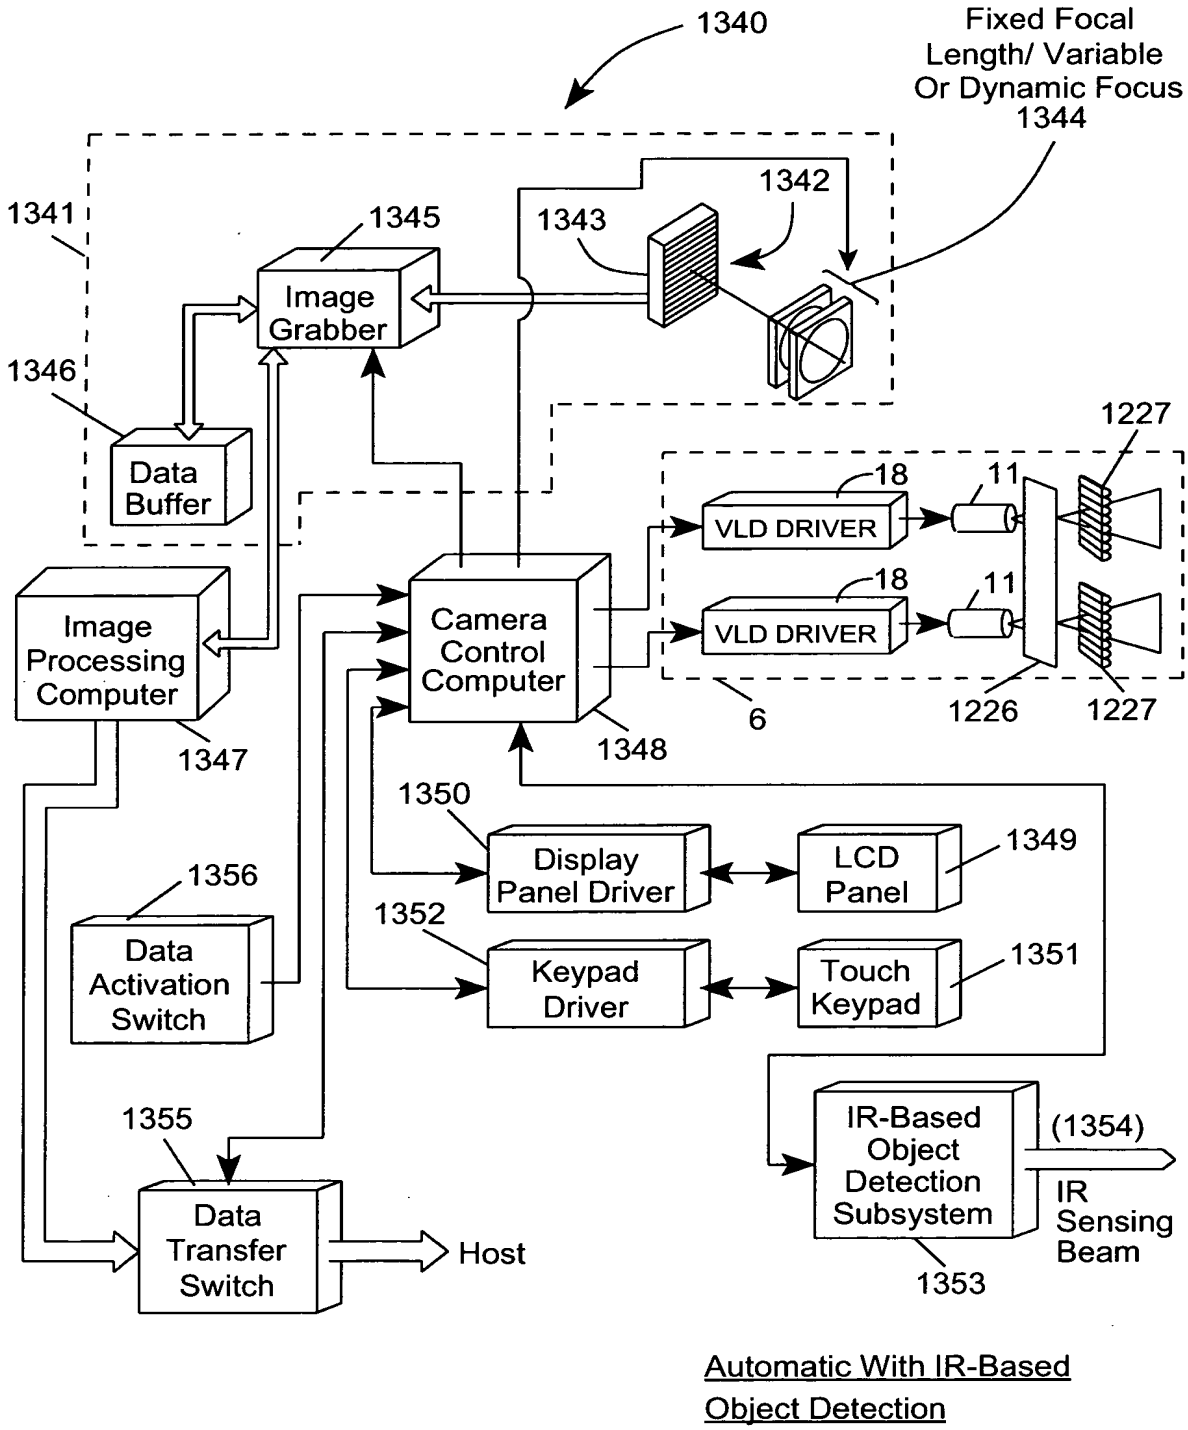

Automatic With IR-Based Object Detection

FIG. 40B2

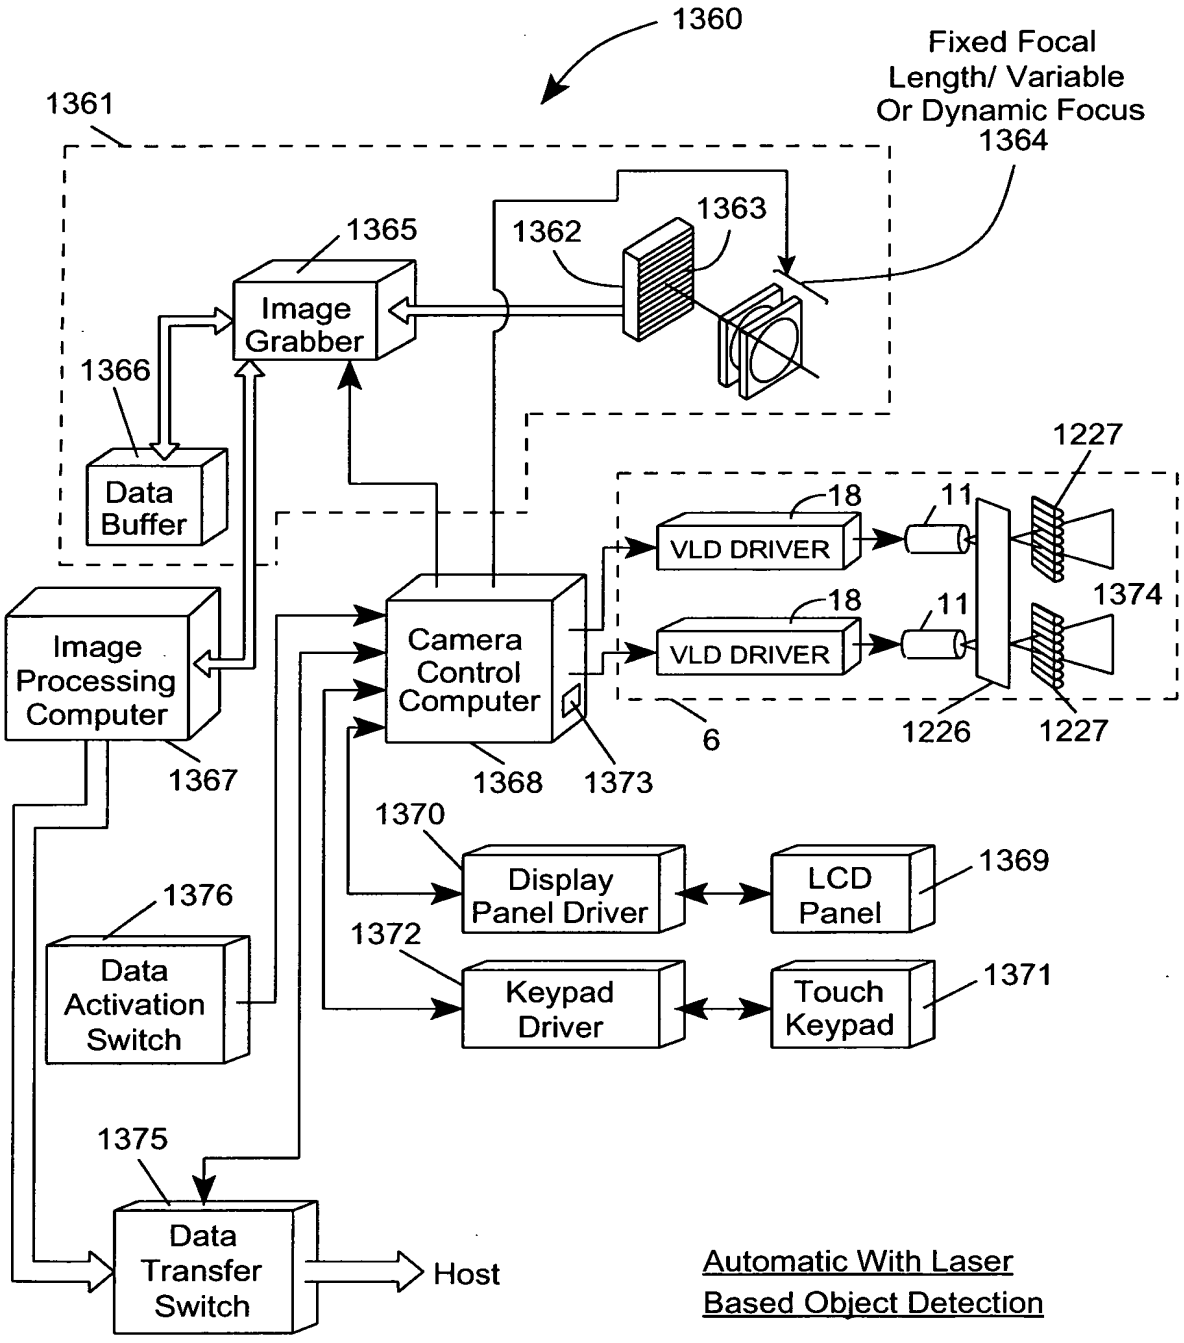
1360
Fixed Focal Length/ Variable Or Dynamic Focus
1364
1361
1365
1362
1363
Image Grabber
1366
Data Buffer
1227
18
11
VLD DRIVER
18
11
VLD DRIVER
1374
Image Processing Computer
Camera Control Computer
6
1226
1227
1367
1368
1373
1370
Display Panel Driver
LCD Panel
1369
1376
1372
Data Activation Switch
Keypad Driver
Touch Keypad
1371
1375
Data Transfer Switch
Host
Automatic With Laser Based Object Detection

FIG. 40B3

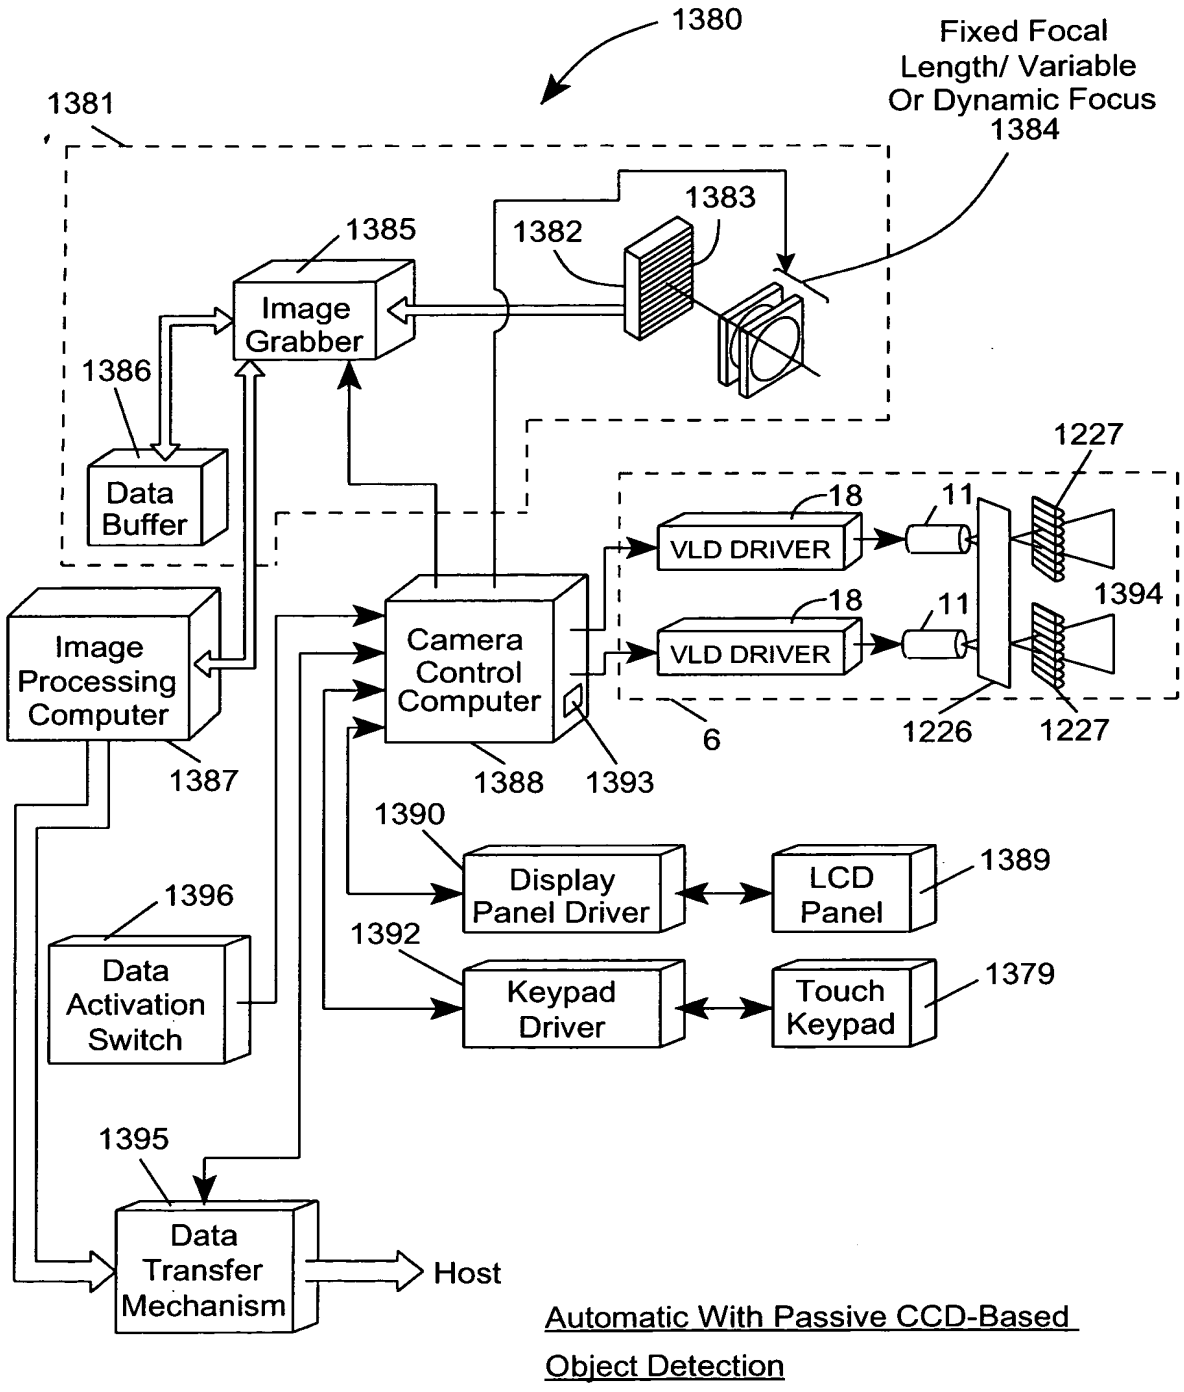
1380
Fixed Focal Length/ Variable Or Dynamic Focus
1384
1381
1383
1382
1385
Image Grabber
1386
Data Buffer
1227
18
11
VLD DRIVER
18
11
VLD DRIVER
1394
Image Processing Computer
Camera Control Computer
6
1226
1227
1387
1388
1393
1390
Display Panel Driver
LCD Panel
1389
1396
Data Activation Switch
1392
Keypad Driver
Touch Keypad
1379
1395
Data Transfer Mechanism
Host
Automatic With Passive CCD-Based Object Detection

FIG. 40B4

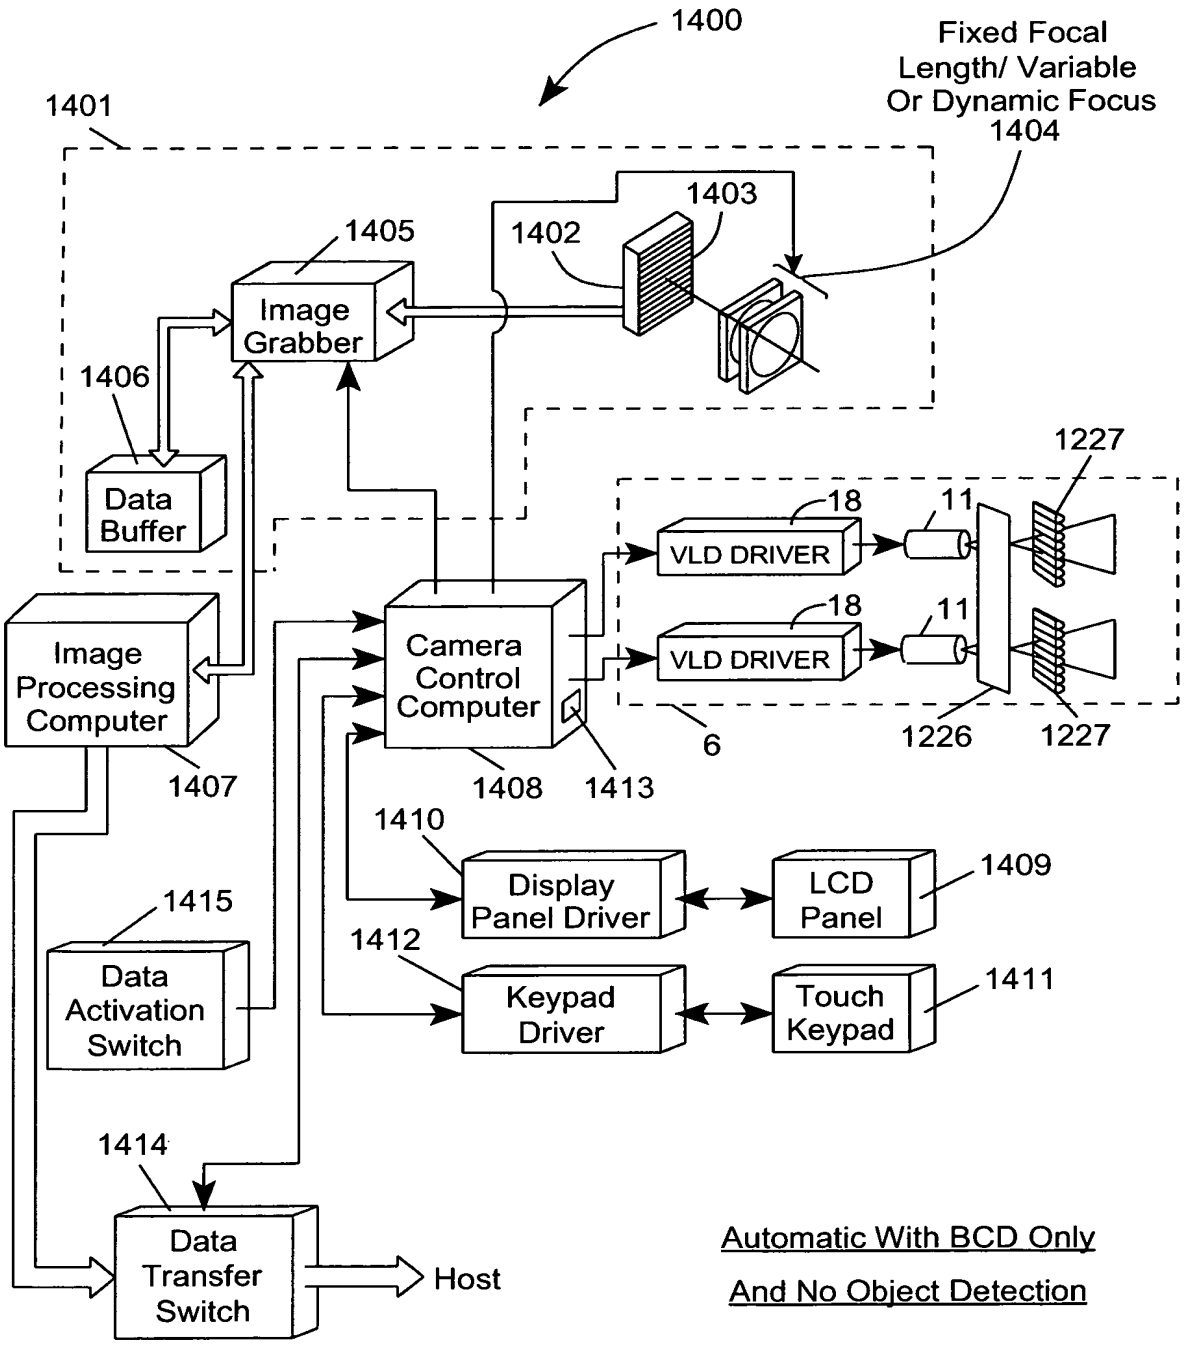
1400
Fixed Focal Length/ Variable Or Dynamic Focus
1404
1401
1403
1402
1405
Image Grabber
1406
Data Buffer
1227
18
11
VLD DRIVER
18
11
VLD DRIVER
Image Processing Computer
Camera Control Computer
6
1226
1227
1407
1408
1413
1410
Display Panel Driver
LCD Panel
1409
1415
Data Activation Switch
1412
Keypad Driver
Touch Keypad
1411
1414
Data Transfer Switch
Host
Automatic With BCD Only
And No Object Detection

FIG. 40B5

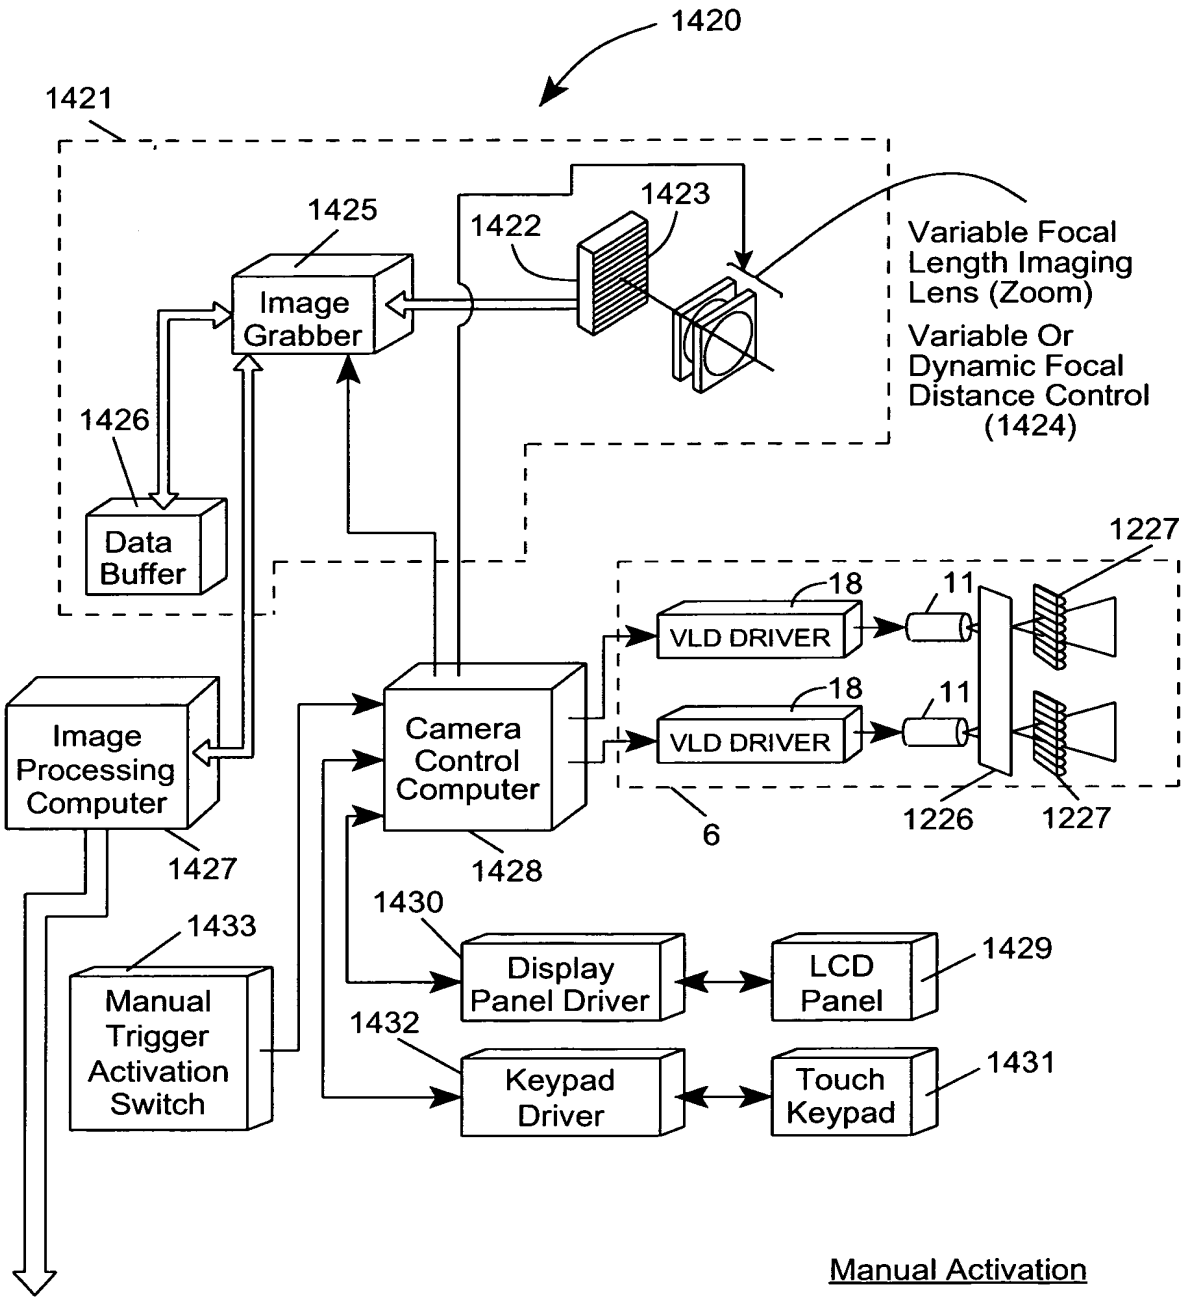
1420
1421
1425
1423
1422
Variable Focal Length Imaging Lens (Zoom)
Variable Or Dynamic Focal Distance Control (1424)
Image Grabber
1426
Data Buffer
1227
18
11
VLD DRIVER
18
11
VLD DRIVER
Image Processing Computer
Camera Control Computer
1427
1428
6
1226
1227
1430
1433
Display Panel Driver
LCD Panel
1429
Manual Trigger Activation Switch
1432
Keypad Driver
Touch Keypad
1431
Manual Activation

FIG. 40C1

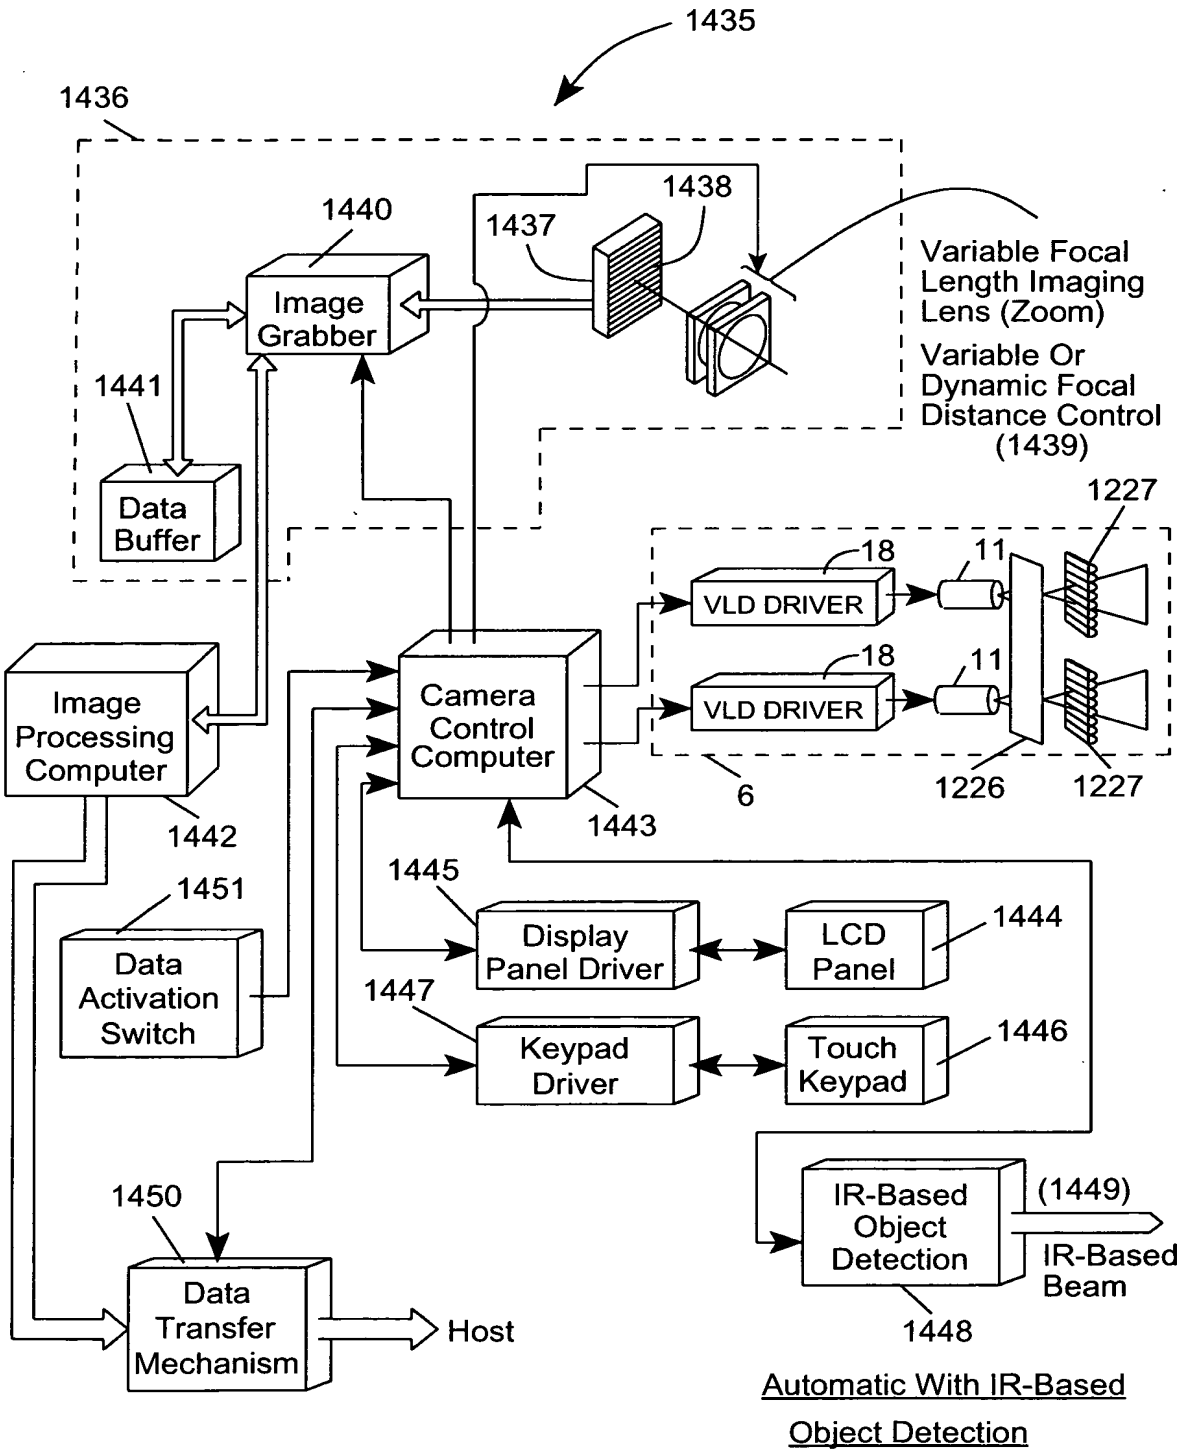
1435
1436
1438
1437
1440
Image Grabber
Variable Focal Length Imaging Lens (Zoom)
Variable Or Dynamic Focal Distance Control (1439)
1441
Data Buffer
1227
18
11
VLD DRIVER
18
11
VLD DRIVER
Image Processing Computer
Camera Control Computer
1442
1443
6
1226
1227
1451
Data Activation Switch
1445
Display Panel Driver
LCD Panel
1444
1447
Keypad Driver
Touch Keypad
1446
1450
Data Transfer Mechanism
Host
IR-Based Object Detection
(1449)
IR-Based Beam
1448
Automatic With IR-Based Object Detection

FIG. 40C2

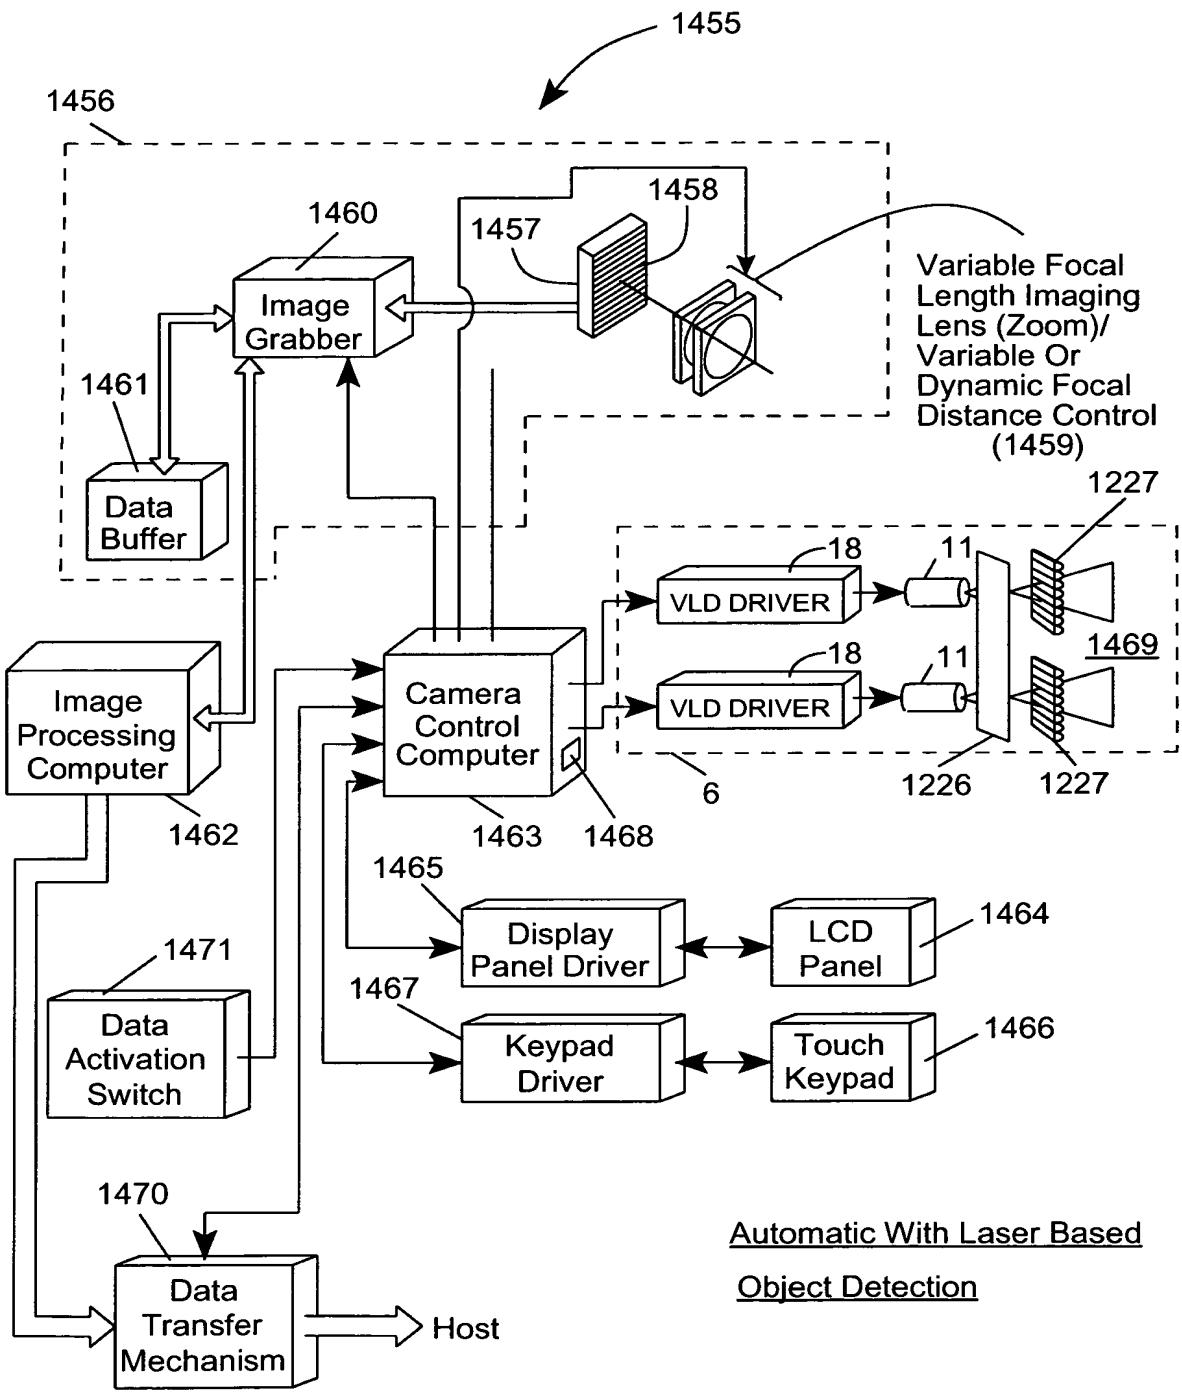
1455
1456
1460
1458
1457
Image Grabber
Variable Focal Length Imaging Lens (Zoom)/ Variable Or Dynamic Focal Distance Control (1459)
1461
Data Buffer
1227
18
11
VLD DRIVER
1469
Image Processing Computer
Camera Control Computer
1462
1463
1468
6
1226
1227
1465
Display Panel Driver
LCD Panel
1464
1471
1467
Data Activation Switch
Keypad Driver
Touch Keypad
1466
1470
Data Transfer Mechanism
Host
Automatic With Laser Based Object Detection

FIG. 40C3

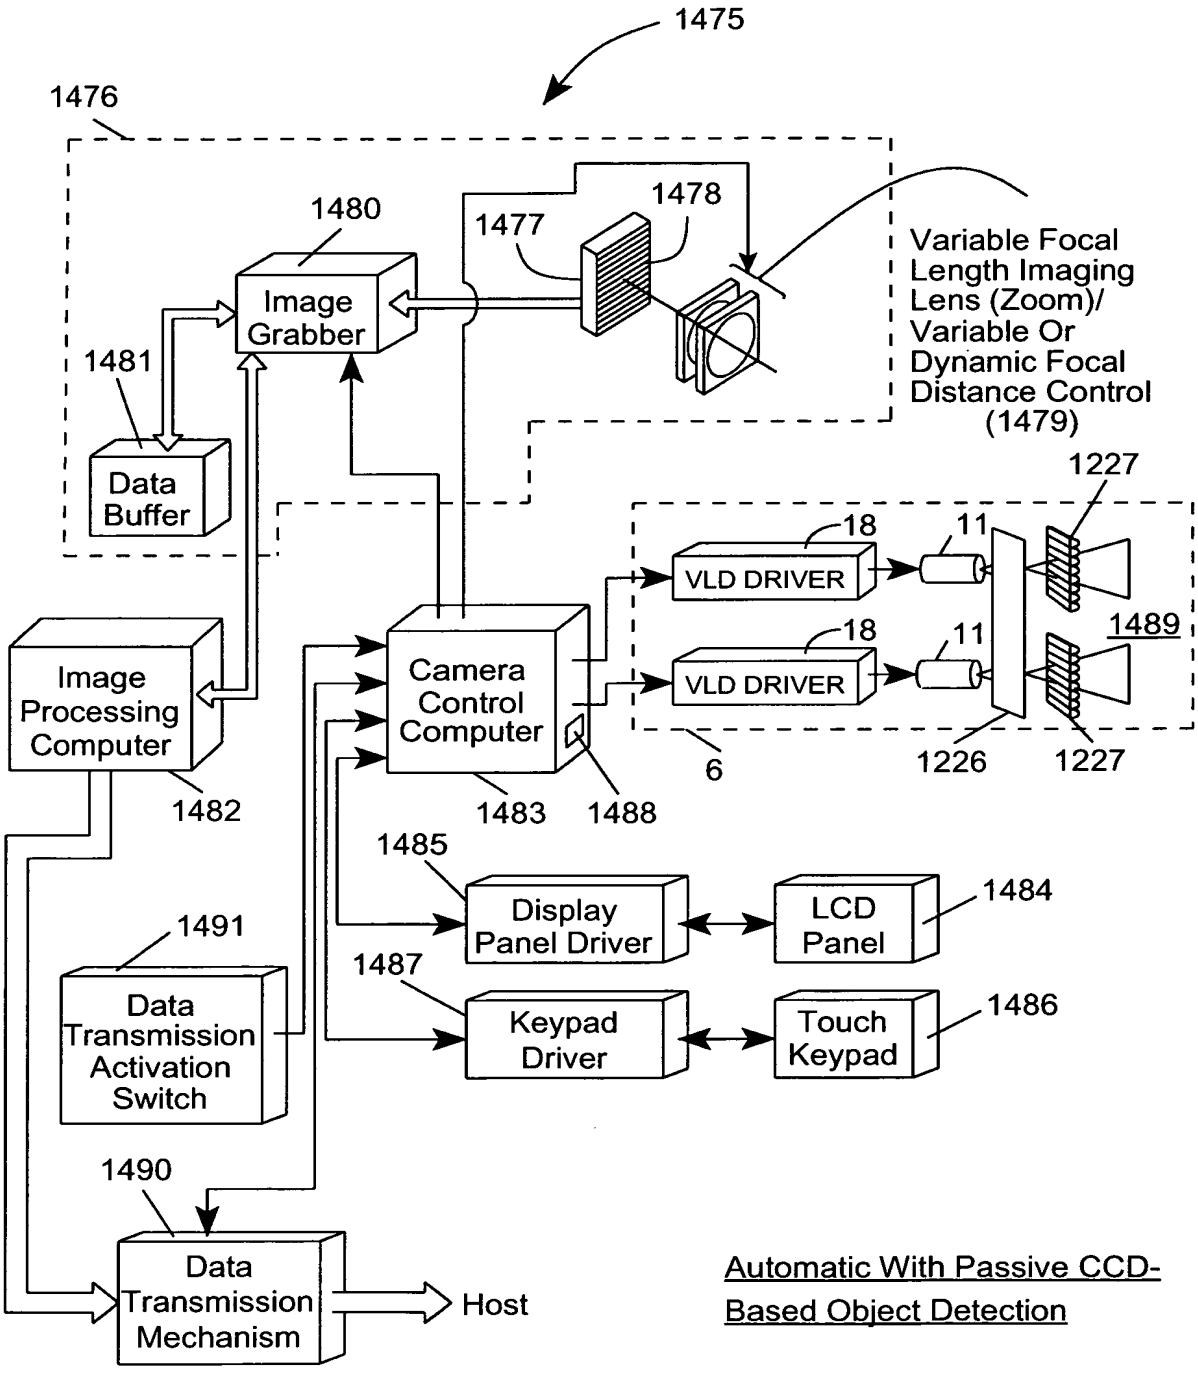
1475
1476
1480
1478
1477
Variable Focal Length Imaging Lens (Zoom)/ Variable Or Dynamic Focal Distance Control (1479)
Image Grabber
1481
Data Buffer
1227
18
11
VLD DRIVER
1489
Image Processing Computer
Camera Control Computer
6
1226
1227
1482
1483
1488
1485
Display Panel Driver
LCD Panel
1484
1491
1487
Keypad Driver
Touch Keypad
1486
Data Transmission Activation Switch
1490
Data Transmission Mechanism
Host
Automatic With Passive CCD-Based Object Detection

FIG. 40C4

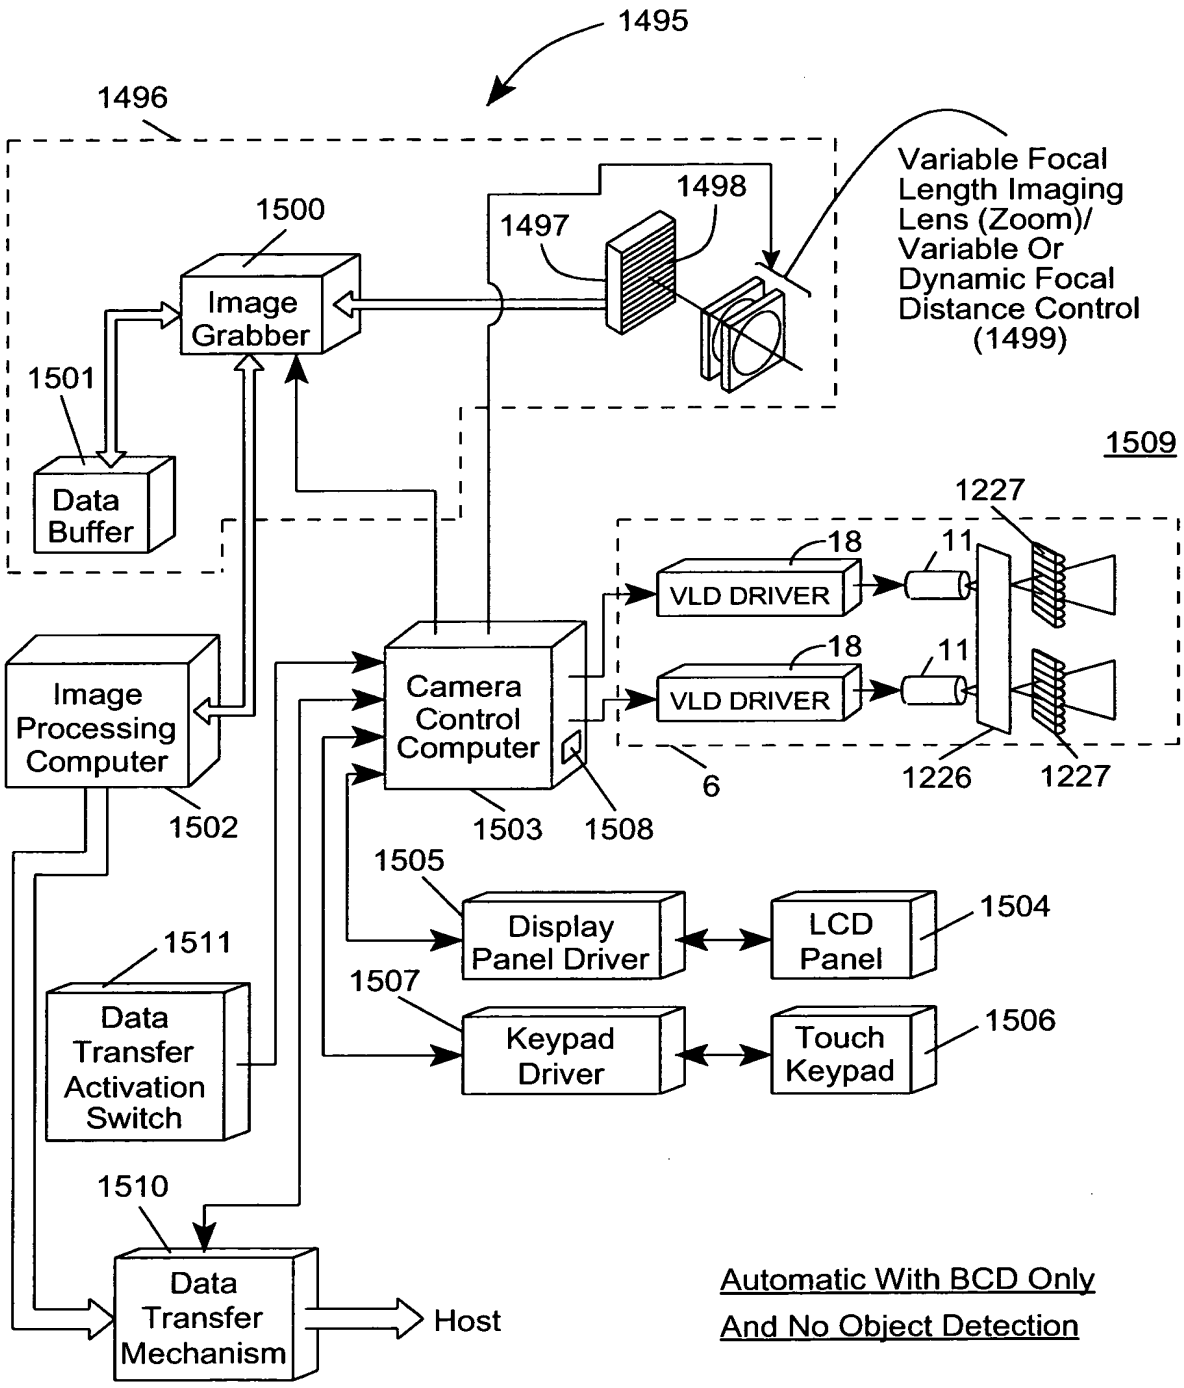
1495
1496
Variable Focal Length Imaging Lens (Zoom)/ Variable Or Dynamic Focal Distance Control (1499)
1498
1497
1500
Image Grabber
1501
Data Buffer
1509
1227
18
11
VLD DRIVER
18
11
VLD DRIVER
Image Processing Computer
Camera Control Computer
1502
1503
1508
6
1226
1227
1505
Display Panel Driver
LCD Panel
1504
1511
1507
Data Transfer Activation Switch
Keypad Driver
Touch Keypad
1506
1510
Data Transfer Mechanism
Host
Automatic With BCD Only
And No Object Detection

FIG. 40C5

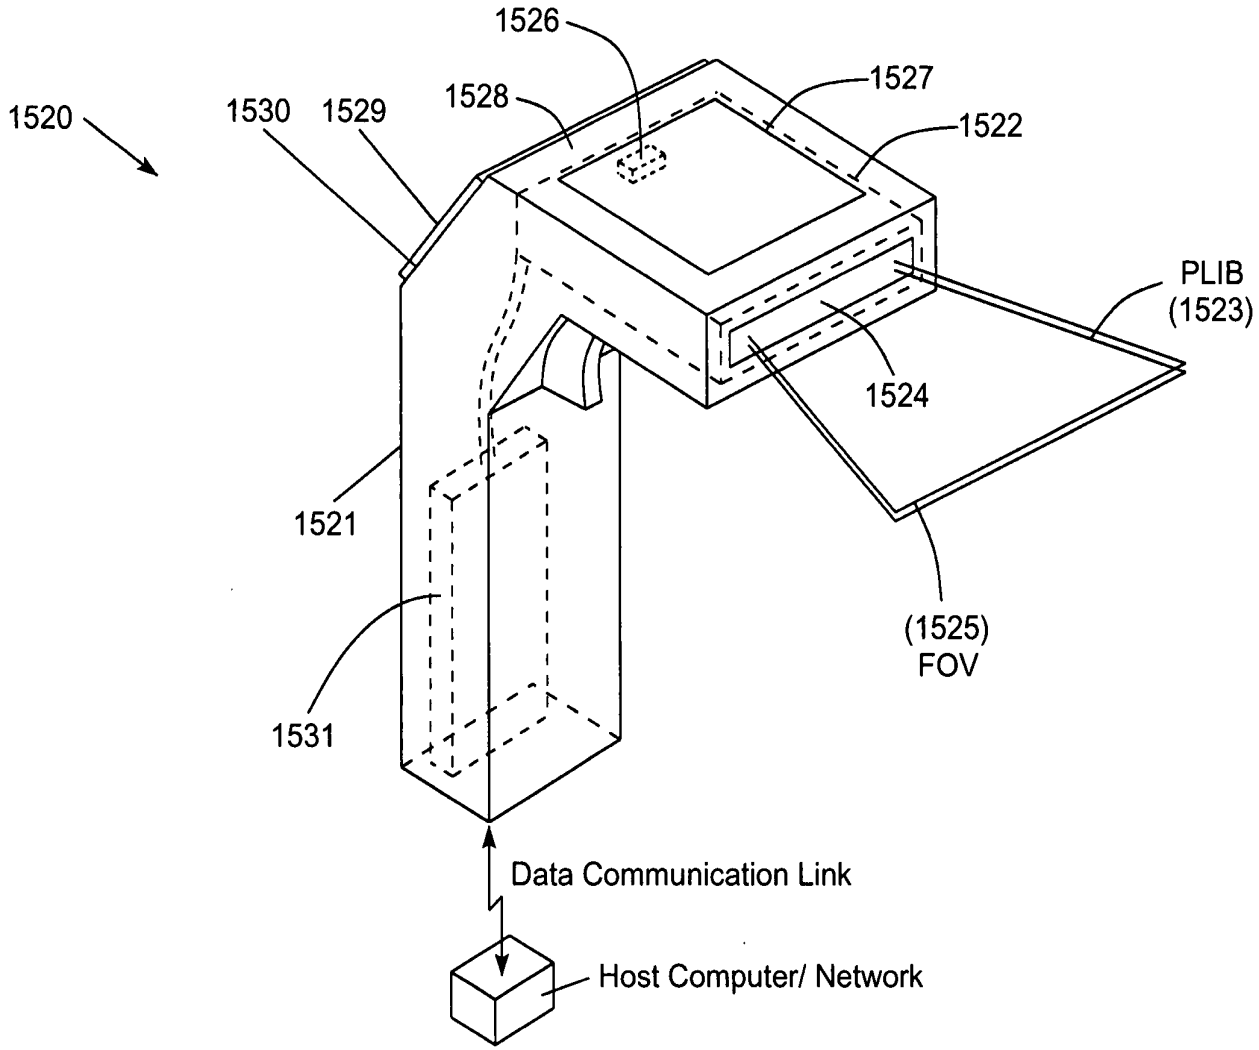
1526
1527
1528
1530
1529
1520
1522
PLIB
(1523)
1524
1521
(1525)
FOV
1531
Data Communication Link
Host Computer/ Network

FIG. 41A

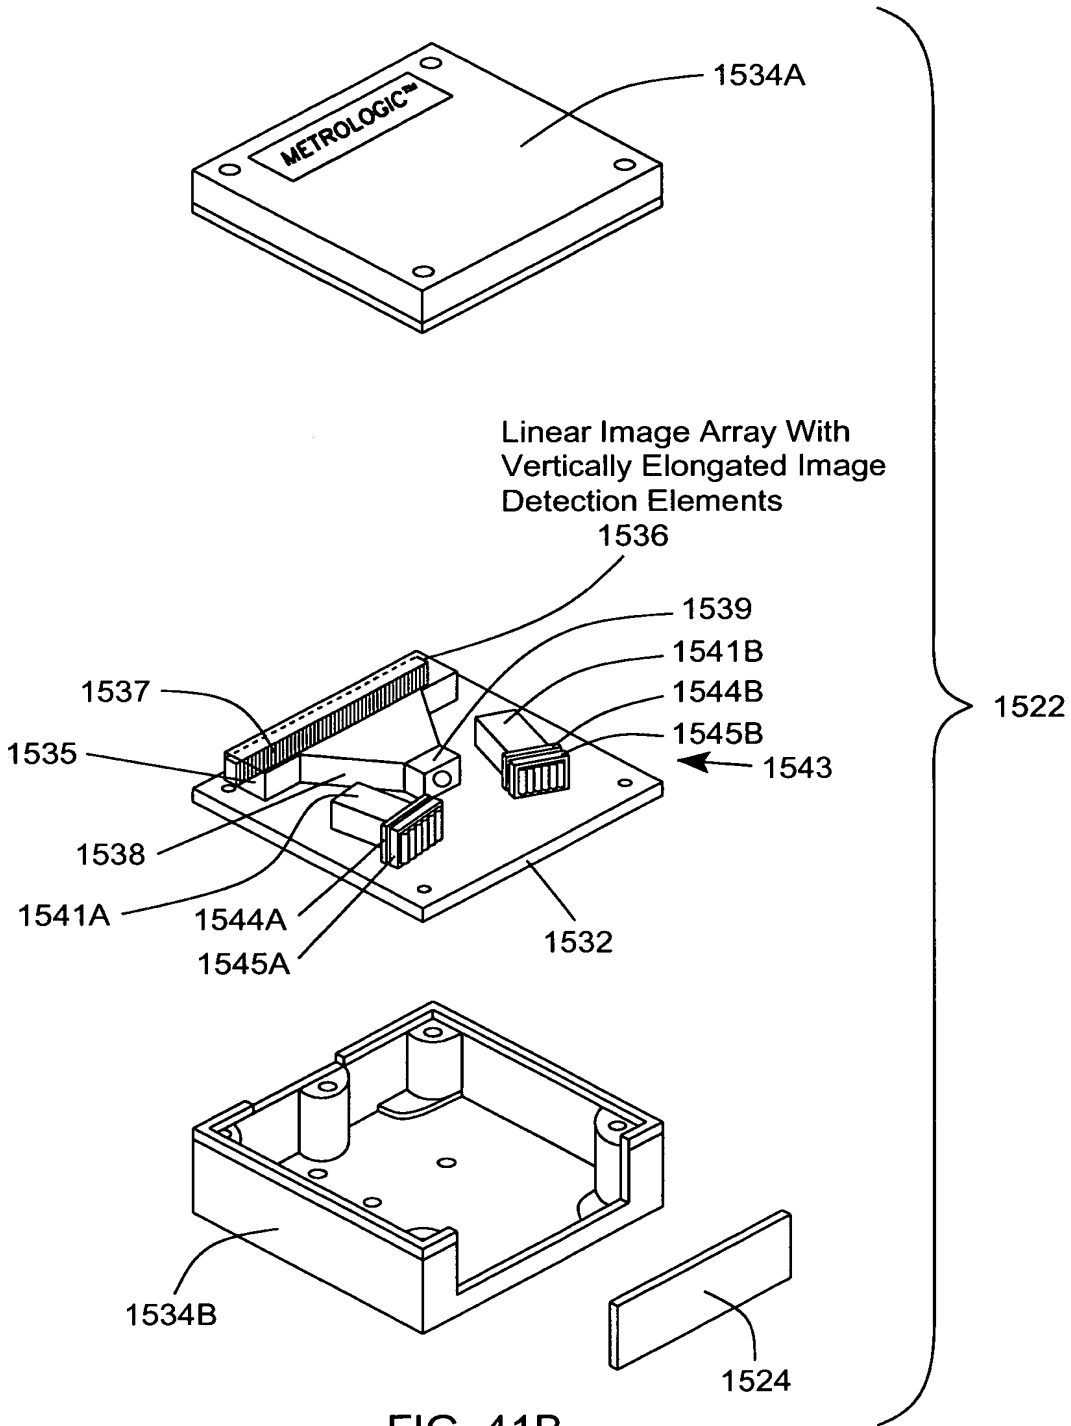
1534A
METROLOGIC
Linear Image Array With
Vertically Elongated Image
Detection Elements
1536
1539
1541B
1544B
1545B
1543
1537
1535
1538
1541A
1544A
1545A
1532
1522
1534B
1524

FIG. 41B

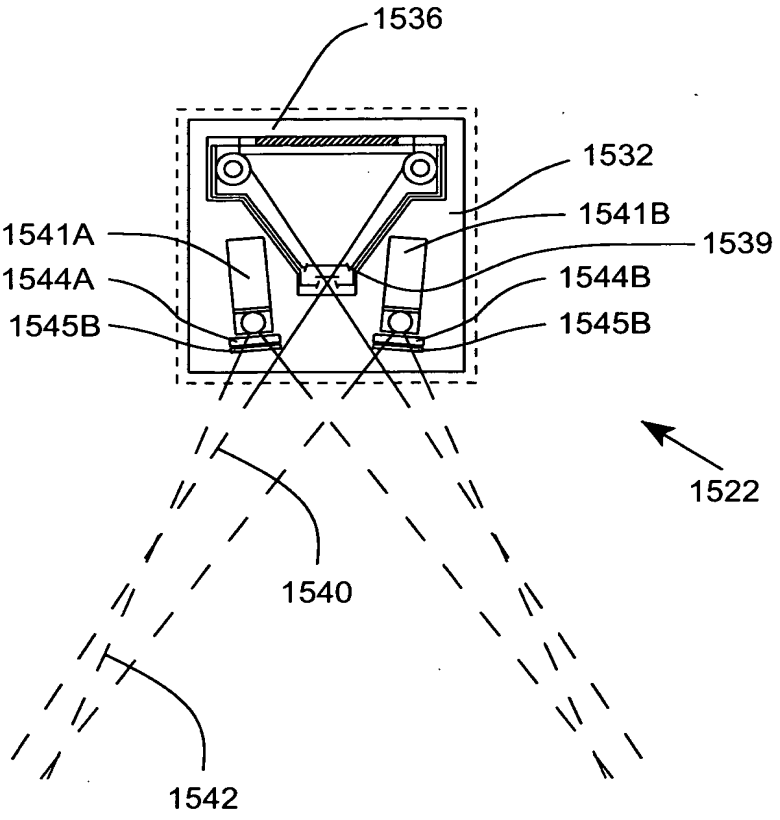

FIG. 41C

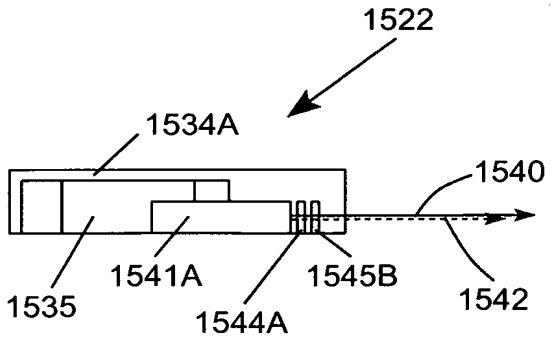

FIG. 41D

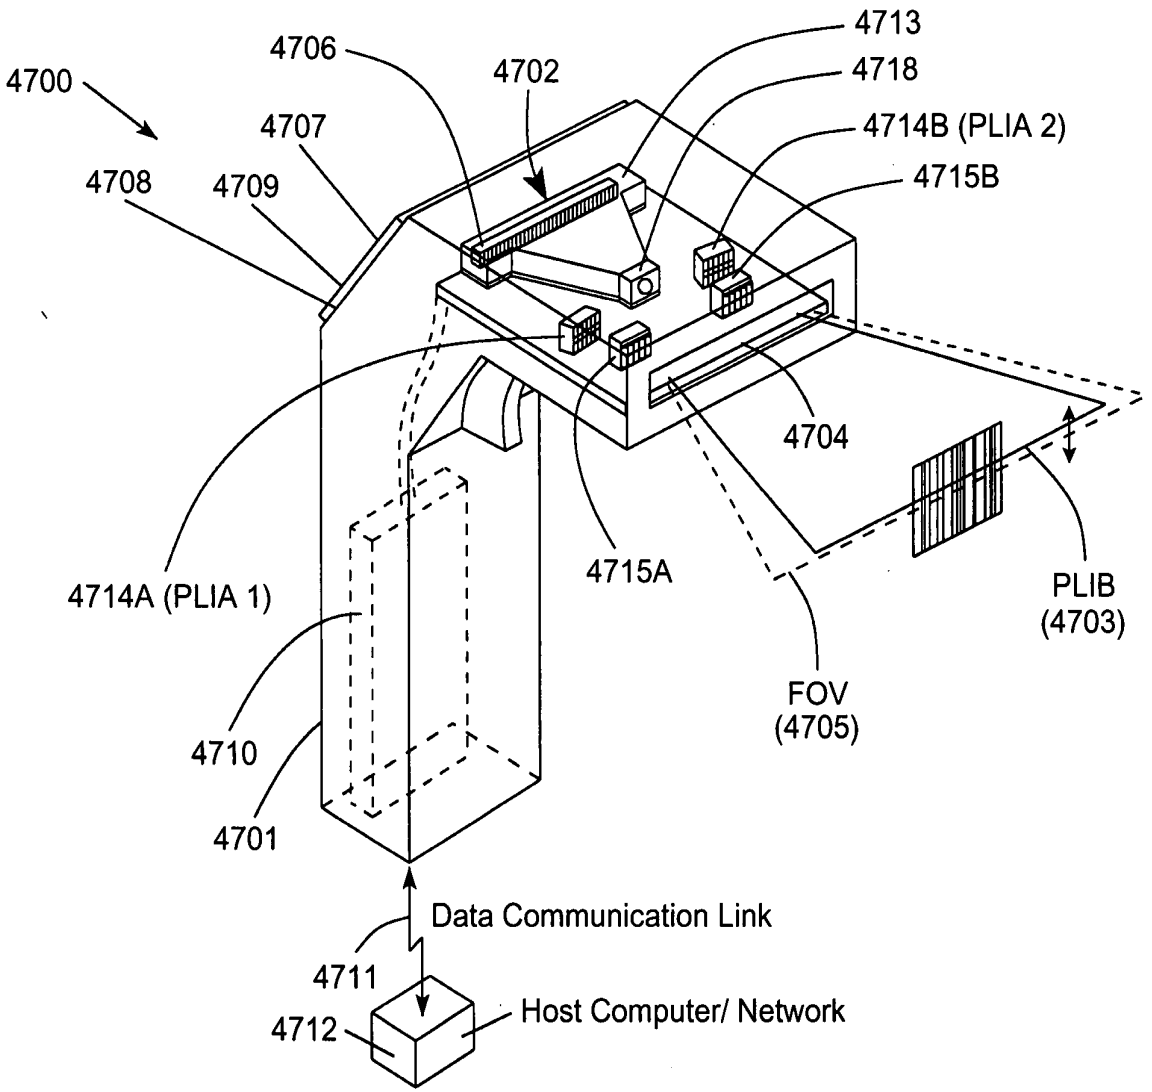
4700
4706
4702
4713
4718
4714B (PLIA 2)
4715B
4707
4708
4709
4704
4714A (PLIA 1)
4715A
PLIB
(4703)
FOV
(4705)
4710
4701
Data Communication Link
4711
4712
Host Computer/ Network

FIG. 42

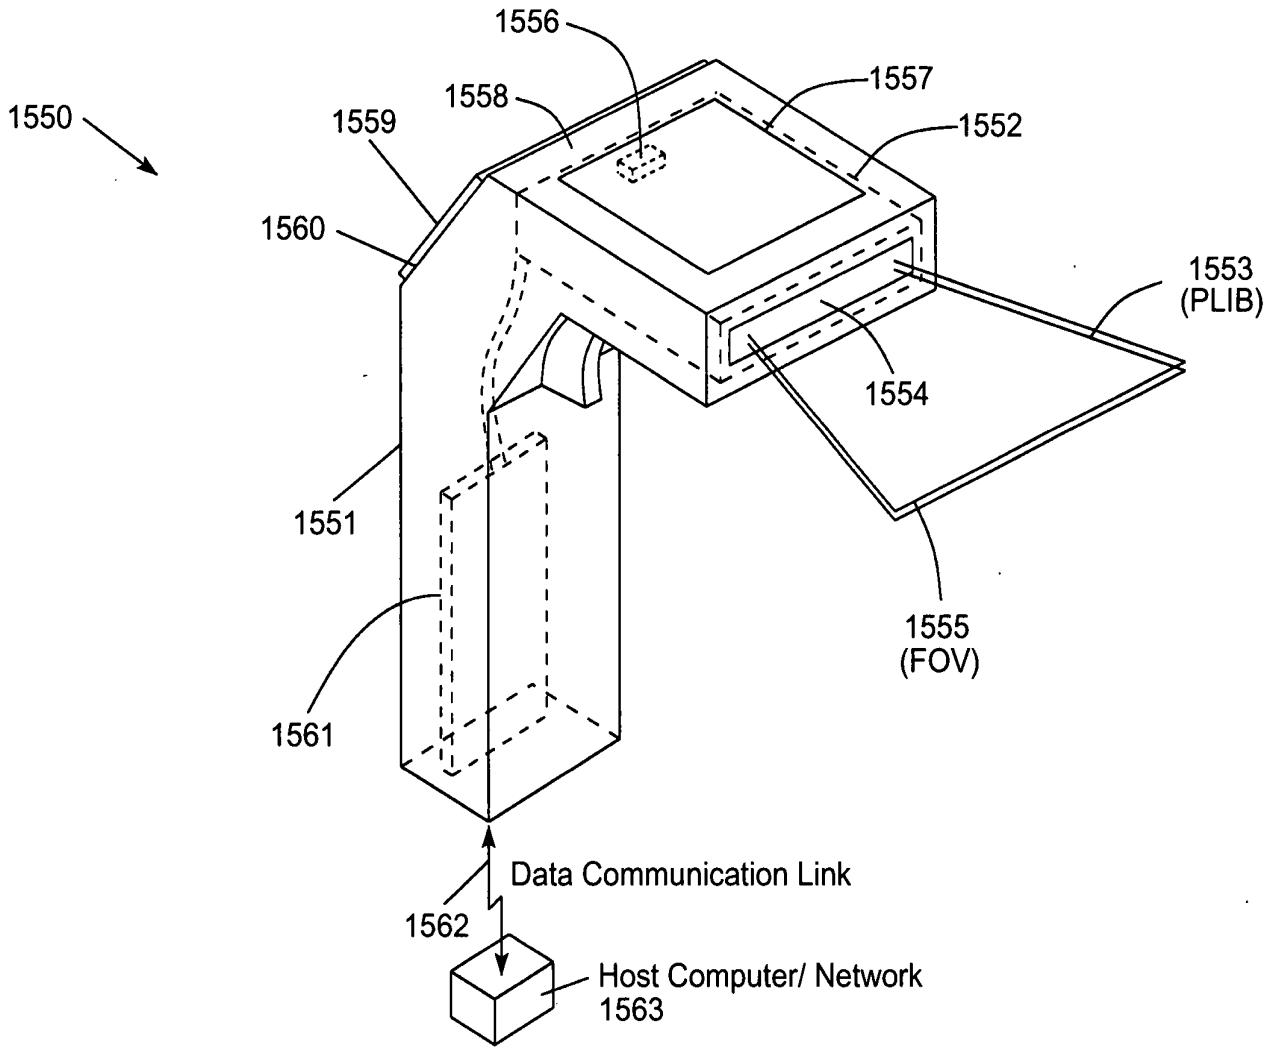
1550
1556
1558
1557
1559
1552
1560
1553
(PLIB)
1554
1551
1555
(FOV)
1561
Data Communication Link
1562
Host Computer/ Network
1563

FIG. 42A

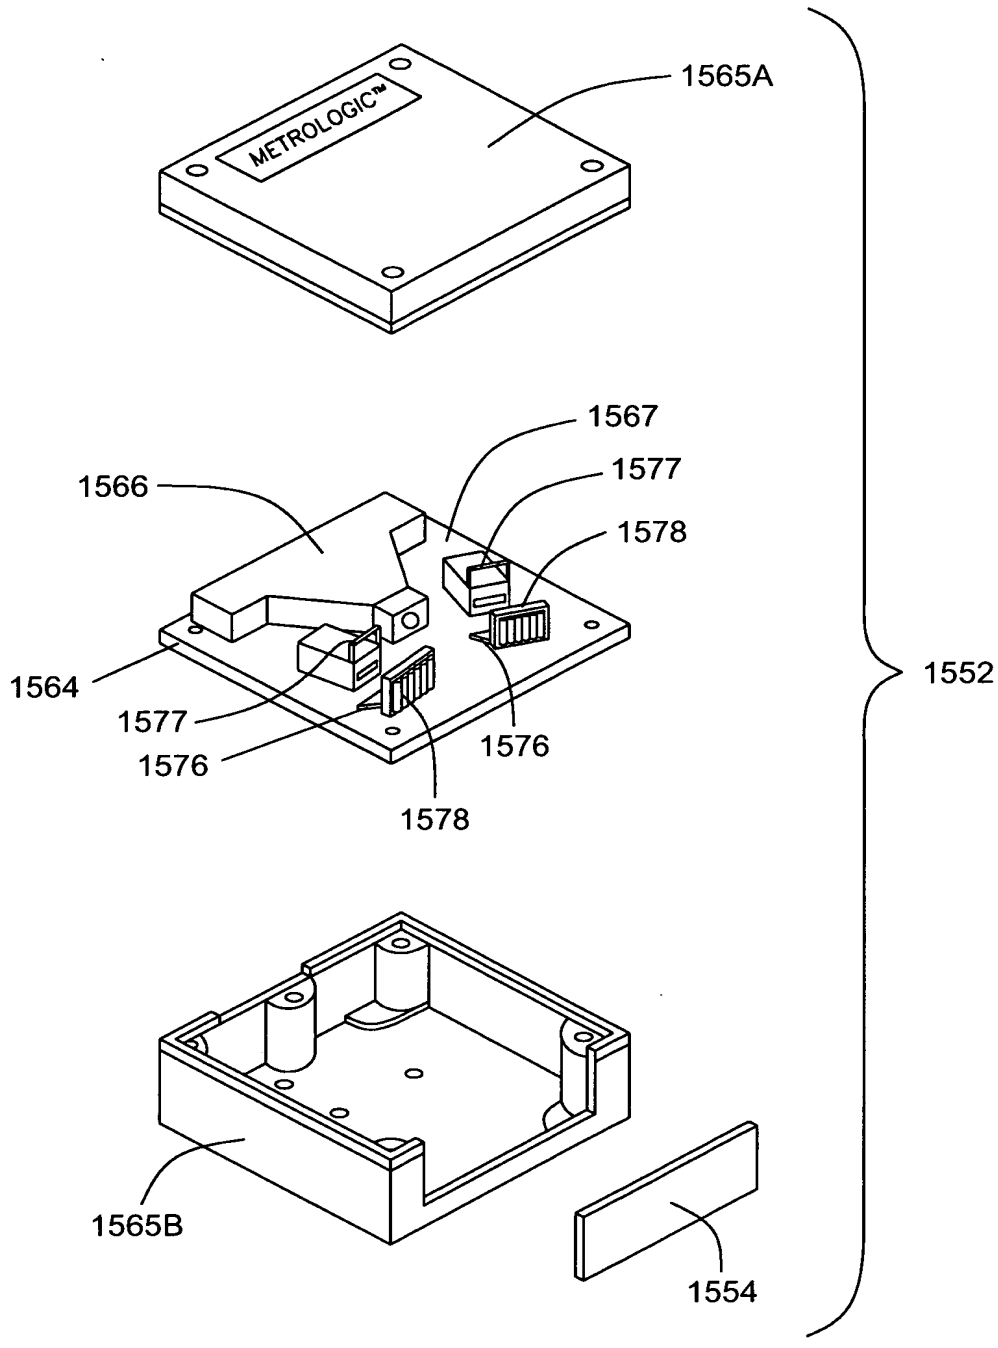
METROLOGIC™
1565A
1567
1577
1566
1578
1564
1577
1576
1576
1578
1552
1565B
1554

FIG. 42B

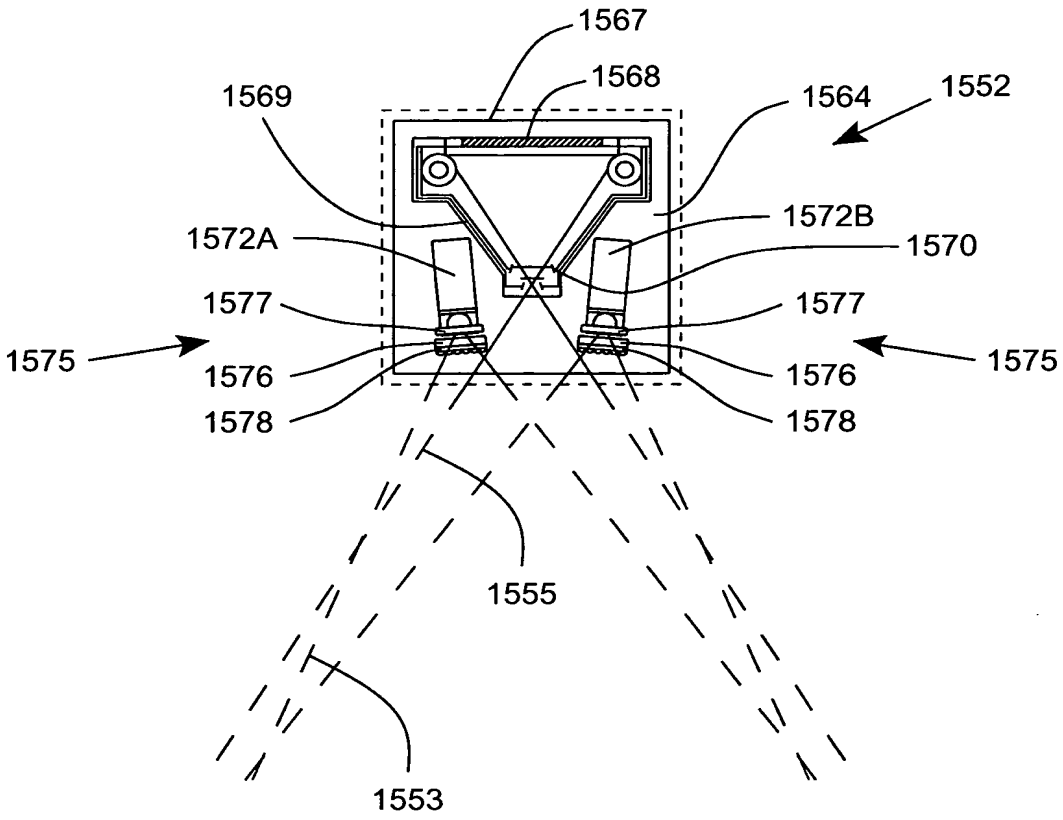

FIG. 42C

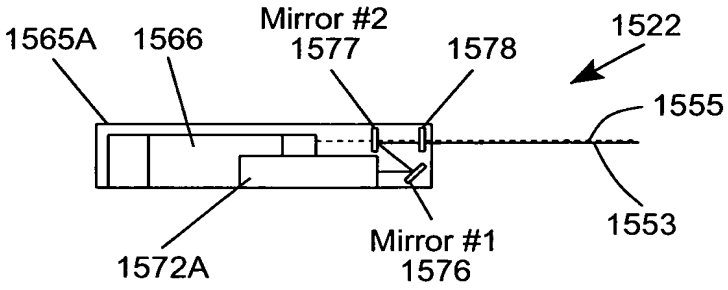

FIG. 42D

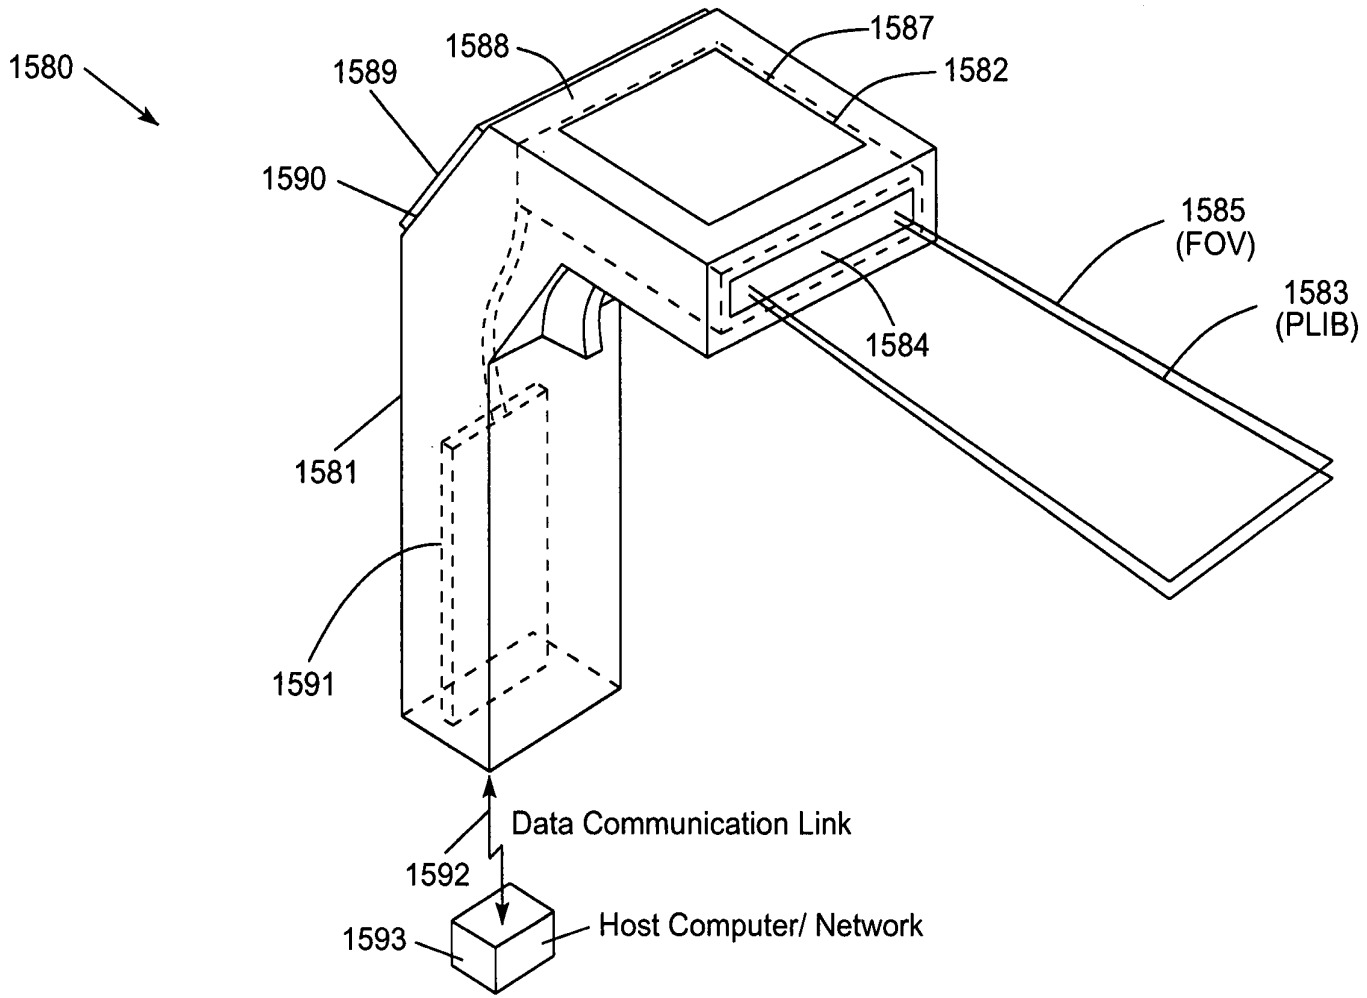
1580
1589
1588
1587
1582
1590
1585
(FOV)
1583
(PLIB)
1584
1581
1591
Data Communication Link
1592
1593
Host Computer/ Network

FIG. 43A

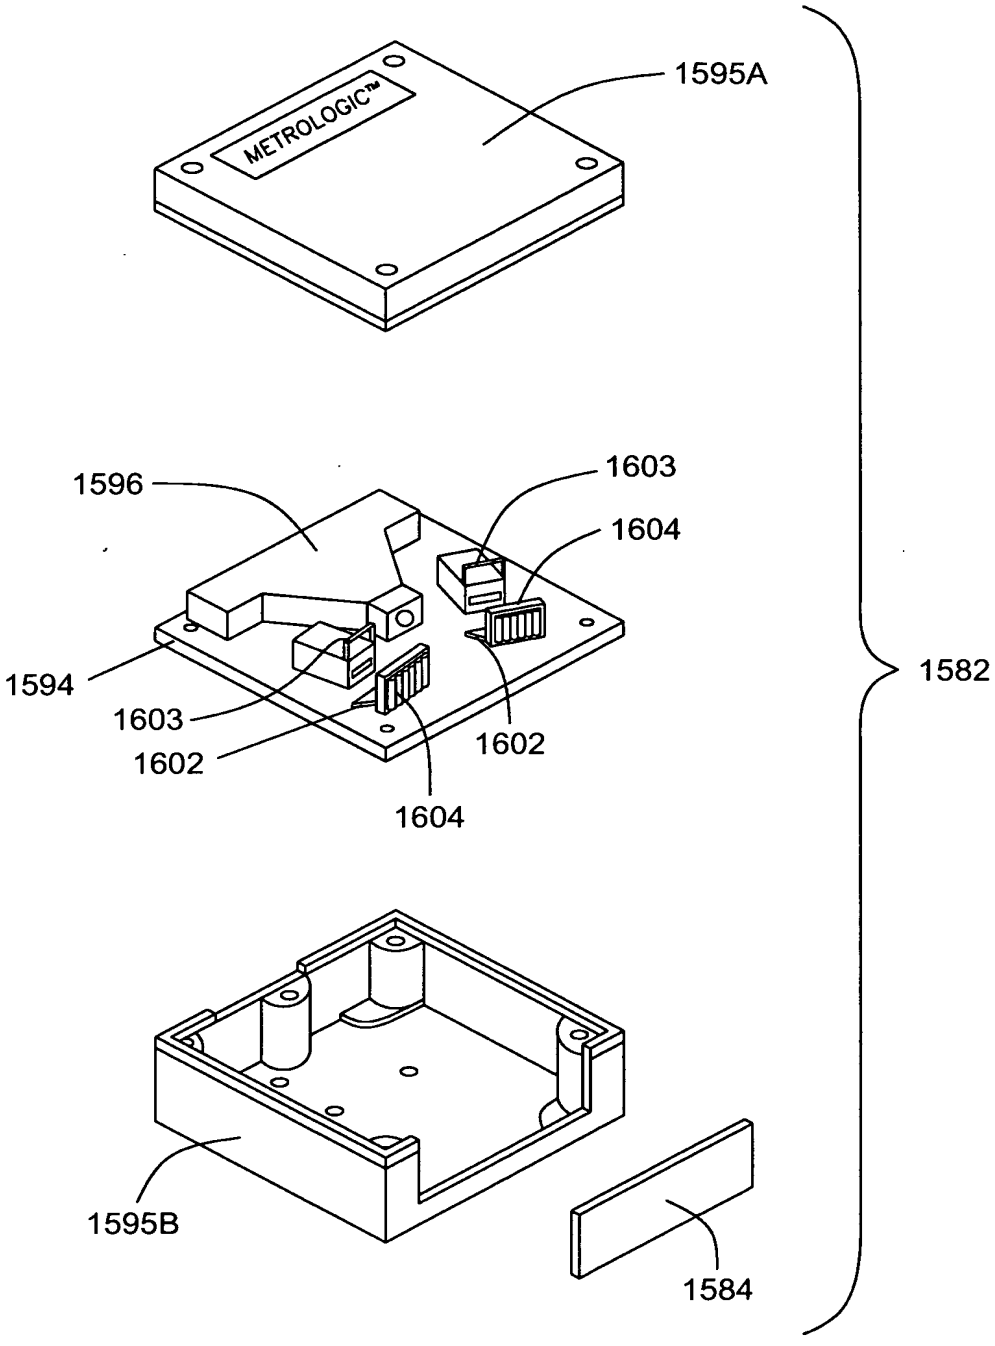
METROLOGIC™
1595A
1596
1603
1604
1594
1603
1602
1602
1604
1582
1595B
1584

FIG. 43B

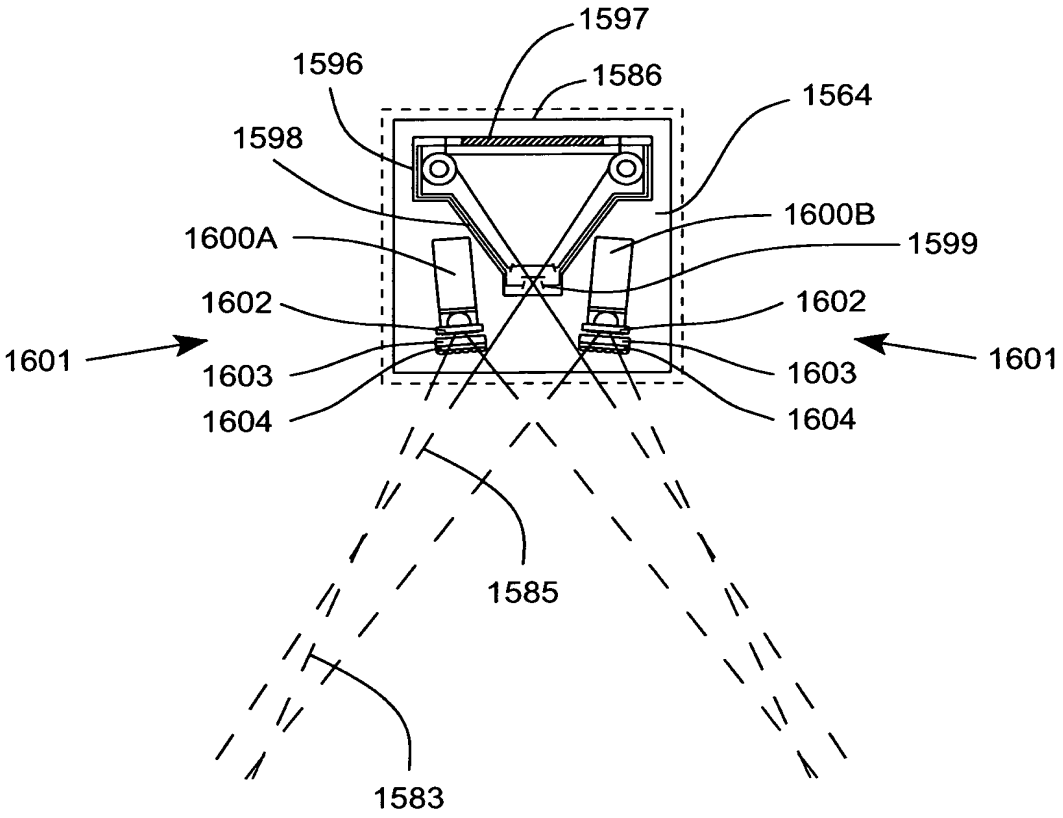

FIG. 43C

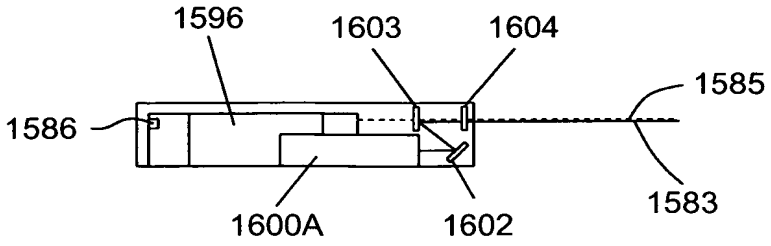

FIG. 43D

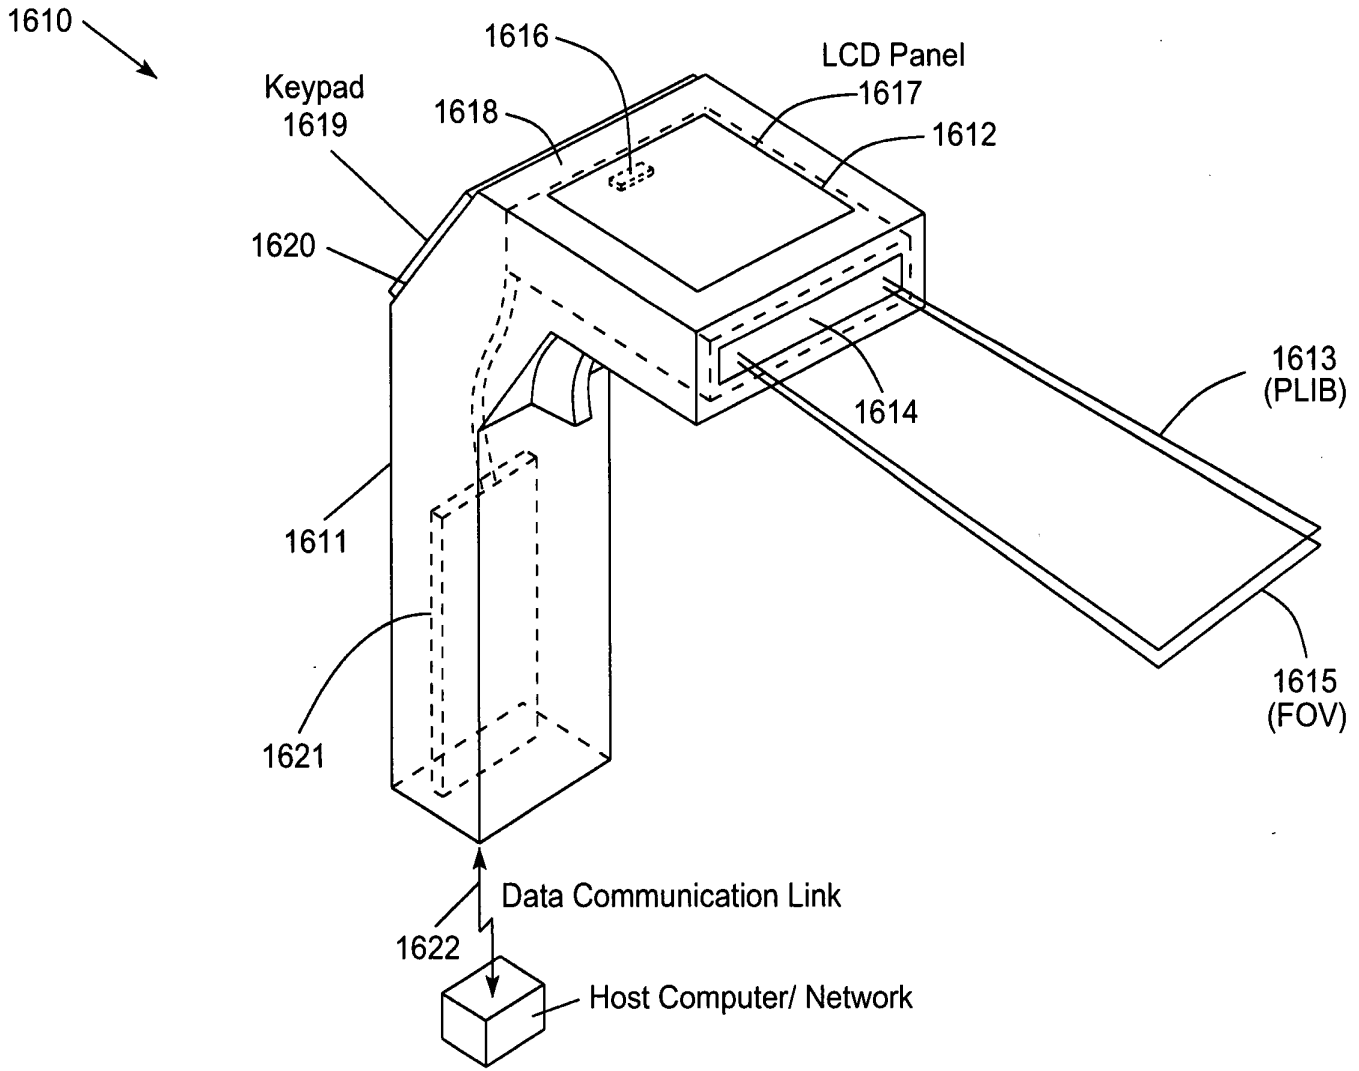
1610
1616
LCD Panel
1617
Keypad
1619
1618
1612
1620
1613
(PLIB)
1614
1611
1615
(FOV)
1621
Data Communication Link
1622
Host Computer/ Network

FIG. 44A

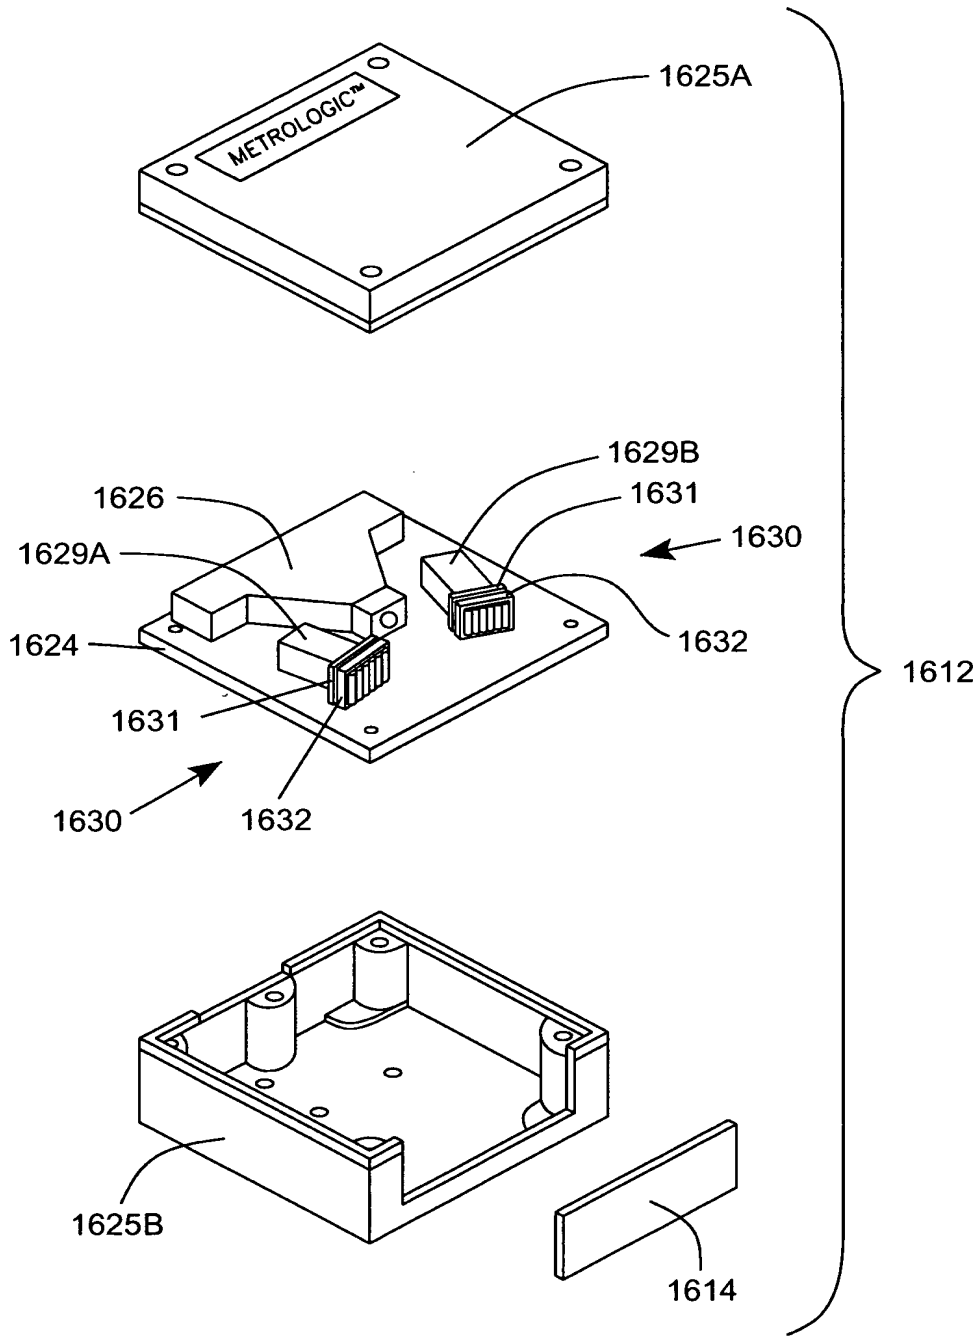
METROLOGIC™
1625A
1629B
1626
1631
1630
1629A
1624
1632
1631
1630
1632
1612
1625B
1614

FIG. 44B

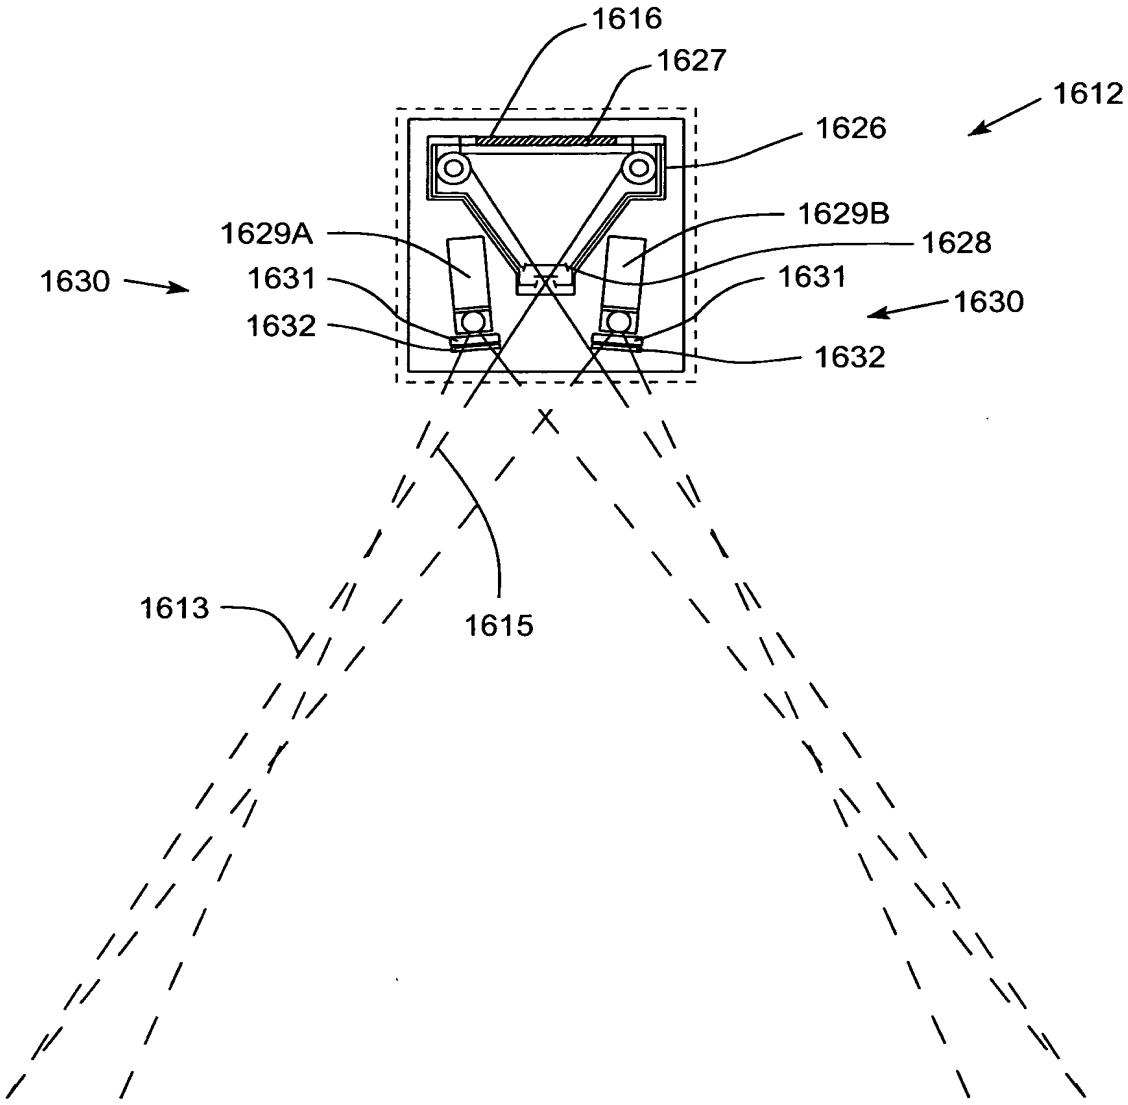
1616
1627
1612
1626
1629B
1629A
1628
1630
1631
1631
1630
1632
1632
1613
1615

FIG. 44C

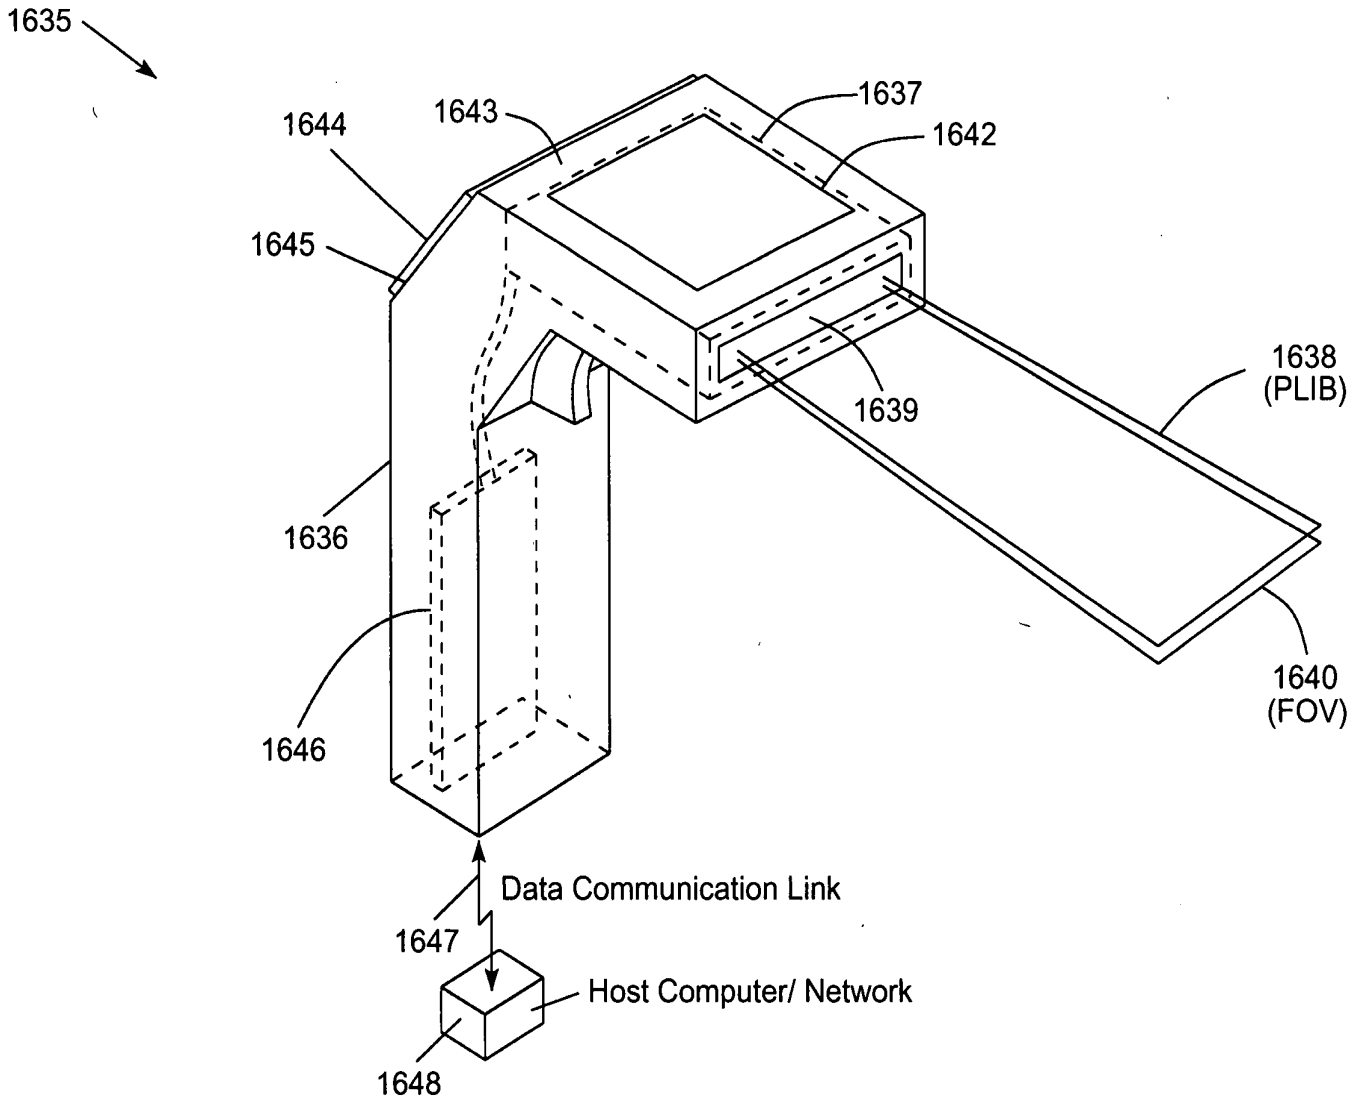
1635
1644
1643
1637
1642
1645
1639
1638
(PLIB)
1636
1640
(FOV)
1646
Data Communication Link
1647
Host Computer/ Network
1648

FIG. 45A

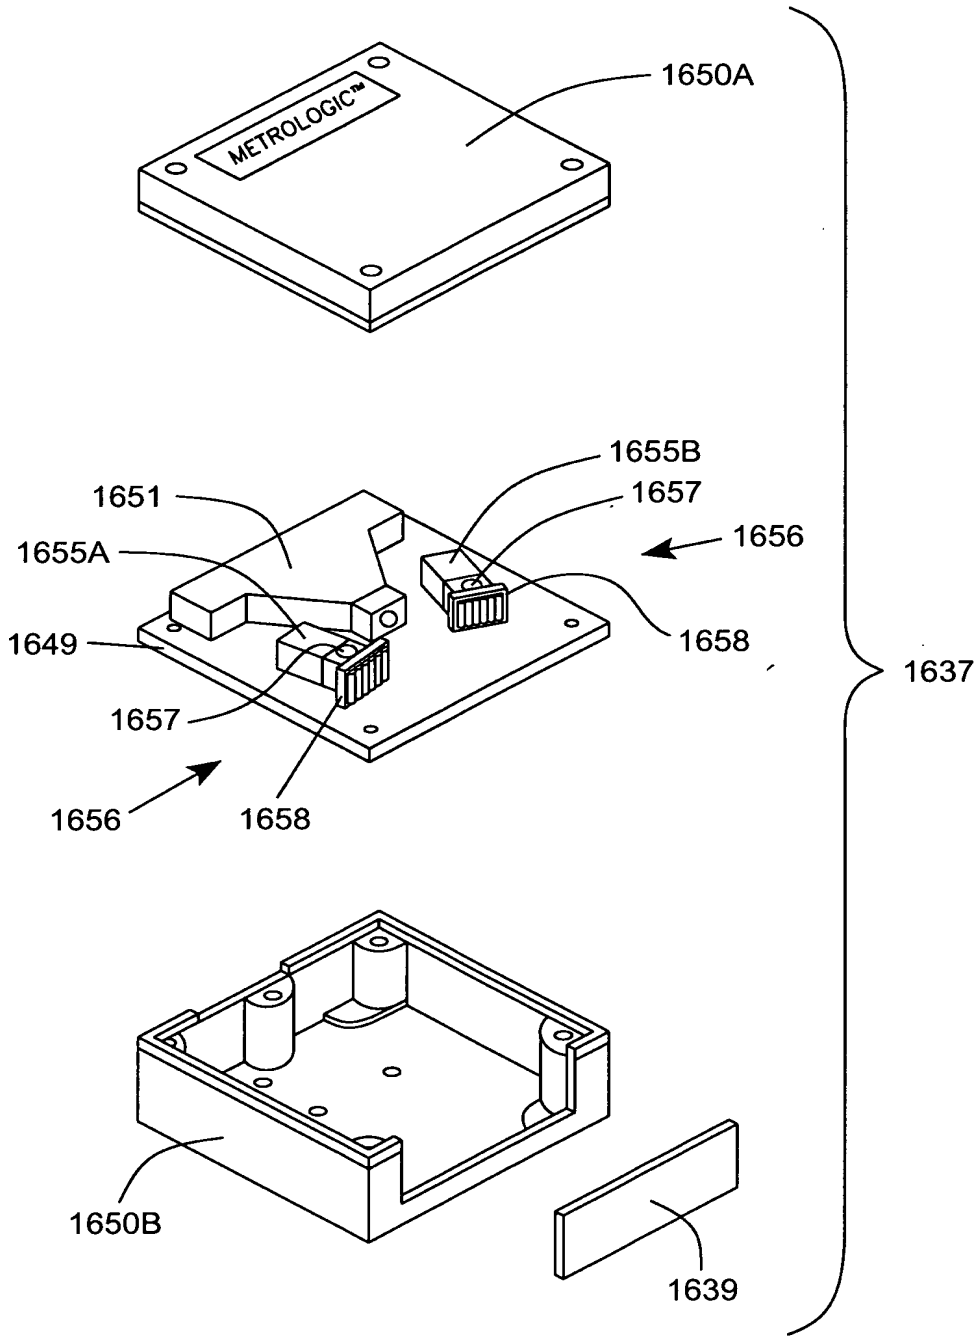
METROLOGIC™
1650A
1655B
1657
1656
1651
1655A
1649
1658
1657
1656
1658
1637
1650B
1639

FIG. 45B

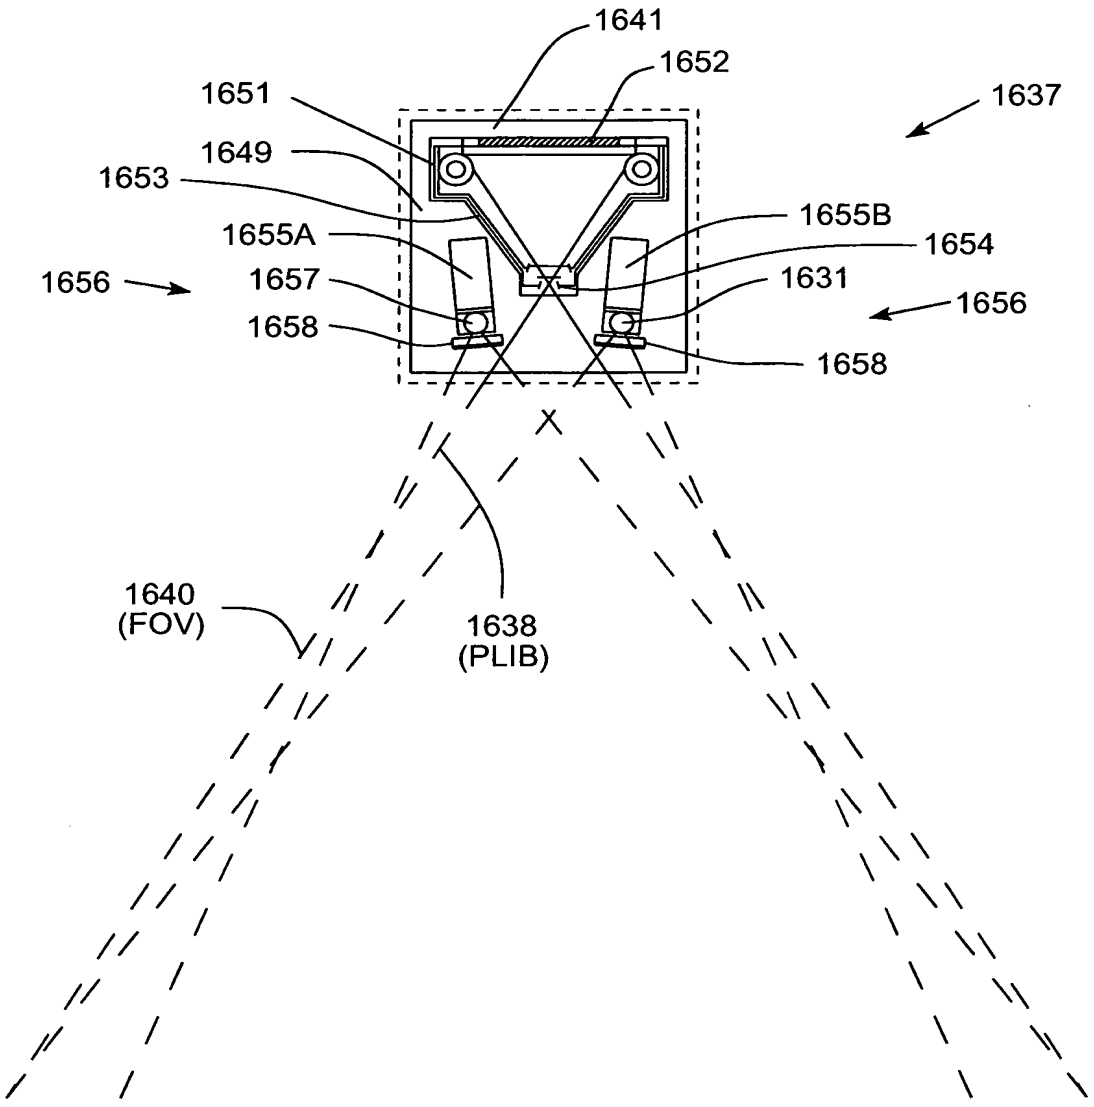
1641
1652
1651
1637
1649
1653
1655B
1655A
1654
1656
1657
1631
1656
1658
1658
1640
(FOV)
1638
(PLIB)

FIG. 45C

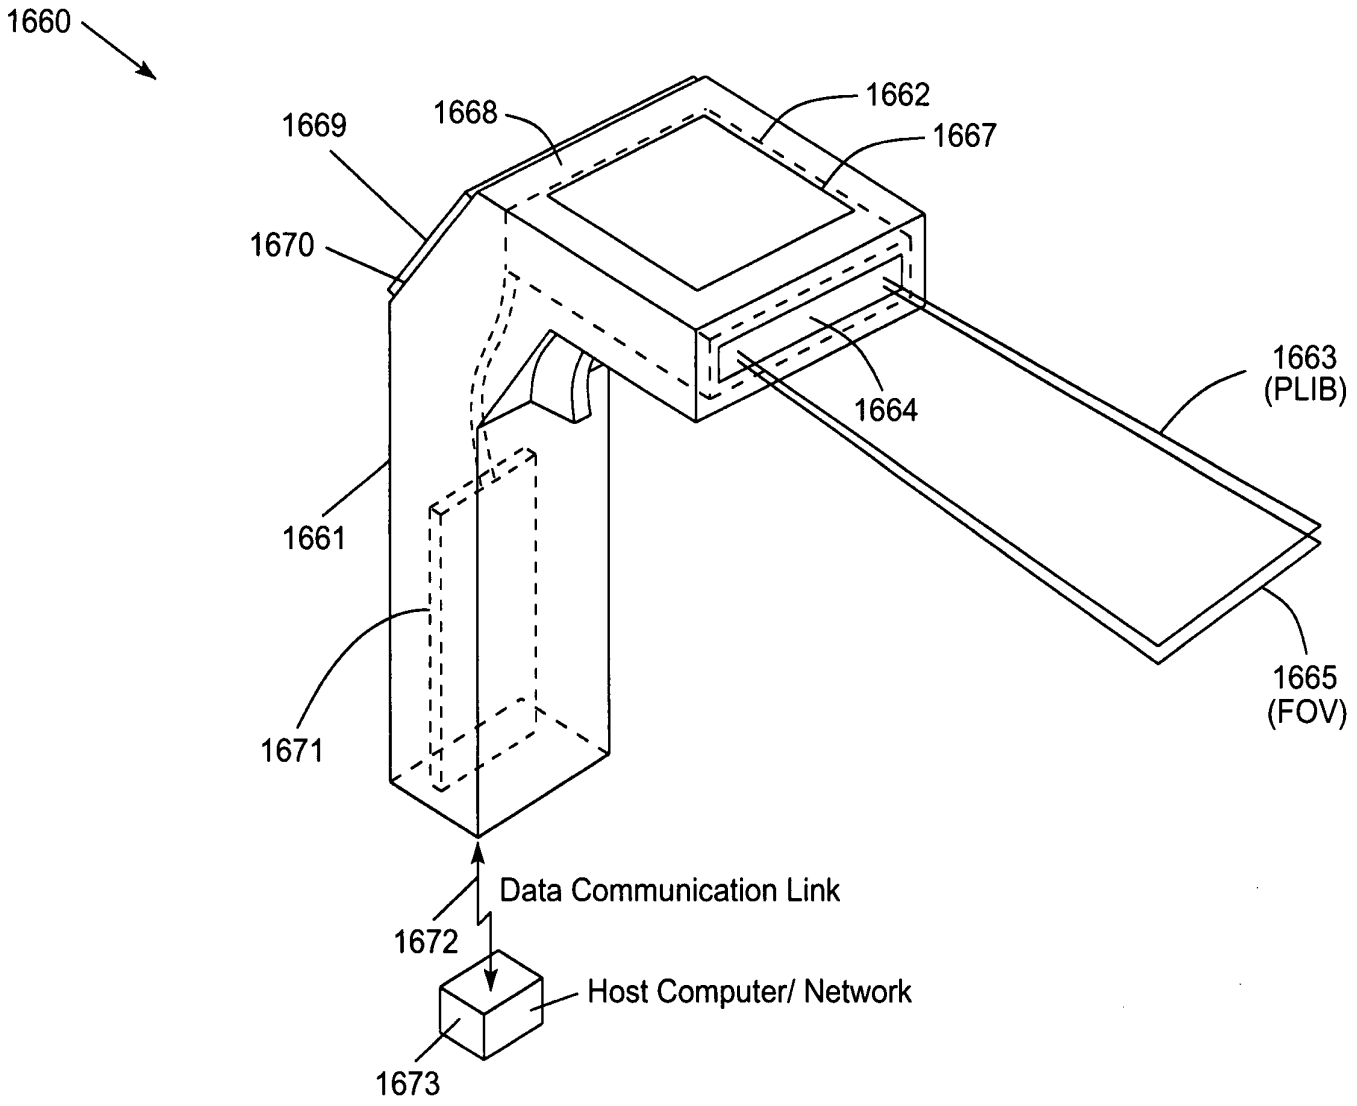
1660
1669
1668
1662
1667
1670
1663
(PLIB)
1664
1661
1665
(FOV)
1671
Data Communication Link
1672
Host Computer/ Network
1673

FIG. 46A

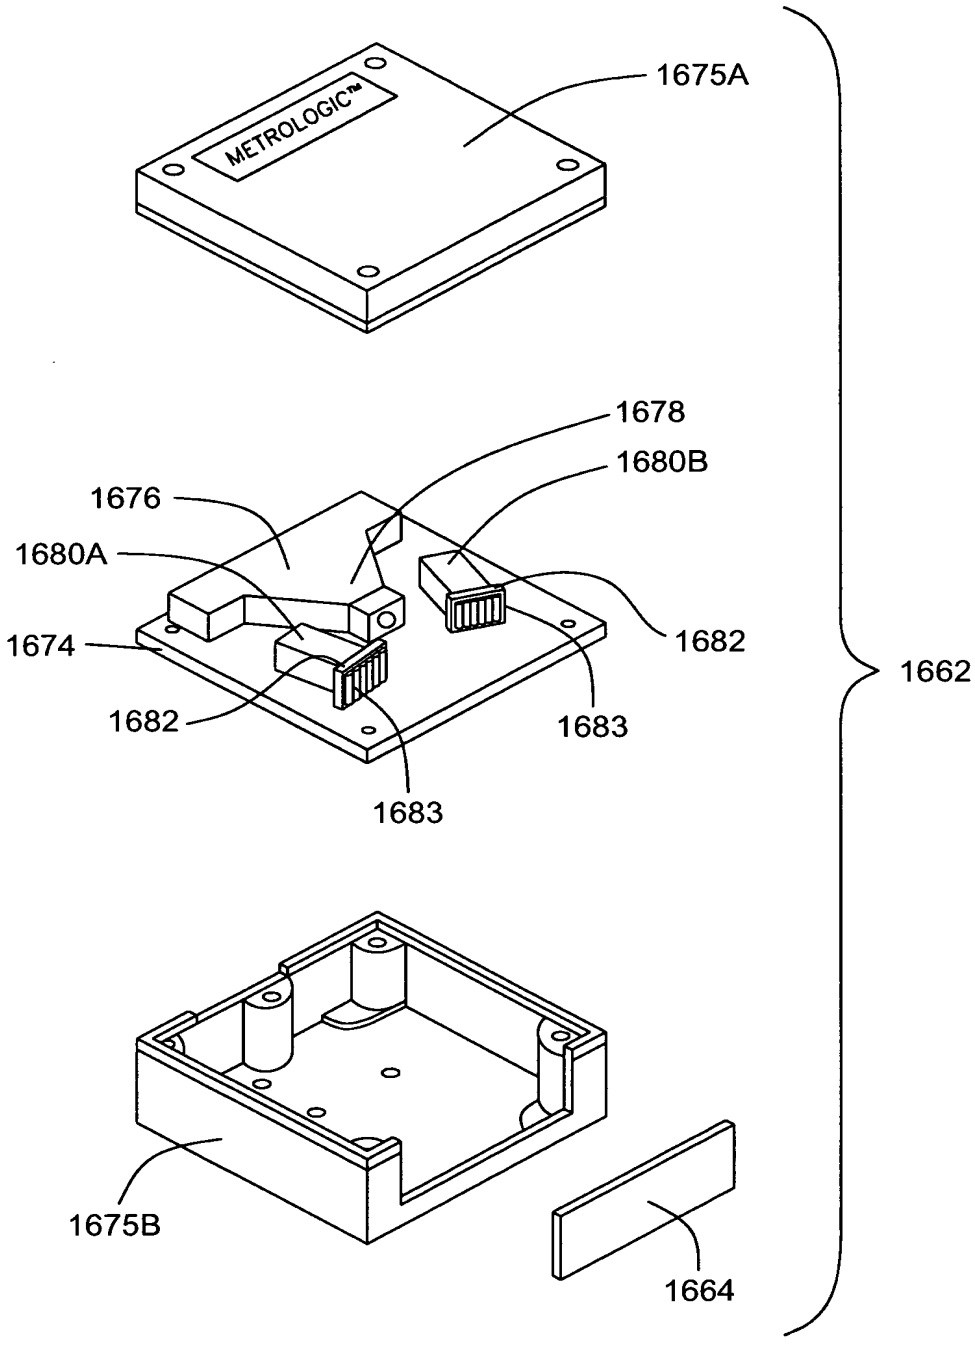
METROLOGIC™
1675A
1678
1680B
1676
1680A
1674
1682
1682
1683
1683
1662
1675B
1664

FIG. 46B

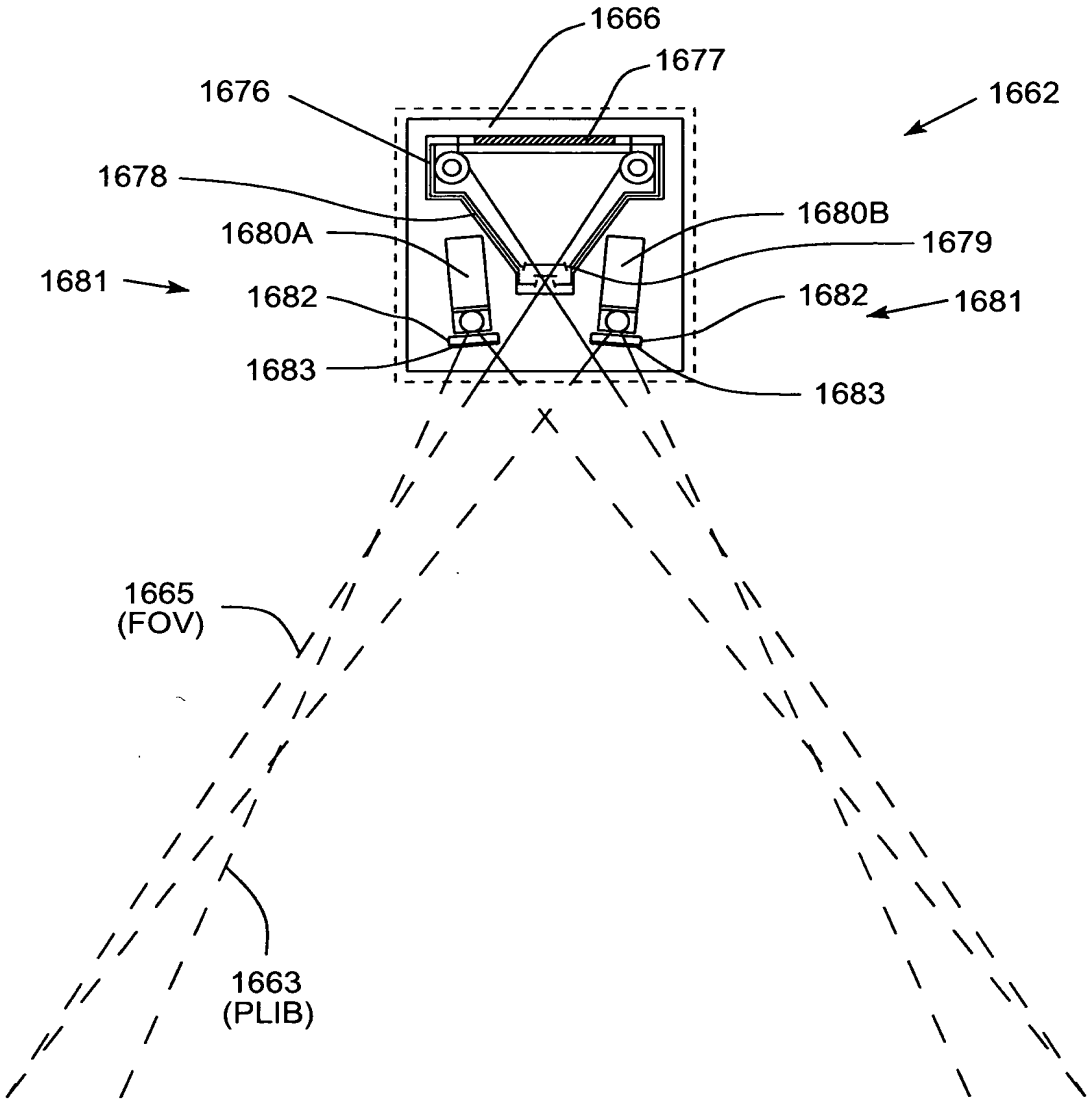
1666
1677
1676
1662
1678
1680B
1680A
1679
1681
1682
1682
1681
1683
1683
1665
(FOV)
1663
(PLIB)

FIG. 46C

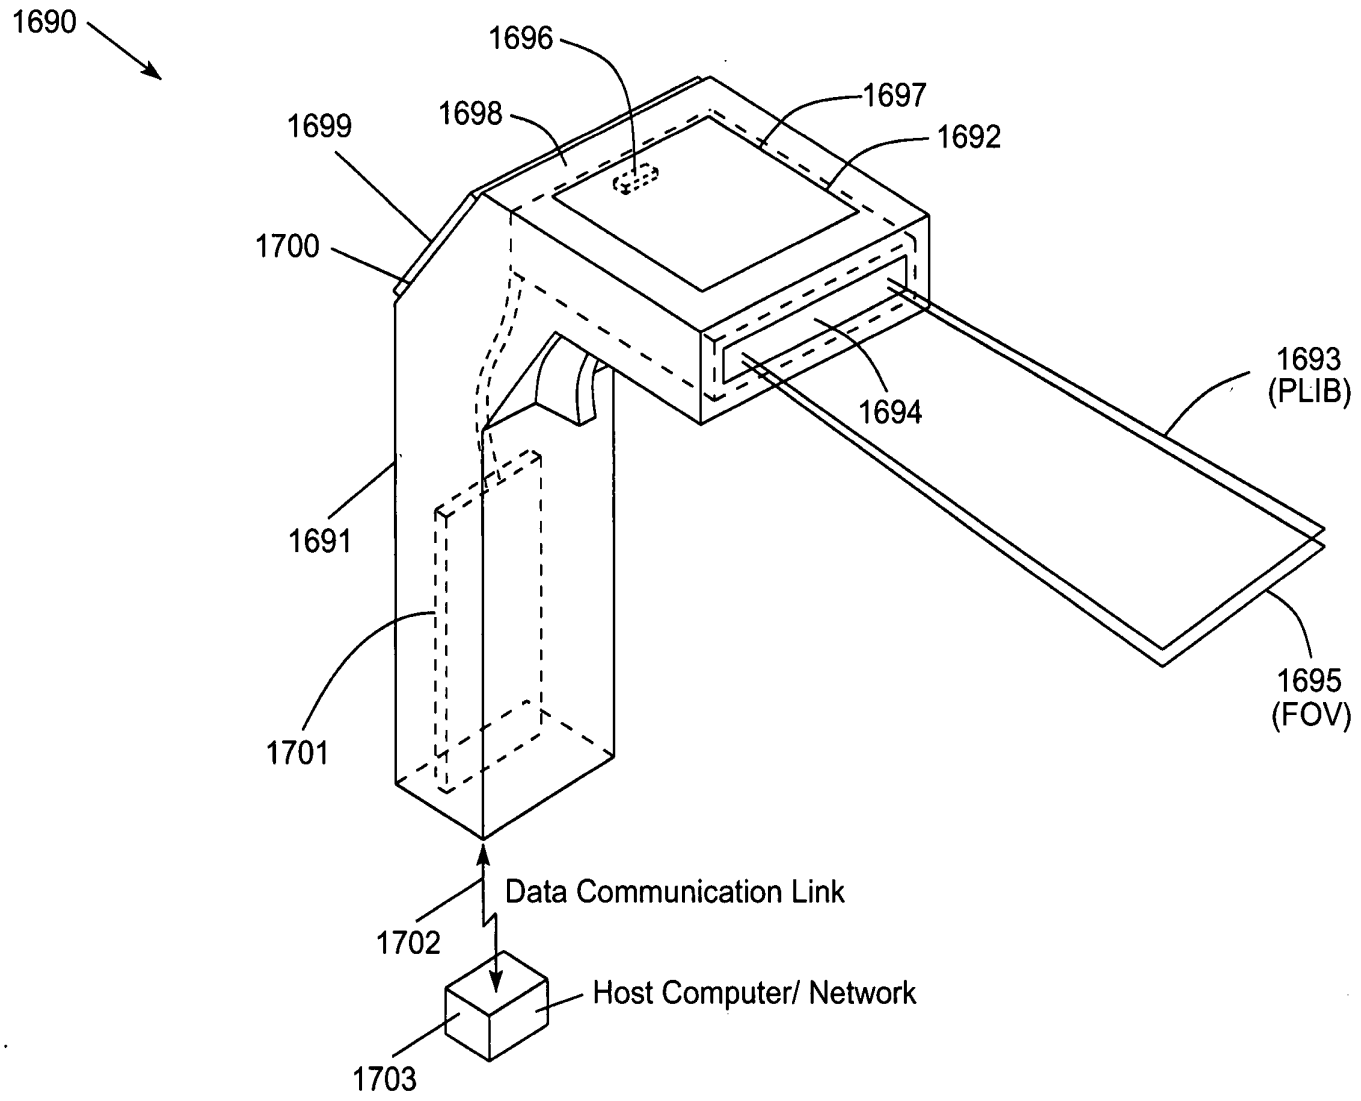
1690
1696
1697
1698
1699
1692
1700
1693
(PLIB)
1694
1691
1695
(FOV)
1701
Data Communication Link
1702
Host Computer/ Network
1703

FIG. 47A

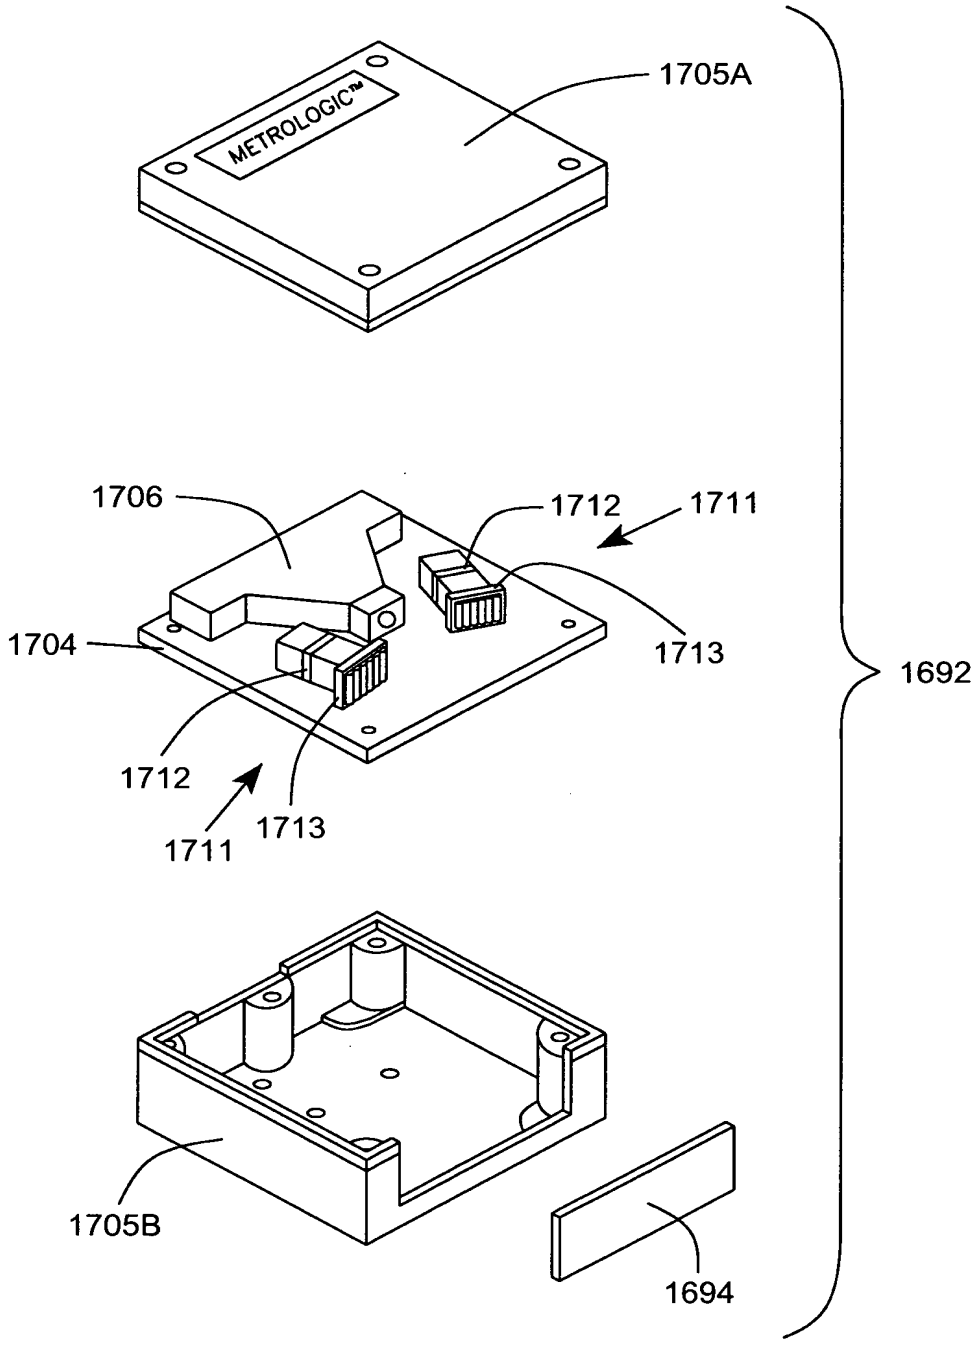
METROLOGIC™
1705A
1706
1712
1711
1704
1713
1712
1711
1713
1692
1705B
1694

FIG. 47B

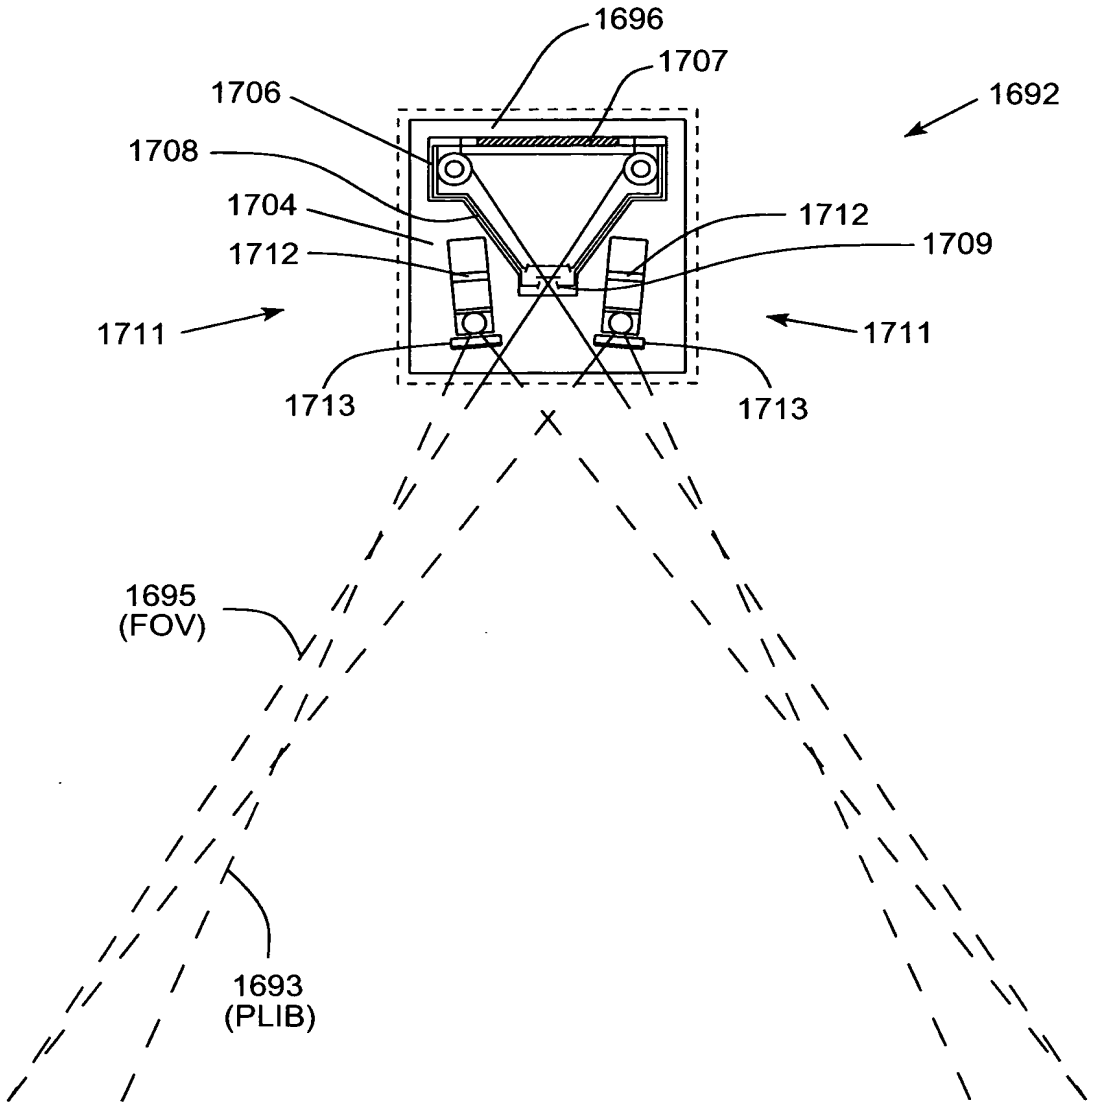
1696
1707
1706
1692
1708
1704
1712
1709
1712
1711
1711
1713
1713
1695
(FOV)
1693
(PLIB)

FIG. 47C

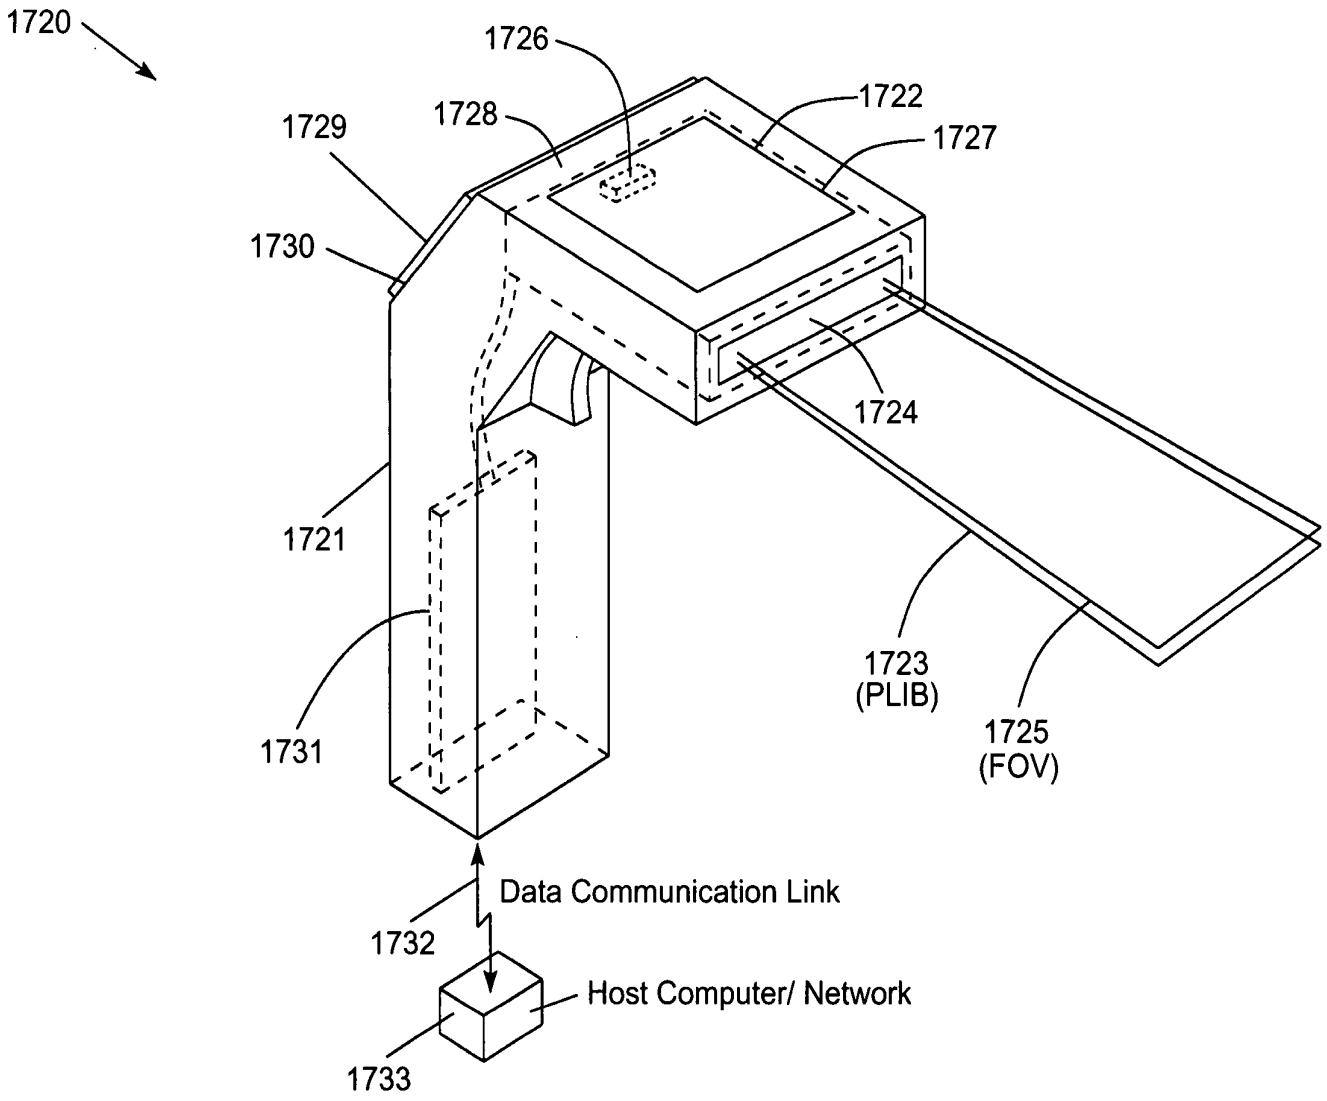
1720
1726
1728
1729
1722
1727
1730
1724
1721
1723
(PLIB)
1725
(FOV)
1731
Data Communication Link
1732
Host Computer/ Network
1733

FIG. 48A

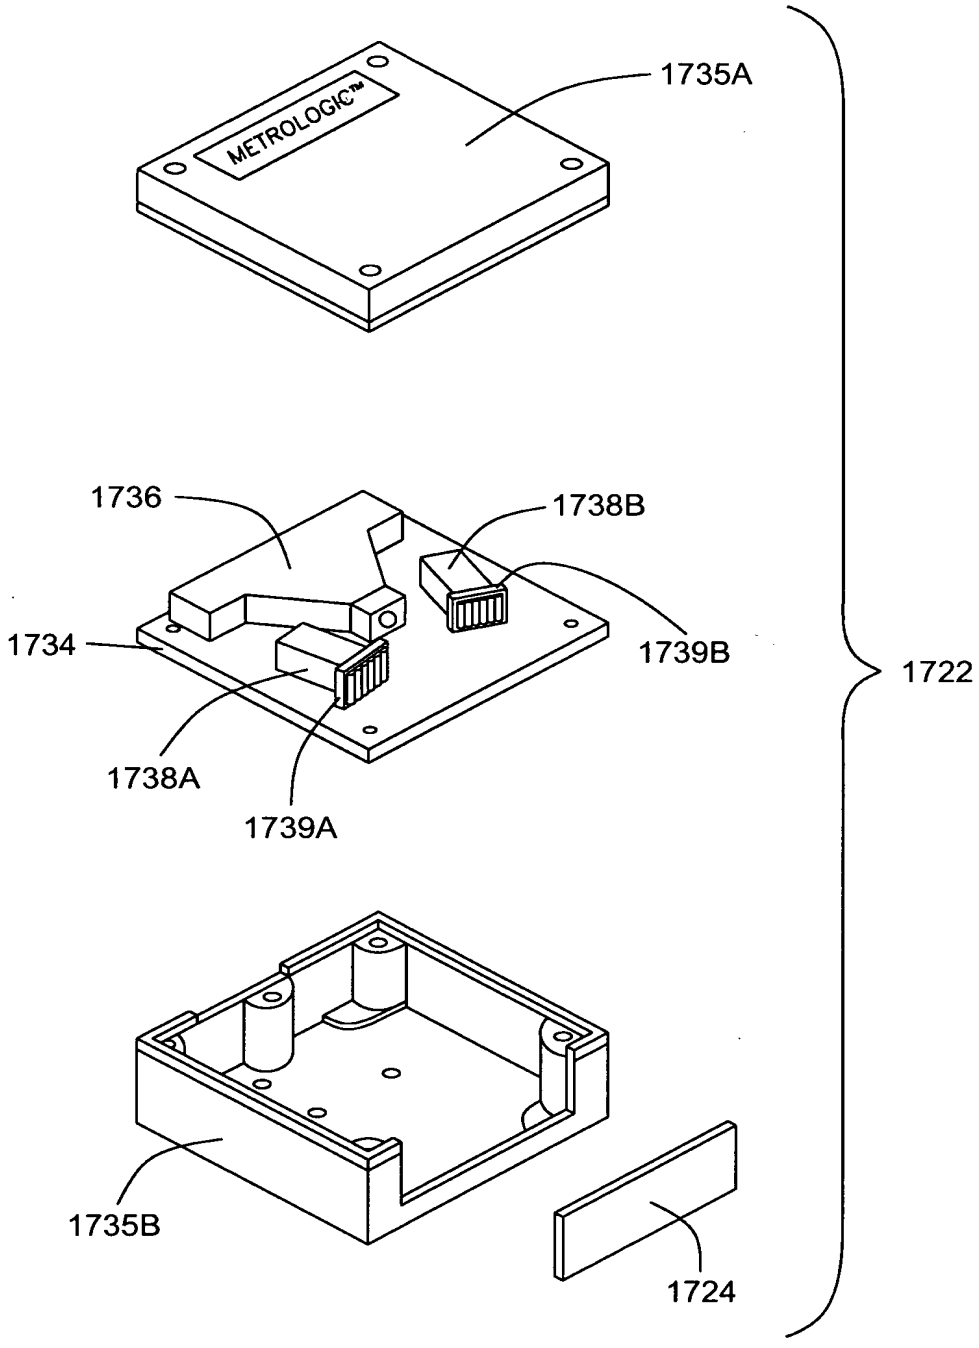
METROLOGIC™
1735A
1736
1738B
1734
1739B
1738A
1739A
1722
1735B
1724

FIG. 48B

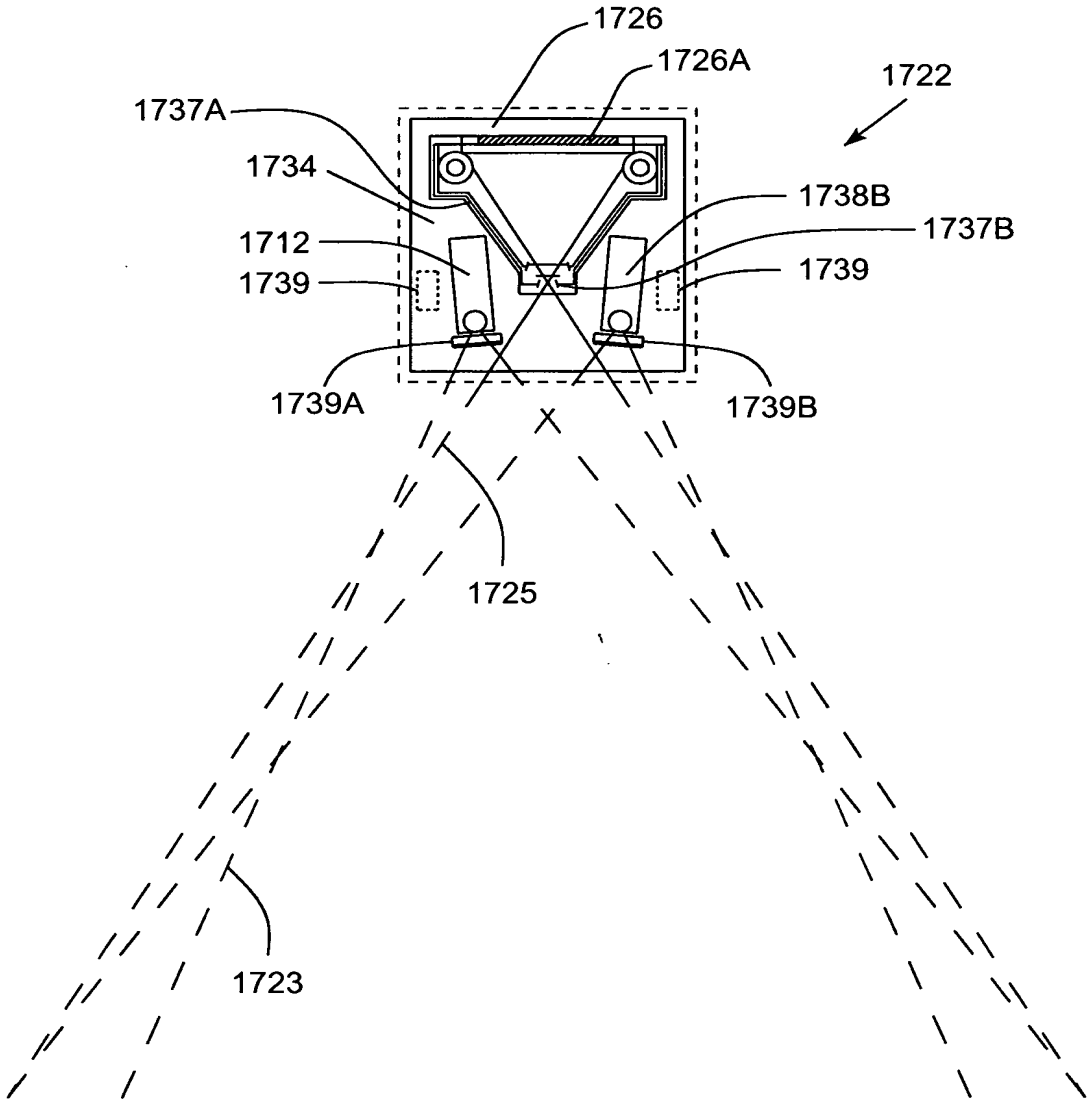
1726
1726A
1722
1737A
1734
1738B
1737B
1712
1739
1739
1739A
1739B
1725
1723

FIG. 48C

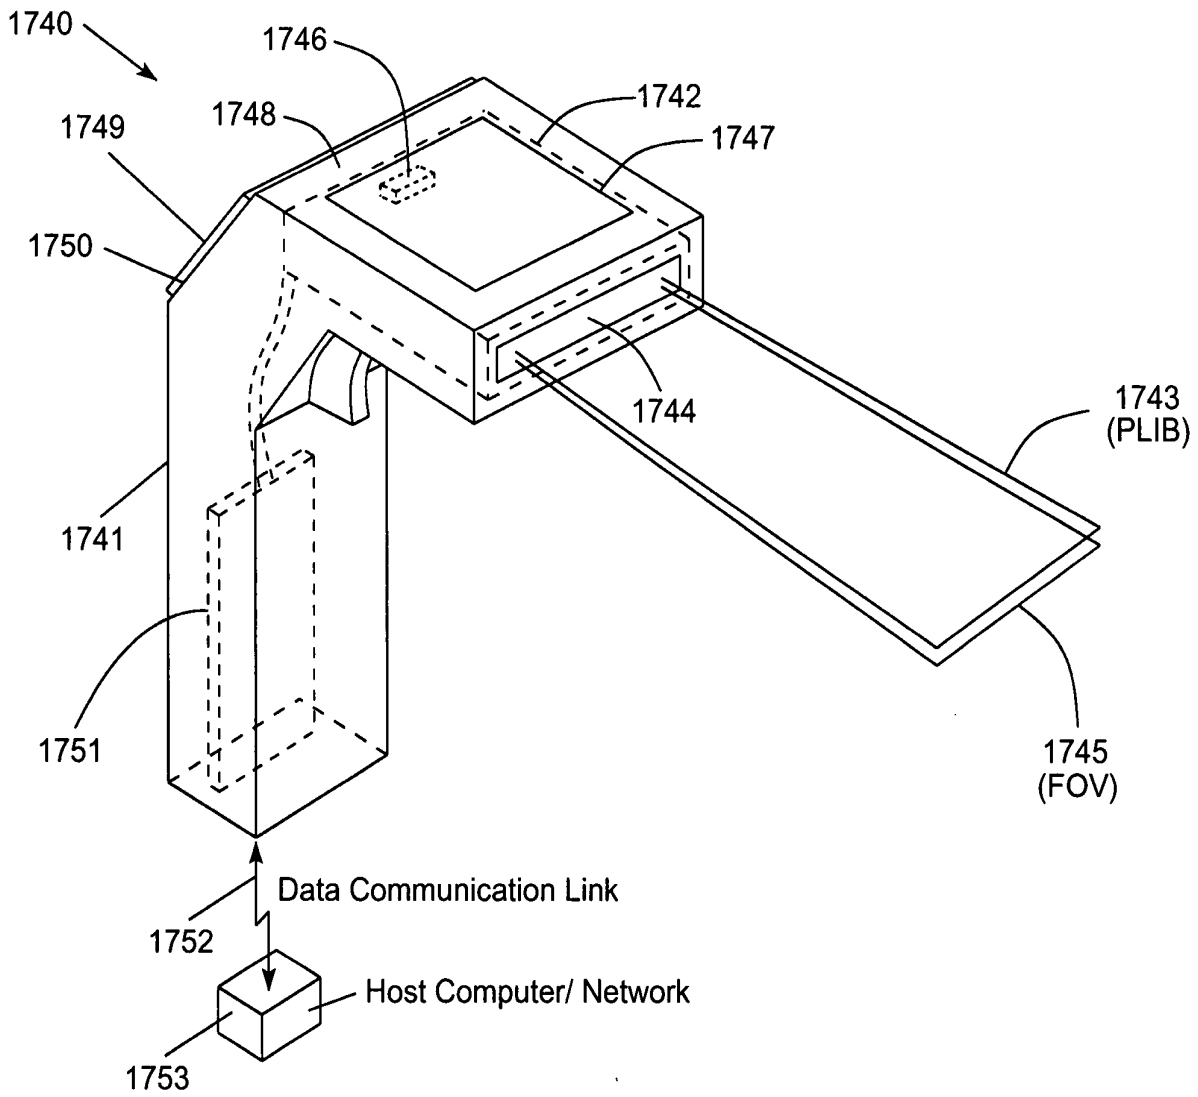
1740
1746
1748
1742
1749
1747
1750
1744
1743
(PLIB)
1741
1751
1745
(FOV)
Data Communication Link
1752
Host Computer/ Network
1753

FIG. 49A

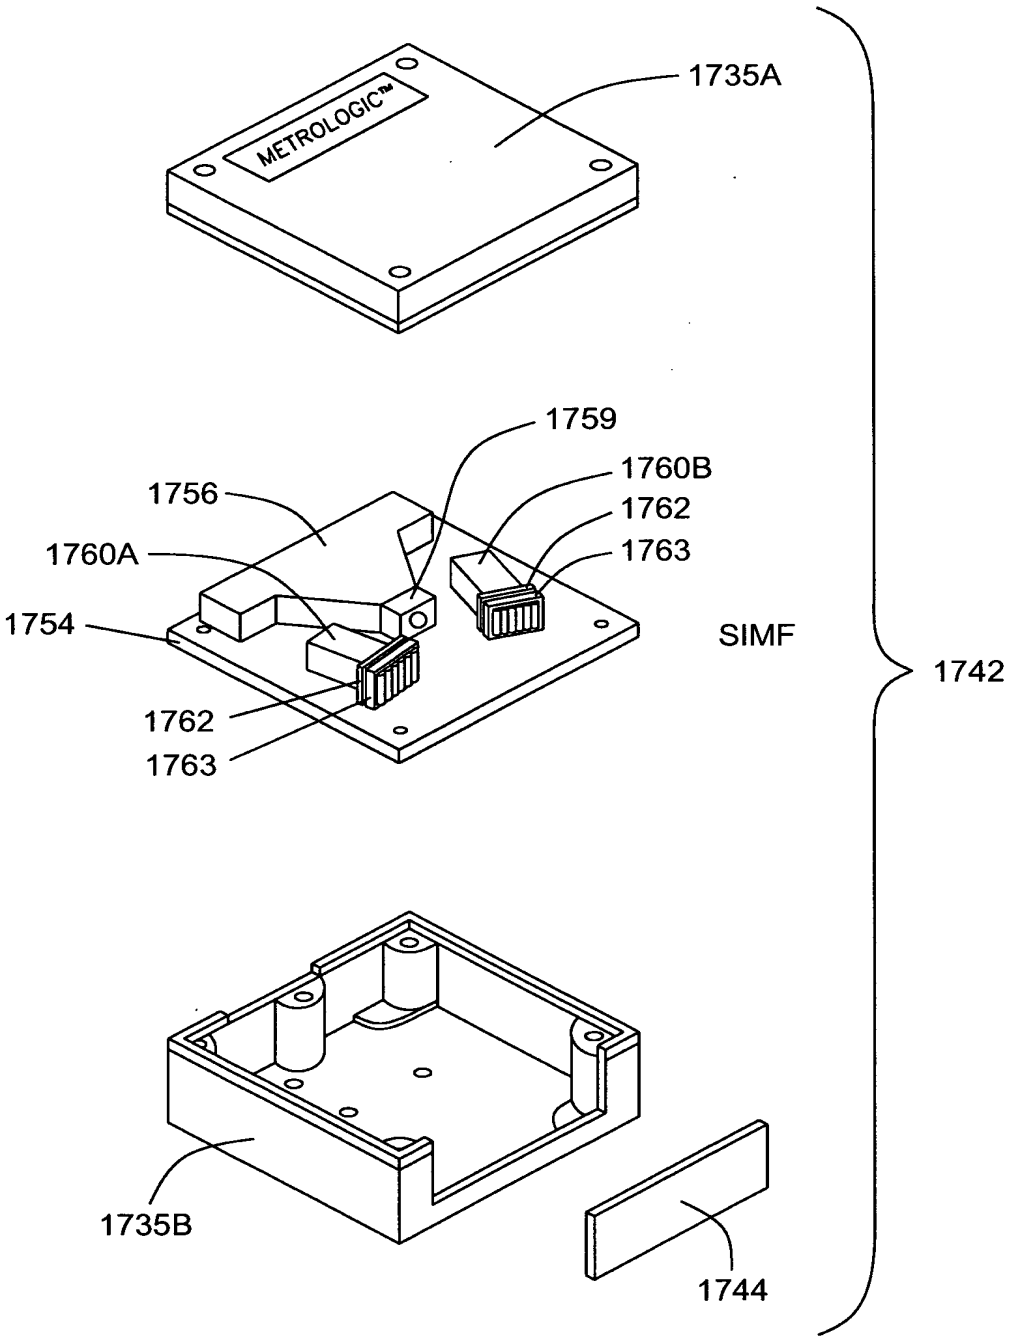
METROLOGIC™
1735A
1759
1760B
1762
1763
1756
1760A
1754
SIMF
1762
1763
1742
1735B
1744

FIG. 49B

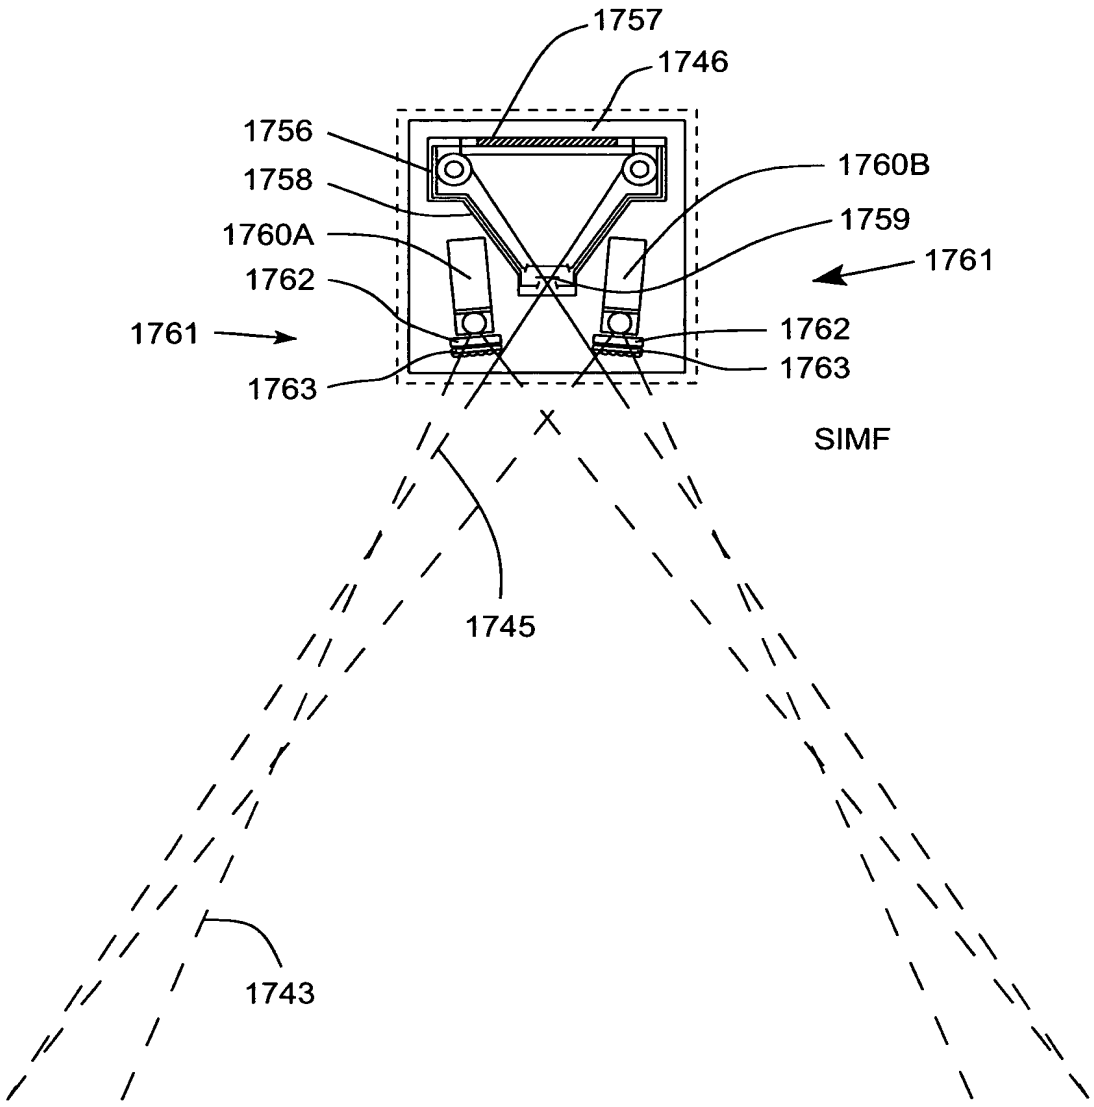
1757
1746
1756
1758
1760A
1762
1761
1763
1760B
1759
1761
1762
1763
SIMF
1745
1743

FIG. 49C

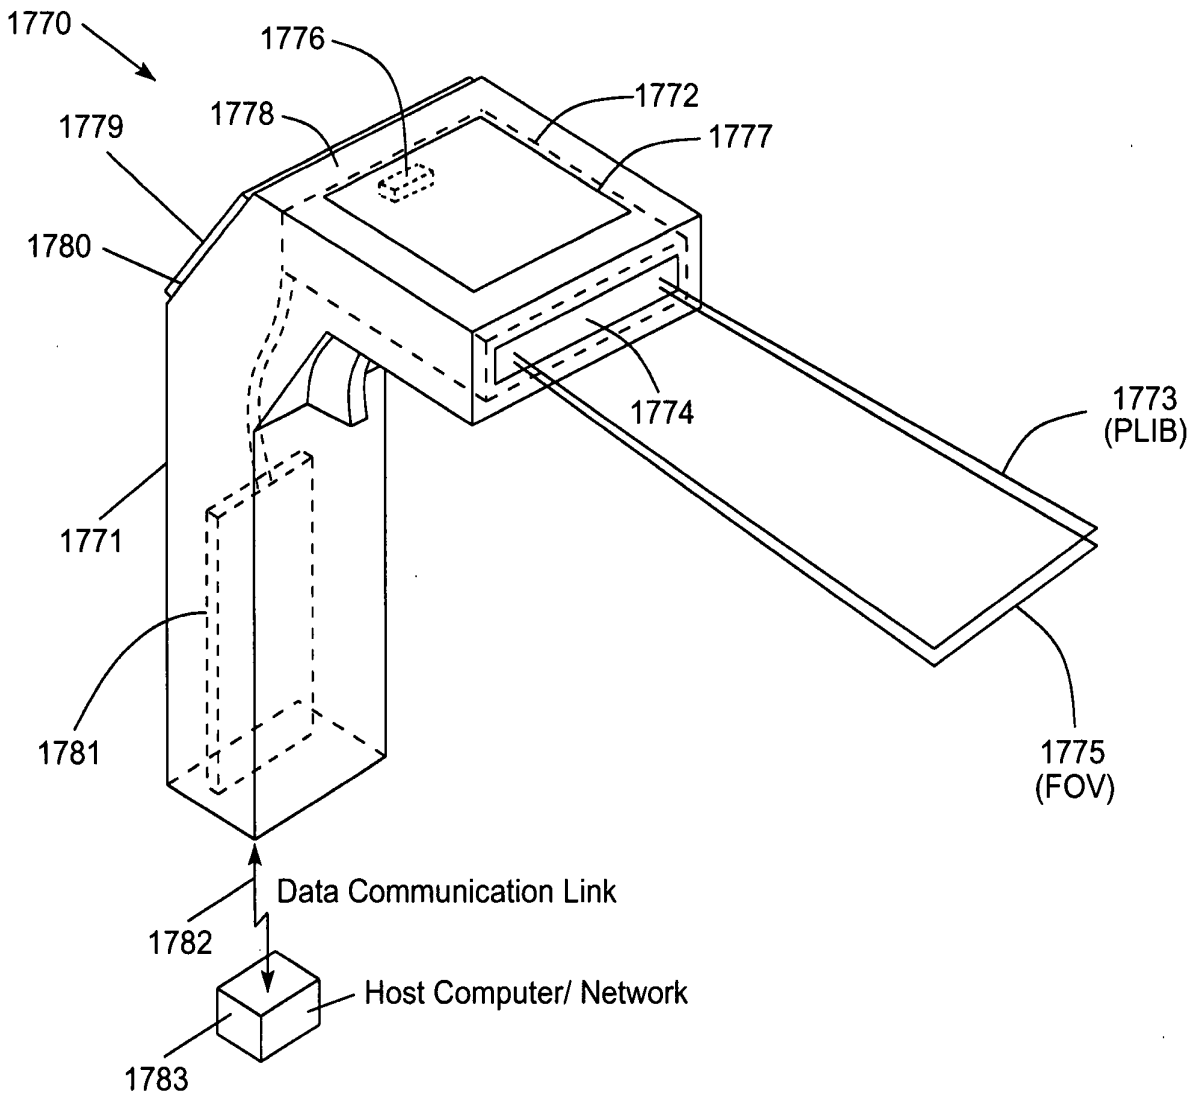
1770
1776
1772
1778
1779
1777
1780
1774
1773
(PLIB)
1771
1781
1775
(FOV)
Data Communication Link
1782
Host Computer/ Network
1783

FIG. 50A

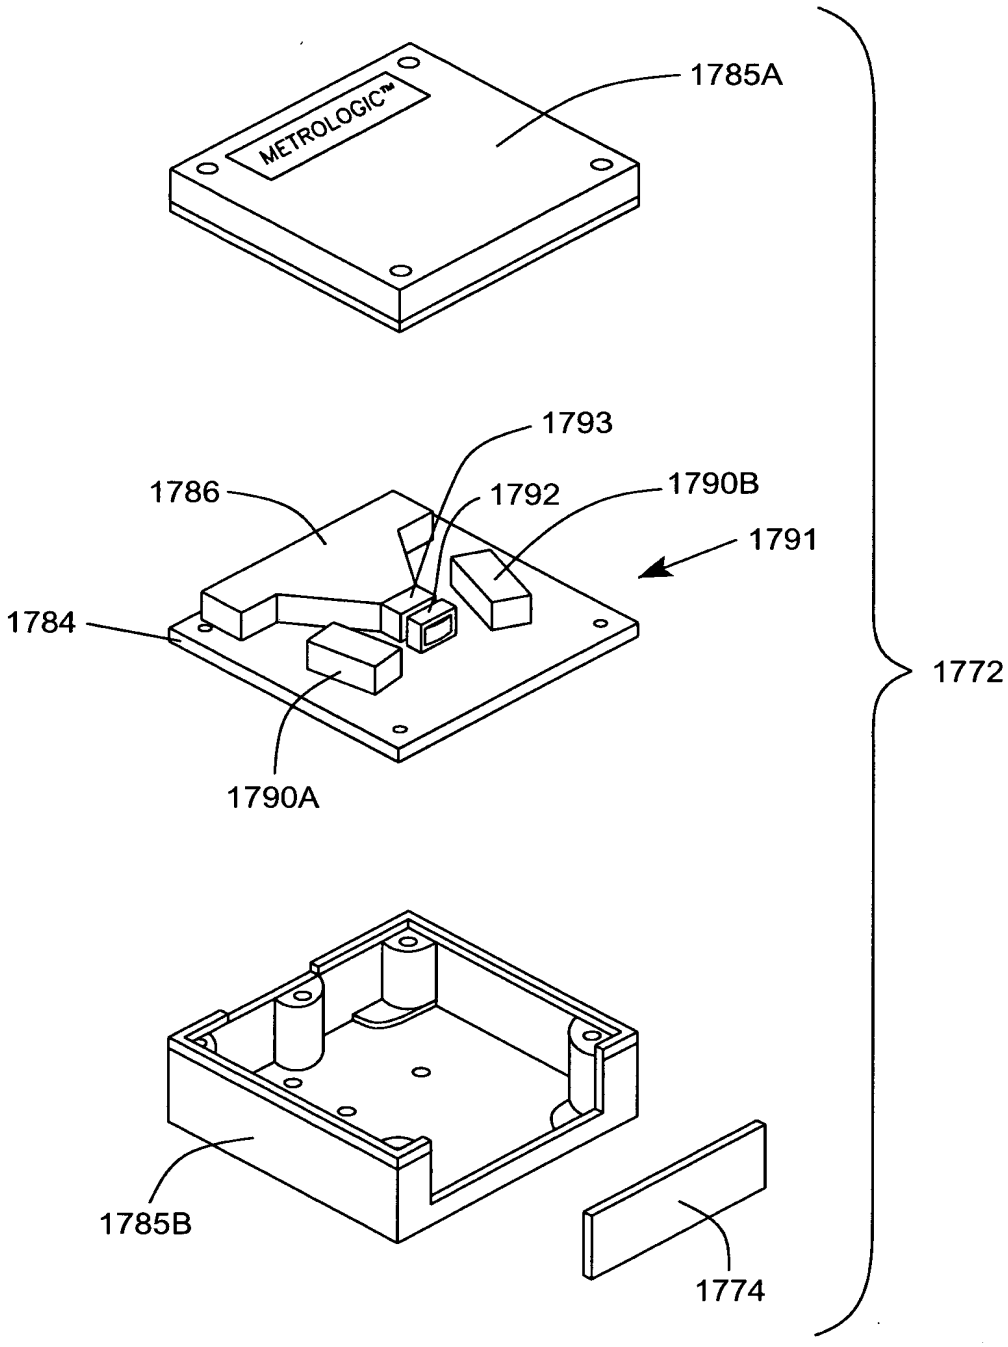
METROLOGIC™
1785A
1793
1786
1792
1790B
1791
1784
1790A
1772
1785B
1774

FIG. 50B

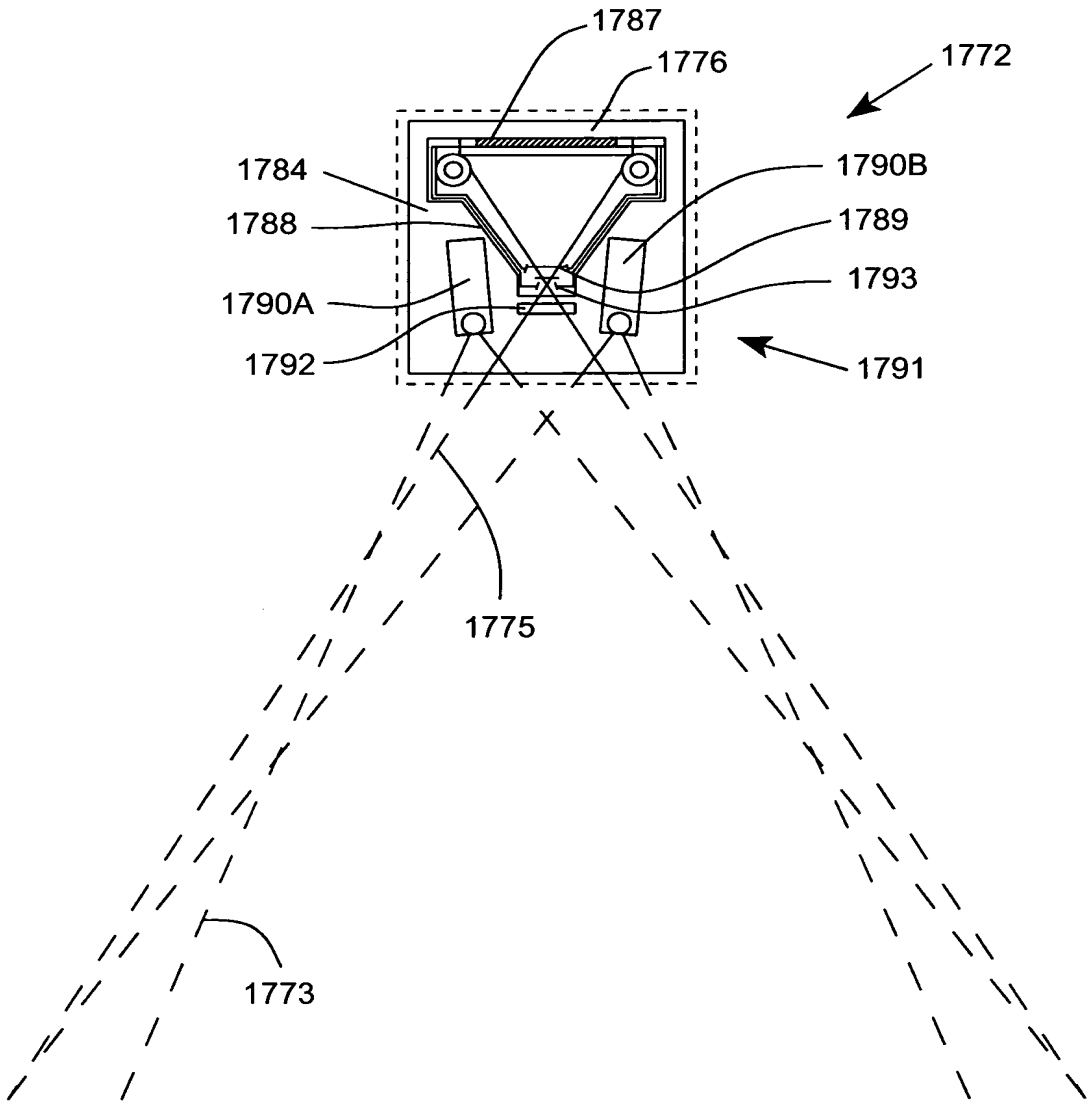
1787
1776
1772
1784
1790B
1788
1789
1790A
1793
1792
1791
1775
1773

FIG. 50C

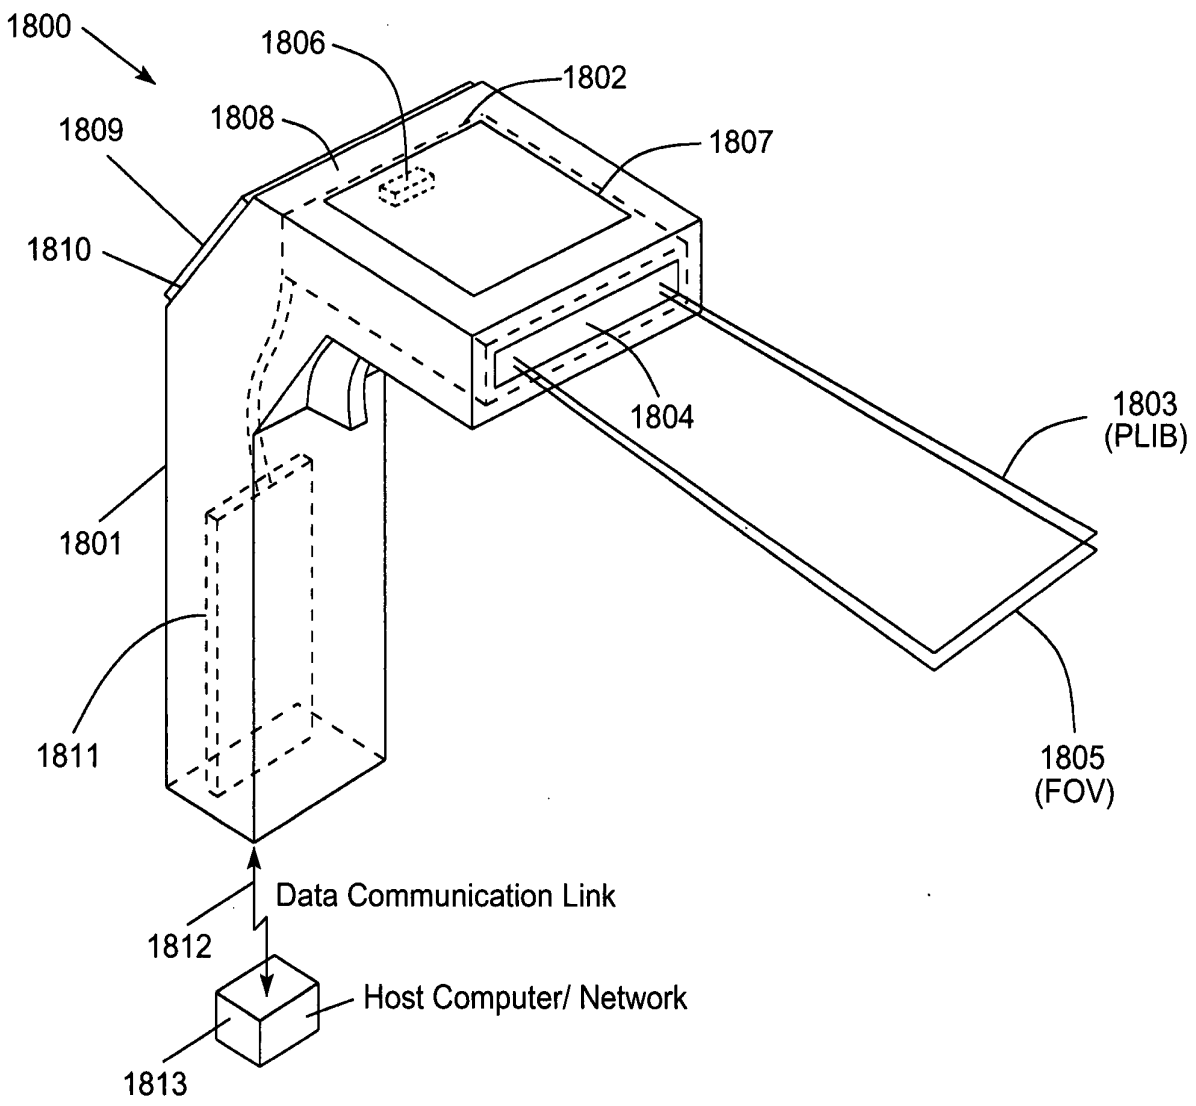
1800
1806
1802
1808
1809
1807
1810
1804
1803
(PLIB)
1801
1811
1805
(FOV)
Data Communication Link
1812
Host Computer/ Network
1813

FIG. 51A

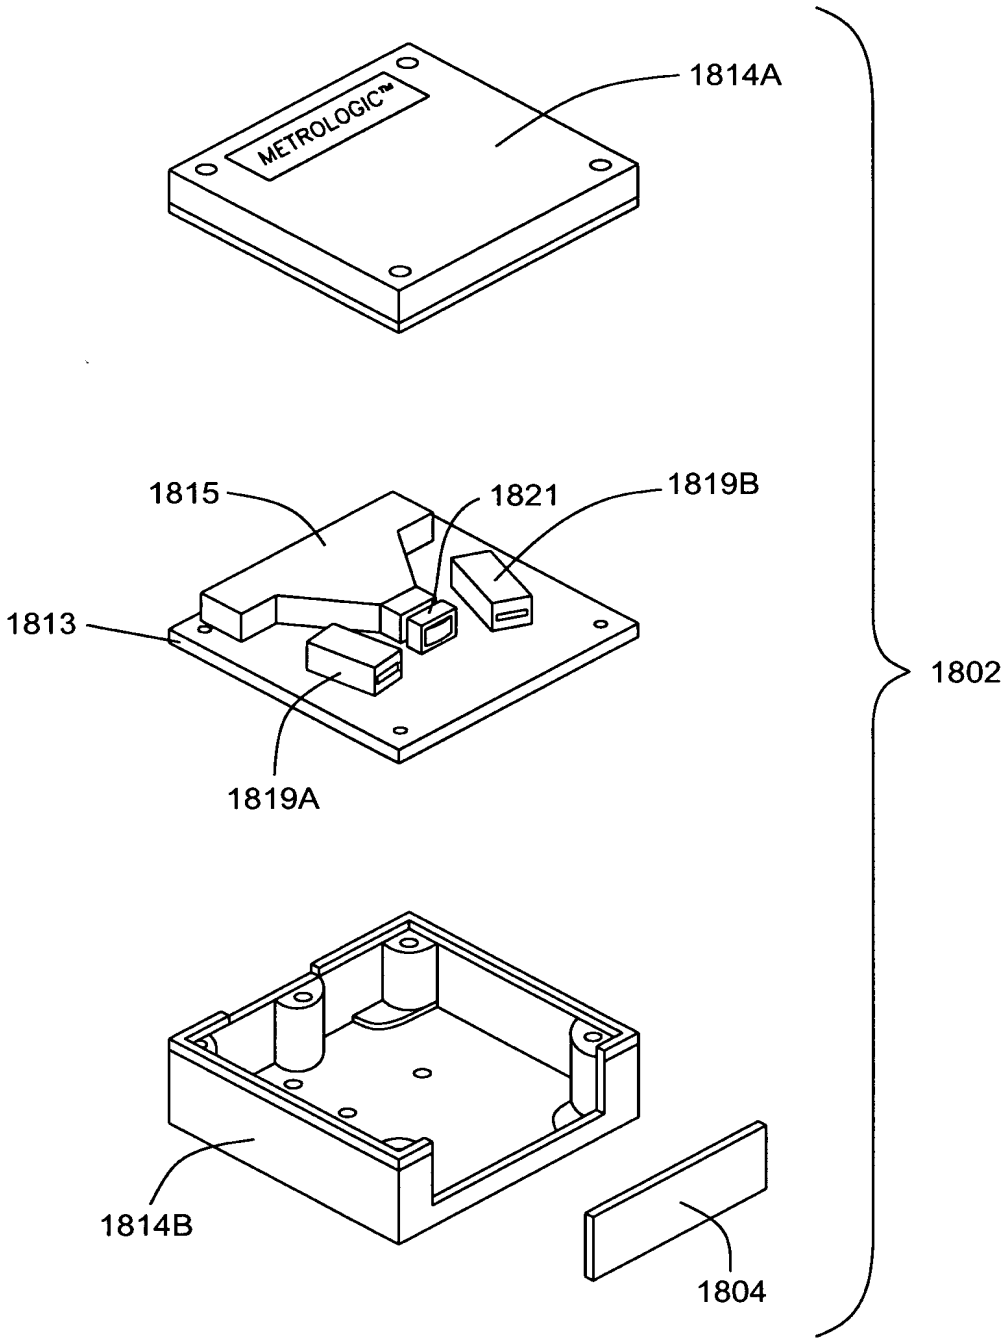
METROLOGIC™
1814A
1815
1821
1819B
1813
1819A
1814B
1804
1802

FIG. 51B

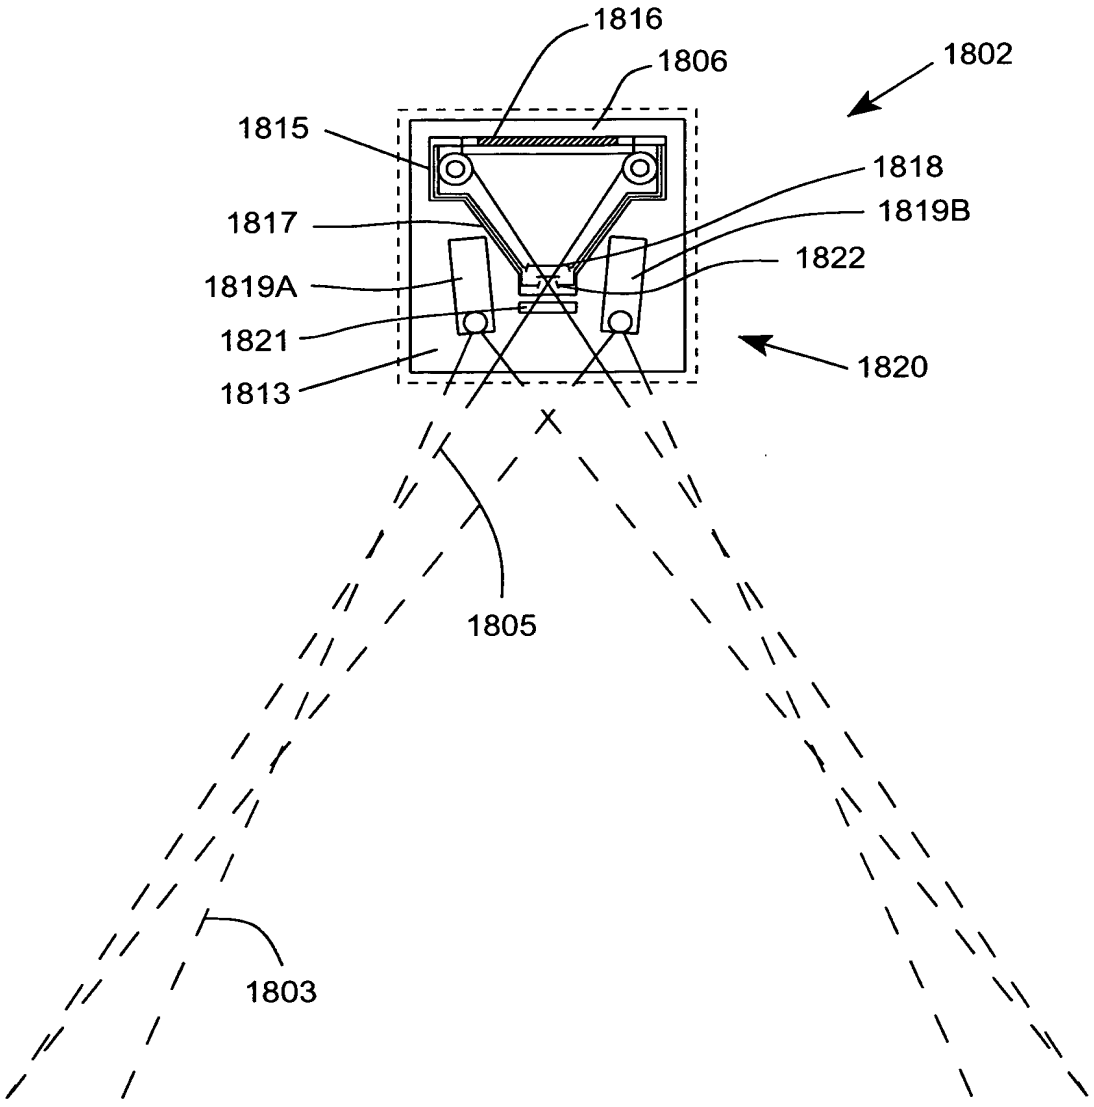
1816
1806
1802
1815
1818
1819B
1817
1822
1819A
1821
1820
1813
1805
1803

FIG. 51C

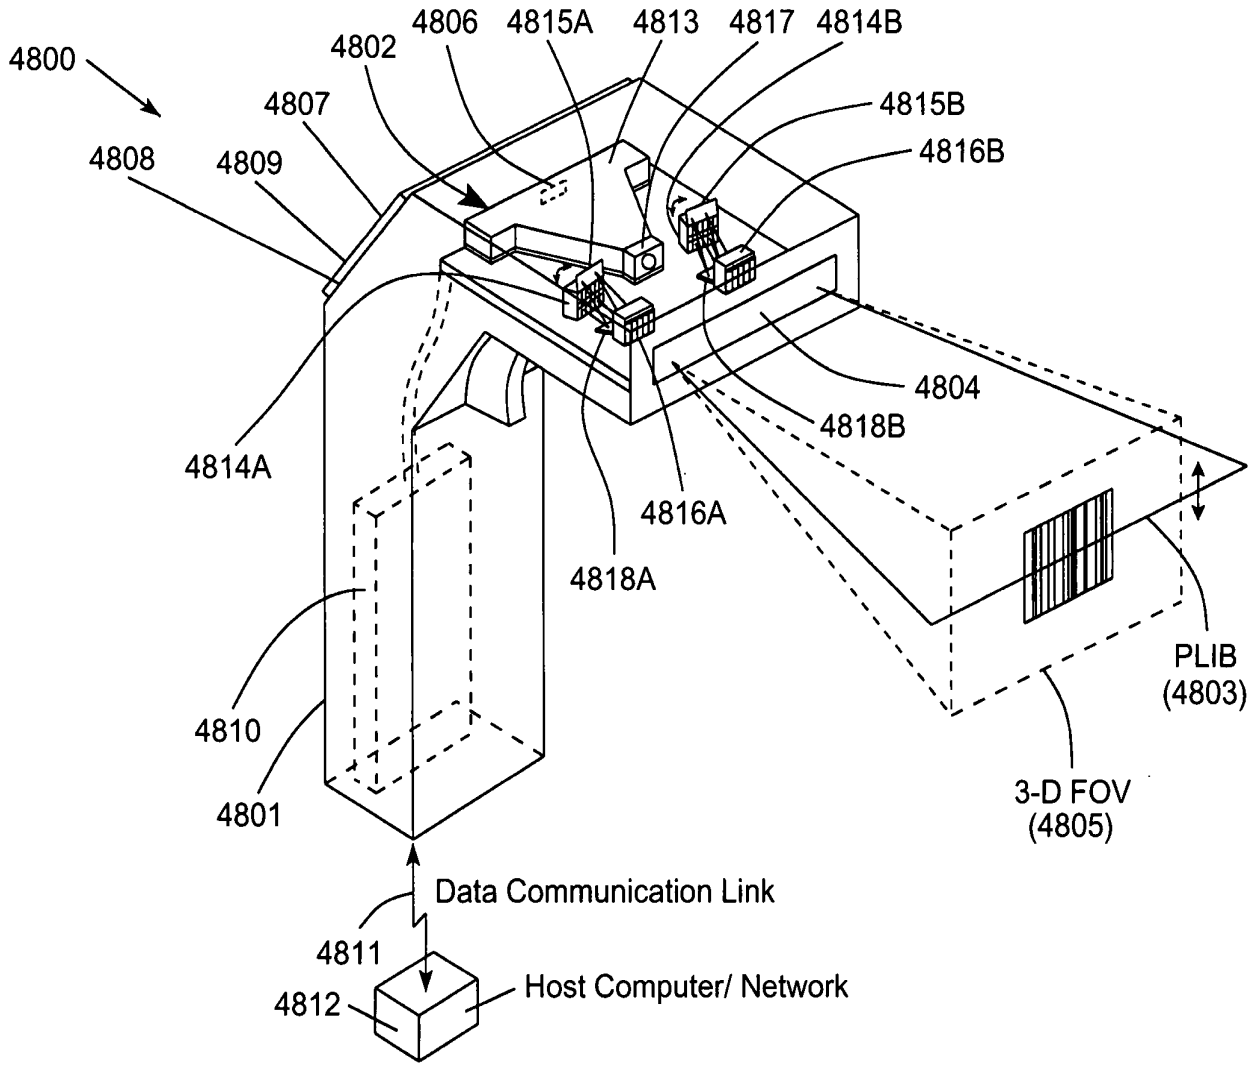
4800
4802
4806
4815A
4813
4817
4814B
4807
4815B
4808
4809
4816B
4804
4818B
4814A
4816A
4818A
4810
4801
PLIB
(4803)
3-D FOV
(4805)
Data Communication Link
4811
4812
Host Computer/ Network

FIG. 52

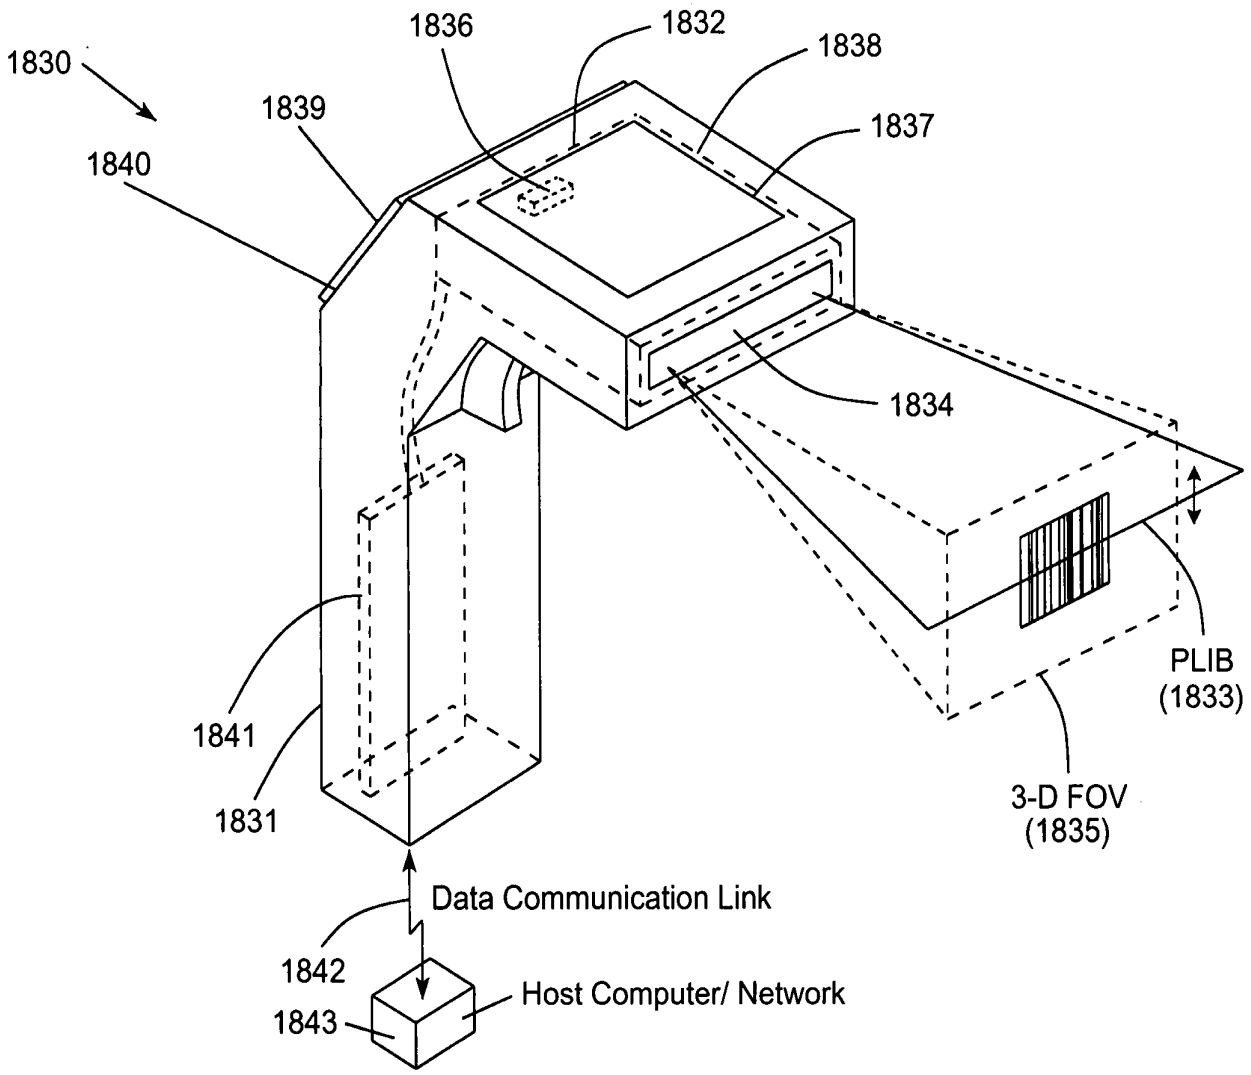
1830
1836
1832
1838
1839
1837
1840
1834
PLIB
(1833)
1841
1831
3-D FOV
(1835)
Data Communication Link
1842
Host Computer/ Network
1843

FIG. 52A

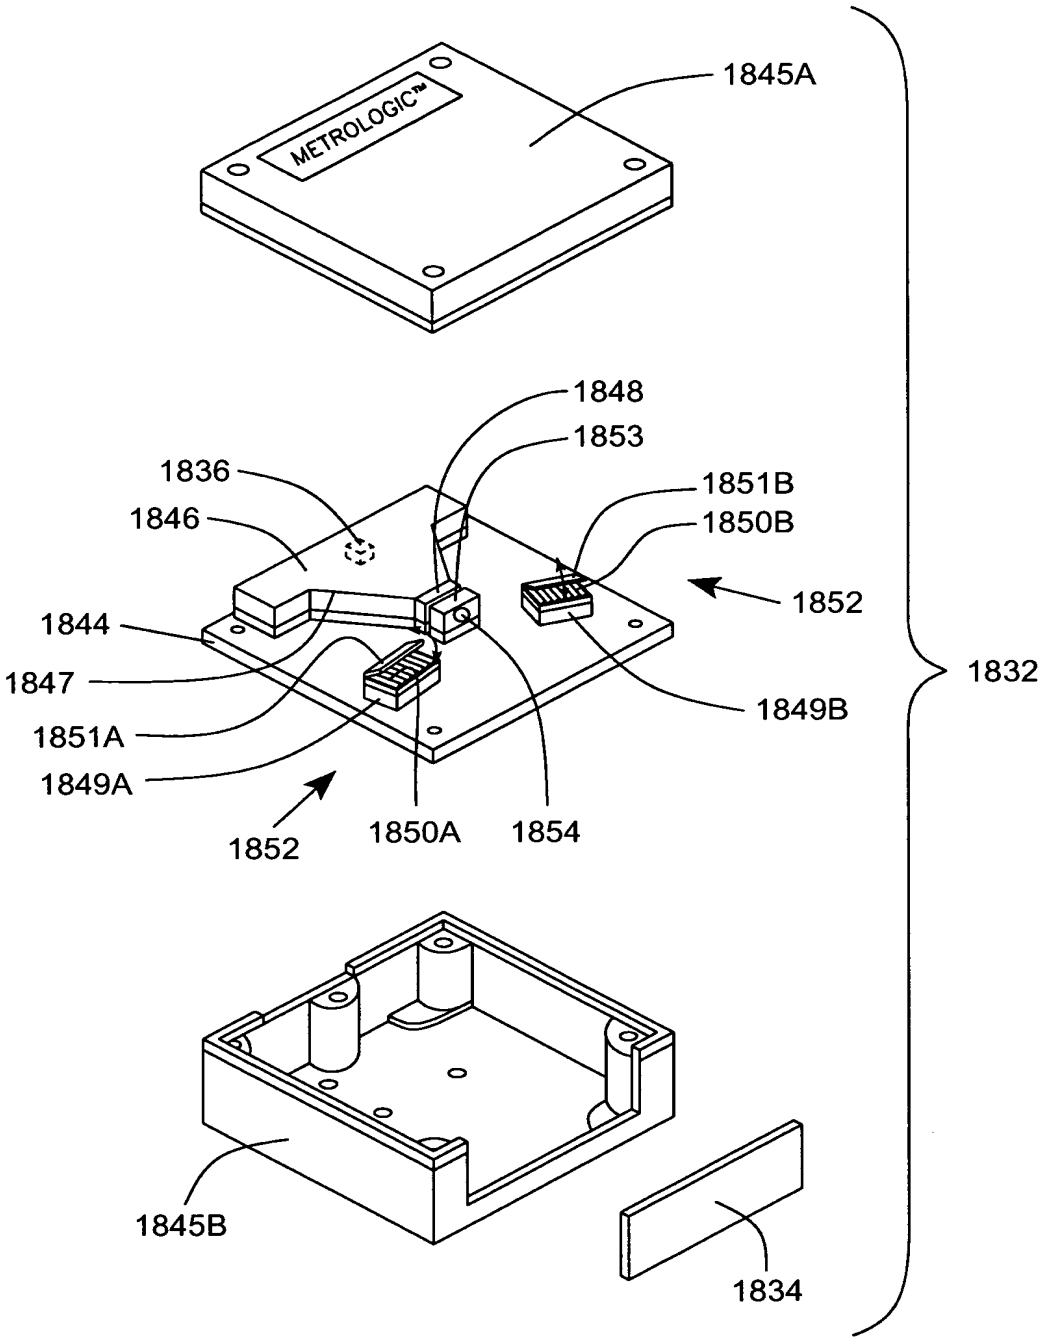

Fig. 1I3A-3B

FIG. 52B

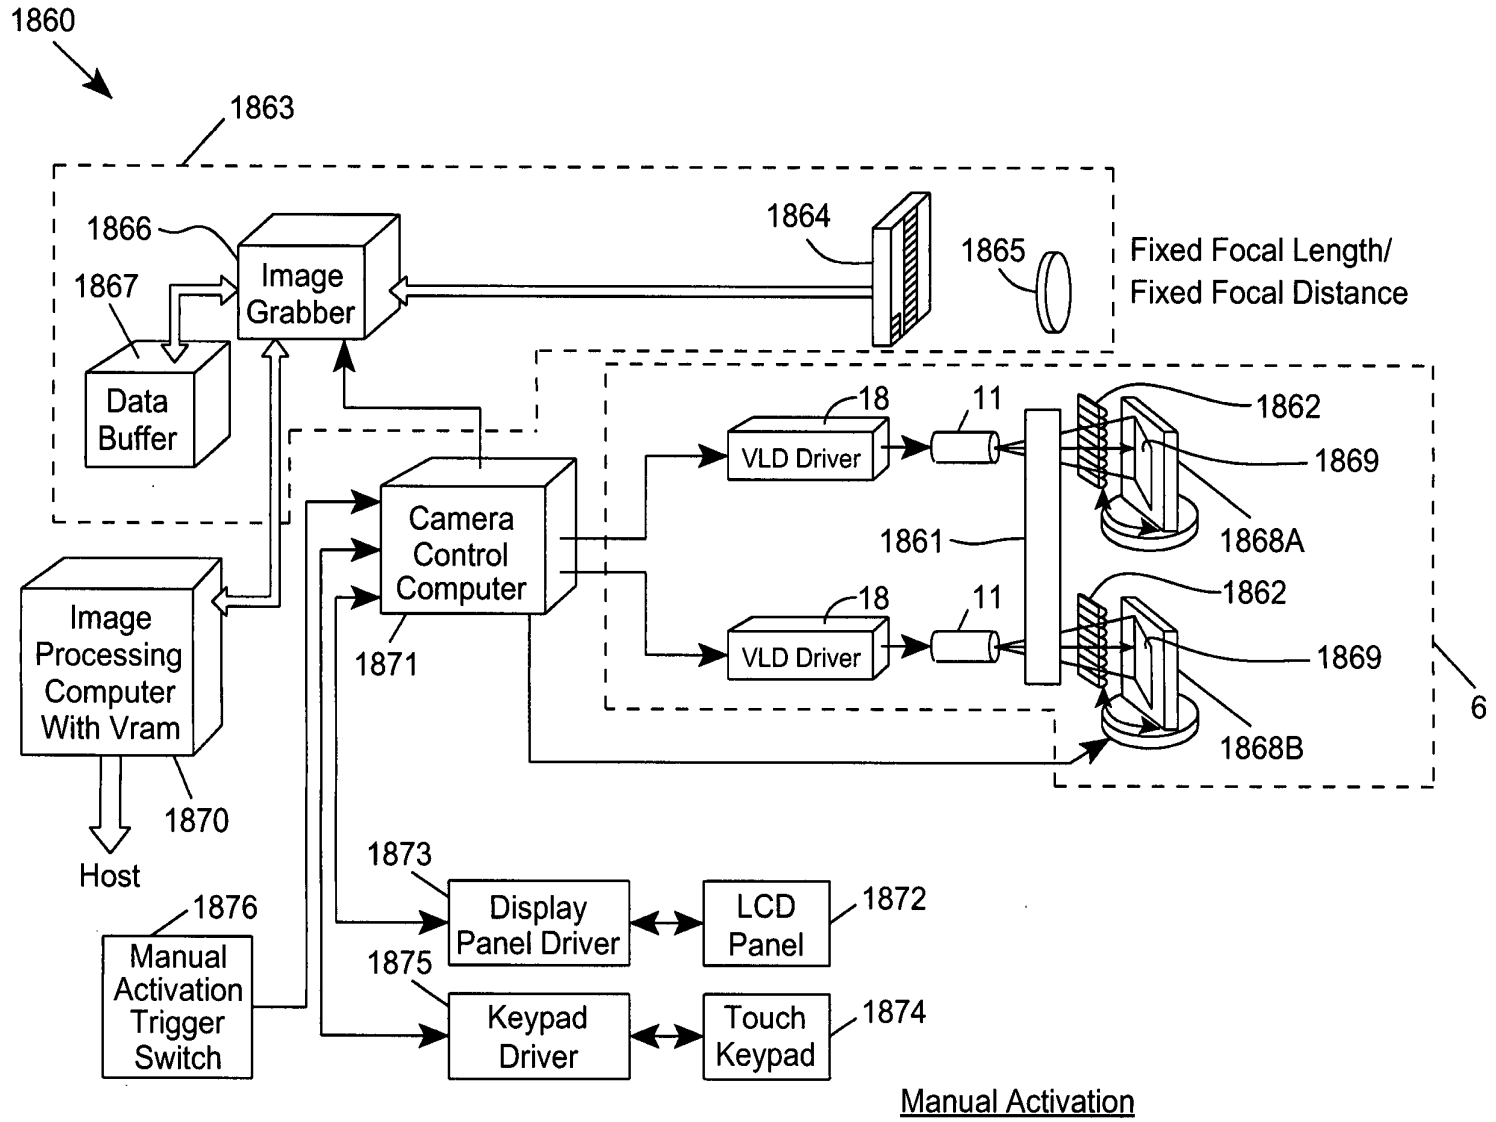
1860
1863
1866
1867
Image Grabber
Data Buffer
1864
1865
Fixed Focal Length/
Fixed Focal Distance
18
11
VLD Driver
1862
1869
1868A
1861
Camera Control Computer
1871
Image Processing Computer With Vram
1870
Host
1873
Display Panel Driver
LCD Panel
1872
1876
Manual Activation Trigger Switch
1875
Keypad Driver
Touch Keypad
1874
1868B
6
Manual Activation

FIG. 53A1

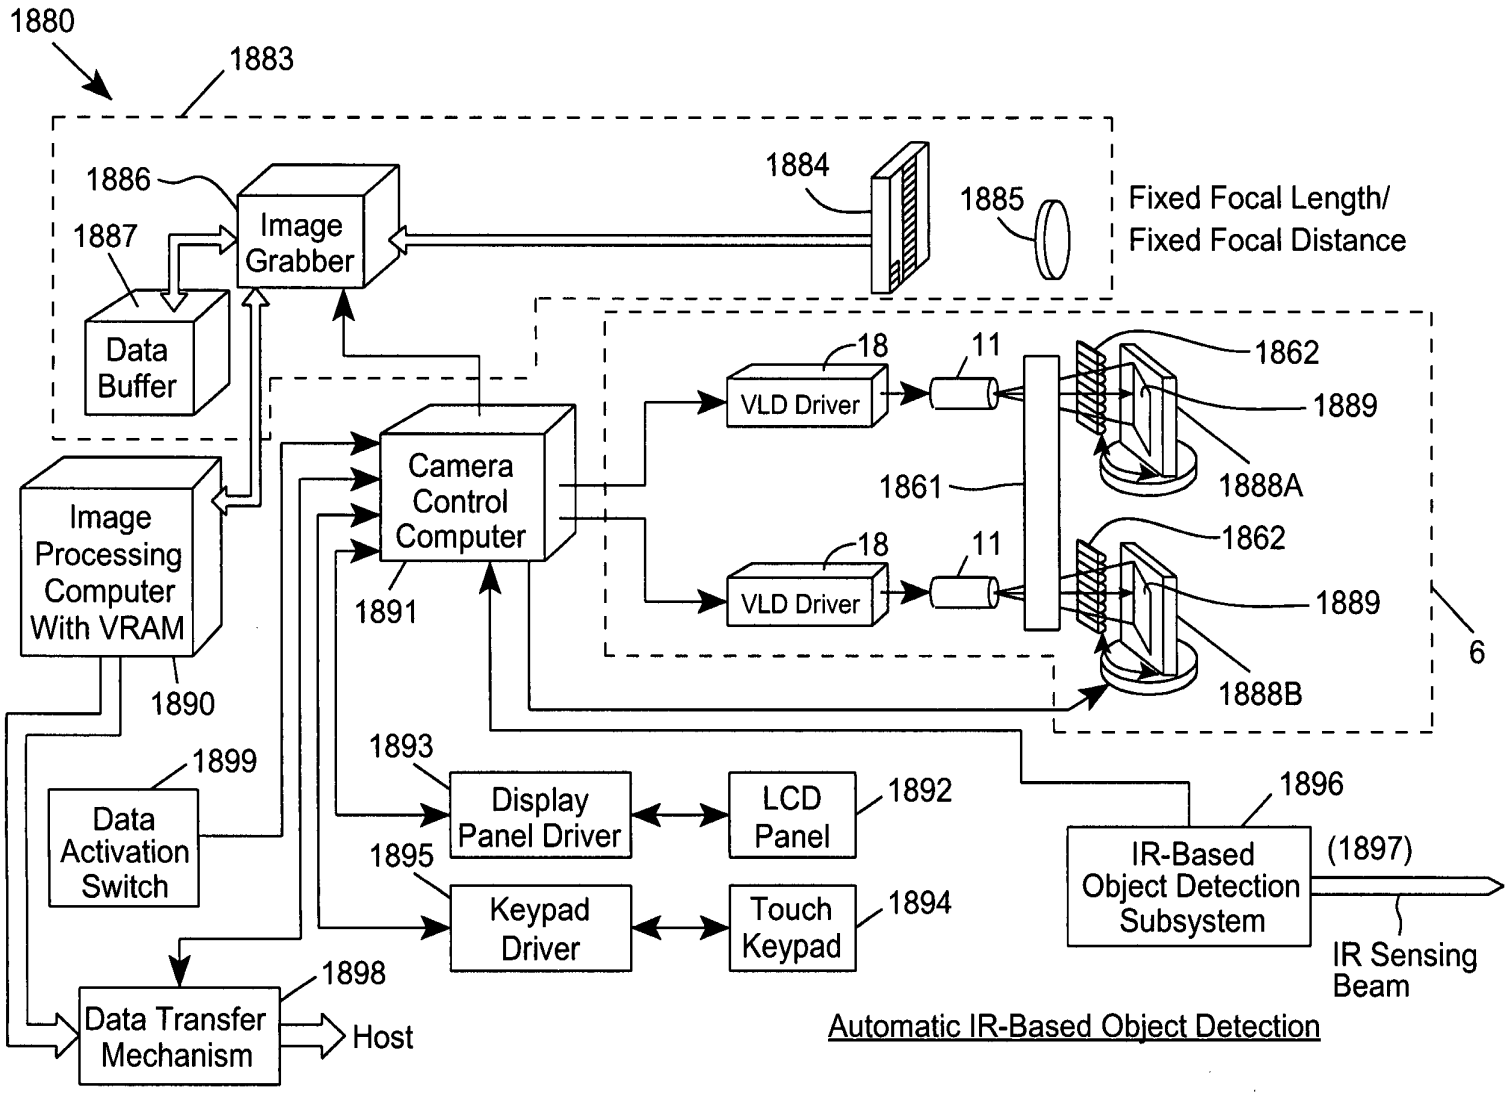
1880
1883
1886
1887
Image Grabber
Data Buffer
1884
1885
Fixed Focal Length/
Fixed Focal Distance
18
11
VLD Driver
1862
1889
1888A
1861
Camera Control Computer
Image Processing Computer With VRAM
1891
1890
1888B
6
1893
1899
Data Activation Switch
Display Panel Driver
LCD Panel
1892
1895
Keypad Driver
Touch Keypad
1894
1896
IR-Based Object Detection Subsystem
(1897)
IR Sensing Beam
1898
Data Transfer Mechanism
Host
Automatic IR-Based Object Detection

FIG. 53A2

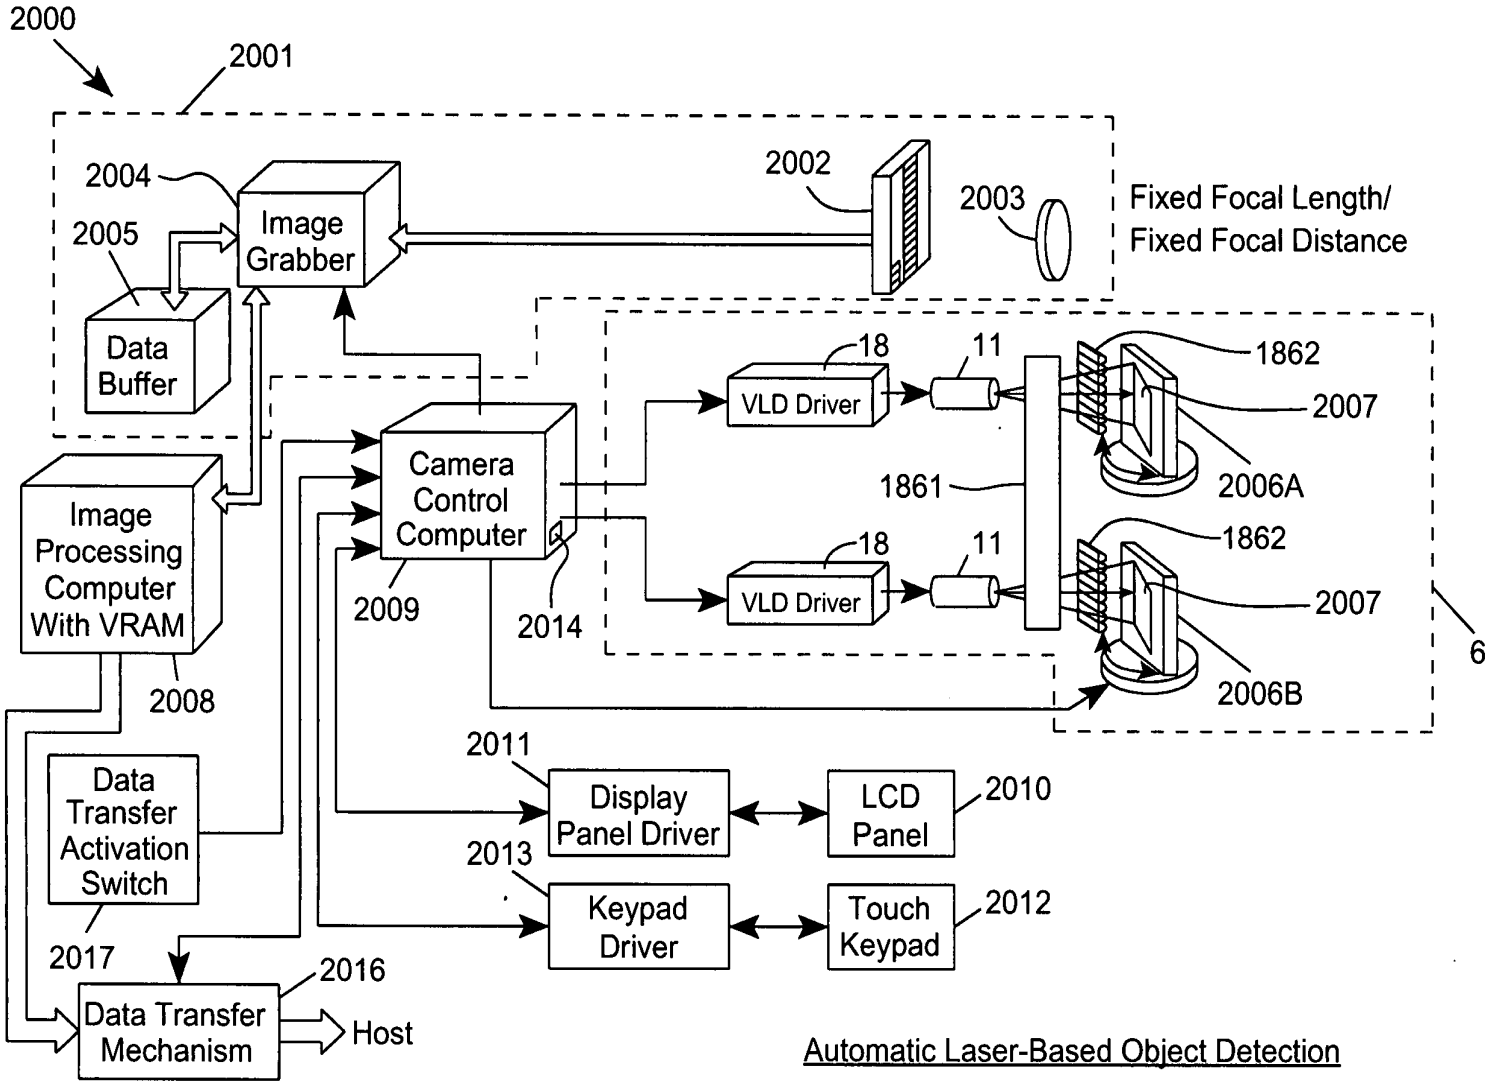
2000
2001
2004
2005
Image Grabber
Data Buffer
2002
2003
Fixed Focal Length/
Fixed Focal Distance
18
11
1862
VLD Driver
2007
1861
2006A
Camera Control Computer
Image Processing Computer With VRAM
2009
2014
2008
6
2011
Display Panel Driver
LCD Panel
2010
2013
Keypad Driver
Touch Keypad
2012
Data Transfer Activation Switch
2017
2016
Data Transfer Mechanism
Host
Automatic Laser-Based Object Detection

FIG. 53A3

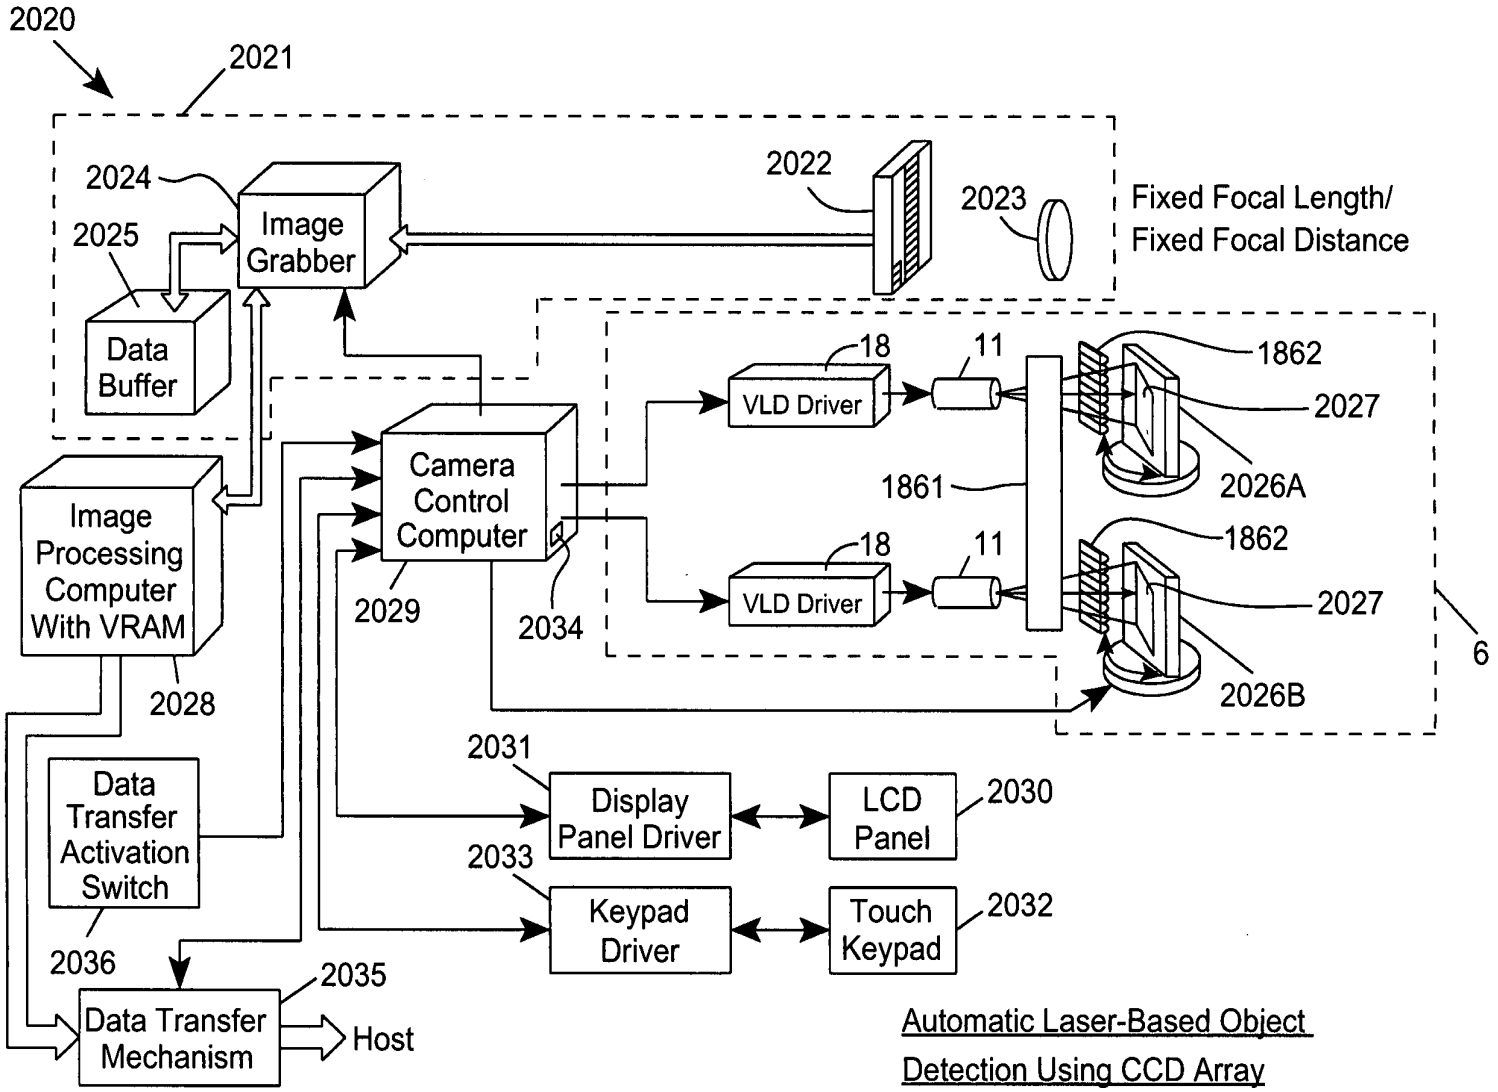
2020
2021
2024
Image Grabber
2022
2023
Fixed Focal Length/
Fixed Focal Distance
2025
Data Buffer
18
11
1862
VLD Driver
2027
1861
2026A
Camera Control Computer
Image Processing Computer With VRAM
18
11
1862
VLD Driver
2027
2029
2034
2026B
6
2028
2031
Data Transfer Activation Switch
Display Panel Driver
LCD Panel
2030
2033
Keypad Driver
Touch Keypad
2032
2036
2035
Data Transfer Mechanism
Host
Automatic Laser-Based Object Detection Using CCD Array

FIG. 53A4

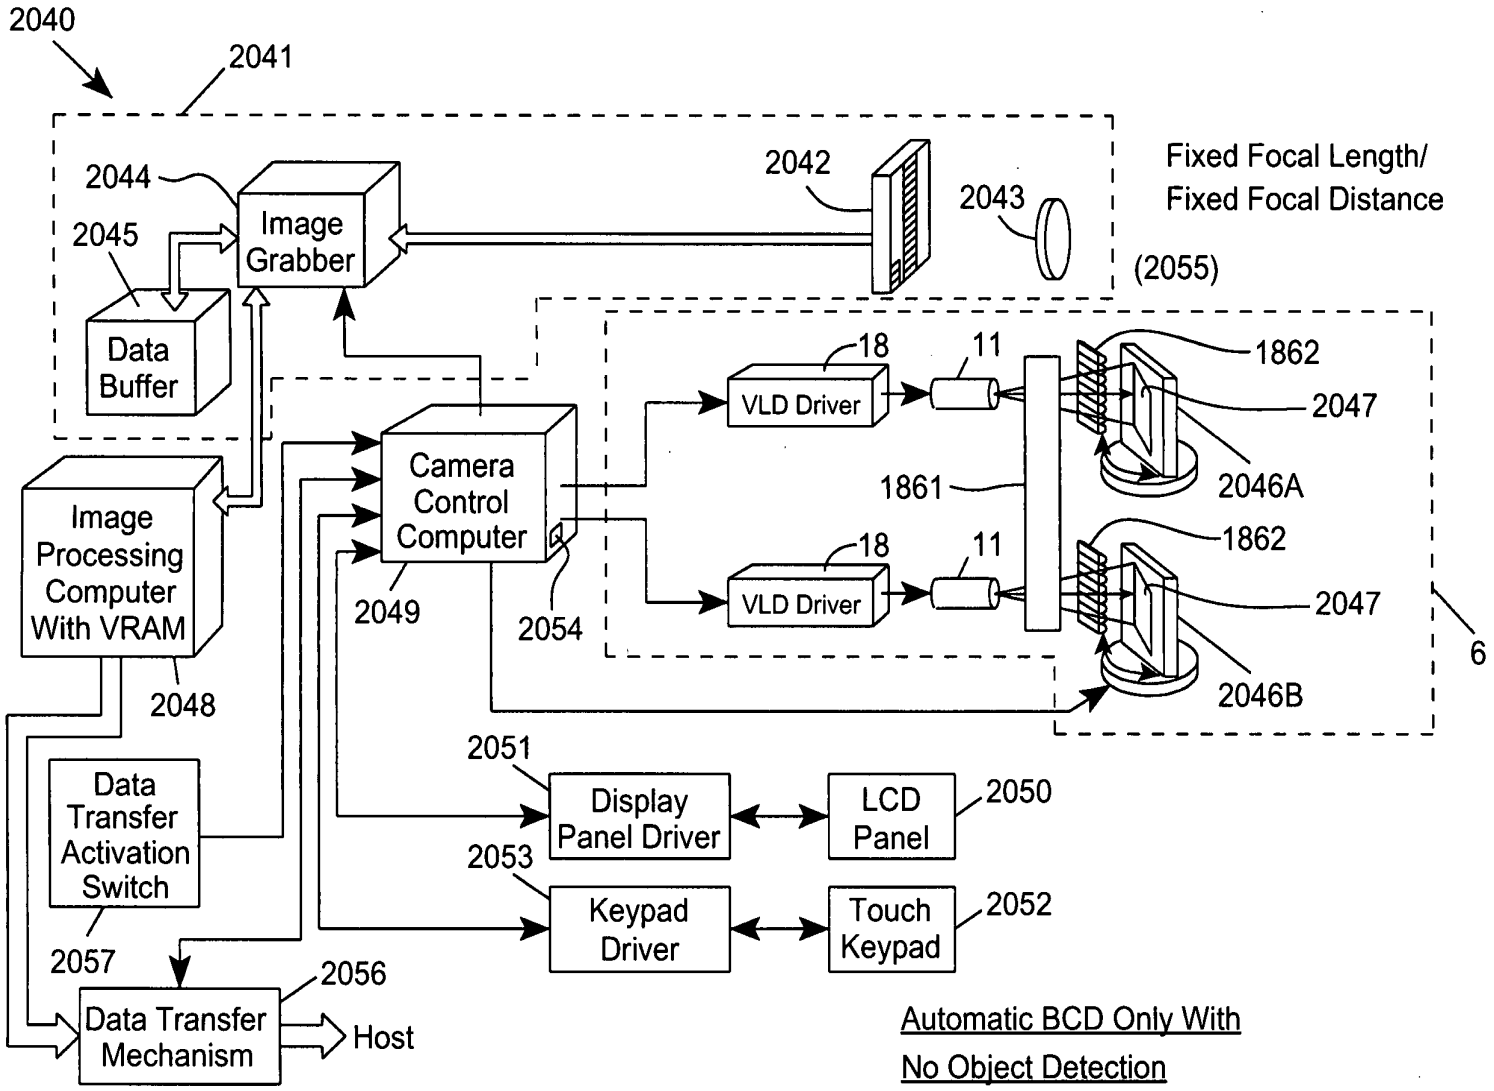
2040
2041
2044
2045
Image Grabber
Data Buffer
2042
2043
Fixed Focal Length/
Fixed Focal Distance
(2055)
18
11
1862
VLD Driver
2047
2046A
1861
Camera Control Computer
Image Processing Computer With VRAM
2049
2054
2048
18
11
1862
VLD Driver
2047
2046B
6
2051
Display Panel Driver
LCD Panel
2050
2053
Keypad Driver
Touch Keypad
2052
Data Transfer Activation Switch
2057
2056
Data Transfer Mechanism
Host
Automatic BCD Only With
No Object Detection

FIG. 53A5

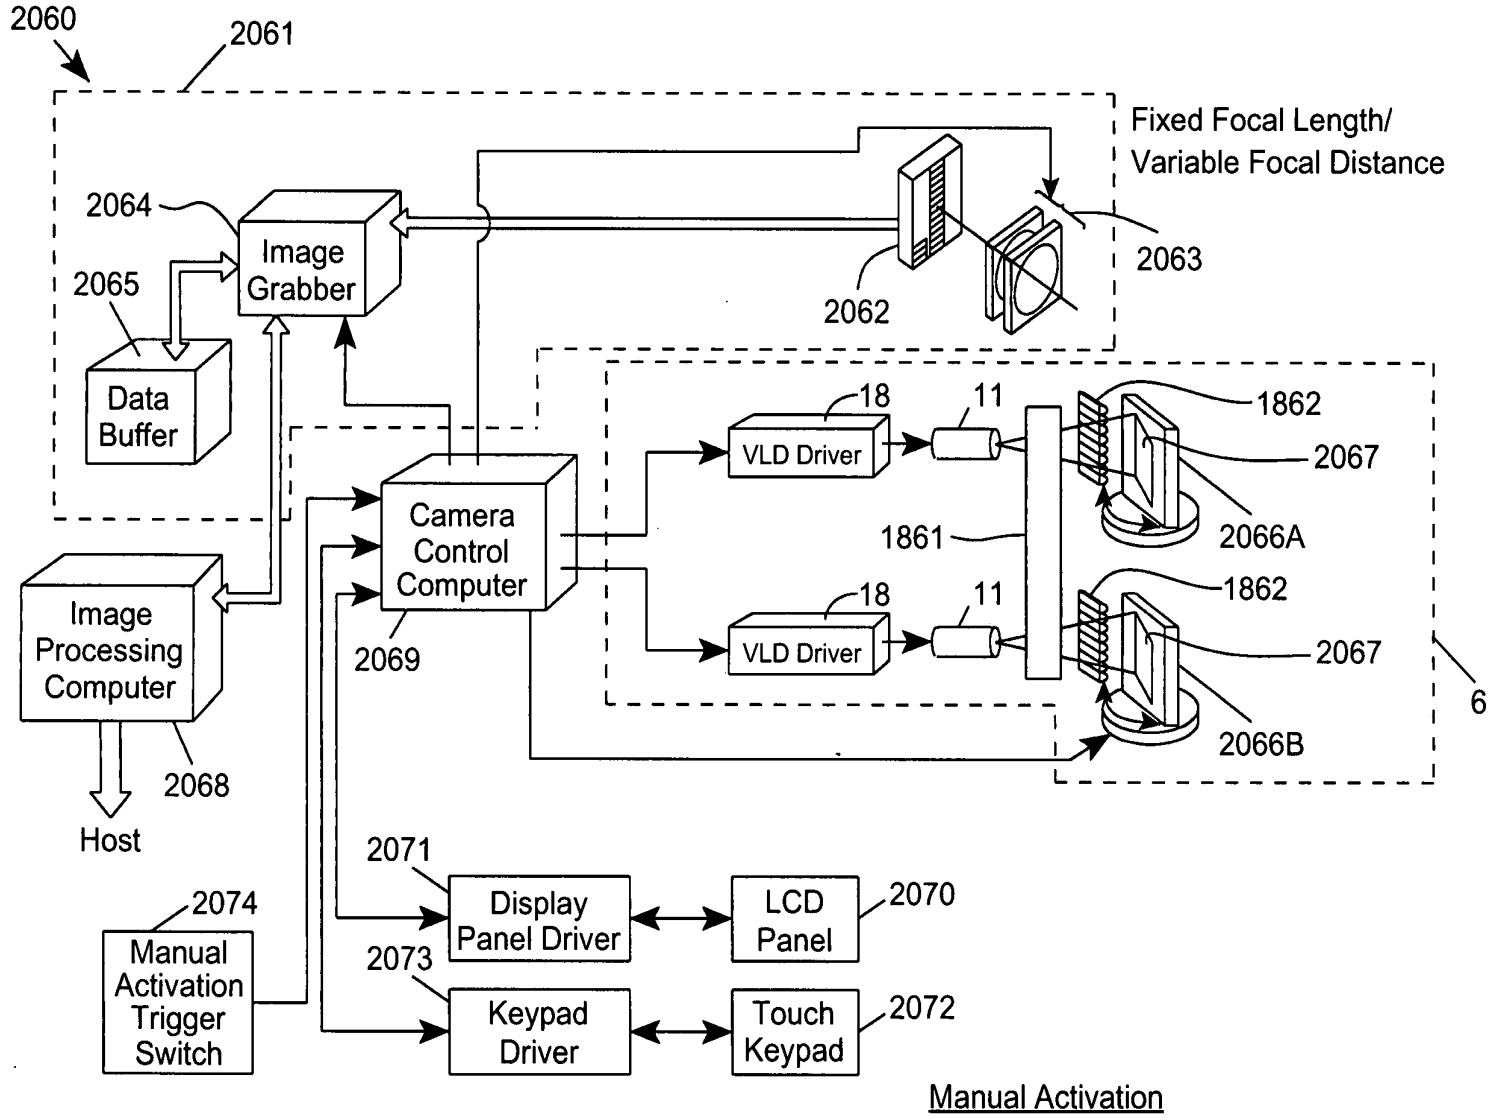
2060
2061
Fixed Focal Length/
Variable Focal Distance
2064
Image
Grabber
2065
Data
Buffer
2062
2063
18
11
1862
VLD Driver
2067
2066A
1861
Camera
Control
Computer
Image
Processing
Computer
2069
18
11
1862
VLD Driver
2067
6
2066B
2068
Host
2071
2074
Display
Panel Driver
LCD
Panel
2070
2073
Manual
Activation
Trigger
Switch
Keypad
Driver
Touch
Keypad
2072
Manual Activation

FIG. 53B1

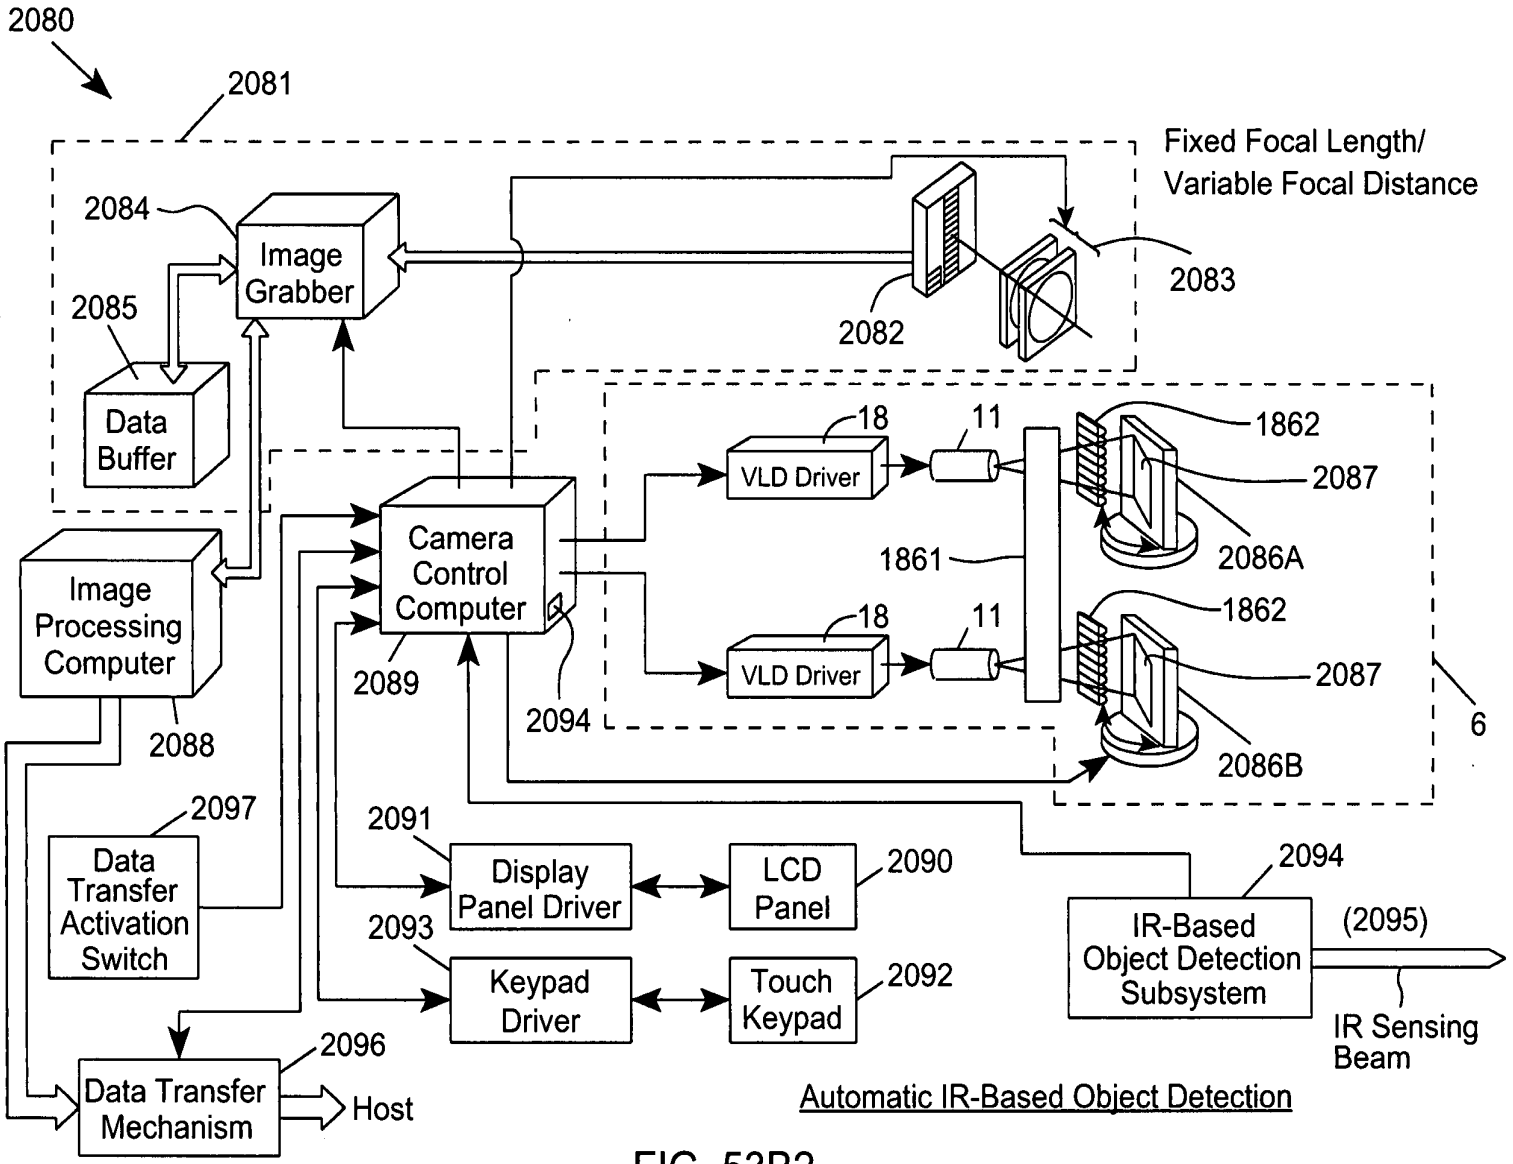
2080
2081
Fixed Focal Length/
Variable Focal Distance
2084
Image
Grabber
2085
Data
Buffer
2082
2083
18
11
1862
VLD Driver
2087
2086A
1861
Camera
Control
Computer
Image
Processing
Computer
2089
2094
2088
18
11
1862
VLD Driver
2087
2086B
6
2097
Data
Transfer
Activation
Switch
2091
Display
Panel Driver
LCD
Panel
2090
2094
2093
Keypad
Driver
Touch
Keypad
2092
IR-Based
Object Detection
Subsystem
(2095)
IR Sensing
Beam
2096
Data Transfer
Mechanism
Host
Automatic IR-Based Object Detection

FIG. 53B2

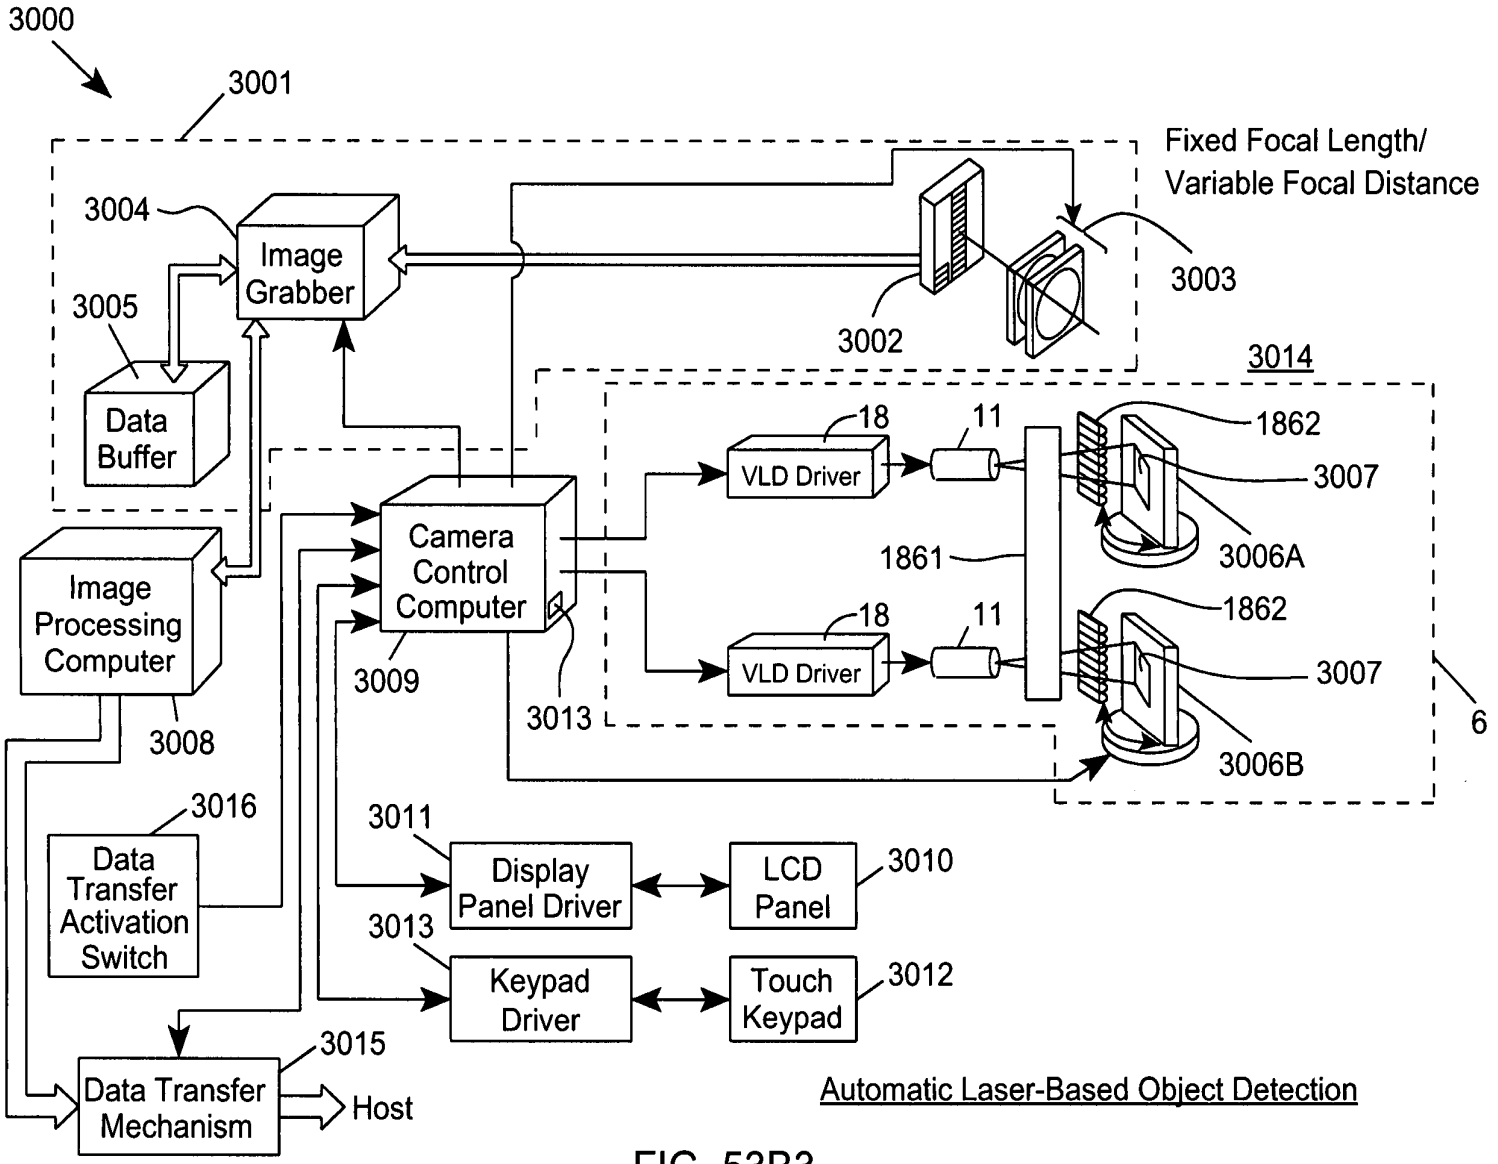
3000
3001
Fixed Focal Length/
Variable Focal Distance
3004
Image
Grabber
3005
Data
Buffer
3002
3003
3014
18
11
1862
VLD Driver
3007
3006A
1861
Camera
Control
Computer
Image
Processing
Computer
3009
3013
3008
18
11
1862
VLD Driver
3007
3006B
6
3016
Data
Transfer
Activation
Switch
3011
Display
Panel Driver
LCD
Panel
3010
3013
Keypad
Driver
Touch
Keypad
3012
3015
Data Transfer
Mechanism
Host
Automatic Laser-Based Object Detection

FIG. 53B3

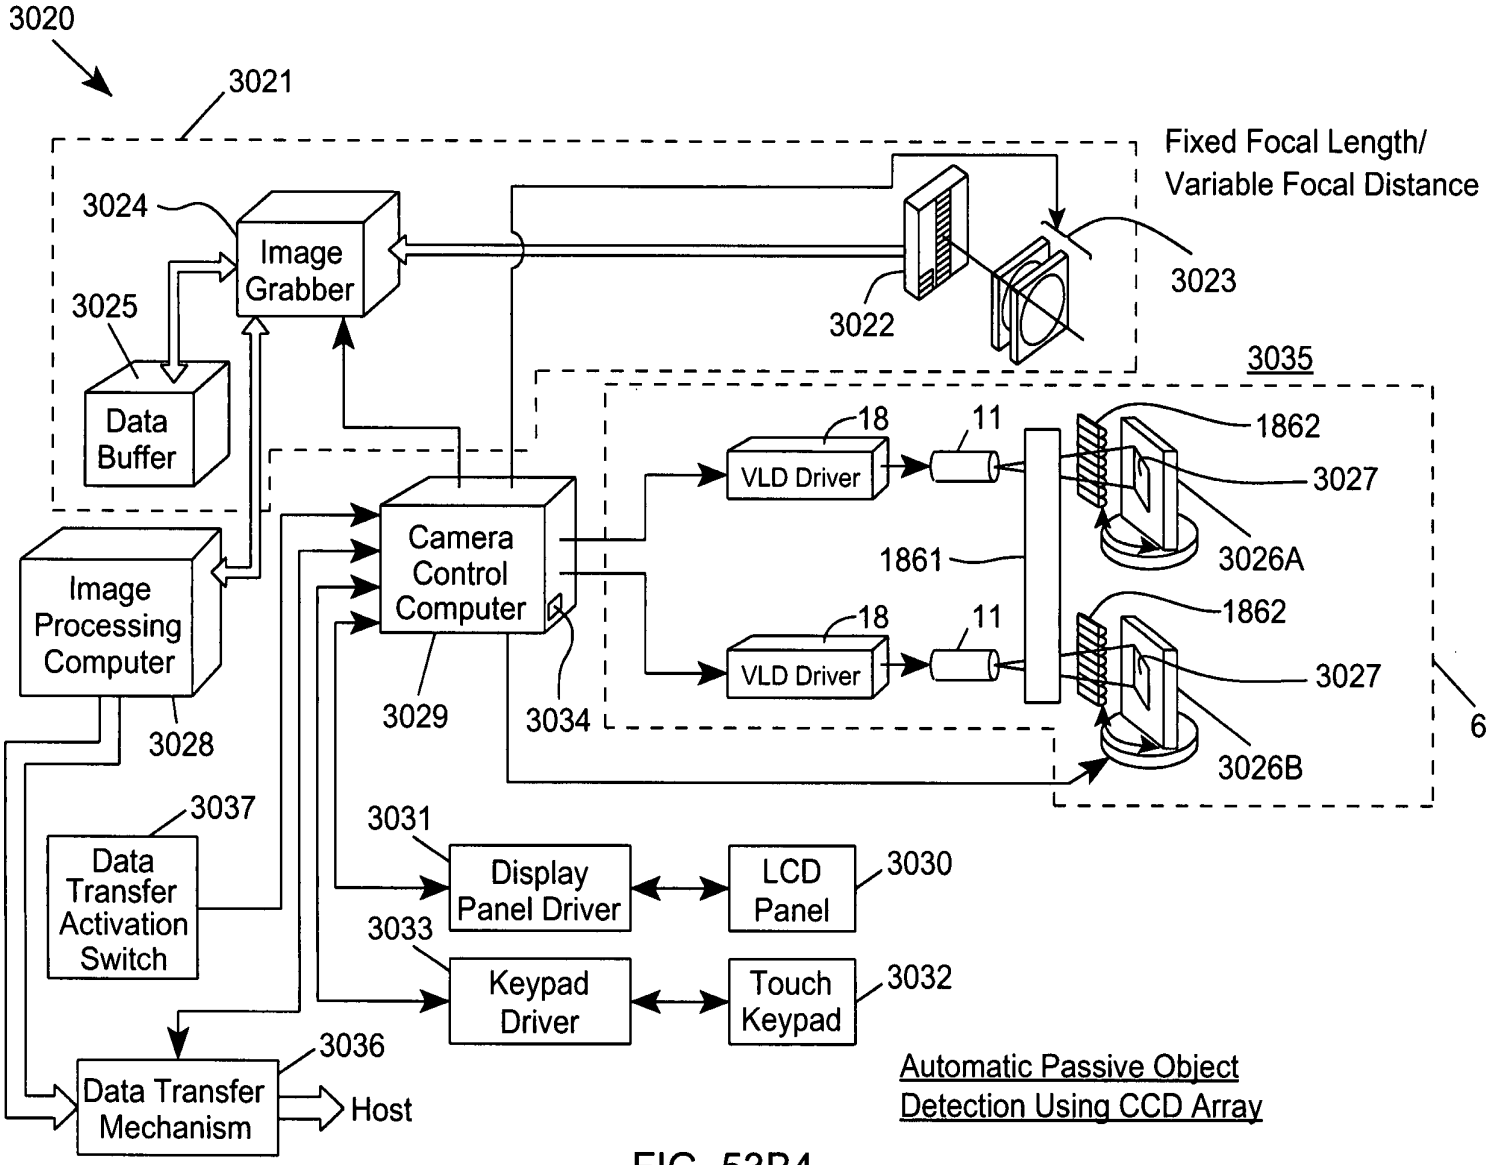
3020
3021
Fixed Focal Length/
Variable Focal Distance
3024
Image
Grabber
3025
Data
Buffer
3022
3023
3035
18
11
1862
VLD Driver
3027
3026A
1861
Camera
Control
Computer
Image
Processing
Computer
3028
3029
3034
18
11
1862
VLD Driver
3027
3026B
6
3037
Data
Transfer
Activation
Switch
3031
Display
Panel Driver
LCD
Panel
3030
3033
Keypad
Driver
Touch
Keypad
3032
3036
Data Transfer
Mechanism
Host
Automatic Passive Object
Detection Using CCD Array

FIG. 53B4

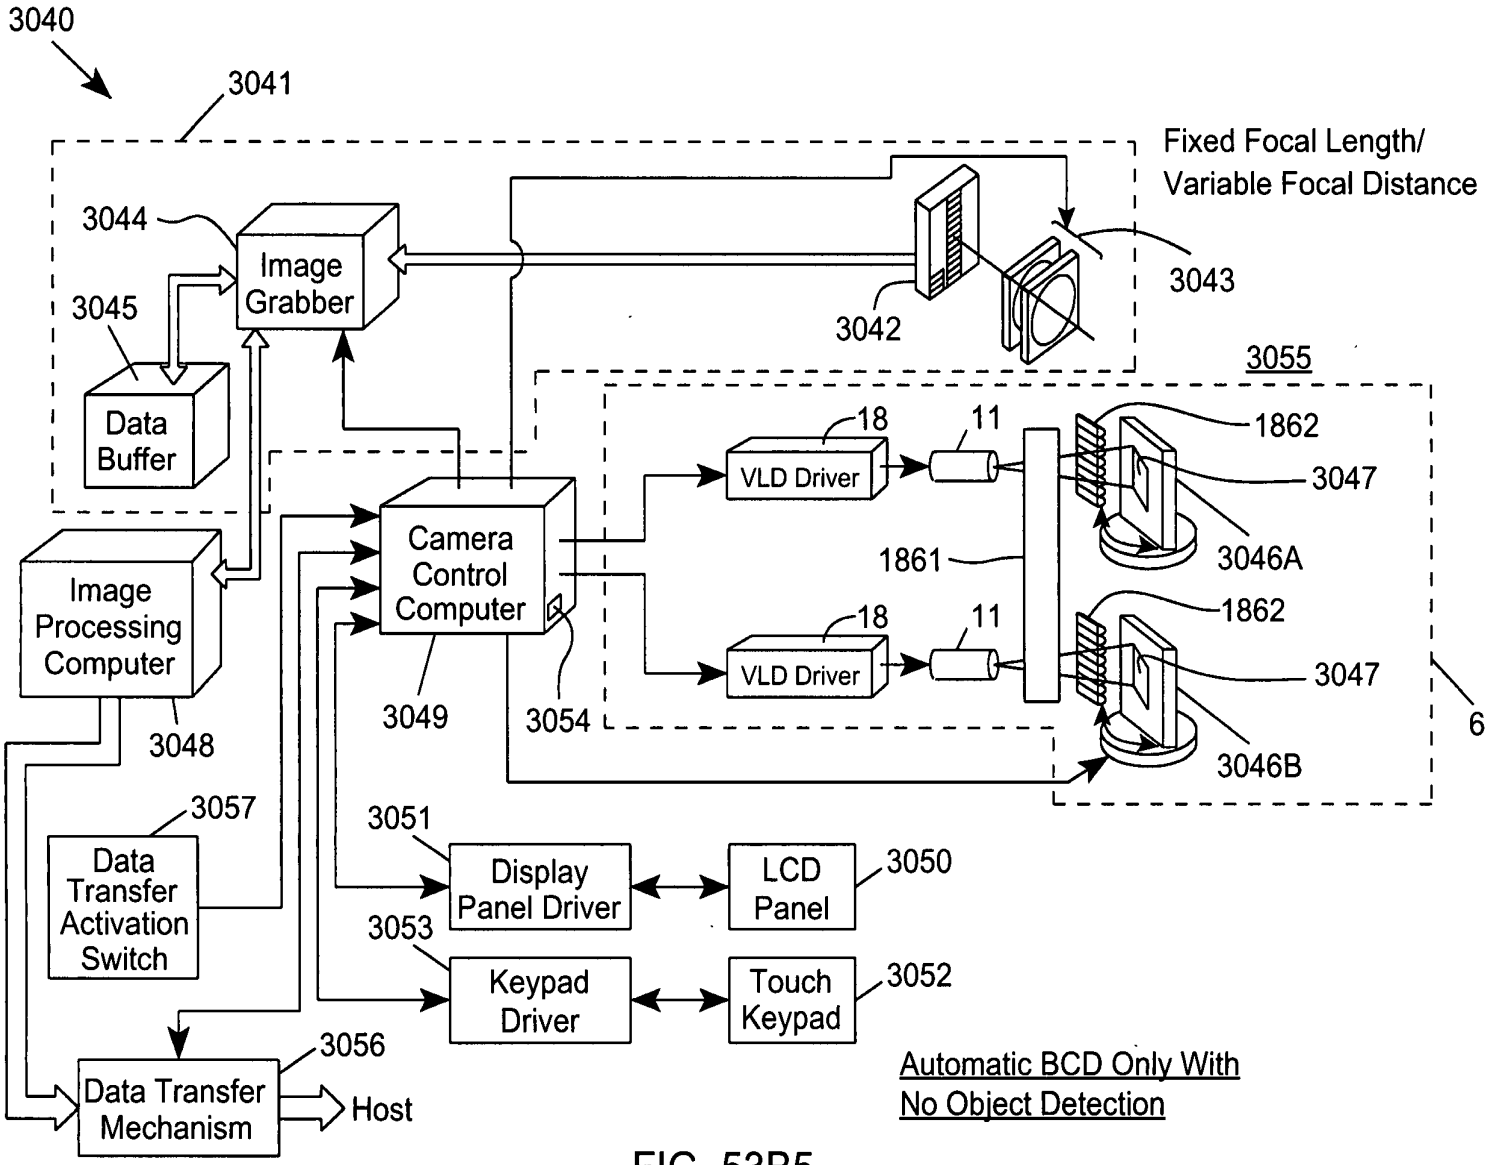
3040
3041
Fixed Focal Length/
Variable Focal Distance
3044
Image
Grabber
3045
Data
Buffer
3042
3043
3055
18
11
1862
VLD Driver
3047
3046A
1861
Camera
Control
Computer
Image
Processing
Computer
18
11
1862
VLD Driver
3047
3049
3054
3048
3046B
6
3057
3051
Data
Transfer
Activation
Switch
Display
Panel Driver
LCD
Panel
3050
3053
Keypad
Driver
Touch
Keypad
3052
3056
Data Transfer
Mechanism
Host
Automatic BCD Only With
No Object Detection

FIG. 53B5

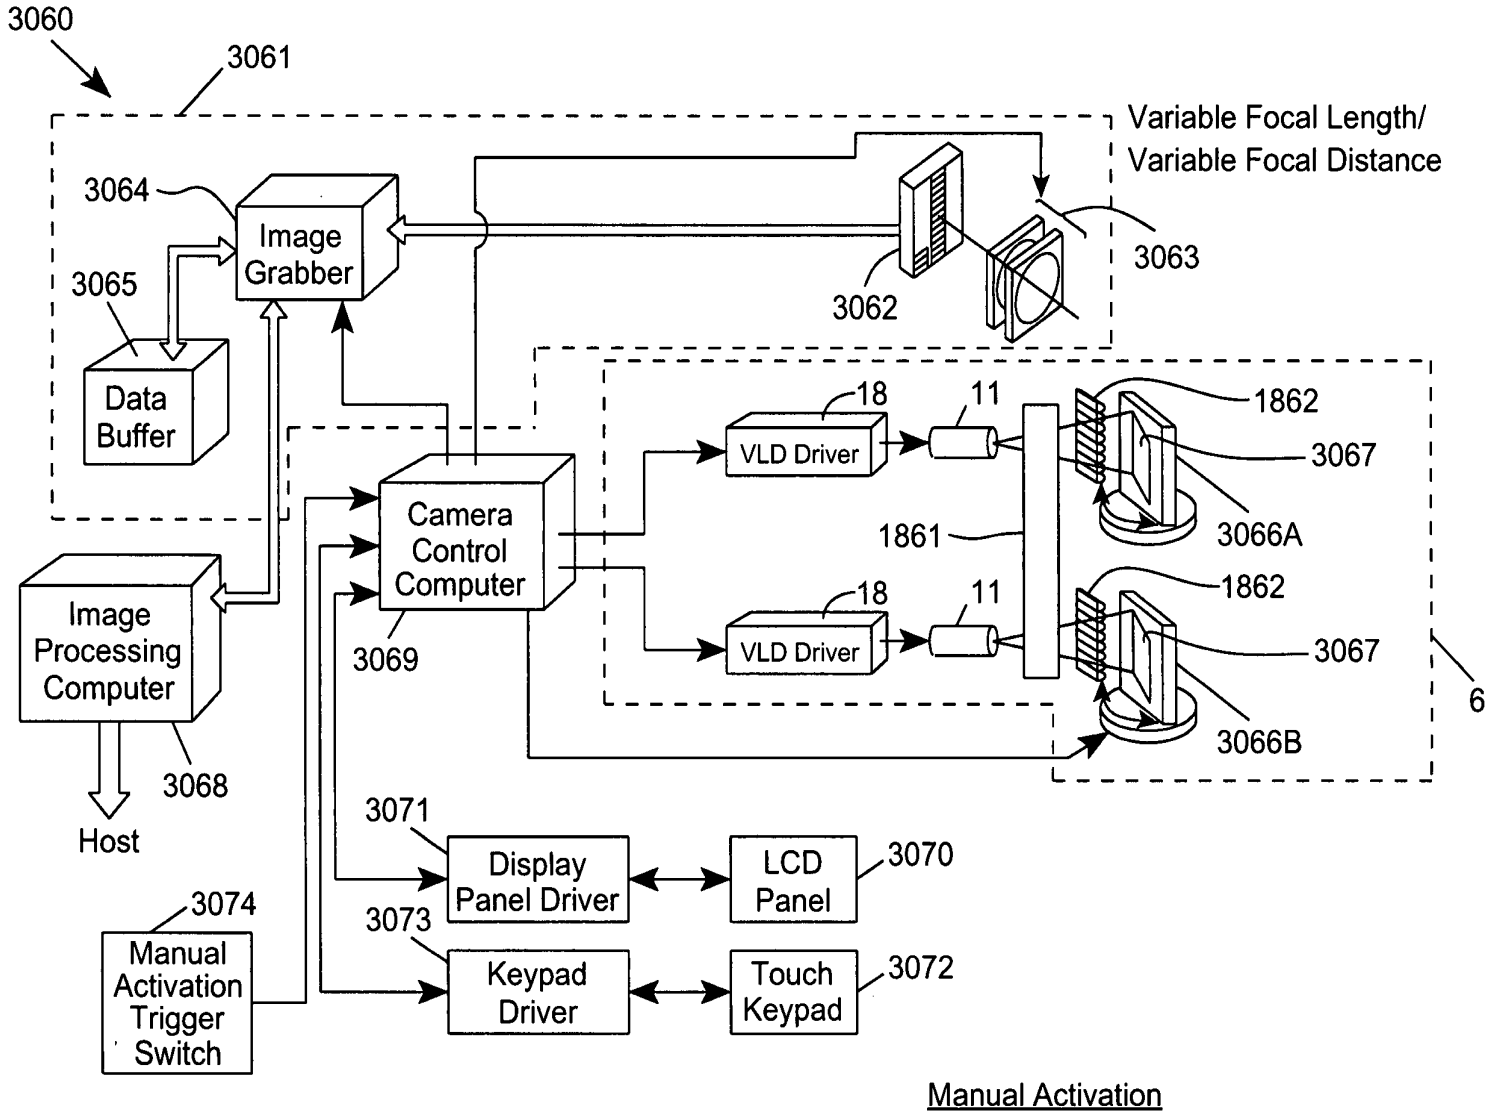
3060
3061
Variable Focal Length/
Variable Focal Distance
3064
Image Grabber
3065
Data Buffer
3062
3063
18
11
1862
VLD Driver
3067
3066A
1861
Camera Control Computer
3069
Image Processing Computer
3068
Host
18
11
1862
VLD Driver
3067
3066B
6
3071
Display Panel Driver
LCD Panel
3070
3074
3073
Manual Activation Trigger Switch
Keypad Driver
Touch Keypad
3072
Manual Activation

FIG. 53C1

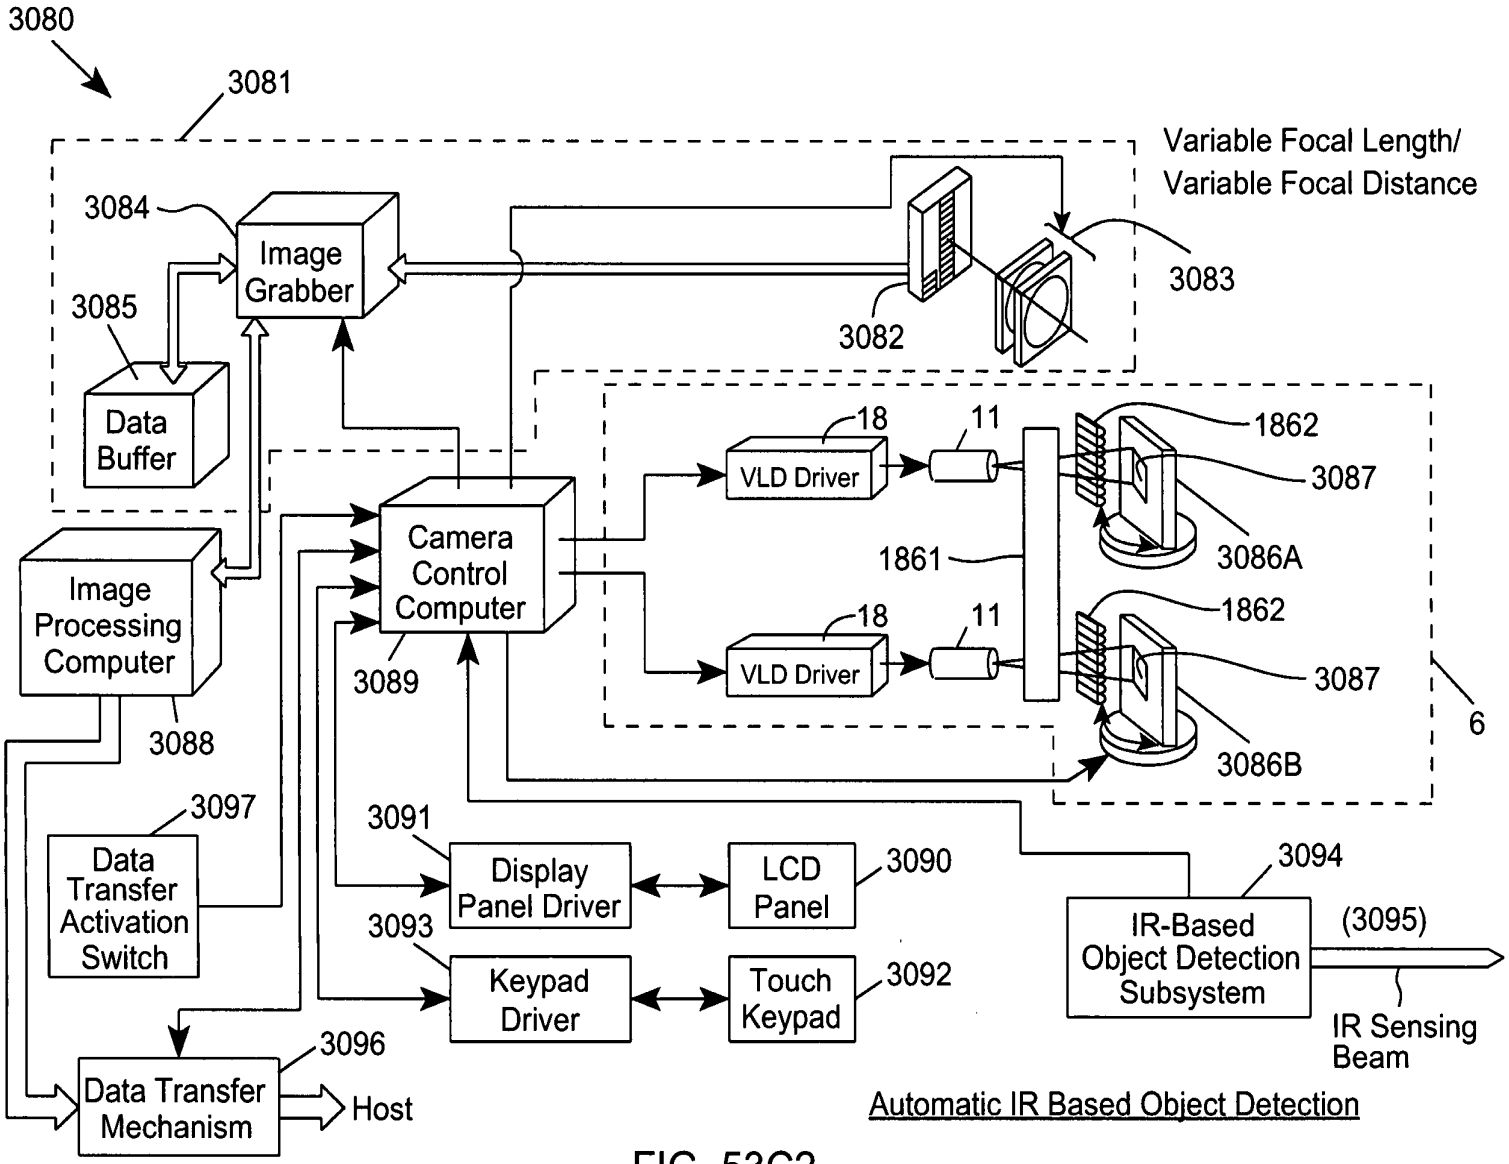
3080
3081
Variable Focal Length/
Variable Focal Distance
3084
Image Grabber
3085
Data Buffer
3082
3083
18
11
VLD Driver
1862
3087
3086A
1861
Camera Control Computer
Image Processing Computer
3089
3088
18
11
VLD Driver
1862
3087
3086B
6
3097
Data Transfer Activation Switch
3091
Display Panel Driver
LCD Panel
3090
3094
3093
Keypad Driver
Touch Keypad
3092
IR-Based Object Detection Subsystem
(3095)
IR Sensing Beam
3096
Data Transfer Mechanism
Host
Automatic IR Based Object Detection

FIG. 53C2

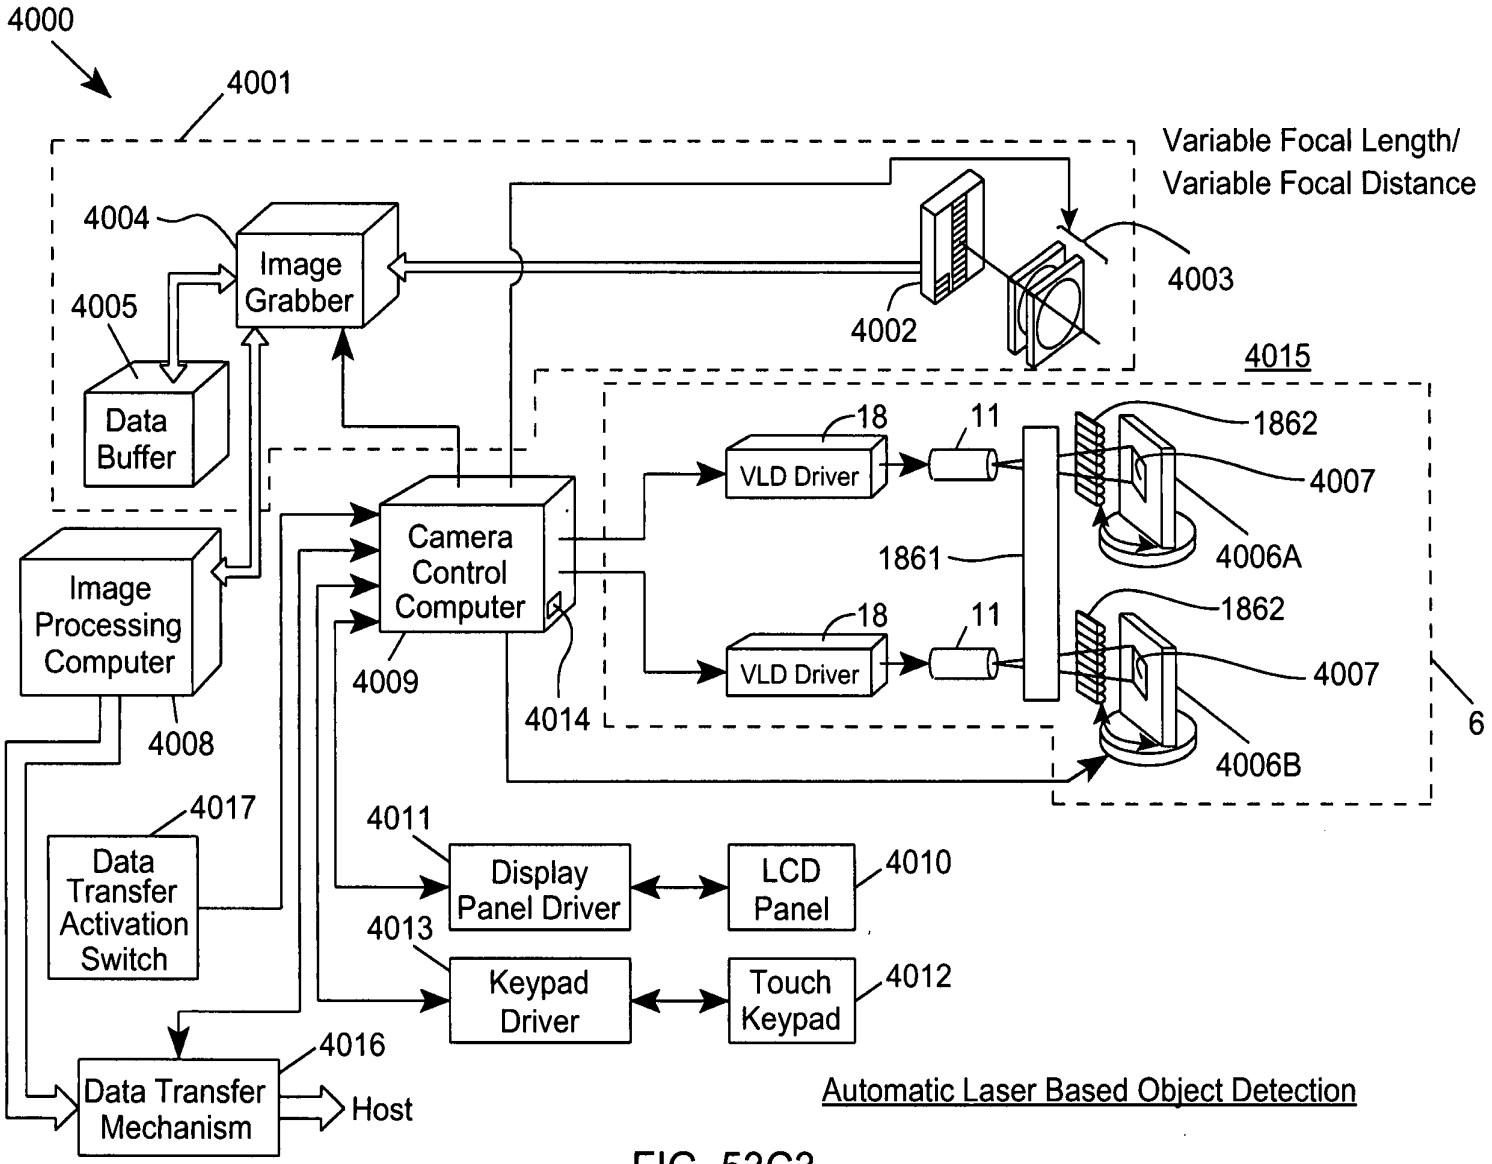
4000
4001
Variable Focal Length/
Variable Focal Distance
4004
Image
Grabber
4005
Data
Buffer
4002
4003
4015
18
11
1862
VLD Driver
4007
4006A
1861
Camera
Control
Computer
Image
Processing
Computer
4009
4014
4008
18
11
1862
VLD Driver
4007
4006B
6
4017
Data
Transfer
Activation
Switch
4011
Display
Panel Driver
LCD
Panel
4010
4013
Keypad
Driver
Touch
Keypad
4012
4016
Data Transfer
Mechanism
Host
Automatic Laser Based Object Detection

FIG. 53C3

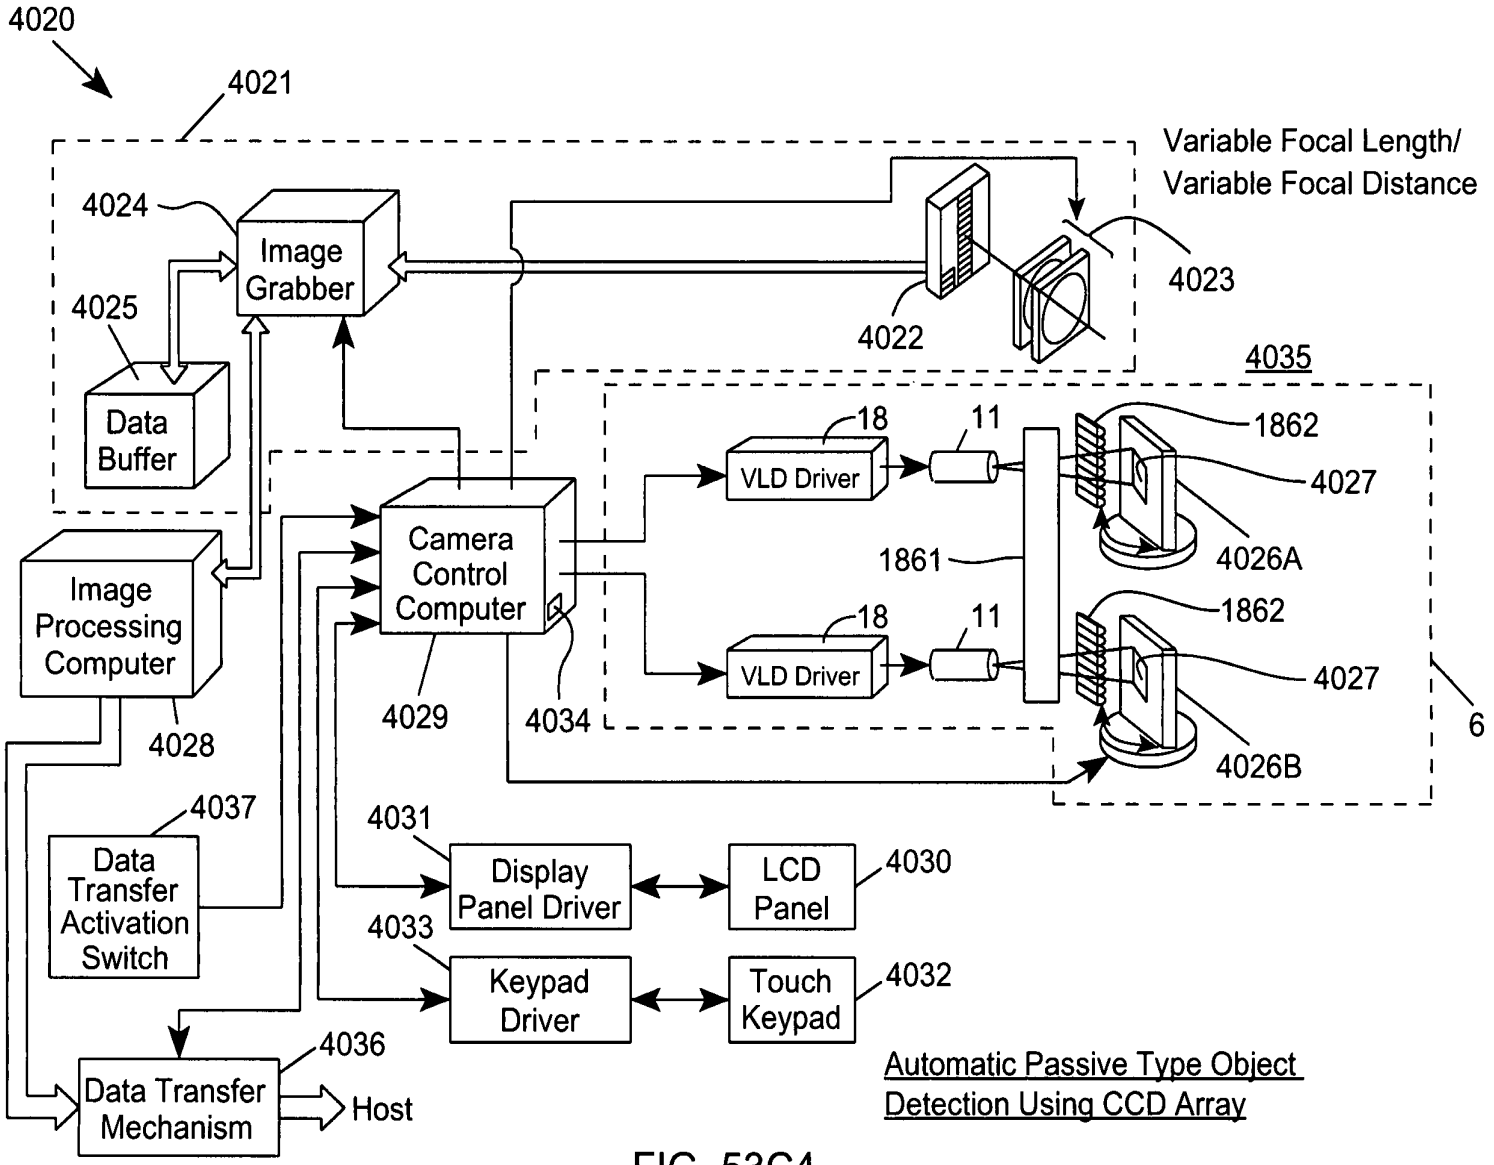
4020
4021
Variable Focal Length/
Variable Focal Distance
4024
Image Grabber
4025
Data Buffer
4022
4023
4035
18
11
1862
VLD Driver
4027
4026A
1861
Camera Control Computer
Image Processing Computer
4028
4029
4034
18
11
1862
VLD Driver
4027
4026B
6
4037
Data Transfer Activation Switch
4031
Display Panel Driver
LCD Panel
4030
4033
Keypad Driver
Touch Keypad
4032
4036
Data Transfer Mechanism
Host
Automatic Passive Type Object Detection Using CCD Array

FIG. 53C4

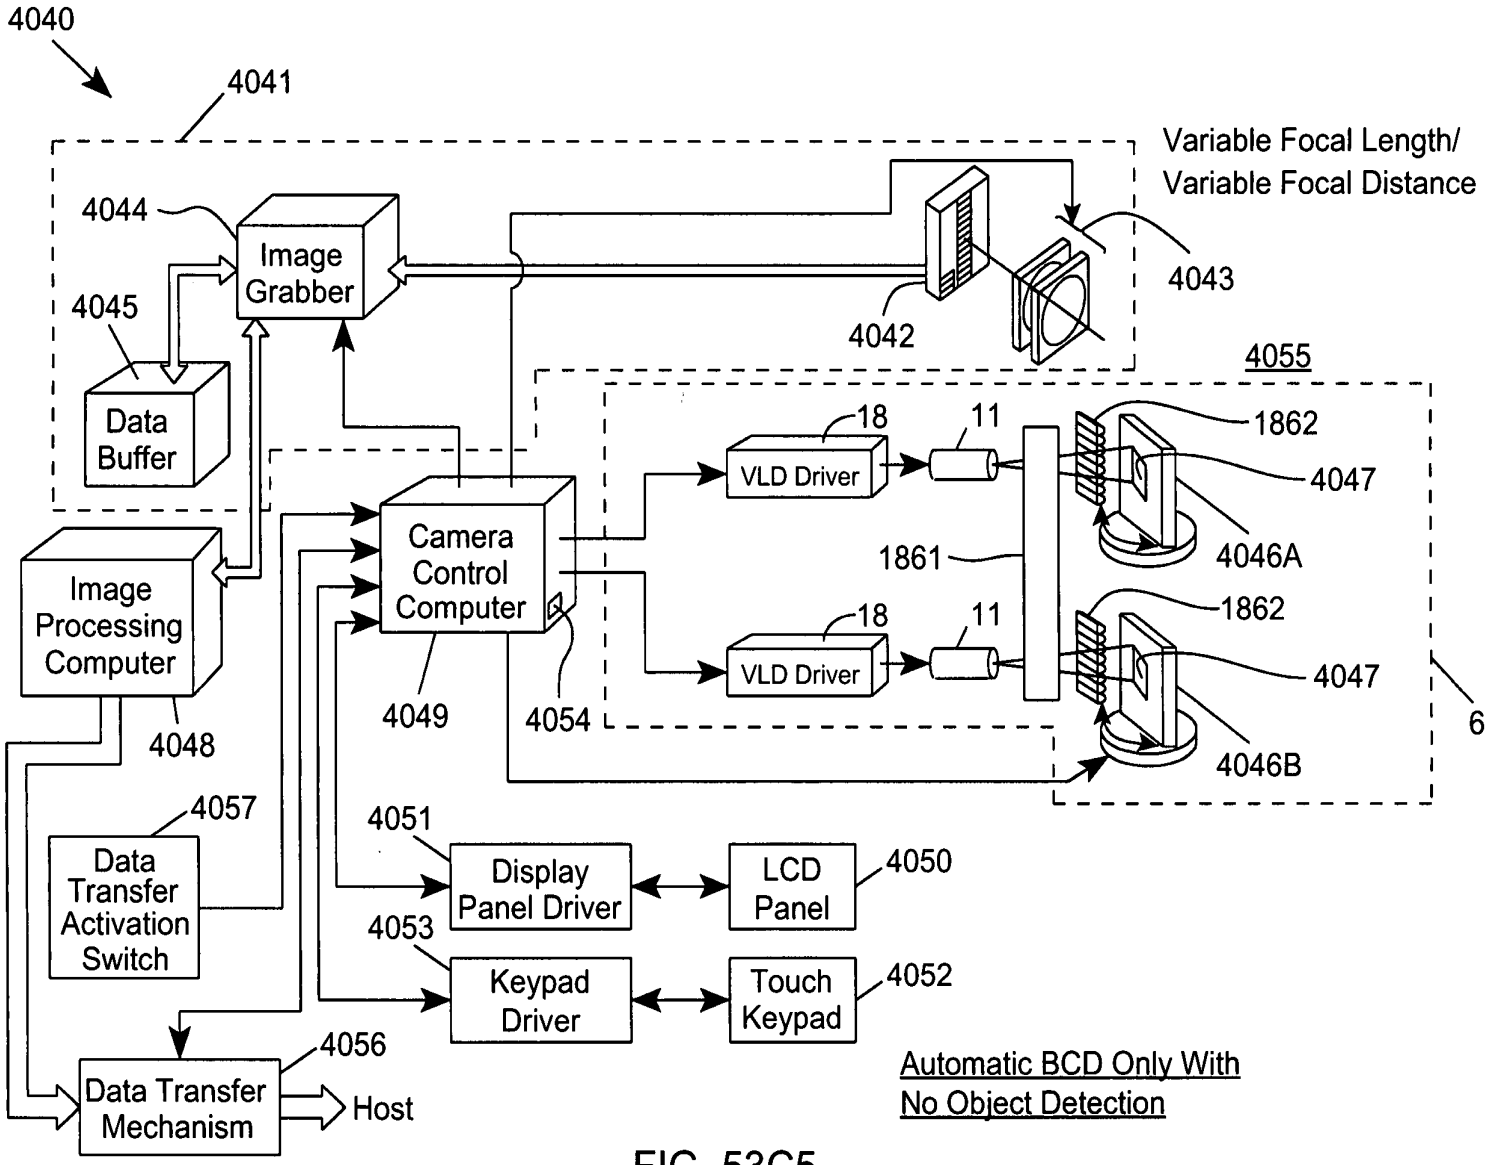
4040
4041
Variable Focal Length/
Variable Focal Distance
4044
Image Grabber
4045
Data Buffer
4042
4043
4055
18
11
1862
VLD Driver
4047
4046A
1861
Camera Control Computer
Image Processing Computer
4049
4054
4048
18
11
1862
VLD Driver
4047
4046B
6
4057
Data Transfer Activation Switch
4051
Display Panel Driver
LCD Panel
4050
4053
Keypad Driver
Touch Keypad
4052
4056
Data Transfer Mechanism
Host
Automatic BCD Only With
No Object Detection

FIG. 53C5

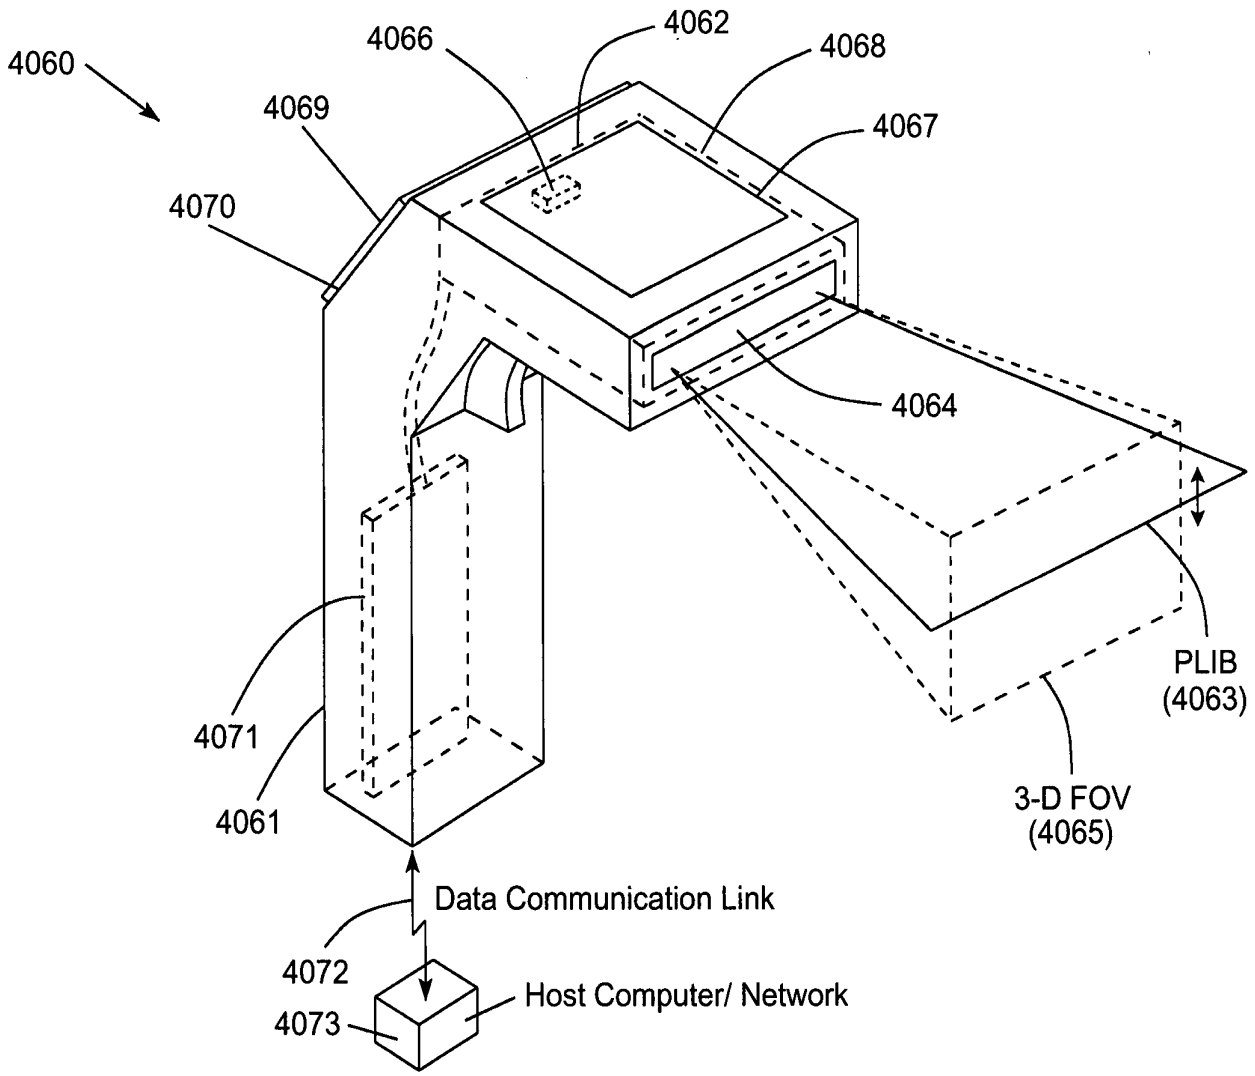
4060
4066
4062
4068
4069
4067
4070
4064
PLIB
(4063)
4071
4061
3-D FOV
(4065)
Data Communication Link
4072
Host Computer/ Network
4073

FIG. 54A

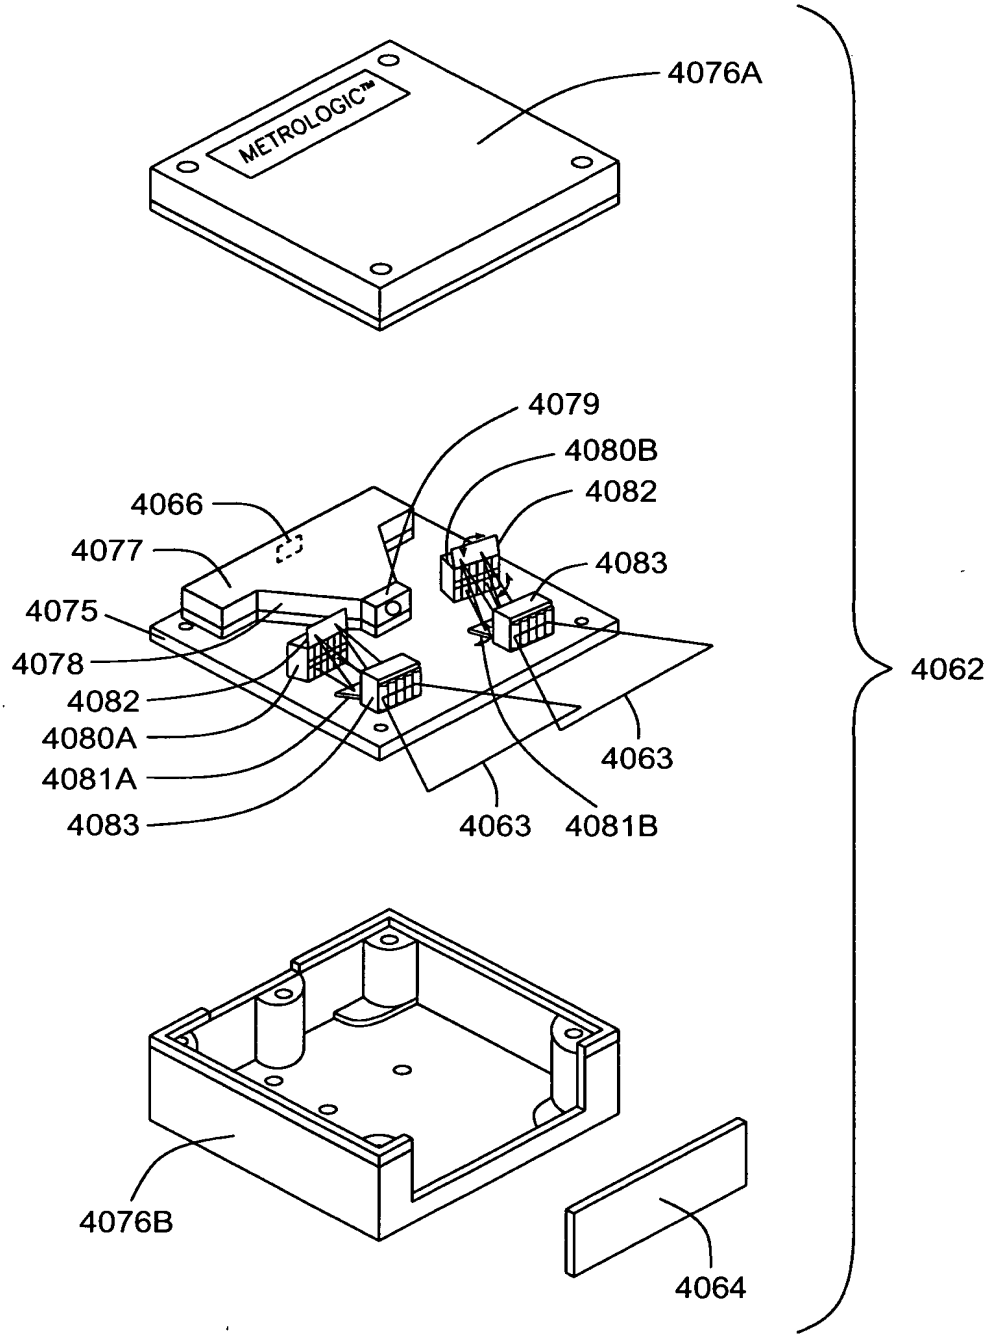

(Dual Mirrors)
Fig. 1I5A-5D

FIG. 54B

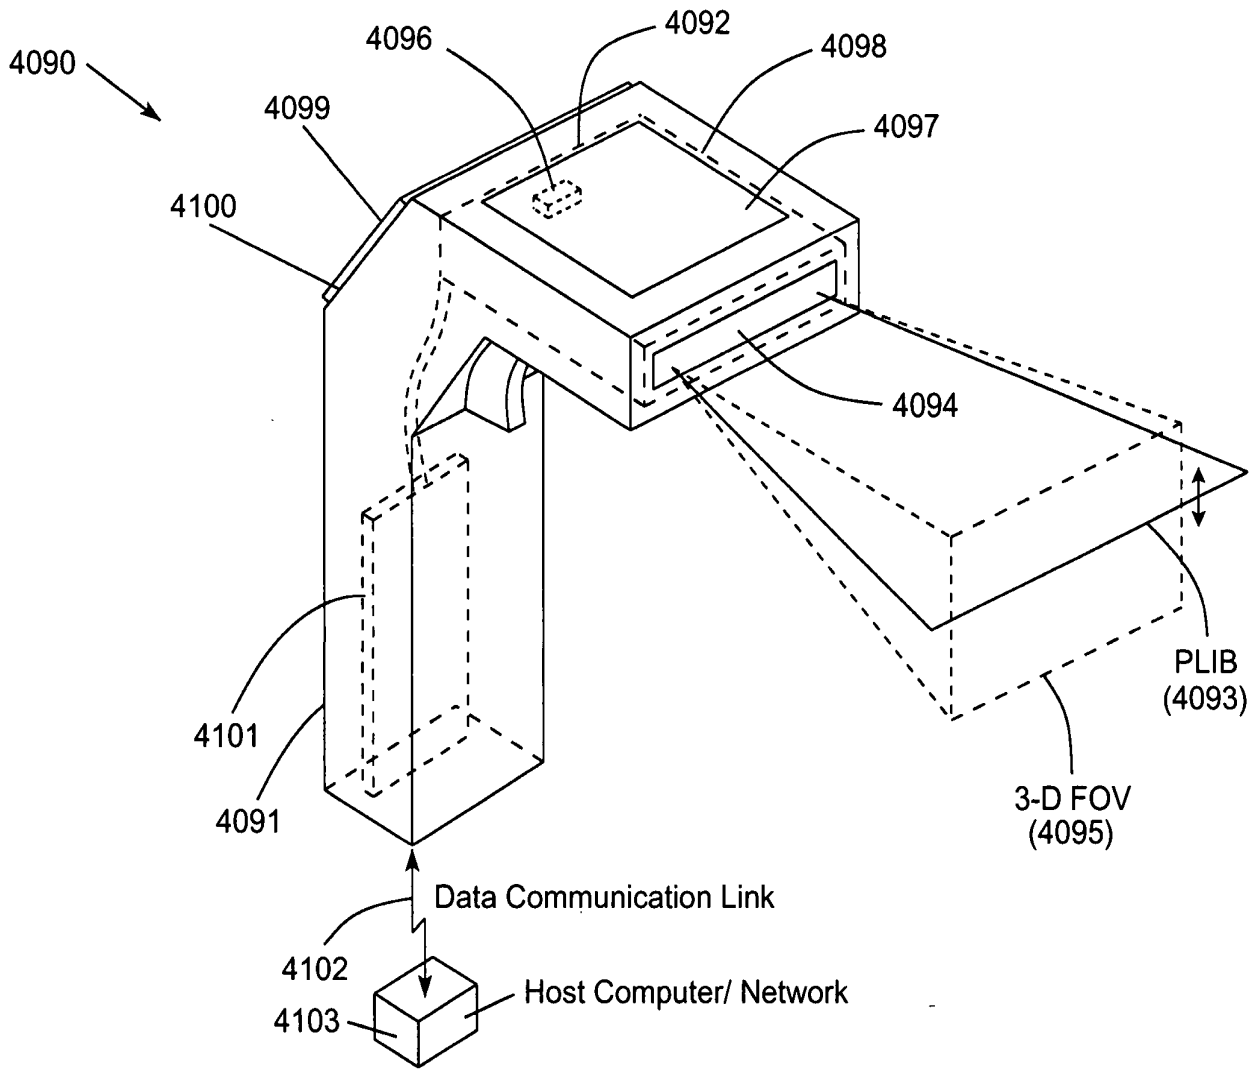
4090
4096
4092
4098
4099
4097
4100
4094
PLIB
(4093)
4101
4091
3-D FOV
(4095)
Data Communication Link
4102
Host Computer/ Network
4103

FIG. 55A

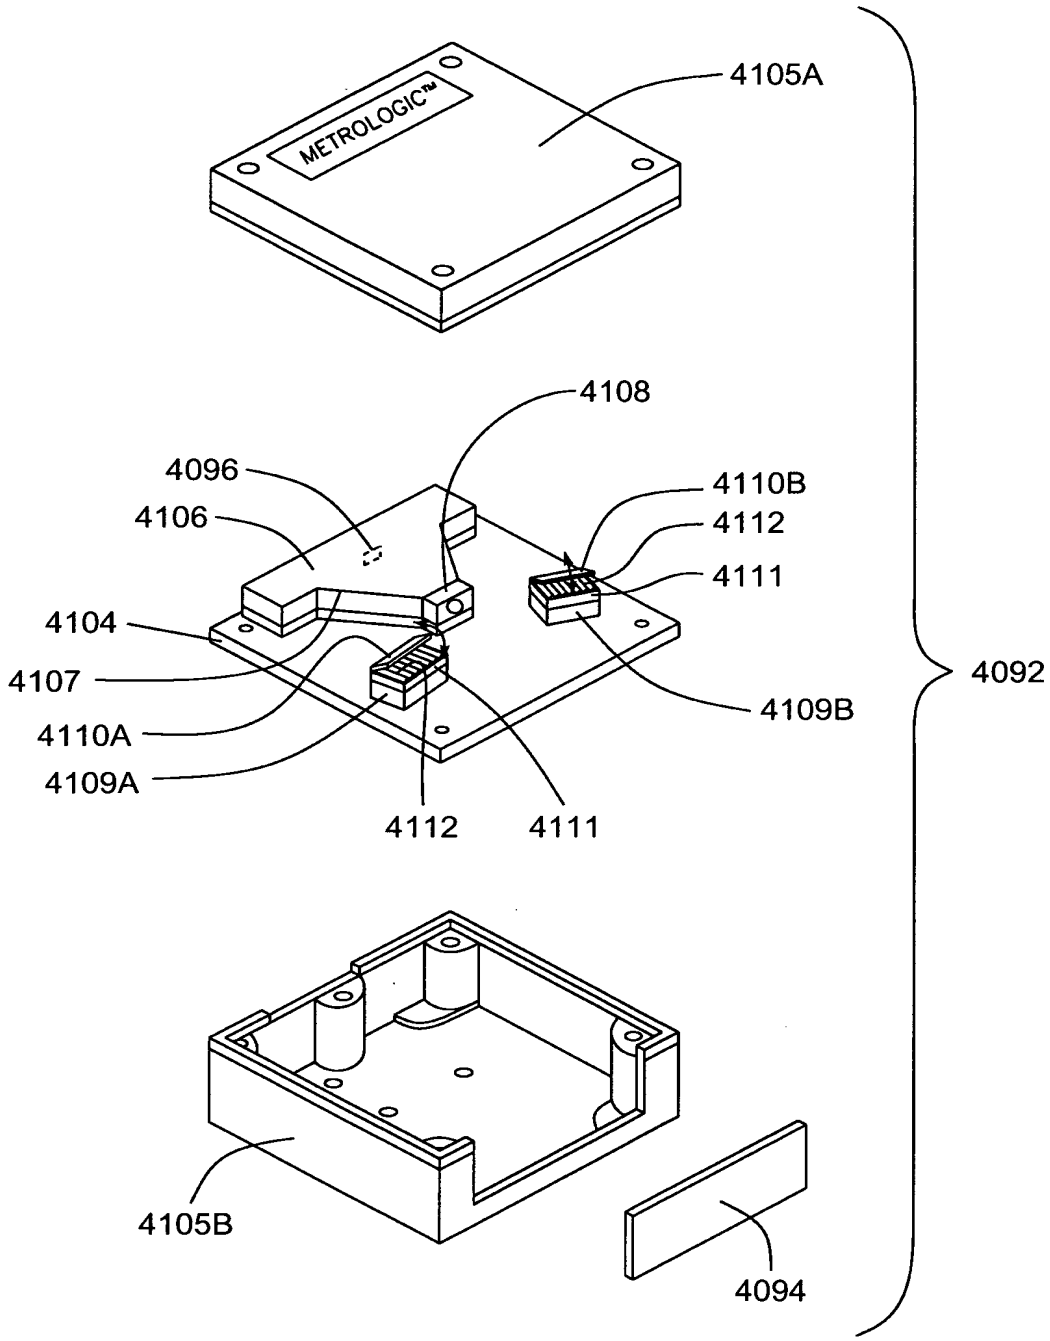

Bragg Cell
Fig. 1I6A-6B

FIG. 55B

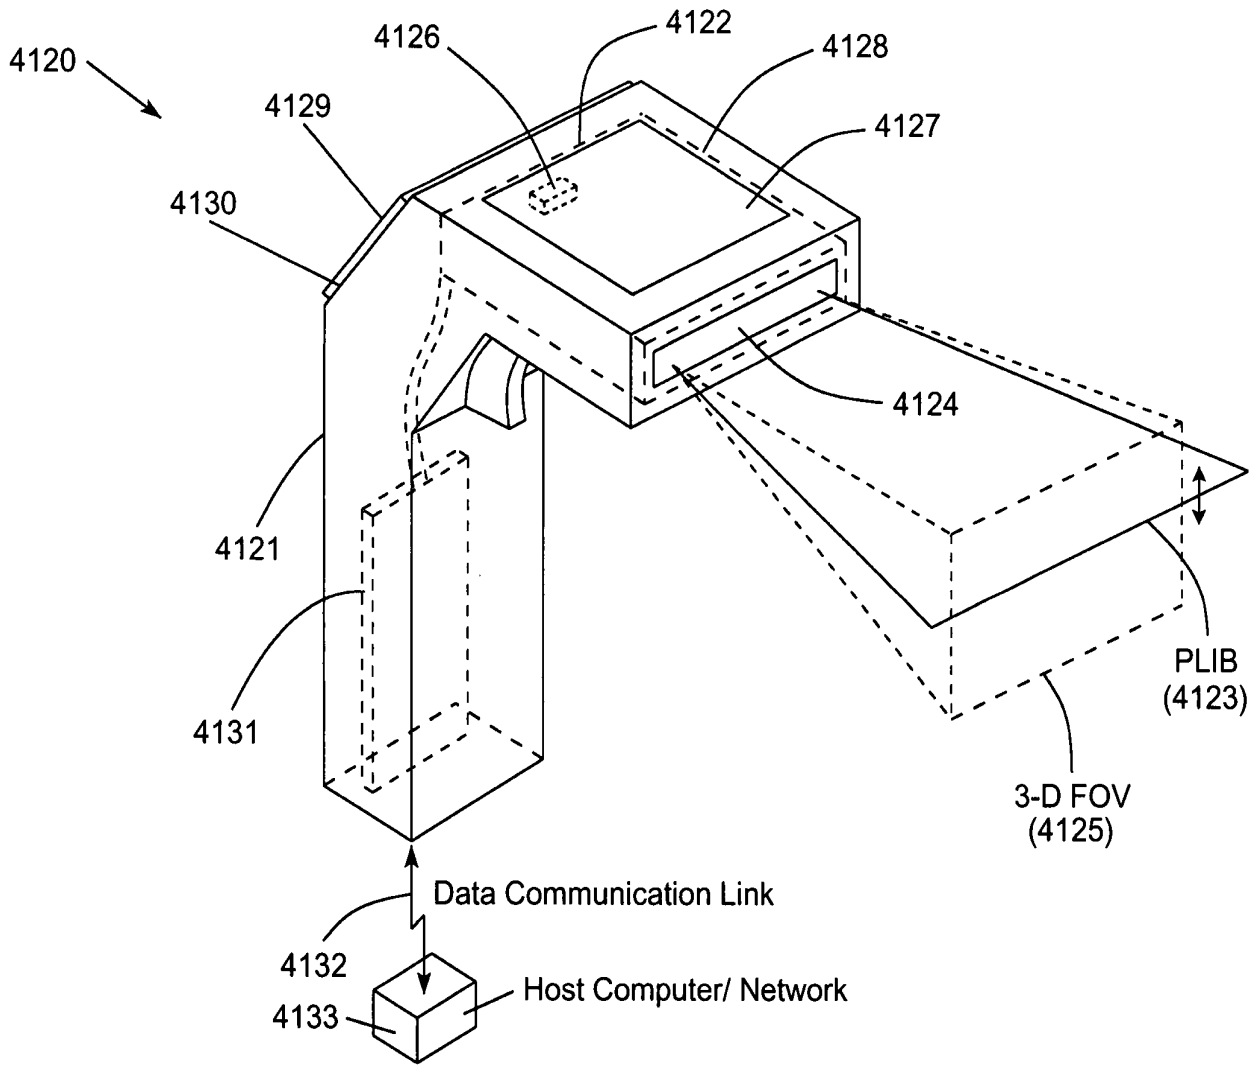
4120
4126
4122
4128
4129
4127
4130
4124
4121
4131
PLIB
(4123)
3-D FOV
(4125)
Data Communication Link
4132
Host Computer/ Network
4133

FIG. 56A

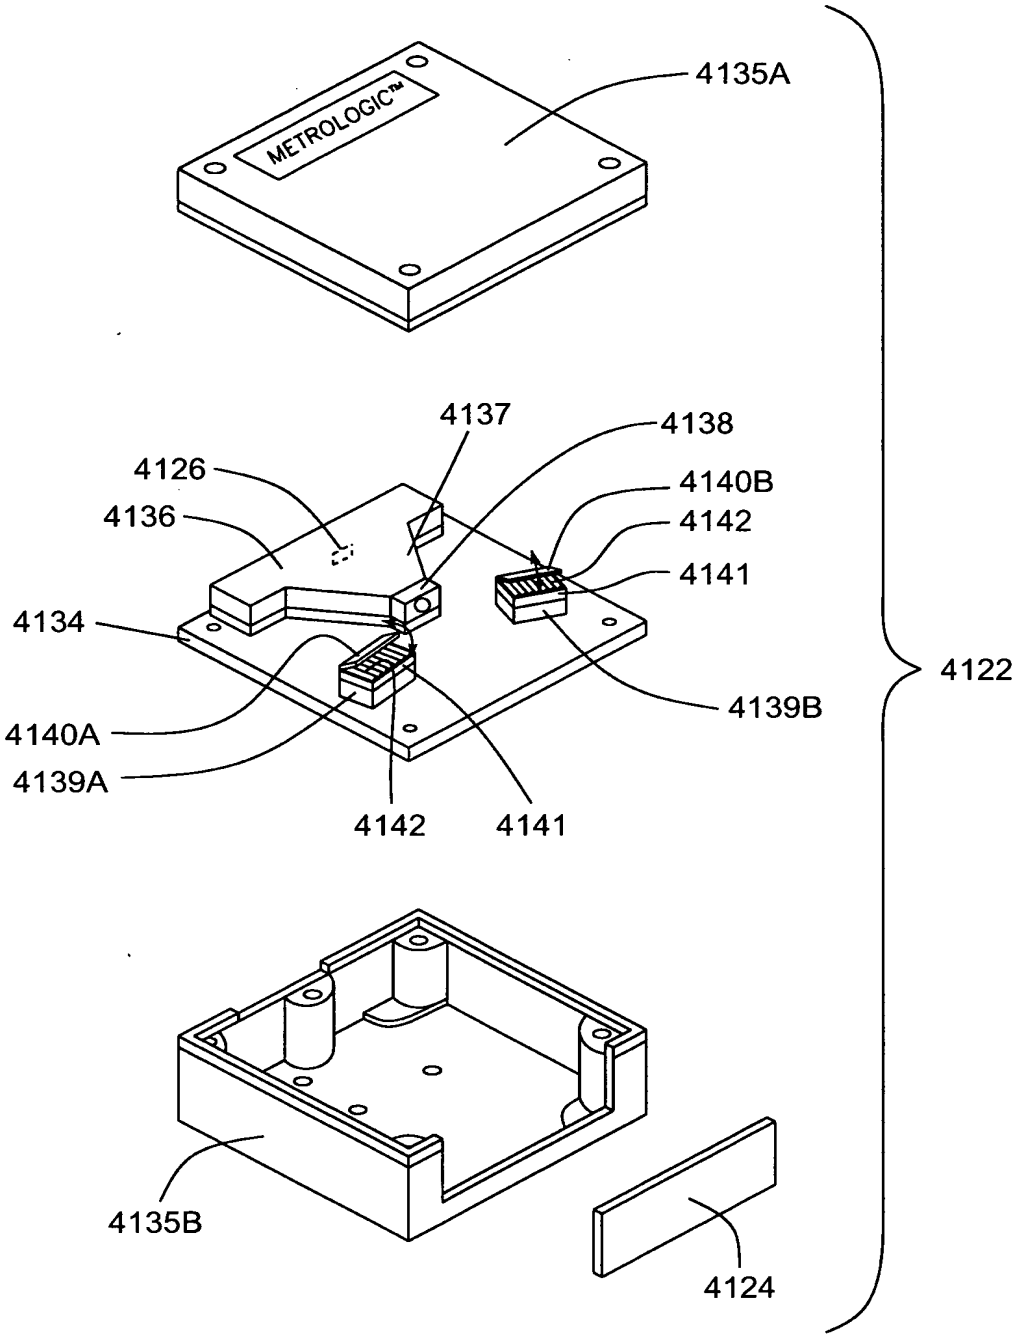

DM
Fig. 1I7A-7B

FIG. 56B

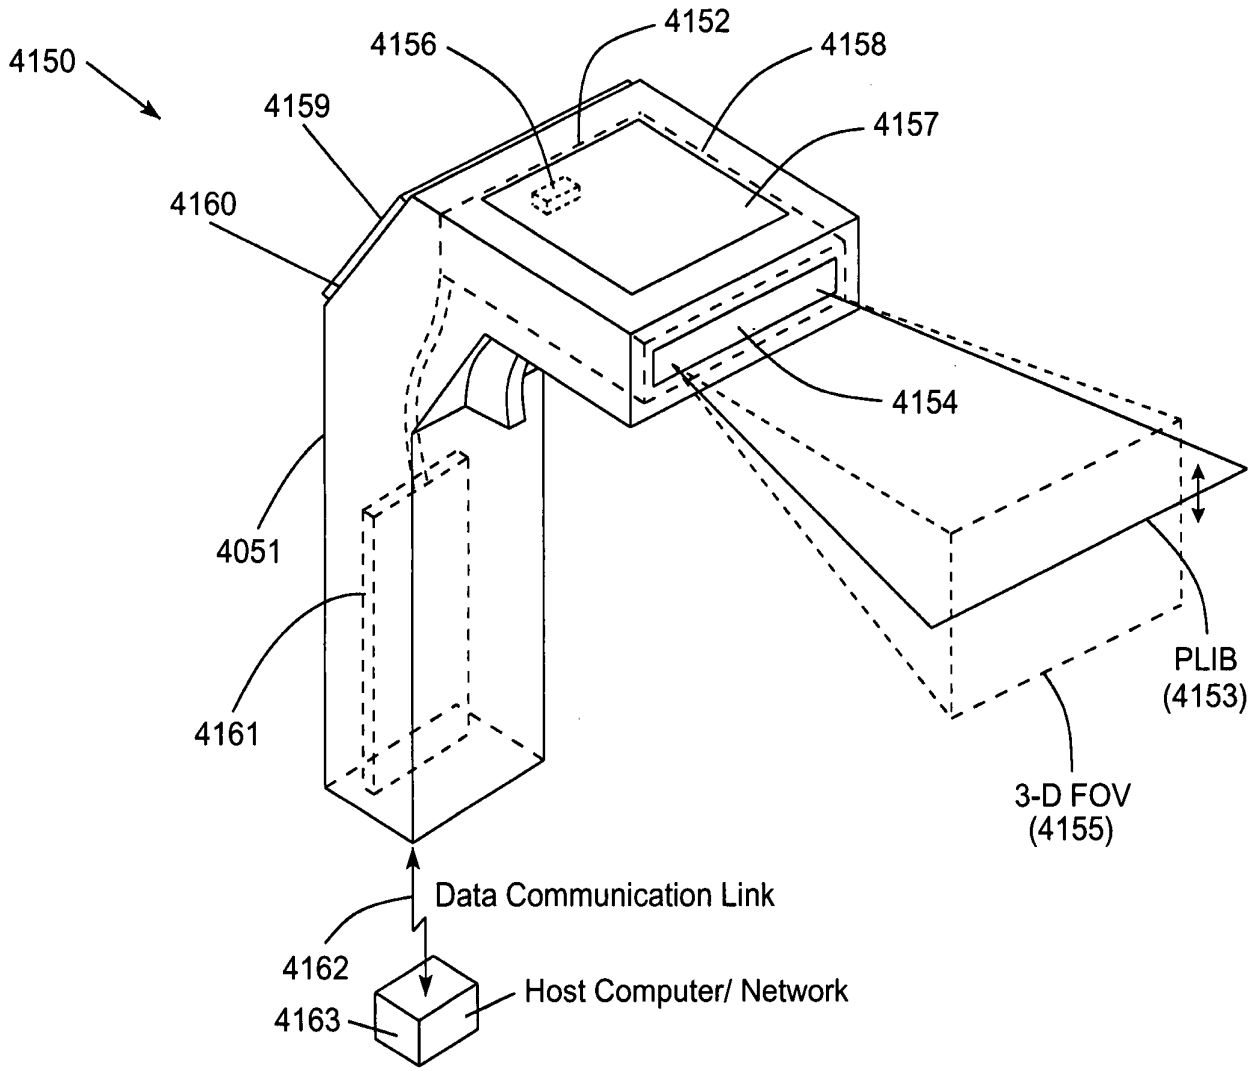
4150
4156
4152
4158
4159
4157
4160
4154
4051
4161
PLIB
(4153)
3-D FOV
(4155)
Data Communication Link
4162
Host Computer/ Network
4163

FIG. 57A

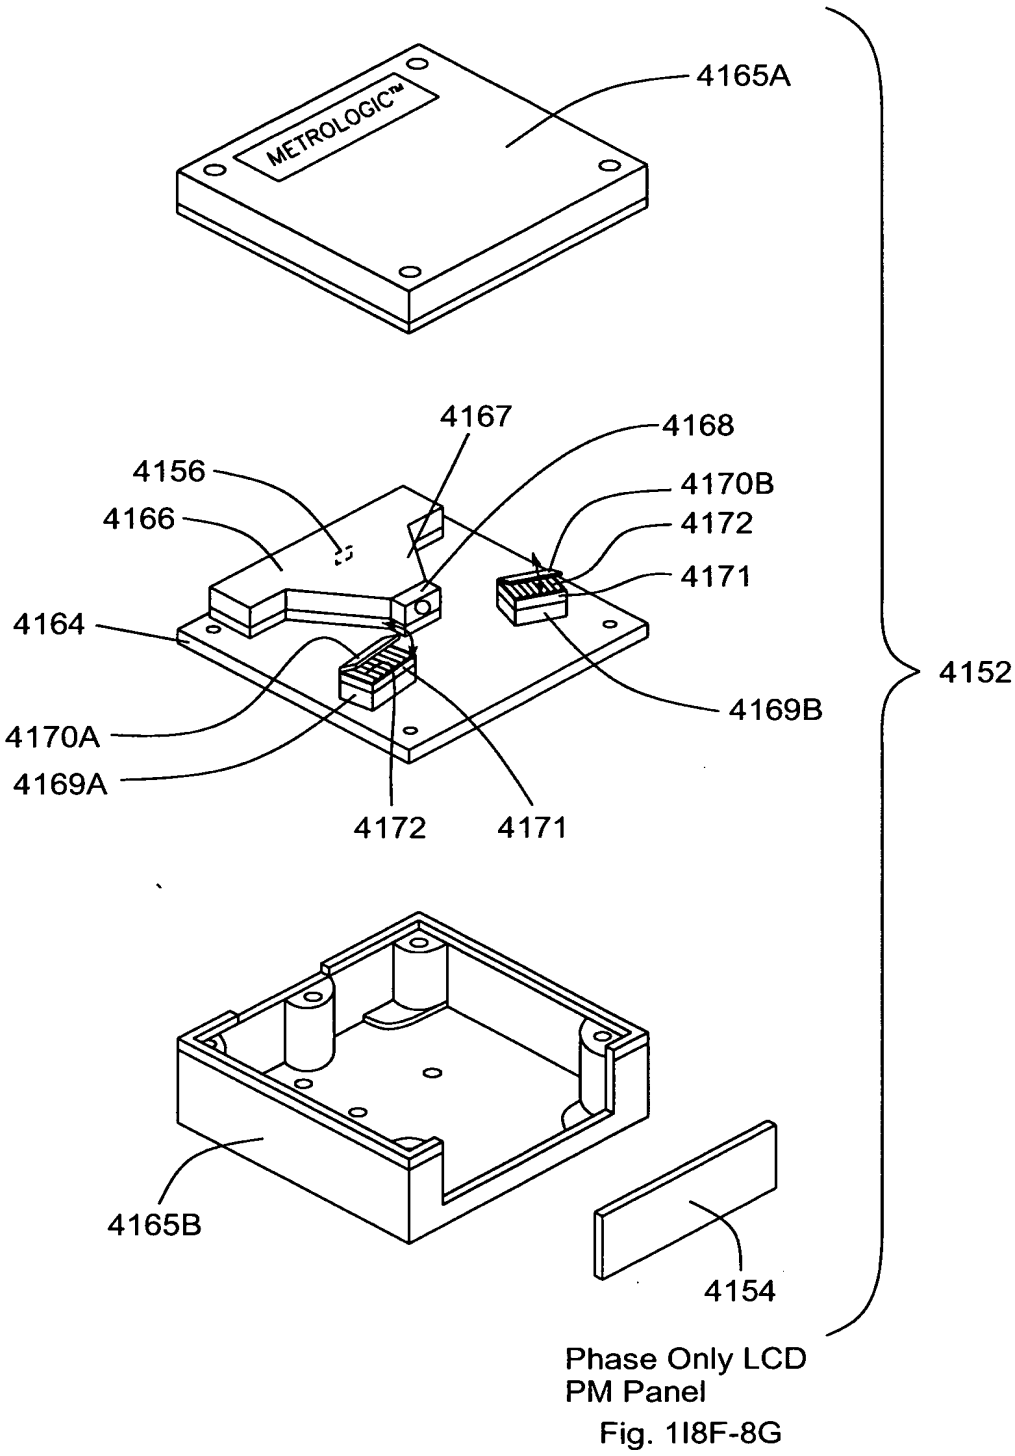
METROLOGIC™
4165A
4167
4168
4156
4170B
4166
4172
4171
4164
4169B
4170A
4169A
4172
4171
4165B
4154
4152
Phase Only LCD
PM Panel
Fig. 1I8F-8G

FIG. 57B

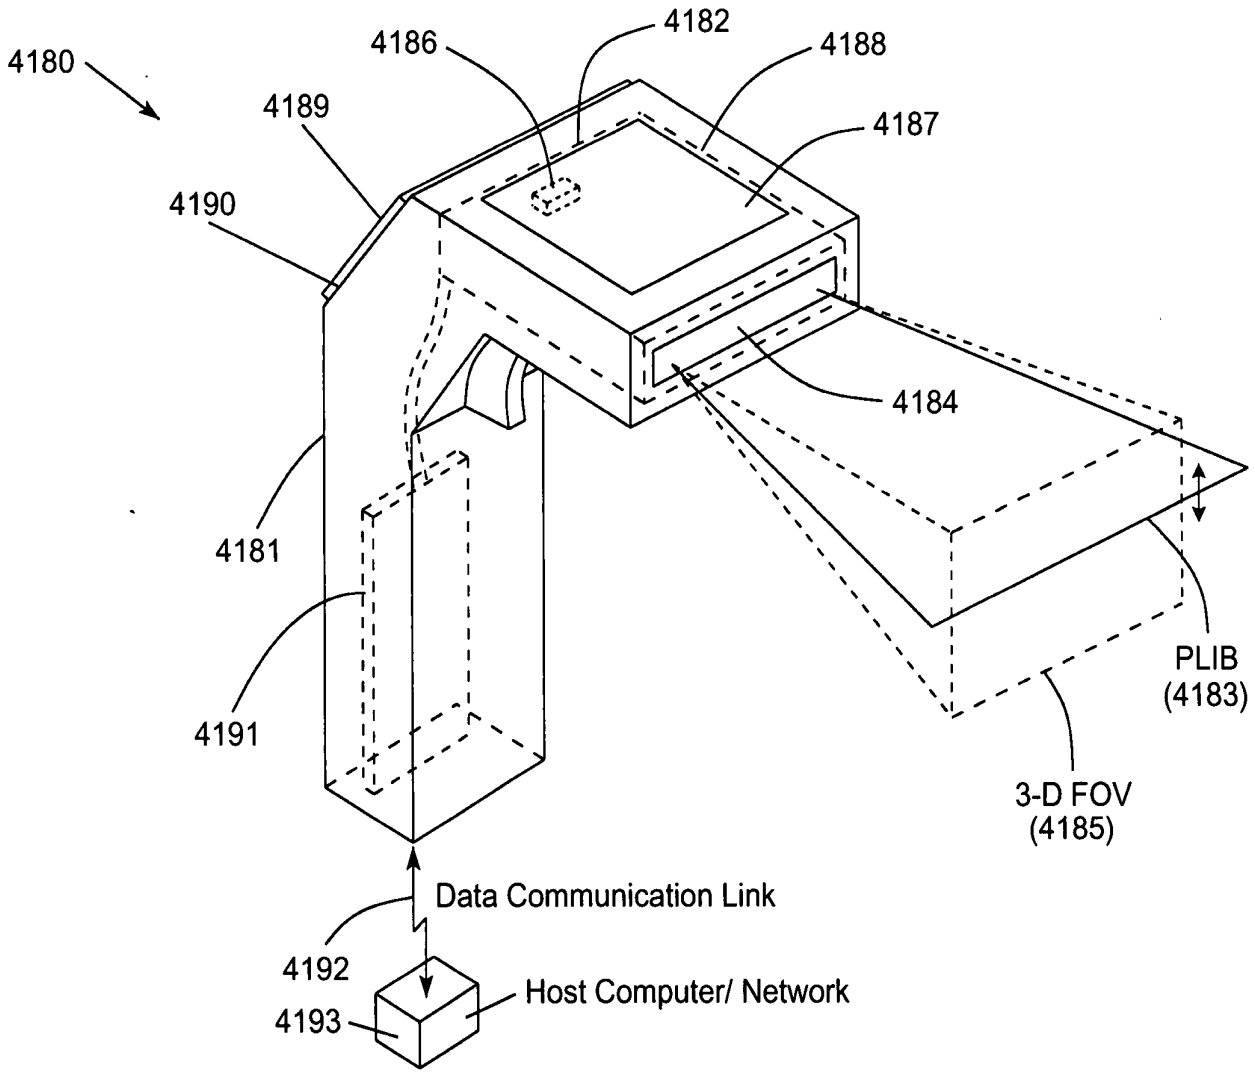
4180
4186
4182
4188
4189
4187
4190
4184
4181
4191
PLIB
(4183)
3-D FOV
(4185)
Data Communication Link
4192
Host Computer/ Network
4193

FIG. 58A

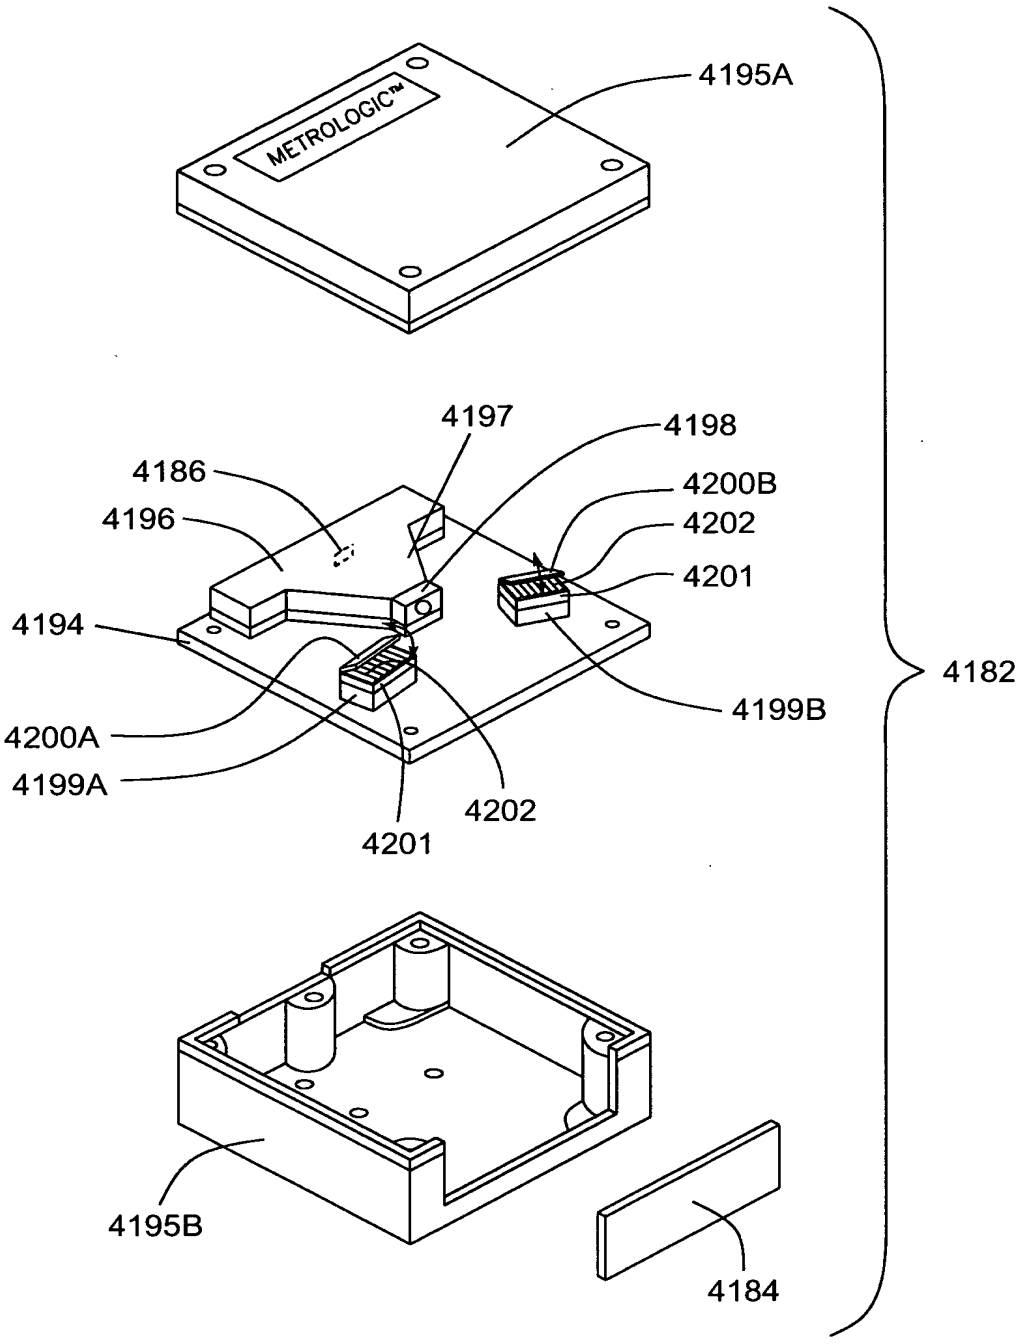

HS Optical Shutter
Fig. 1I14A-14B

FIG. 58B

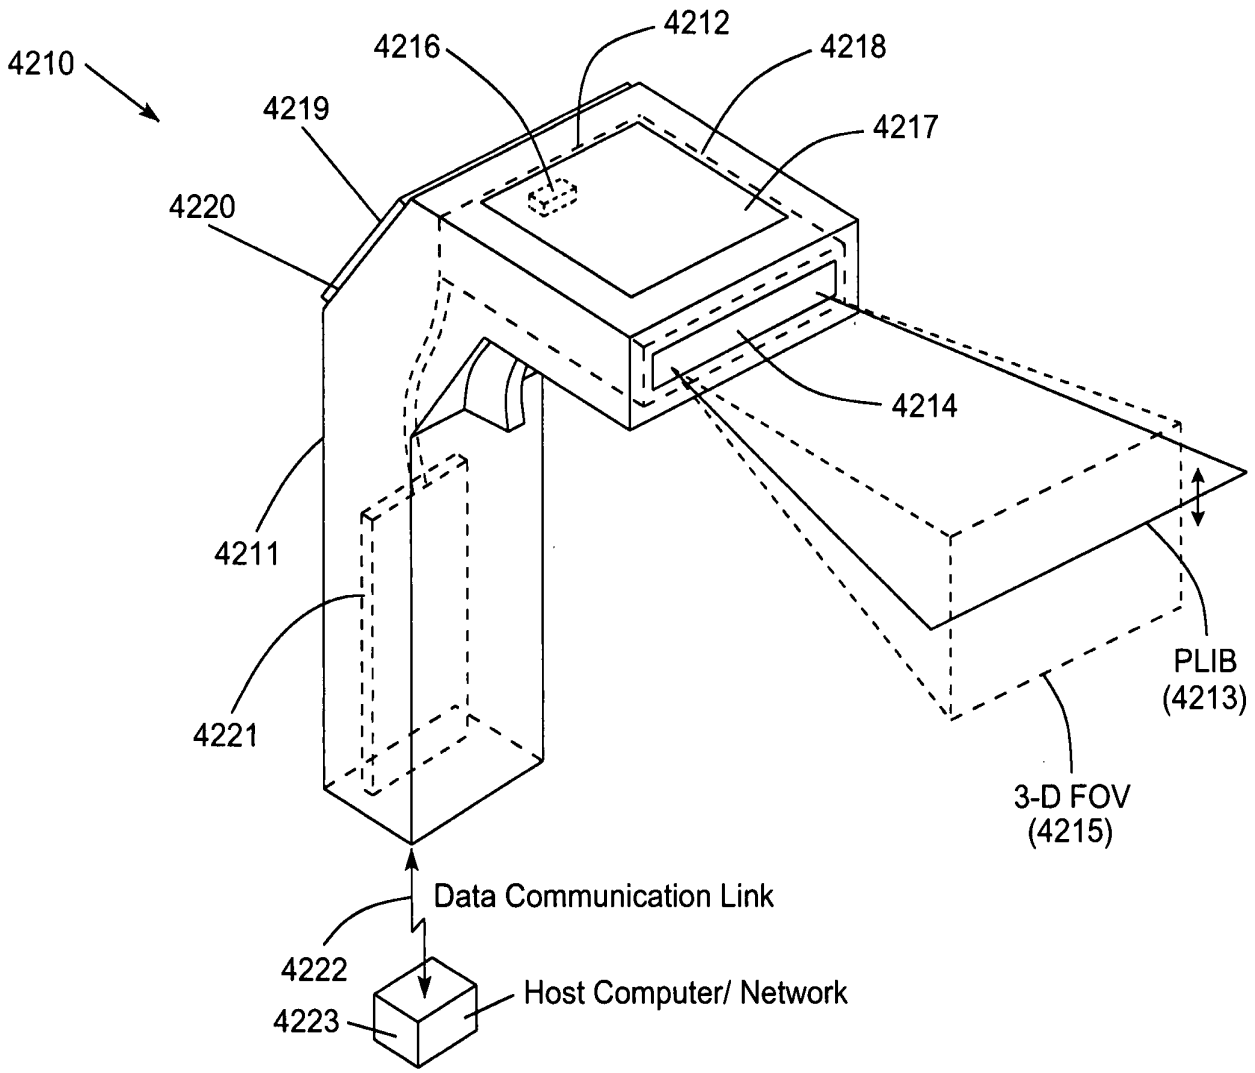
4210
4216
4212
4218
4219
4217
4220
4214
4211
4221
PLIB
(4213)
3-D FOV
(4215)
Data Communication Link
4222
Host Computer/ Network
4223

FIG. 59A

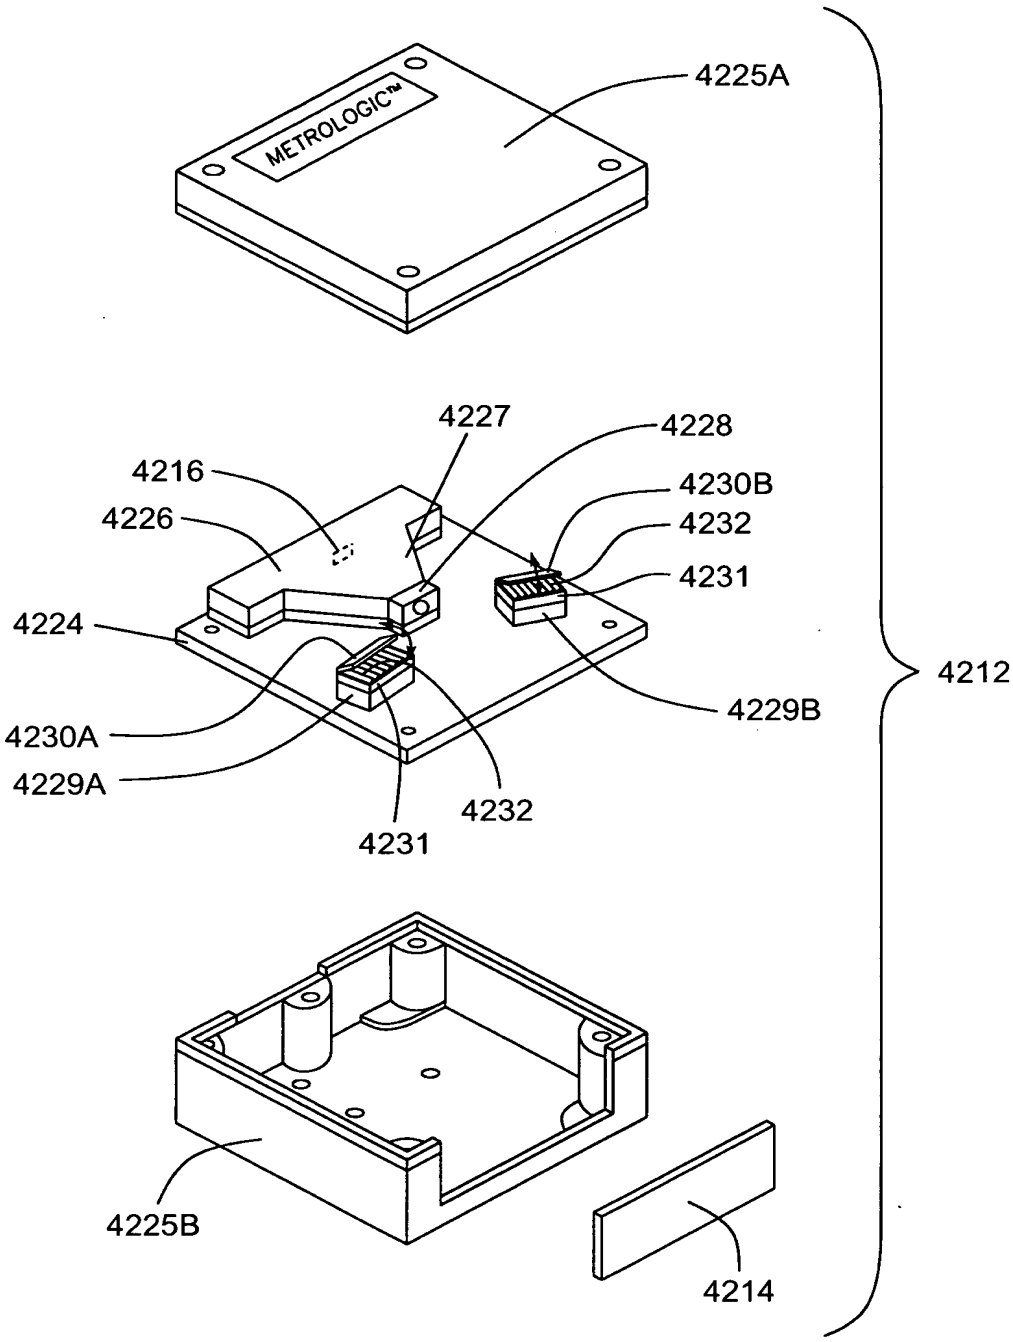

MLLD

Fig. 1I15A-15B

FIG. 59B

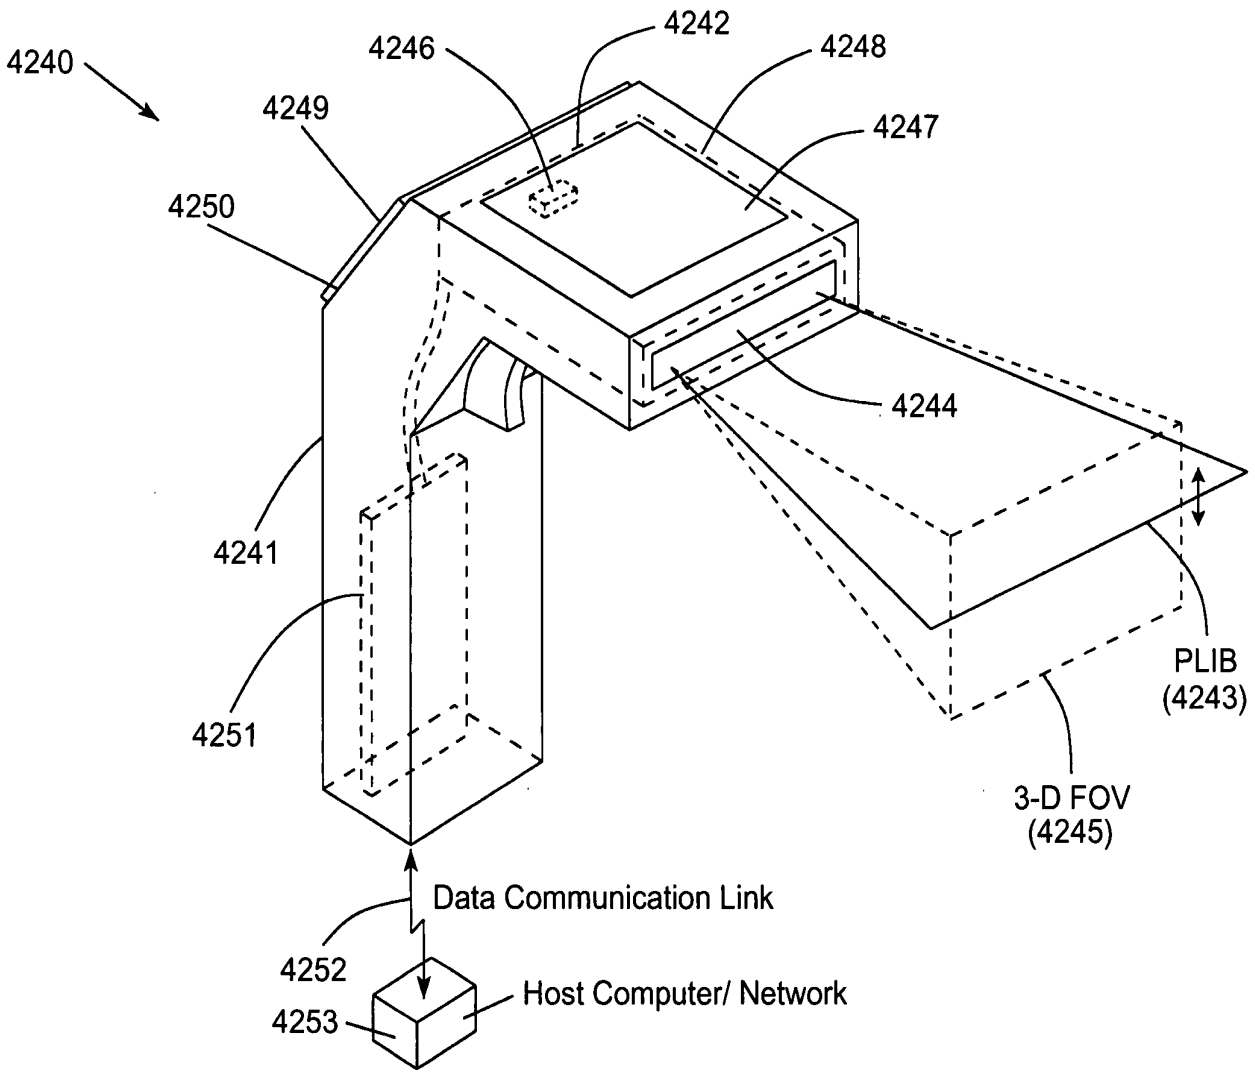
4240
4242
4246
4248
4249
4247
4250
4244
4241
4251
PLIB
(4243)
3-D FOV
(4245)
Data Communication Link
4252
Host Computer/ Network
4253

FIG. 60A

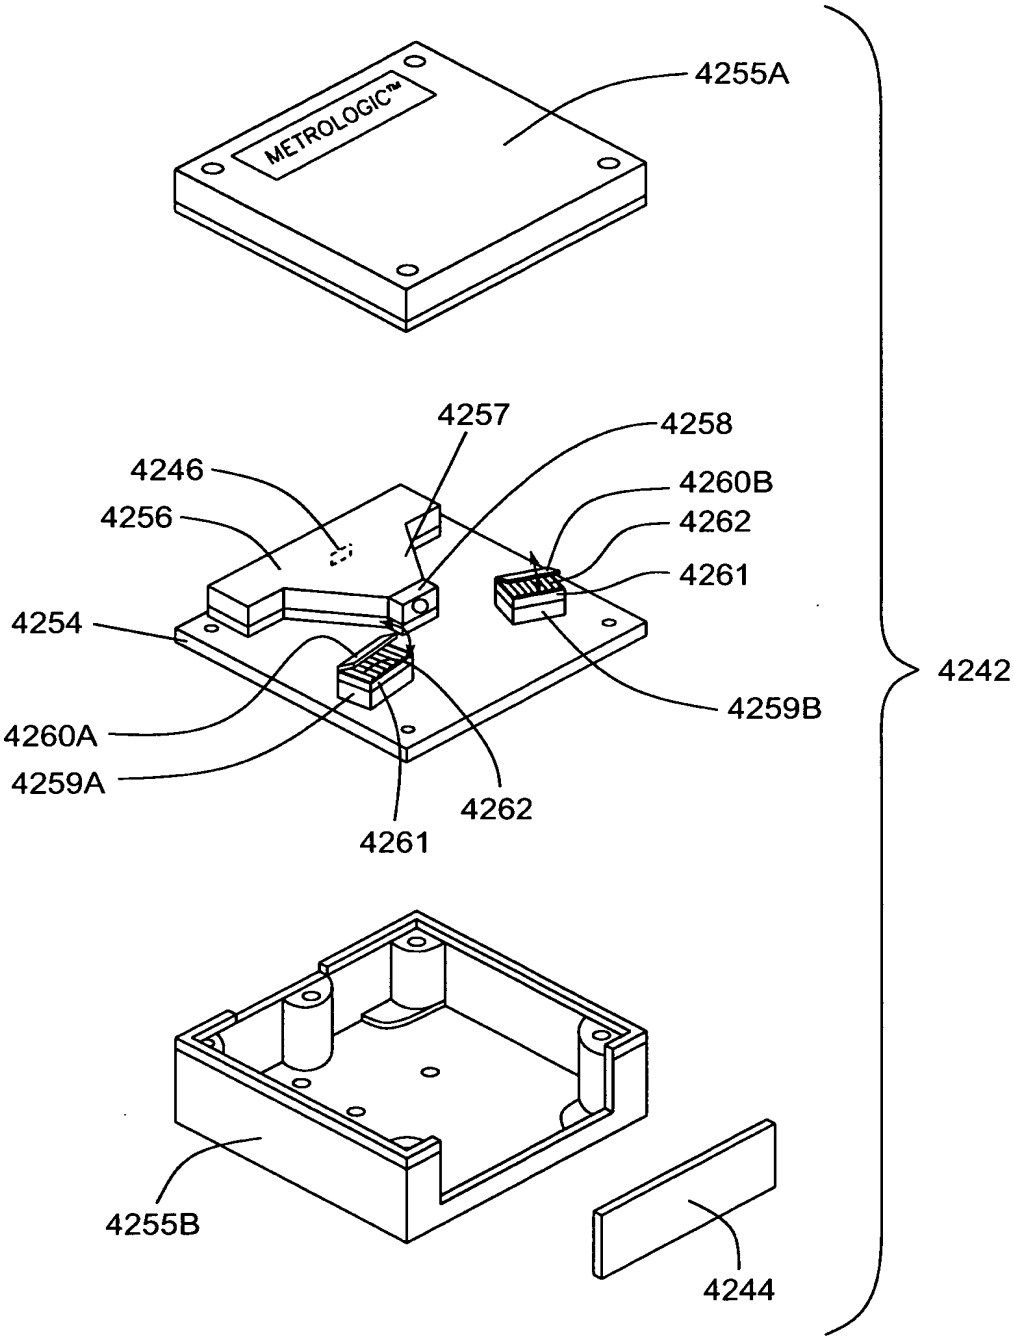

Etalon (Temp. Phase Mod.)
Fig. 1I17A-17B

FIG. 60B

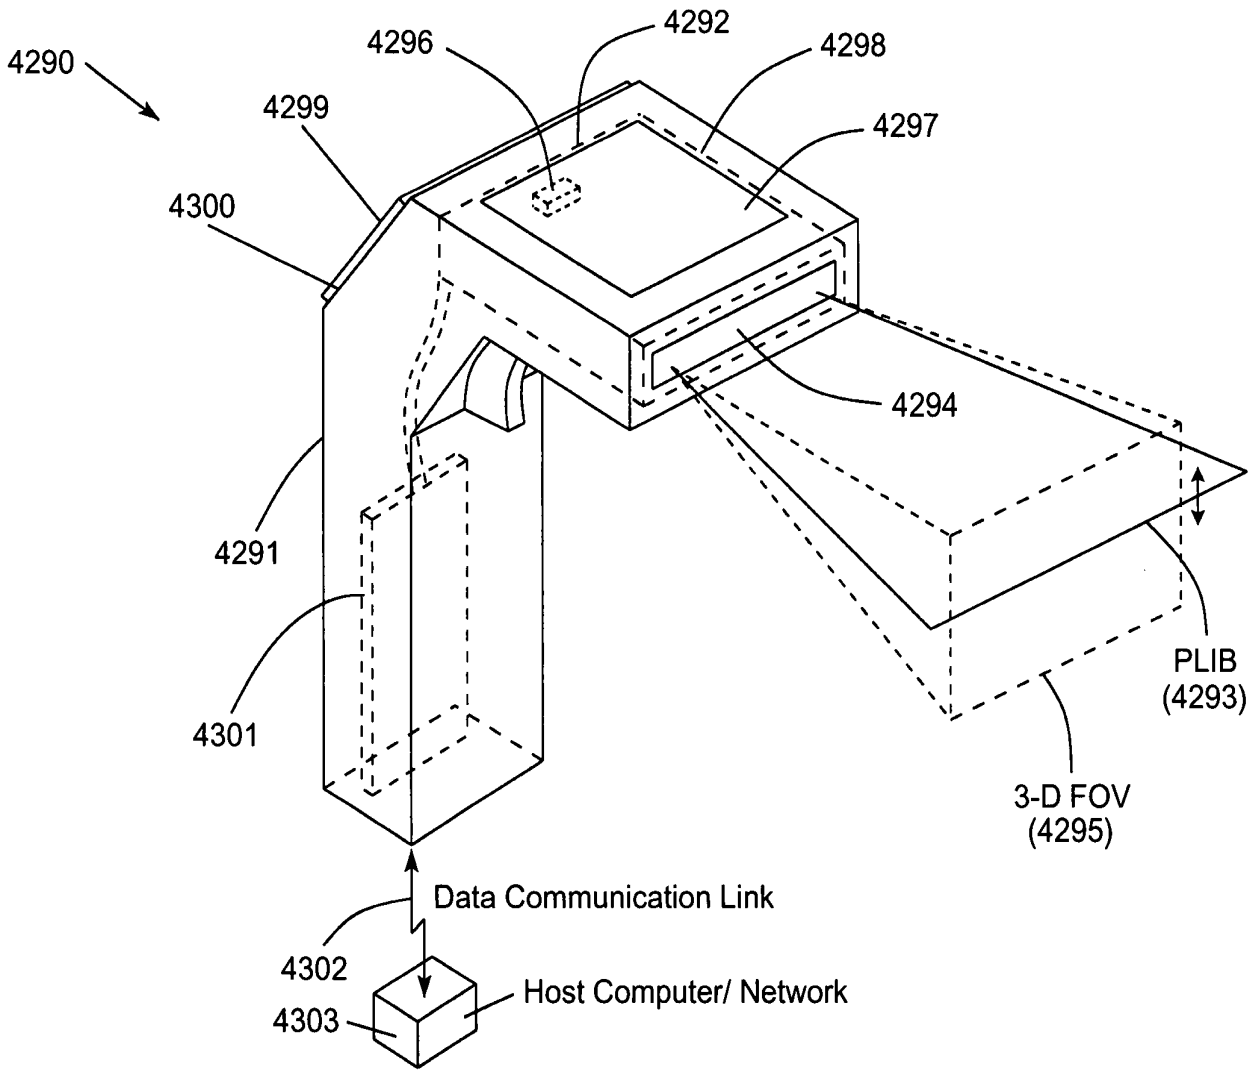
4290
4296
4292
4298
4299
4297
4300
4294
4291
4301
PLIB
(4293)
3-D FOV
(4295)
Data Communication Link
4302
Host Computer/ Network
4303

FIG. 61A

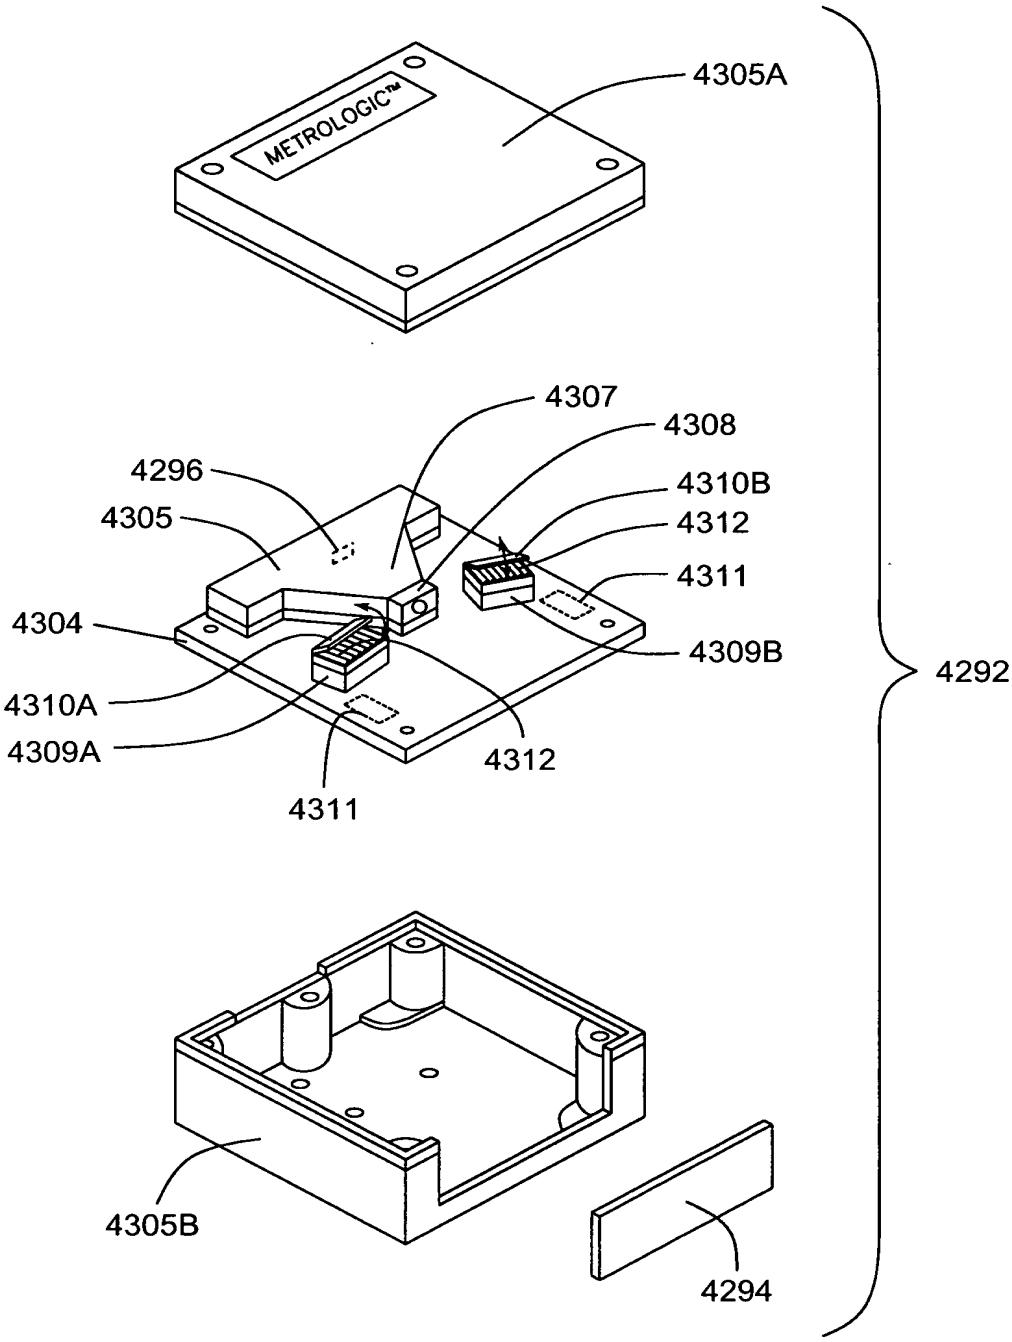

Mode Hopping
Fig. 1I19A-19B

FIG. 61B

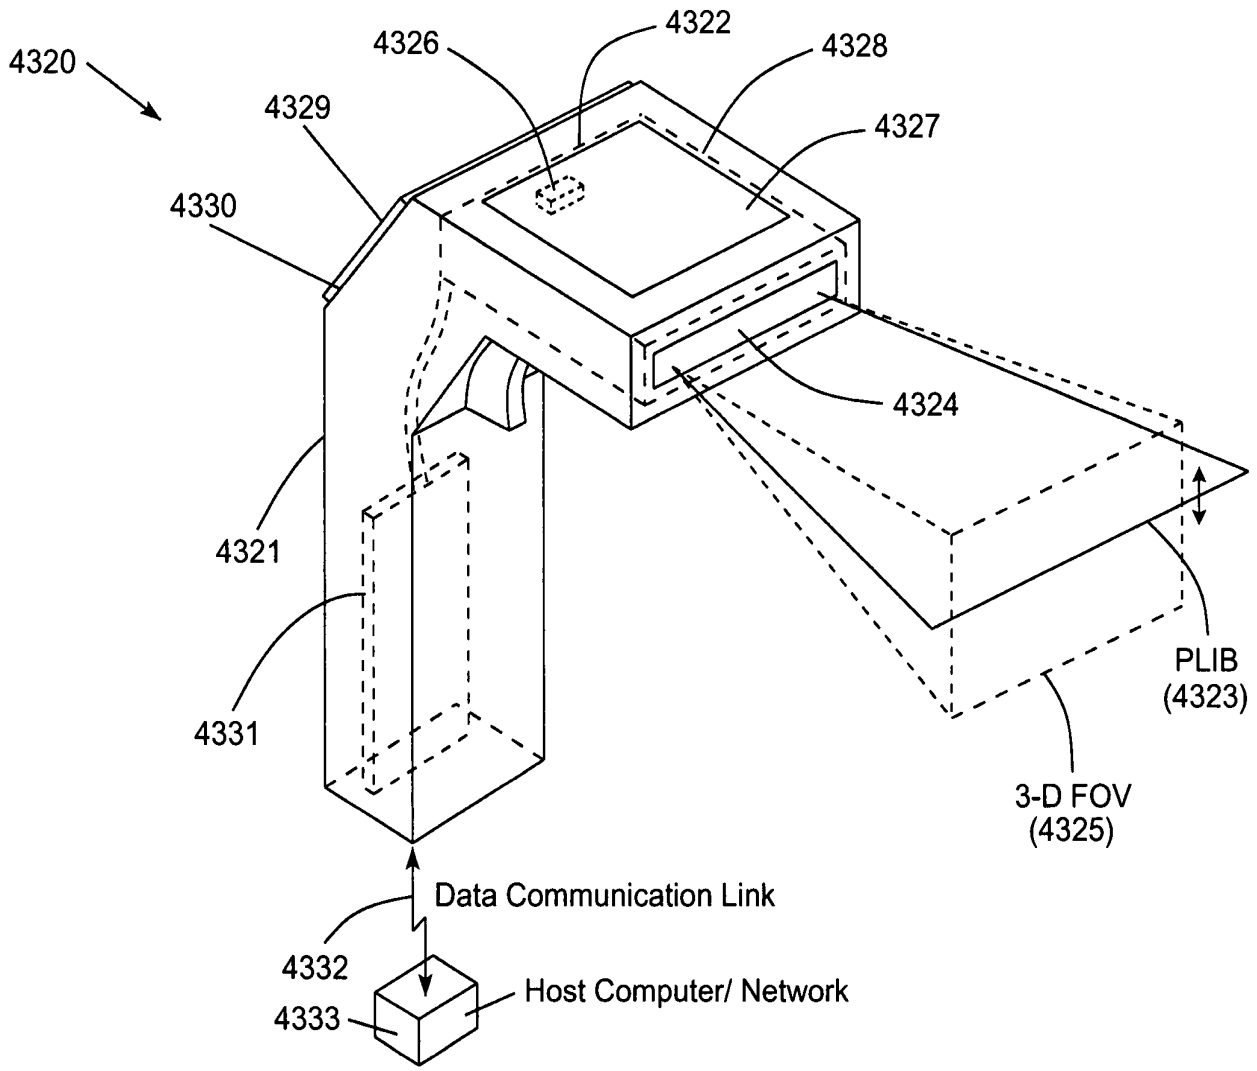
4320
4326
4322
4328
4329
4327
4330
4324
4321
4331
PLIB
(4323)
3-D FOV
(4325)
Data Communication Link
4332
Host Computer/ Network
4333

FIG. 62A

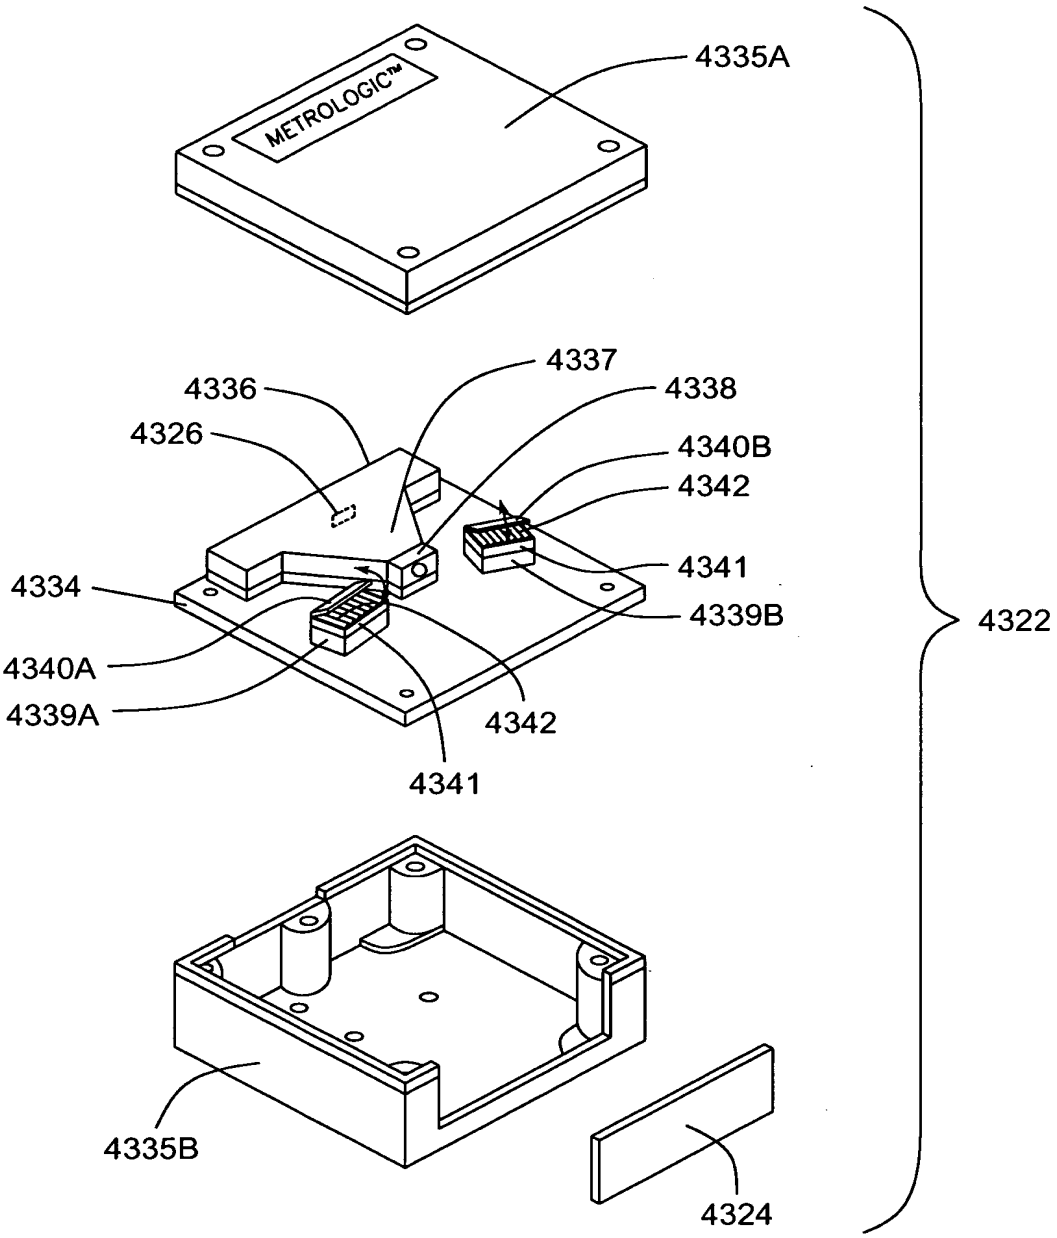

Micro-oscillating
Spatial Intensity
Modulation Panels
Fig. 1I21A-21D

FIG. 62B

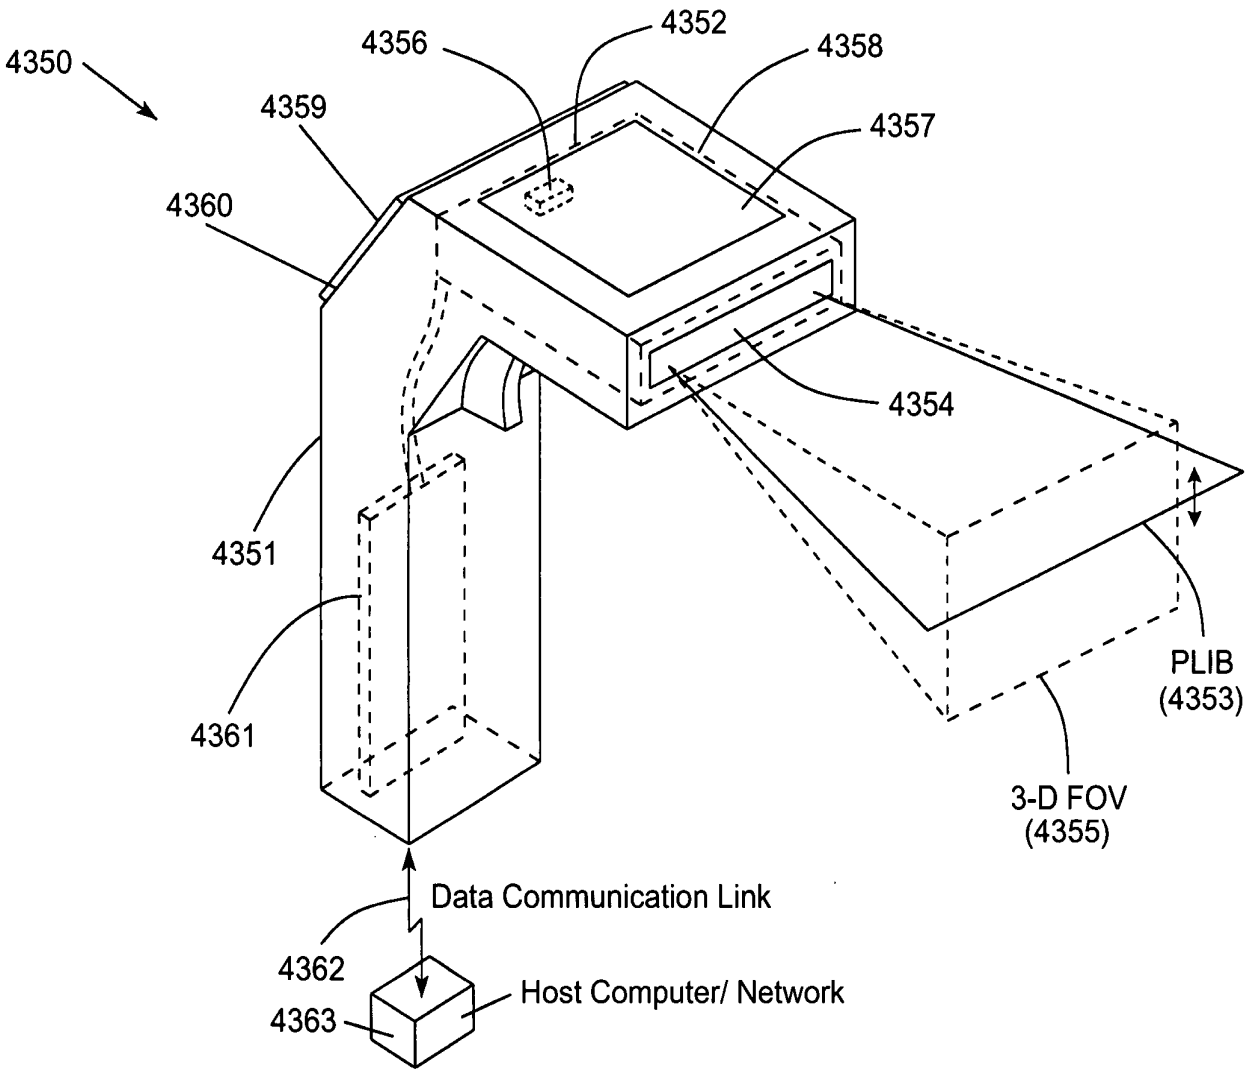
4350
4356
4352
4358
4359
4357
4360
4354
4351
4361
PLIB
(4353)
3-D FOV
(4355)
Data Communication Link
4362
Host Computer/ Network
4363

FIG. 63A

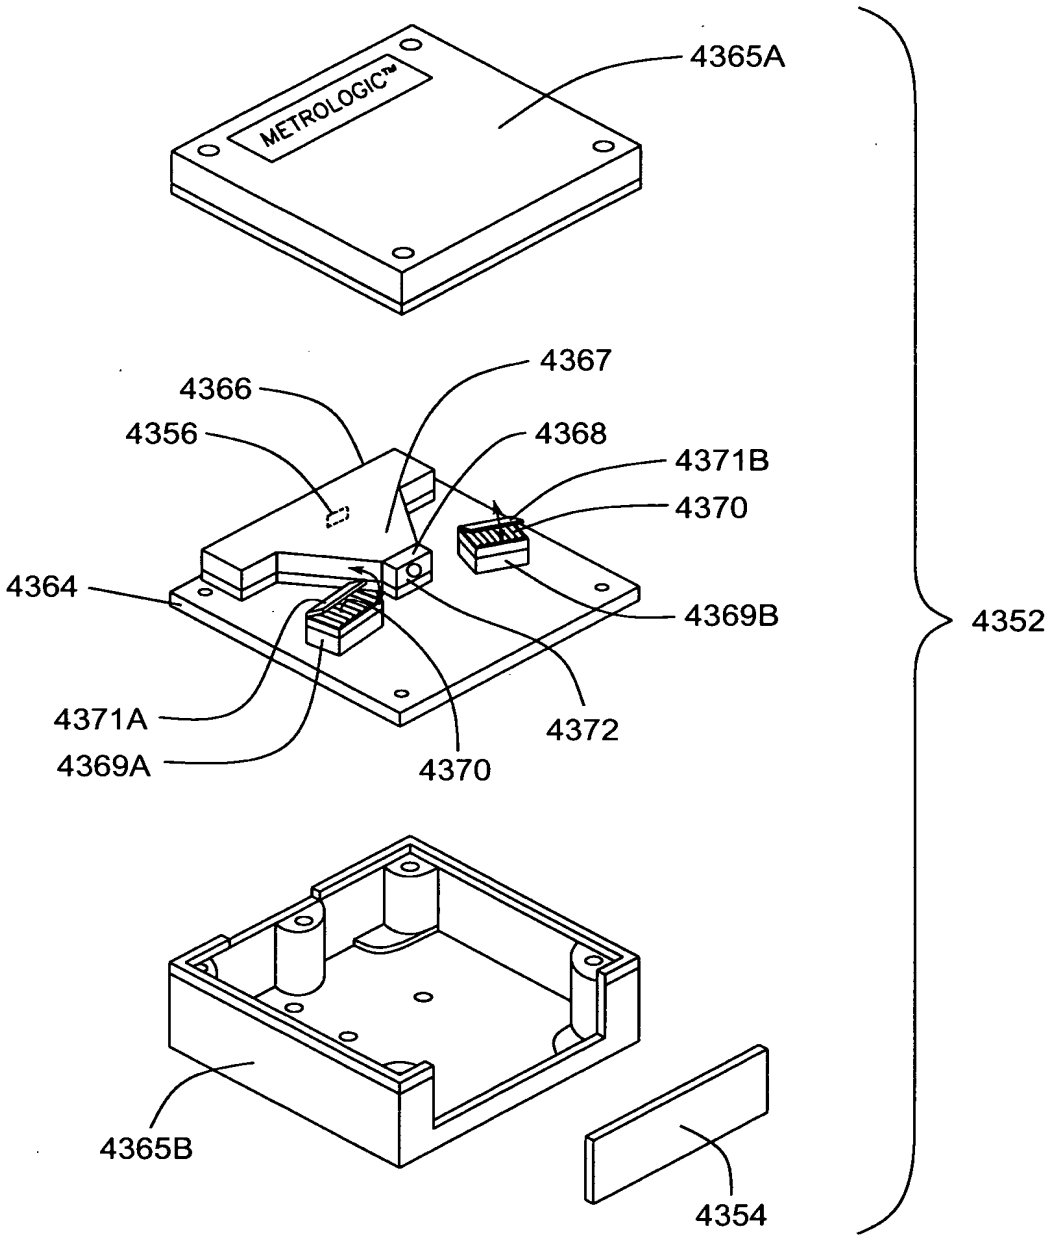

EO or Mechanically
Rotating Iris

Fig. 1I23A-23B

FIG. 63B

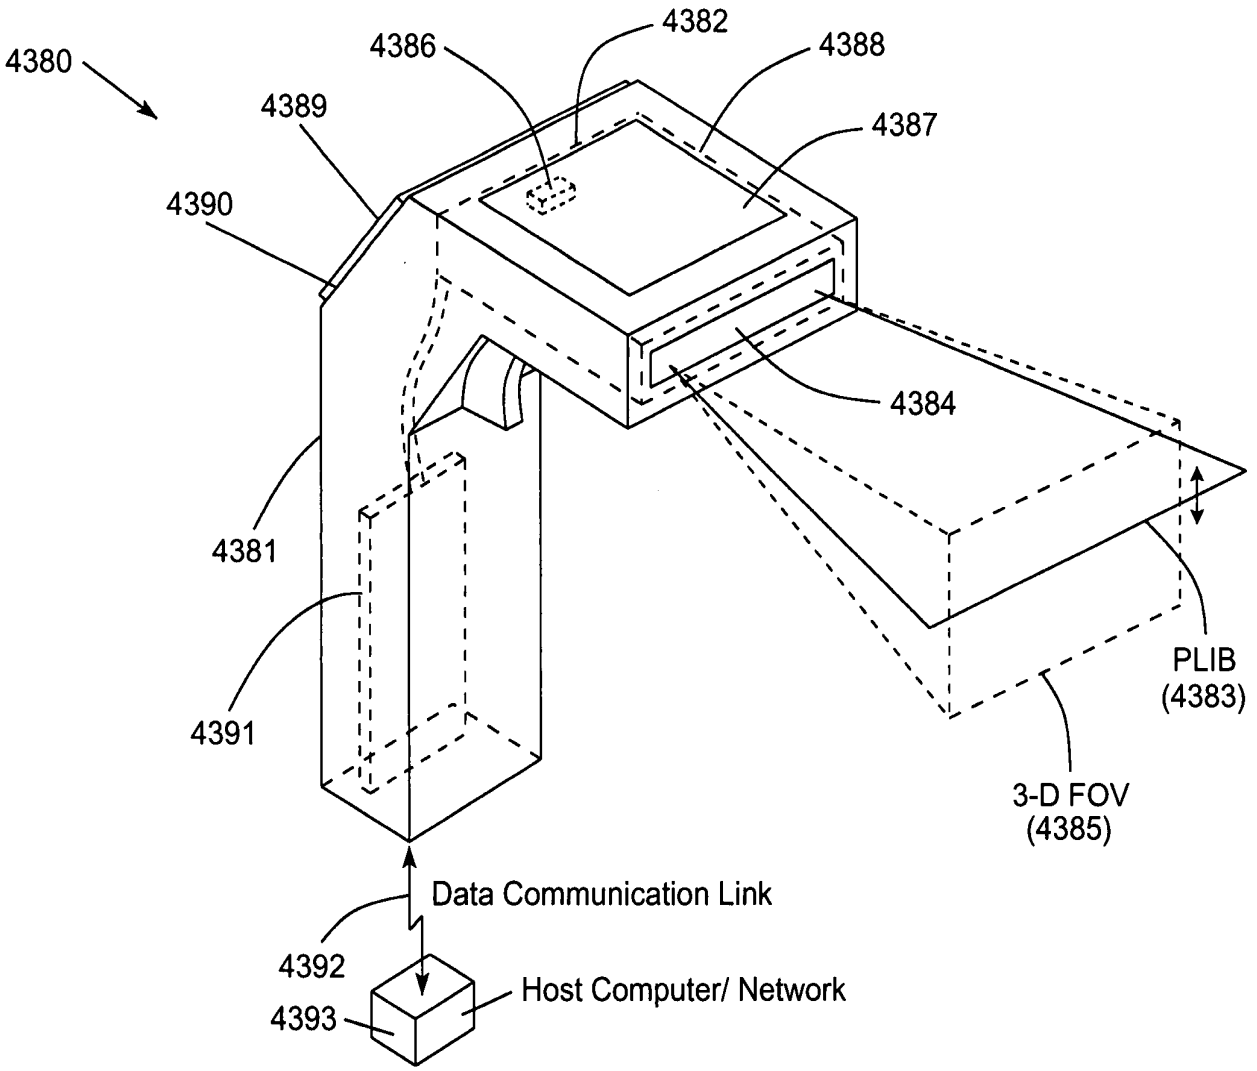
4380
4386
4382
4388
4389
4387
4390
4384
4381
4391
PLIB
(4383)
3-D FOV
(4385)
Data Communication Link
4392
Host Computer/ Network
4393

FIG. 64A

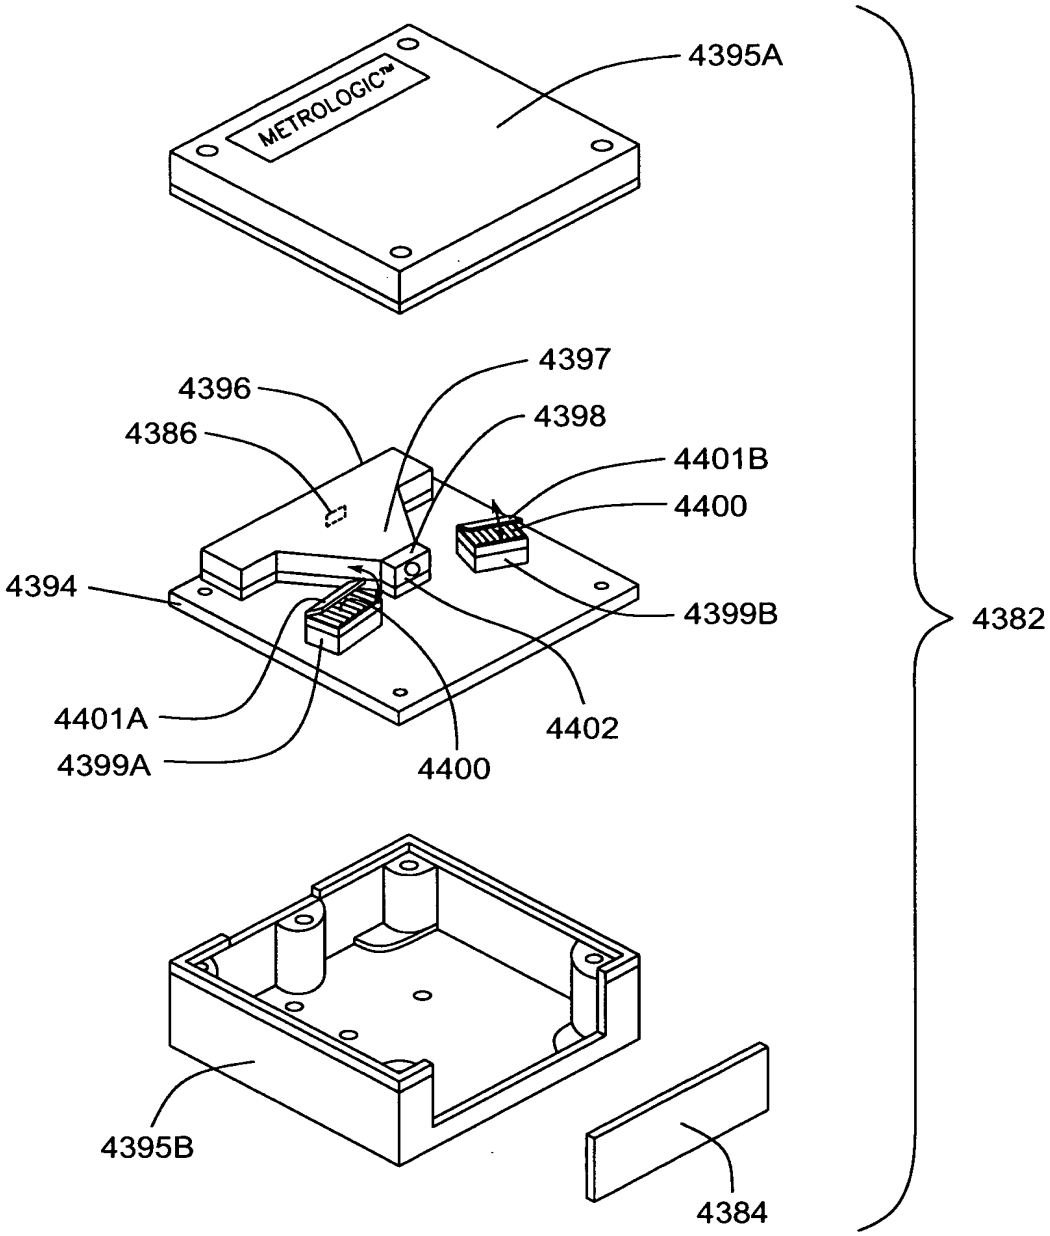

E-optical Shutter
Before IFD Lens

Fig. 1I24A

FIG. 64B



FIG. 65A



FIG. 65B

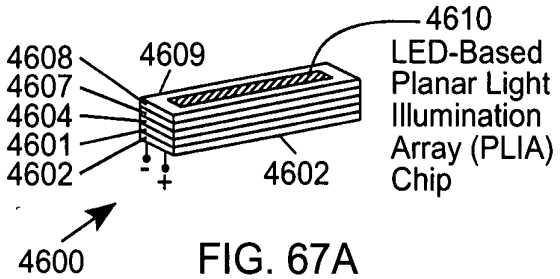

FIG. 67A

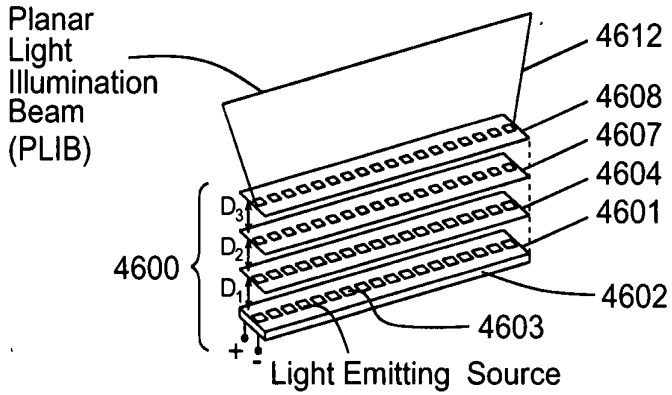

FIG. 67B



FIG. 66A



FIG. 66B

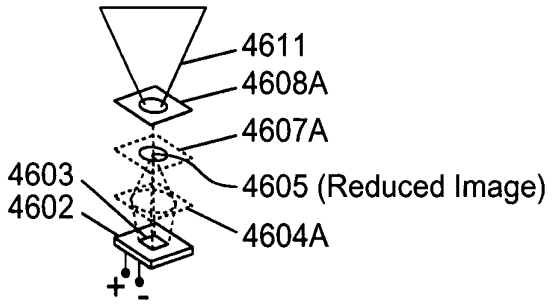

FIG. 67C

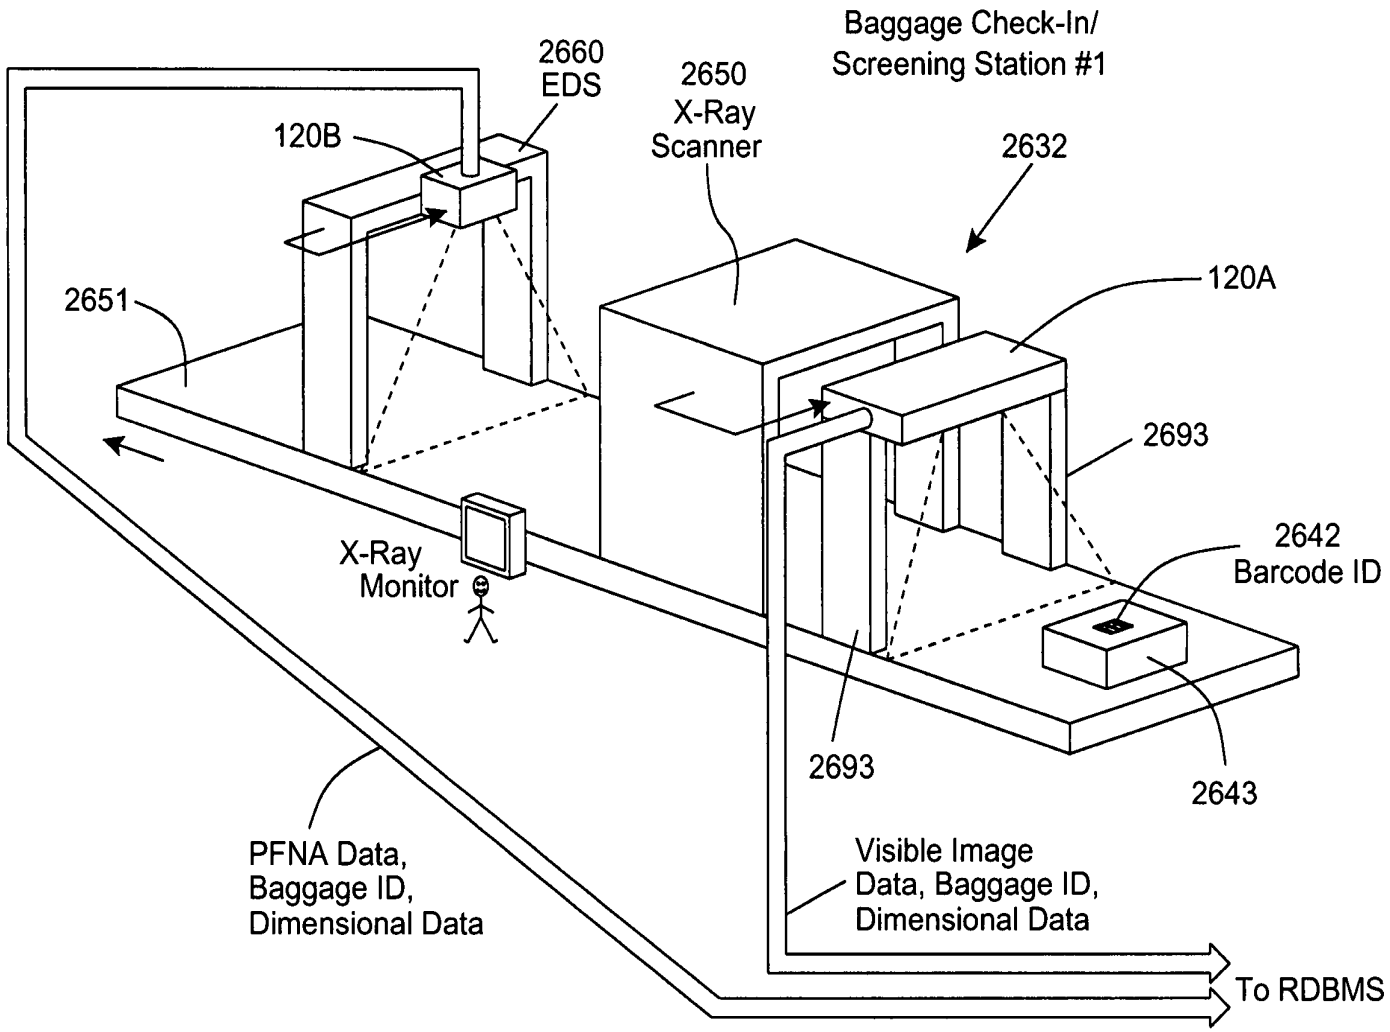
Baggage Check-In/
Screening Station #1
2660
EDS
2650
X-Ray
Scanner
2632
120B
2651
120A
2693
2642
Barcode ID
X-Ray
Monitor
2693
2643
PFNA Data,
Baggage ID,
Dimensional Data
Visible Image
Data, Baggage ID,
Dimensional Data
To RDBMS

FIG. 68-1

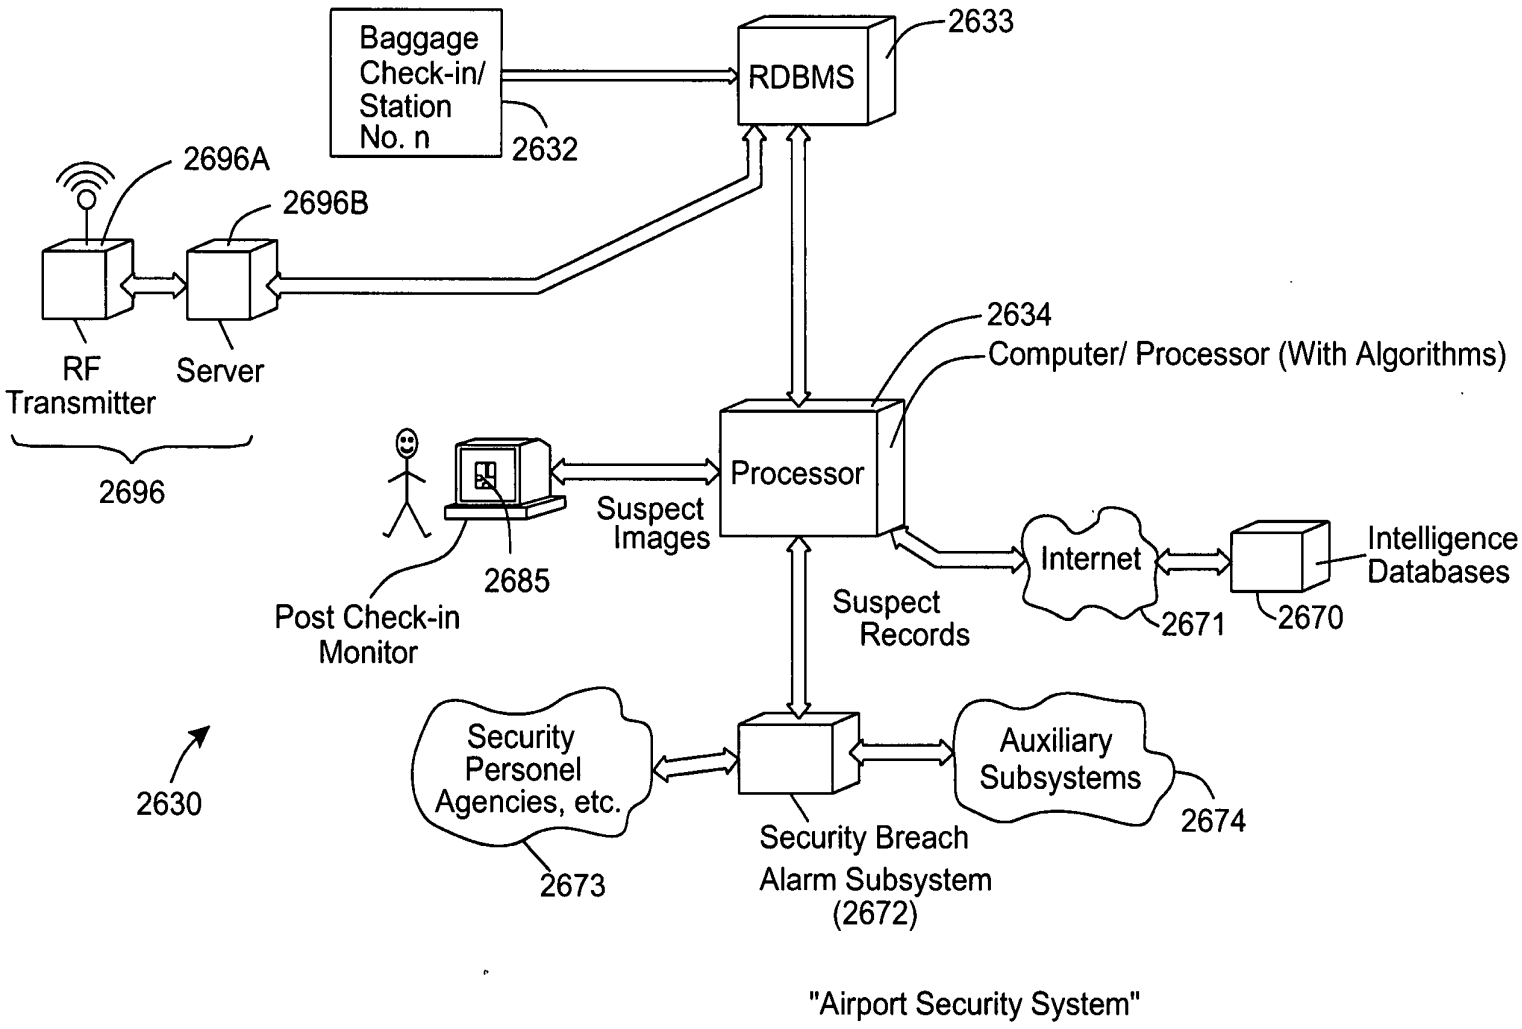
Baggage Check-in/ Station No. n
2632
RDBMS
2633
2696A
2696B
RF Transmitter
Server
2696
2634
Computer/ Processor (With Algorithms)
Processor
Suspect Images
2685
Post Check-in Monitor
Internet
2671
Intelligence Databases
2670
Suspect Records
2630
Security Personel Agencies, etc.
2673
Security Breach Alarm Subsystem (2672)
Auxiliary Subsystems
2674
"Airport Security System"

FIG. 68-2

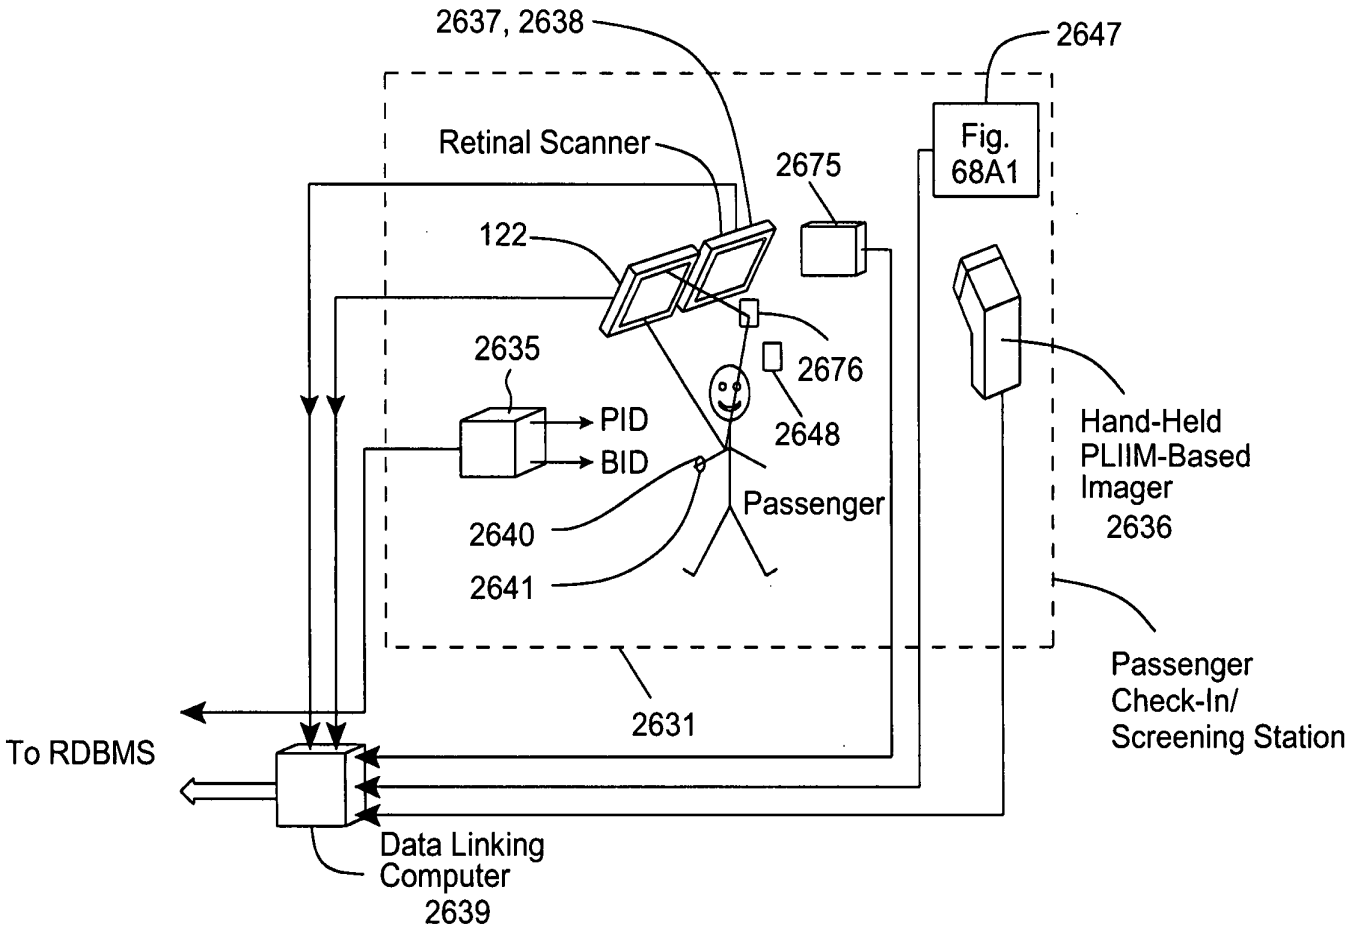
2637, 2638
2647
Retinal Scanner
Fig. 68A1
2675
122
2635
2676
PID
BID
2648
Passenger
Hand-Held PLIIM-Based Imager 2636
2640
2641
2631
Passenger Check-In/ Screening Station
To RDBMS
Data Linking Computer 2639

FIG. 68-3

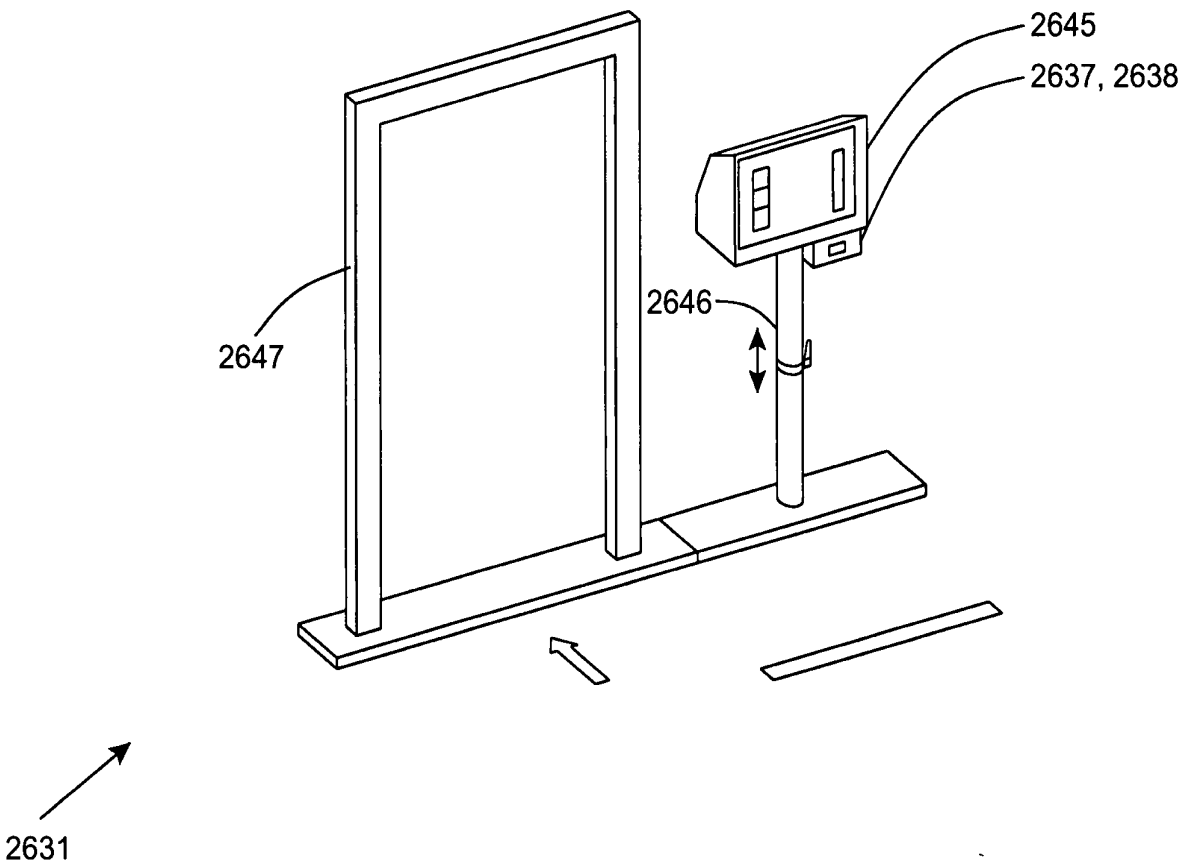

FIG. 68A

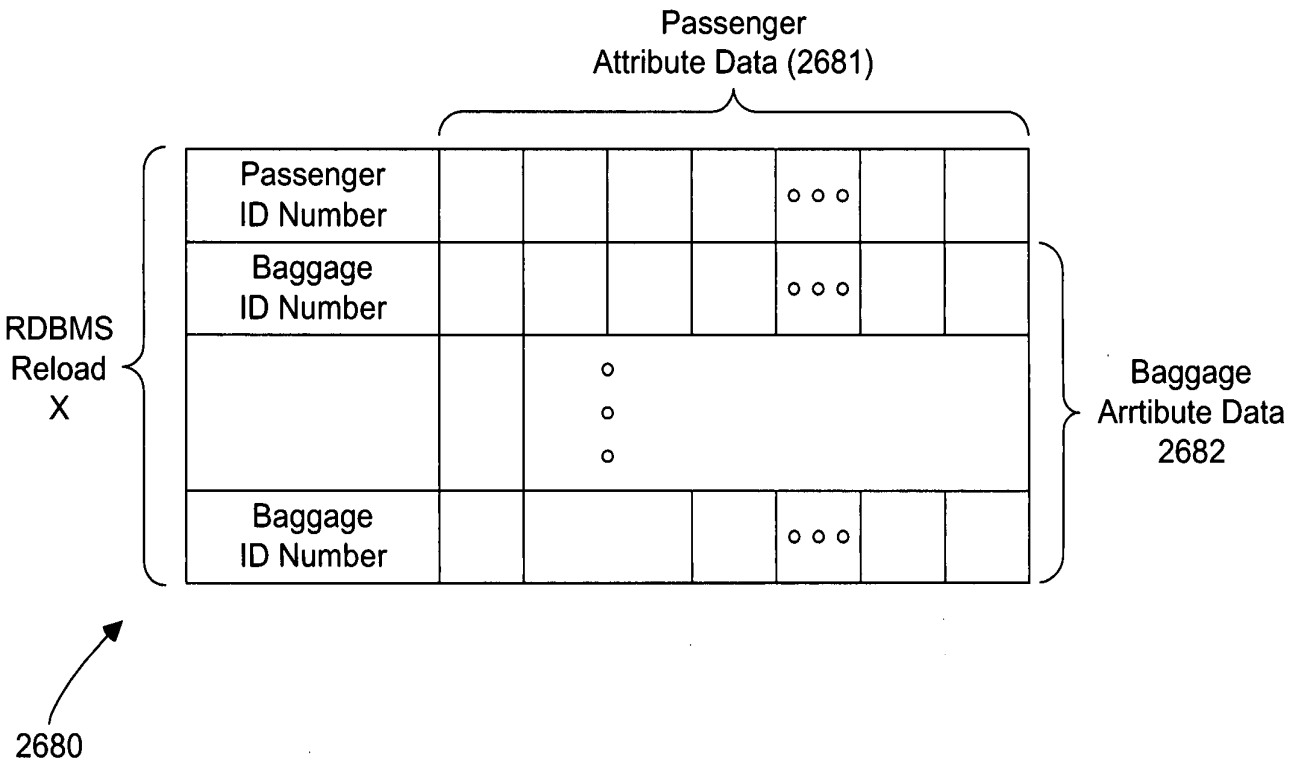
Passenger
Attribute Data (2681)
Passenger
ID Number
Baggage
ID Number
Baggage
ID Number
RDBMS
Reload
X
Baggage
Arrtibute Data
2682
2680

FIG. 68B

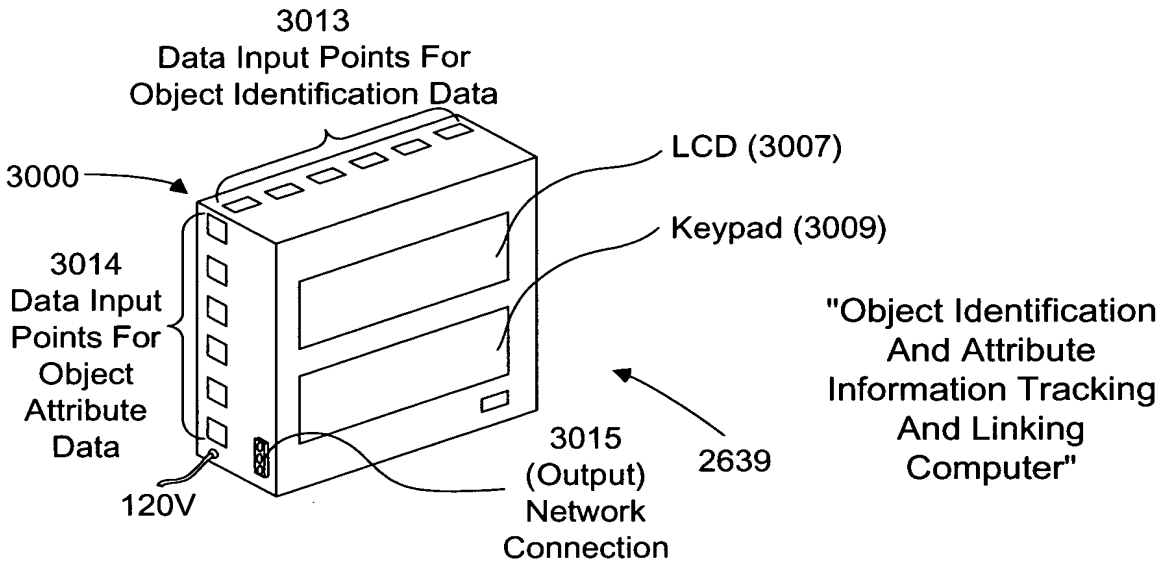

FIG. 68C1

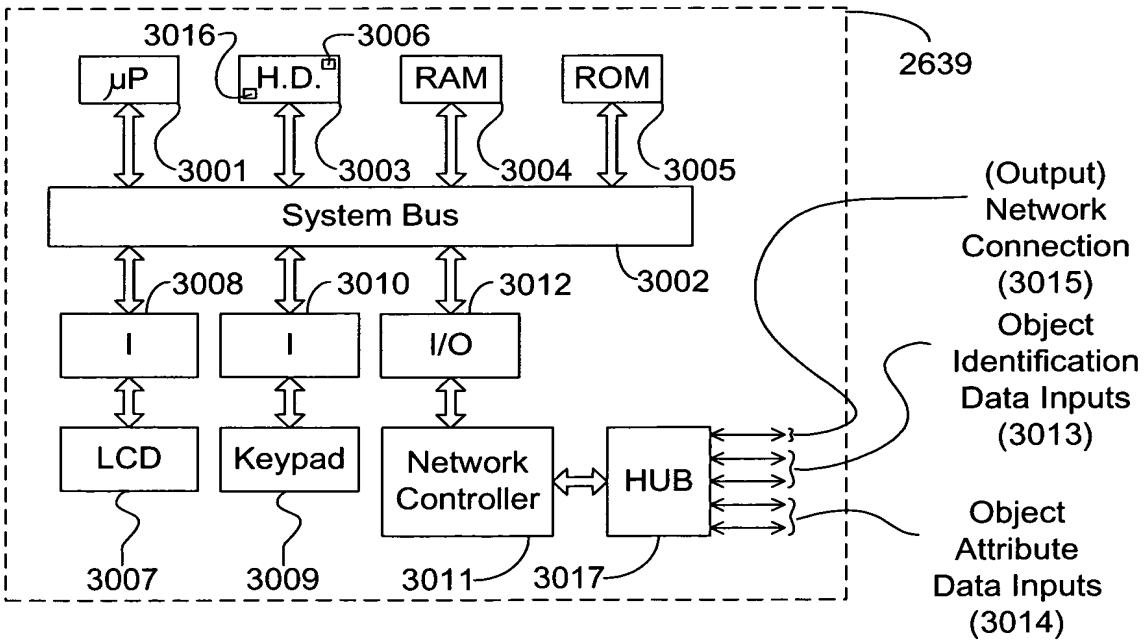

FIG. 68C2

Object Identification And Attribute Information Tracking And Linking Computer System

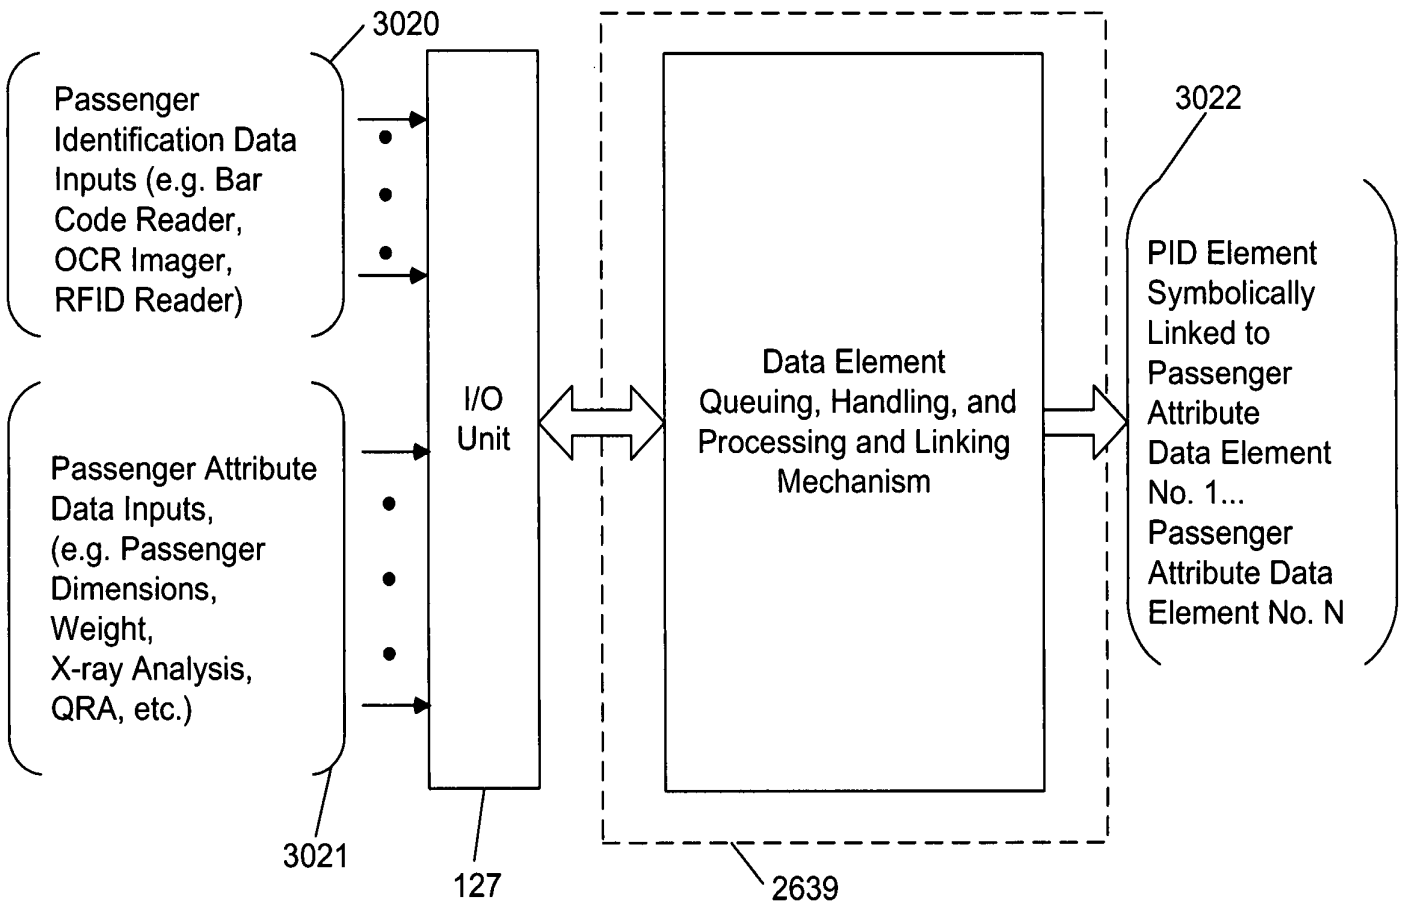

FIG. 68C3

Data Element Queuing, Handling, And Processing Subsystem Employed In The Object Identification And Attribute Acquisition System Of The Present Invention. (131)

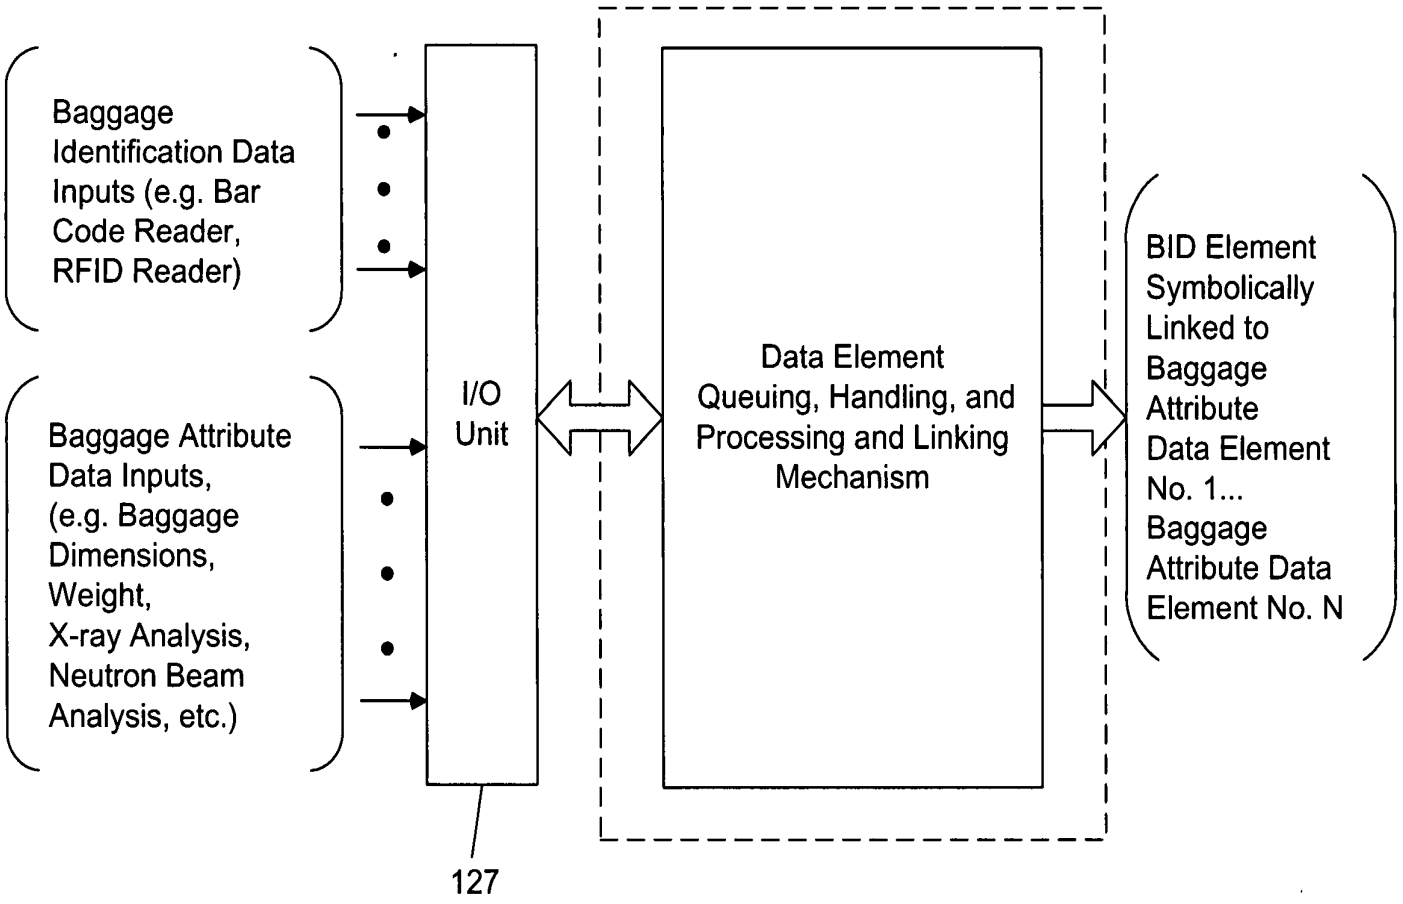

FIG. 68C4

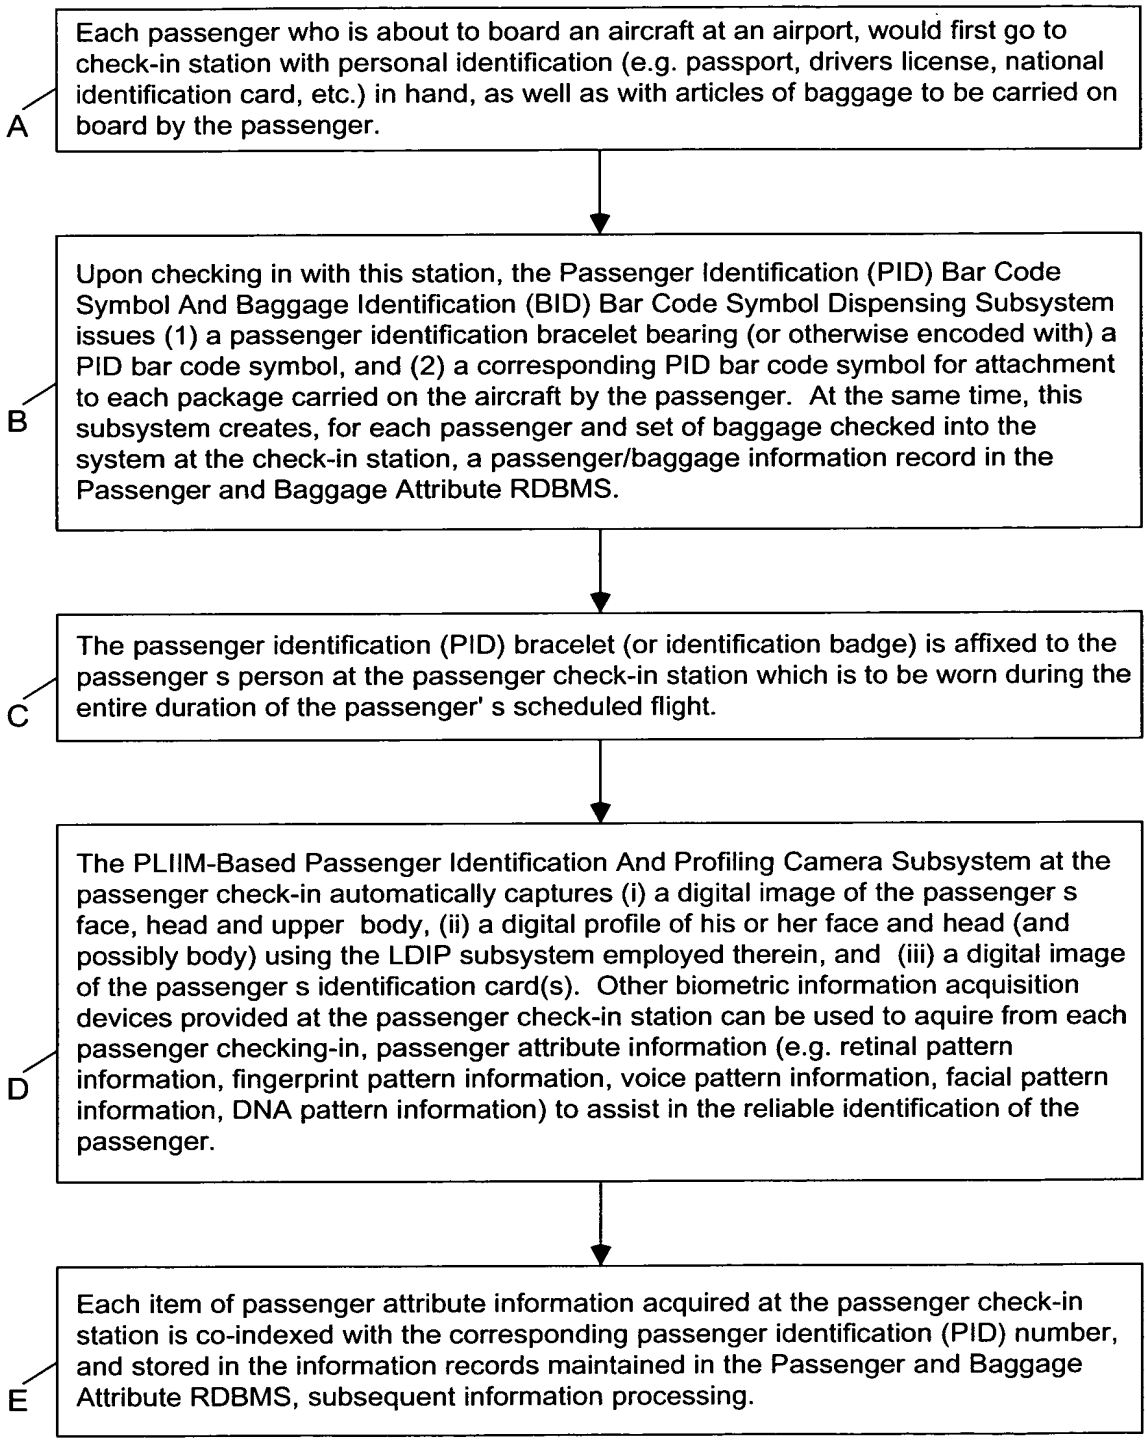
A
Each passenger who is about to board an aircraft at an airport, would first go to check-in station with personal identification (e.g. passport, drivers license, national identification card, etc.) in hand, as well as with articles of baggage to be carried on board by the passenger.
B
Upon checking in with this station, the Passenger Identification (PID) Bar Code Symbol And Baggage Identification (BID) Bar Code Symbol Dispensing Subsystem issues (1) a passenger identification bracelet bearing (or otherwise encoded with) a PID bar code symbol, and (2) a corresponding PID bar code symbol for attachment to each package carried on the aircraft by the passenger. At the same time, this subsystem creates, for each passenger and set of baggage checked into the system at the check-in station, a passenger/baggage information record in the Passenger and Baggage Attribute RDBMS.
C
The passenger identification (PID) bracelet (or identification badge) is affixed to the passenger s person at the passenger check-in station which is to be worn during the entire duration of the passenger' s scheduled flight.
D
The PLIIM-Based Passenger Identification And Profiling Camera Subsystem at the passenger check-in automatically captures (i) a digital image of the passenger s face, head and upper body, (ii) a digital profile of his or her face and head (and possibly body) using the LDIP subsystem employed therein, and (iii) a digital image of the passenger s identification card(s). Other biometric information acquisition devices provided at the passenger check-in station can be used to aquire from each passenger checking-in, passenger attribute information (e.g. retinal pattern information, fingerprint pattern information, voice pattern information, facial pattern information, DNA pattern information) to assist in the reliable identification of the passenger.
E
Each item of passenger attribute information acquired at the passenger check-in station is co-indexed with the corresponding passenger identification (PID) number, and stored in the information records maintained in the Passenger and Baggage Attribute RDBMS, subsequent information processing.

FIG. 68D1

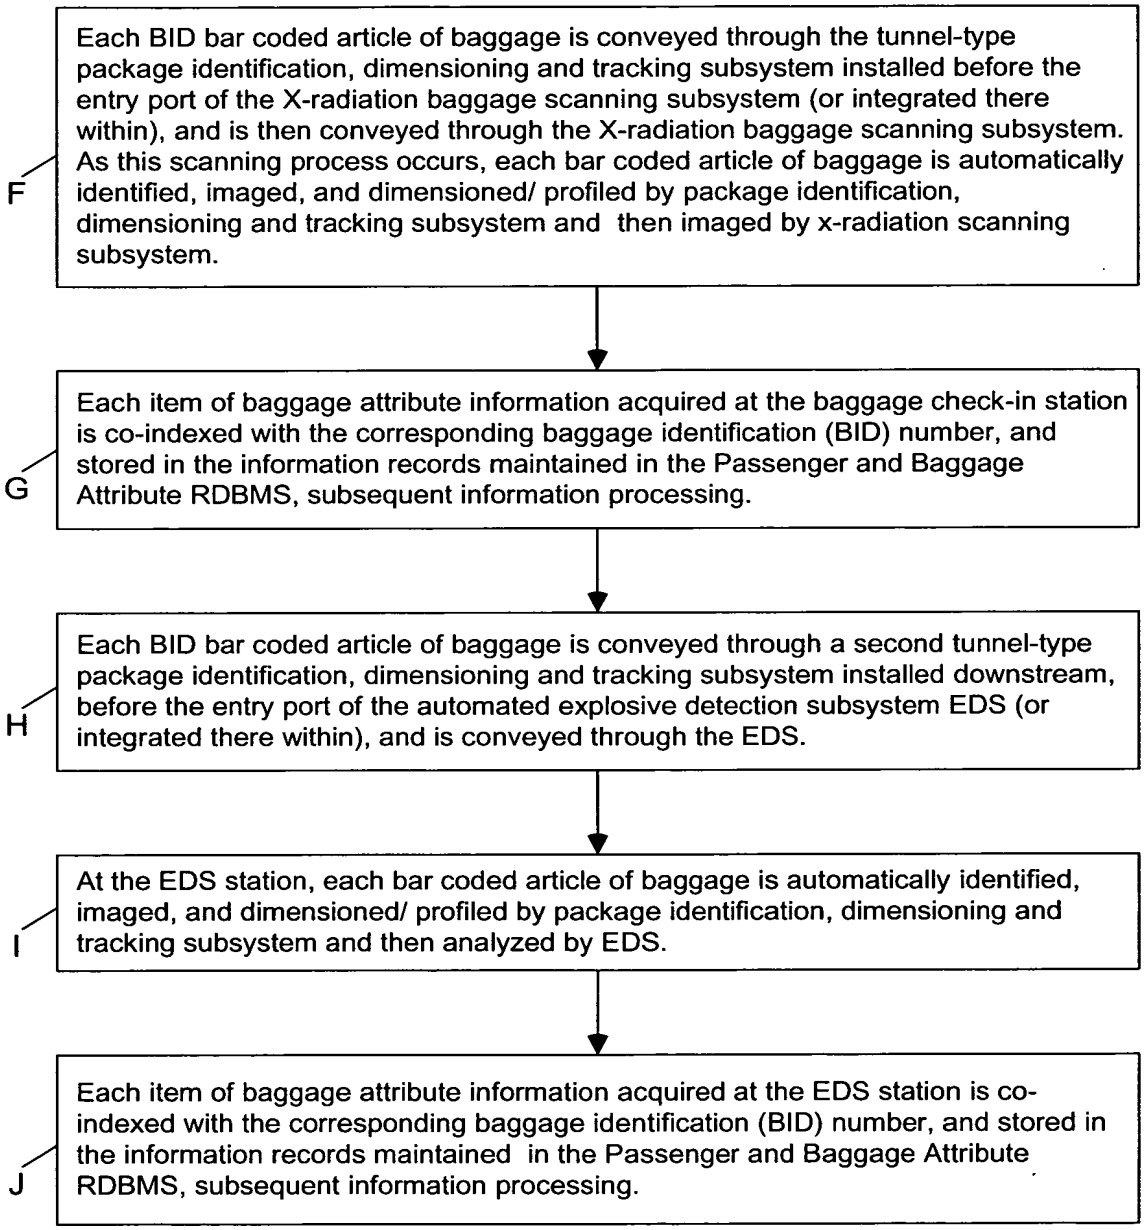
F
Each BID bar coded article of baggage is conveyed through the tunnel-type package identification, dimensioning and tracking subsystem installed before the entry port of the X-radiation baggage scanning subsystem (or integrated there within), and is then conveyed through the X-radiation baggage scanning subsystem. As this scanning process occurs, each bar coded article of baggage is automatically identified, imaged, and dimensioned/ profiled by package identification, dimensioning and tracking subsystem and then imaged by x-radiation scanning subsystem.
G
Each item of baggage attribute information acquired at the baggage check-in station is co-indexed with the corresponding baggage identification (BID) number, and stored in the information records maintained in the Passenger and Baggage Attribute RDBMS, subsequent information processing.
H
Each BID bar coded article of baggage is conveyed through a second tunnel-type package identification, dimensioning and tracking subsystem installed downstream, before the entry port of the automated explosive detection subsystem EDS (or integrated there within), and is conveyed through the EDS.
I
At the EDS station, each bar coded article of baggage is automatically identified, imaged, and dimensioned/ profiled by package identification, dimensioning and tracking subsystem and then analyzed by EDS.
J
Each item of baggage attribute information acquired at the EDS station is co-indexed with the corresponding baggage identification (BID) number, and stored in the information records maintained in the Passenger and Baggage Attribute RDBMS, subsequent information processing.

FIG. 68D2

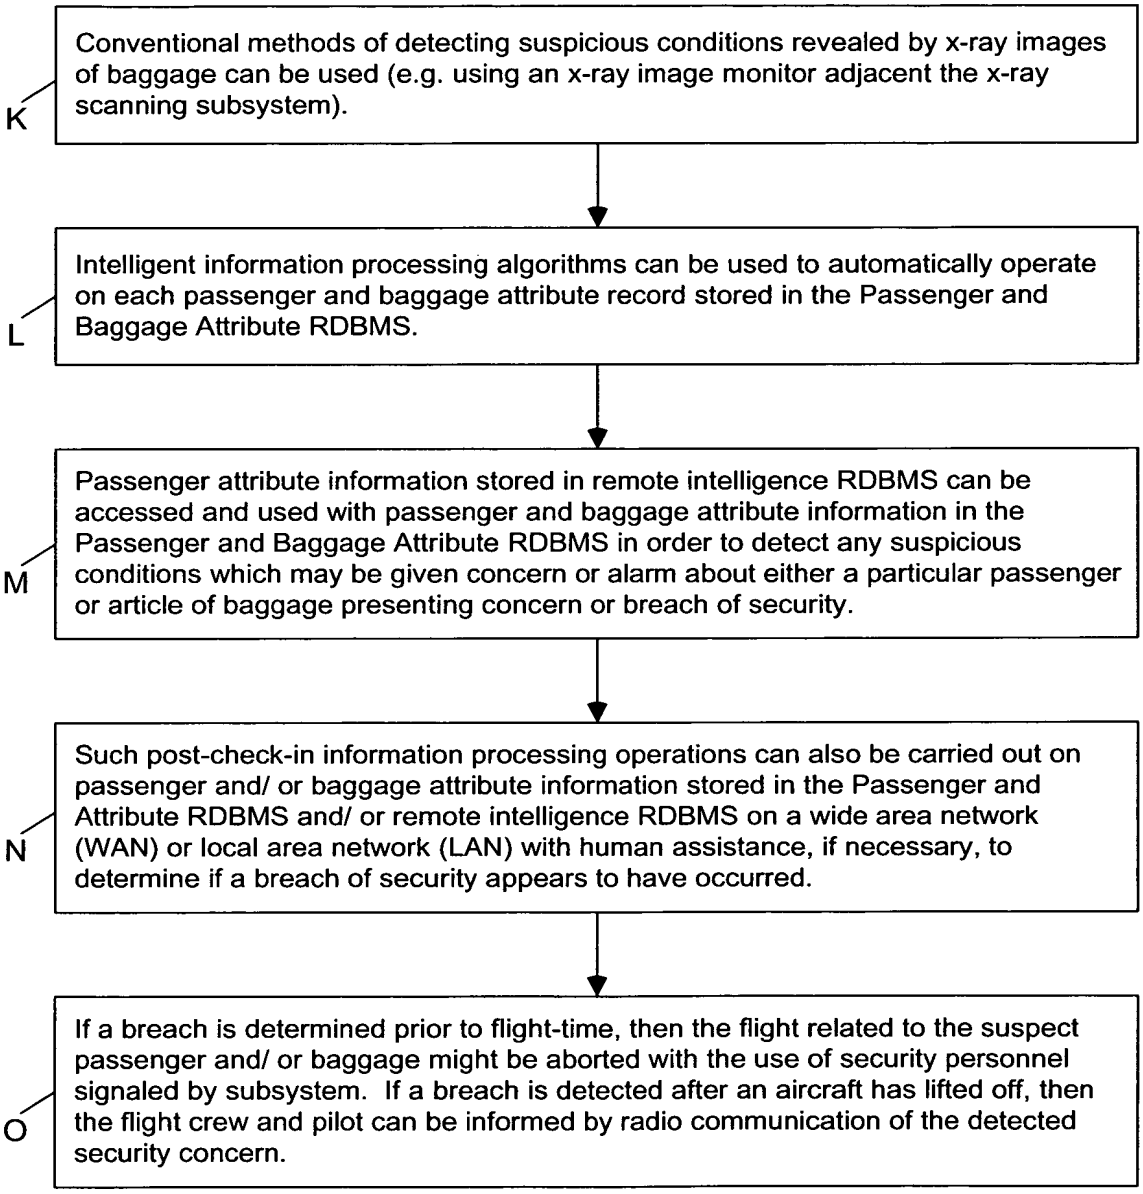
K
Conventional methods of detecting suspicious conditions revealed by x-ray images of baggage can be used (e.g. using an x-ray image monitor adjacent the x-ray scanning subsystem).
L
Intelligent information processing algorithms can be used to automatically operate on each passenger and baggage attribute record stored in the Passenger and Baggage Attribute RDBMS.
M
Passenger attribute information stored in remote intelligence RDBMS can be accessed and used with passenger and baggage attribute information in the Passenger and Baggage Attribute RDBMS in order to detect any suspicious conditions which may be given concern or alarm about either a particular passenger or article of baggage presenting concern or breach of security.
N
Such post-check-in information processing operations can also be carried out on passenger and/ or baggage attribute information stored in the Passenger and Attribute RDBMS and/ or remote intelligence RDBMS on a wide area network (WAN) or local area network (LAN) with human assistance, if necessary, to determine if a breach of security appears to have occurred.
O
If a breach is determined prior to flight-time, then the flight related to the suspect passenger and/ or baggage might be aborted with the use of security personnel signaled by subsystem. If a breach is detected after an aircraft has lifted off, then the flight crew and pilot can be informed by radio communication of the detected security concern.

FIG. 68D3

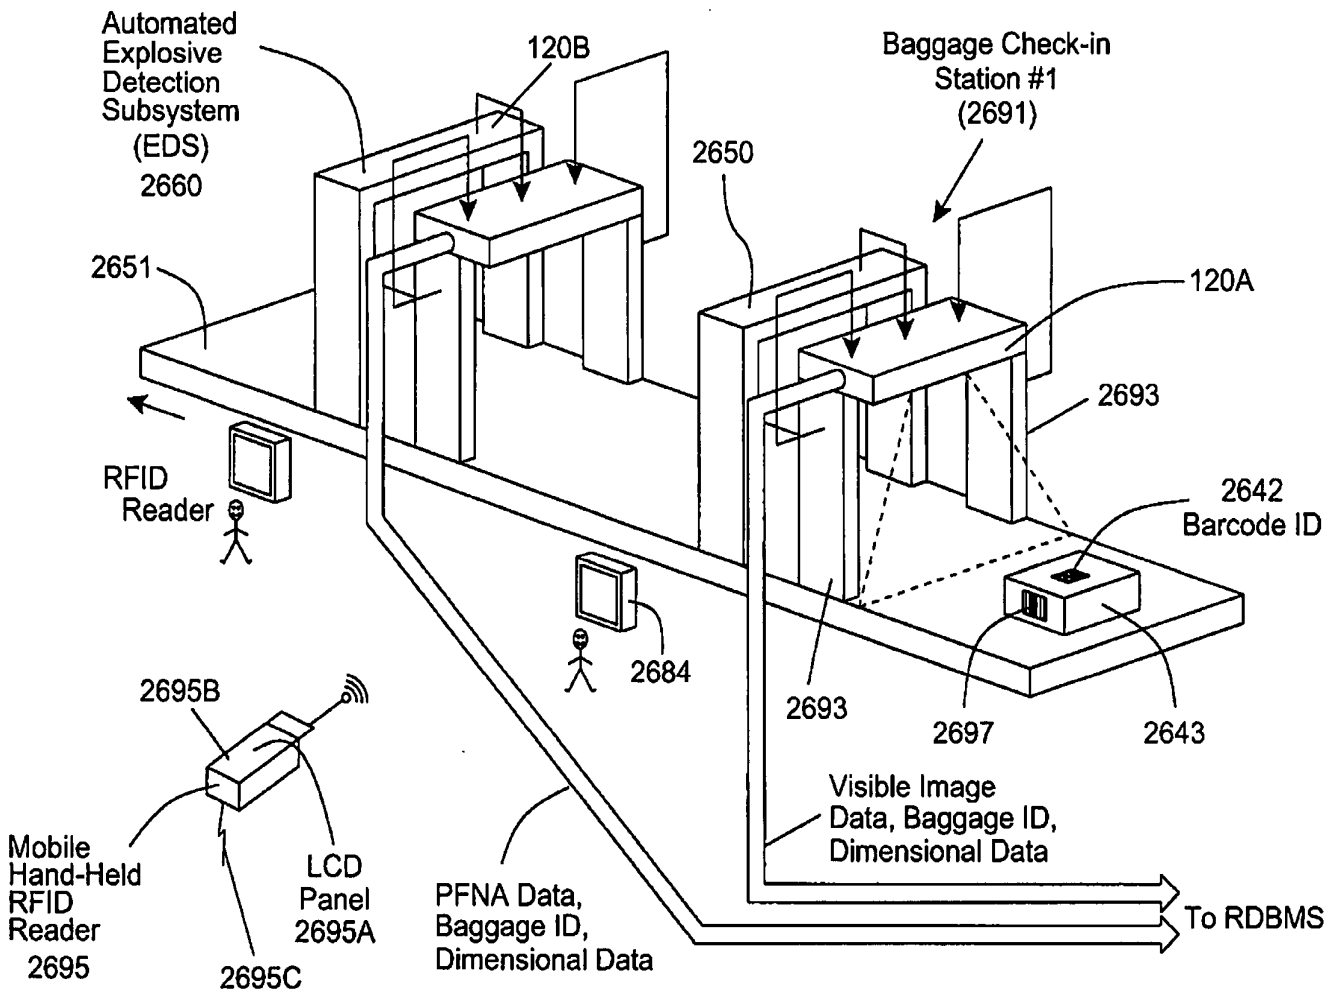
Automated
Explosive
Detection
Subsystem
(EDS)
2660
120B
Baggage Check-in
Station #1
(2691)
2650
2651
120A
2693
RFID
Reader
2642
Barcode ID
2684
2693
2697
2643
2695B
Visible Image
Data, Baggage ID,
Dimensional Data
Mobile
Hand-Held
RFID
Reader
2695
LCD
Panel
2695A
2695C
PFNA Data,
Baggage ID,
Dimensional Data
To RDBMS

FIG. 69A1

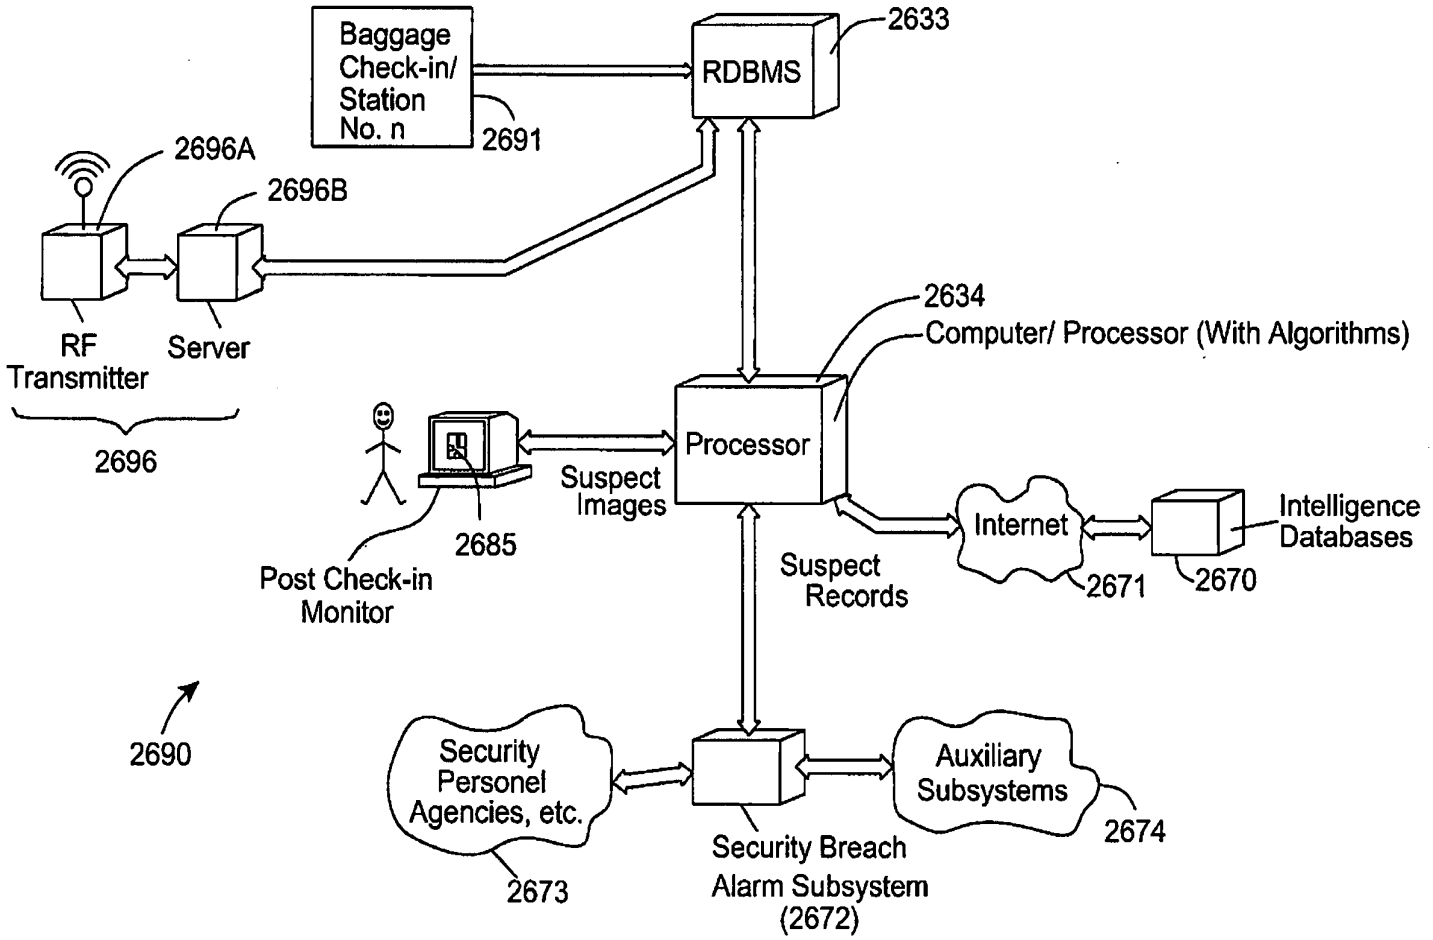
Baggage
Check-in/
Station
No. n
2691
RDBMS
2633
2696A
2696B
RF
Transmitter
Server
2696
2634
Computer/ Processor (With Algorithms)
Processor
Suspect
Images
2685
Post Check-in
Monitor
Internet
Intelligence
Databases
2671
2670
Suspect
Records
2690
Security
Personel
Agencies, etc.
2673
Auxiliary
Subsystems
2674
Security Breach
Alarm Subsystem
(2672)

FIG. 69A2

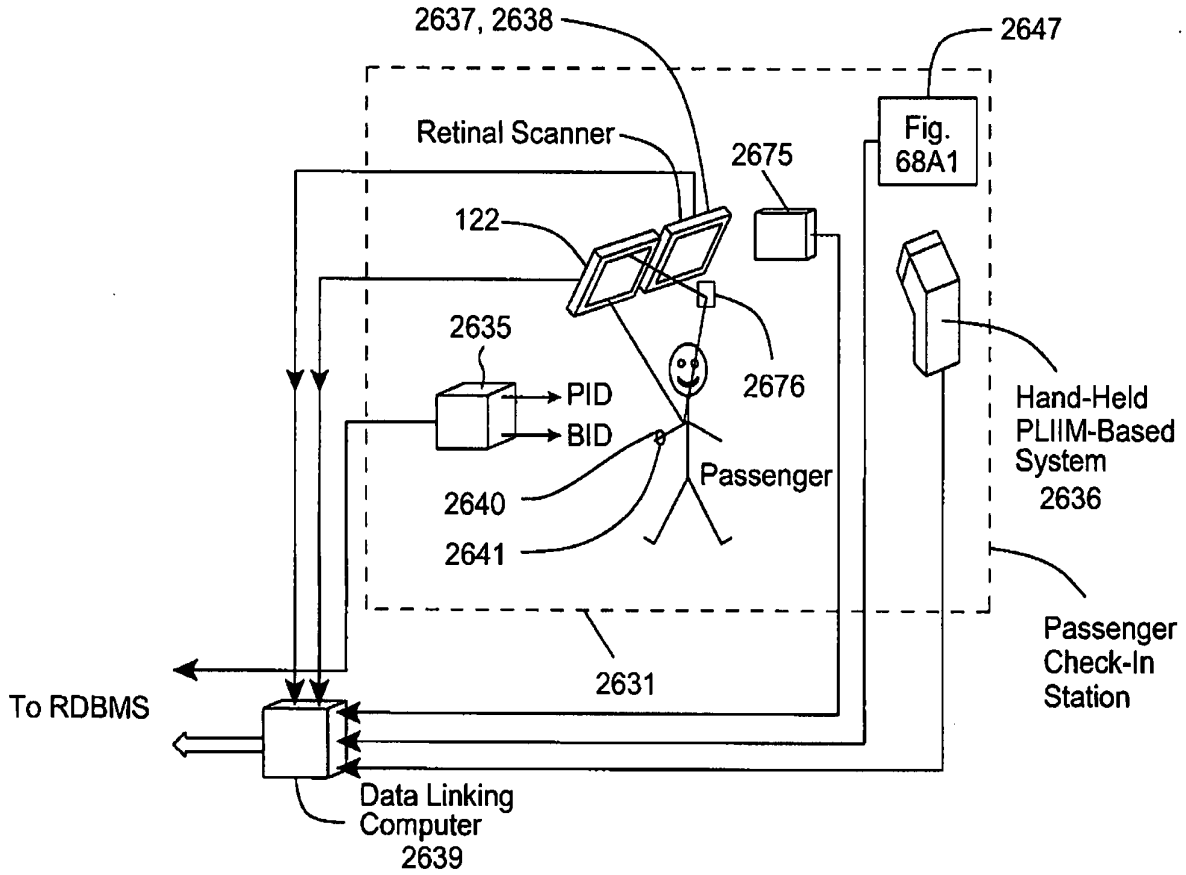
2637, 2638
2647
Retinal Scanner
Fig. 68A1
2675
122
2635
2676
PID
BID
Hand-Held PLIIM-Based System 2636
Passenger
2640
2641
Passenger Check-In Station
2631
To RDBMS
Data Linking Computer 2639

FIG. 69A3

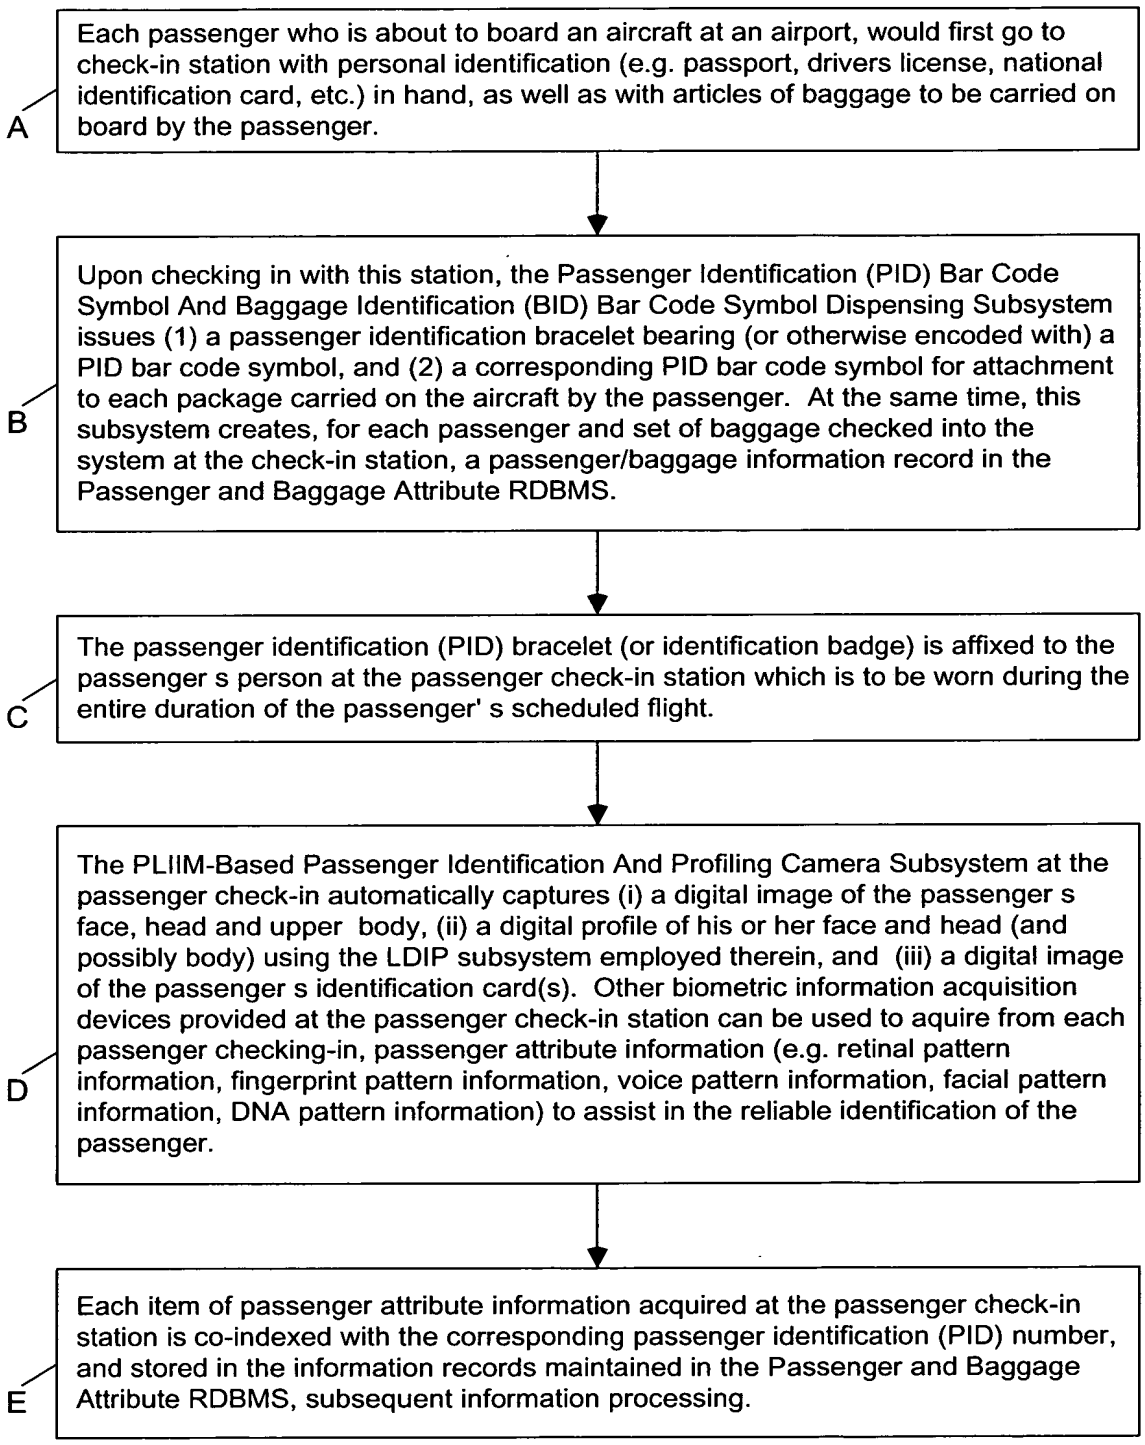
A
Each passenger who is about to board an aircraft at an airport, would first go to check-in station with personal identification (e.g. passport, drivers license, national identification card, etc.) in hand, as well as with articles of baggage to be carried on board by the passenger.
B
Upon checking in with this station, the Passenger Identification (PID) Bar Code Symbol And Baggage Identification (BID) Bar Code Symbol Dispensing Subsystem issues (1) a passenger identification bracelet bearing (or otherwise encoded with) a PID bar code symbol, and (2) a corresponding PID bar code symbol for attachment to each package carried on the aircraft by the passenger. At the same time, this subsystem creates, for each passenger and set of baggage checked into the system at the check-in station, a passenger/baggage information record in the Passenger and Baggage Attribute RDBMS.
C
The passenger identification (PID) bracelet (or identification badge) is affixed to the passenger s person at the passenger check-in station which is to be worn during the entire duration of the passenger' s scheduled flight.
D
The PLIIM-Based Passenger Identification And Profiling Camera Subsystem at the passenger check-in automatically captures (i) a digital image of the passenger s face, head and upper body, (ii) a digital profile of his or her face and head (and possibly body) using the LDIP subsystem employed therein, and (iii) a digital image of the passenger s identification card(s). Other biometric information acquisition devices provided at the passenger check-in station can be used to aquire from each passenger checking-in, passenger attribute information (e.g. retinal pattern information, fingerprint pattern information, voice pattern information, facial pattern information, DNA pattern information) to assist in the reliable identification of the passenger.
E
Each item of passenger attribute information acquired at the passenger check-in station is co-indexed with the corresponding passenger identification (PID) number, and stored in the information records maintained in the Passenger and Baggage Attribute RDBMS, subsequent information processing.

FIG. 69B1

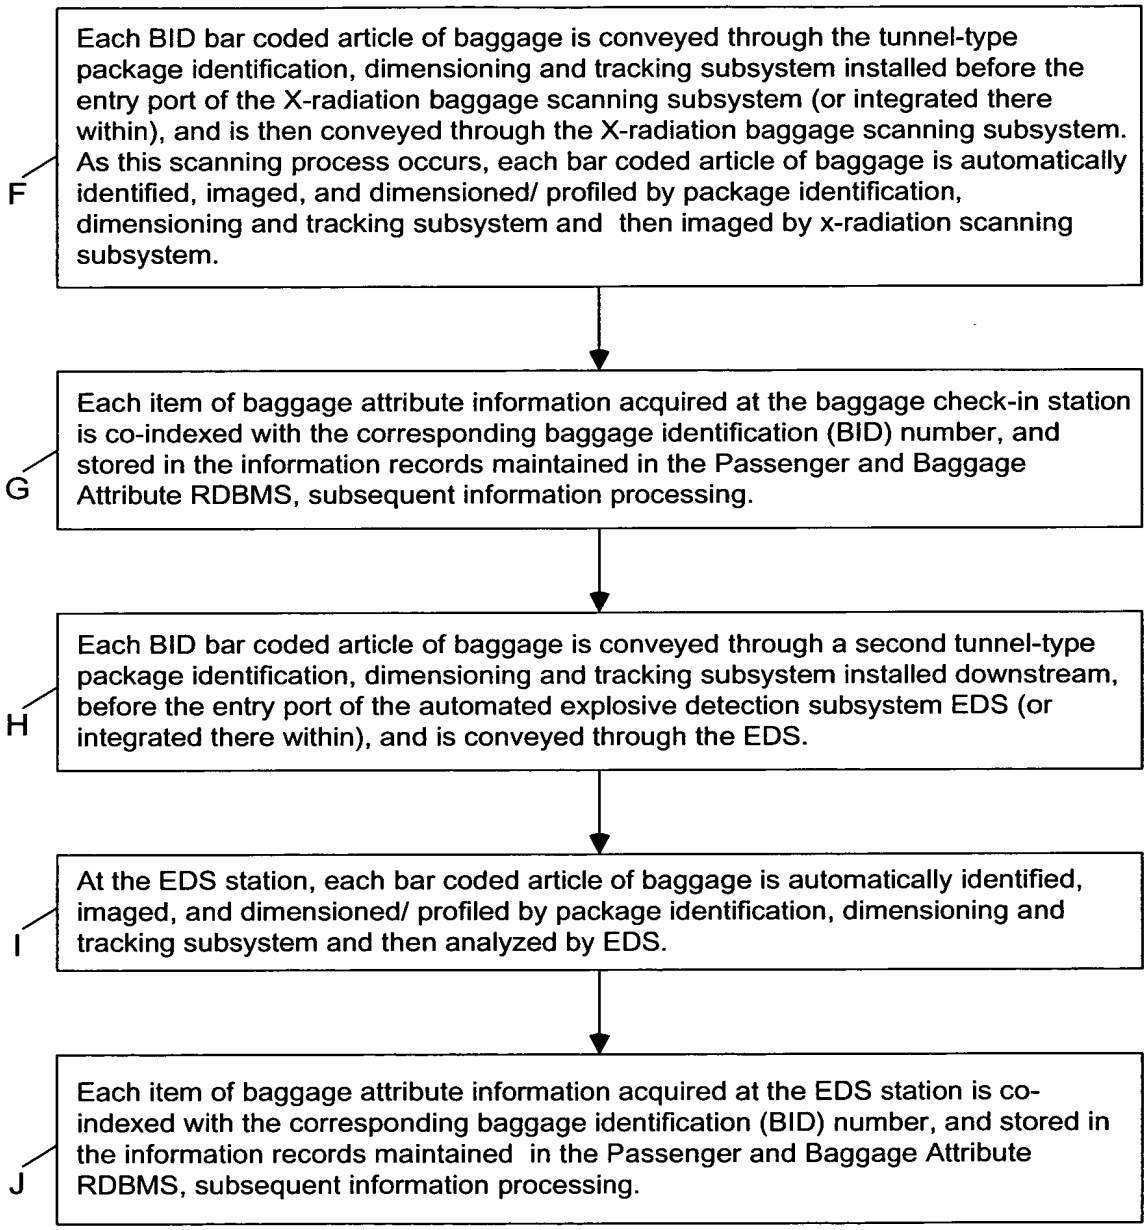
F
Each BID bar coded article of baggage is conveyed through the tunnel-type package identification, dimensioning and tracking subsystem installed before the entry port of the X-radiation baggage scanning subsystem (or integrated there within), and is then conveyed through the X-radiation baggage scanning subsystem. As this scanning process occurs, each bar coded article of baggage is automatically identified, imaged, and dimensioned/ profiled by package identification, dimensioning and tracking subsystem and then imaged by x-radiation scanning subsystem.
G
Each item of baggage attribute information acquired at the baggage check-in station is co-indexed with the corresponding baggage identification (BID) number, and stored in the information records maintained in the Passenger and Baggage Attribute RDBMS, subsequent information processing.
H
Each BID bar coded article of baggage is conveyed through a second tunnel-type package identification, dimensioning and tracking subsystem installed downstream, before the entry port of the automated explosive detection subsystem EDS (or integrated there within), and is conveyed through the EDS.
I
At the EDS station, each bar coded article of baggage is automatically identified, imaged, and dimensioned/ profiled by package identification, dimensioning and tracking subsystem and then analyzed by EDS.
J
Each item of baggage attribute information acquired at the EDS station is co-indexed with the corresponding baggage identification (BID) number, and stored in the information records maintained in the Passenger and Baggage Attribute RDBMS, subsequent information processing.

FIG. 69B2

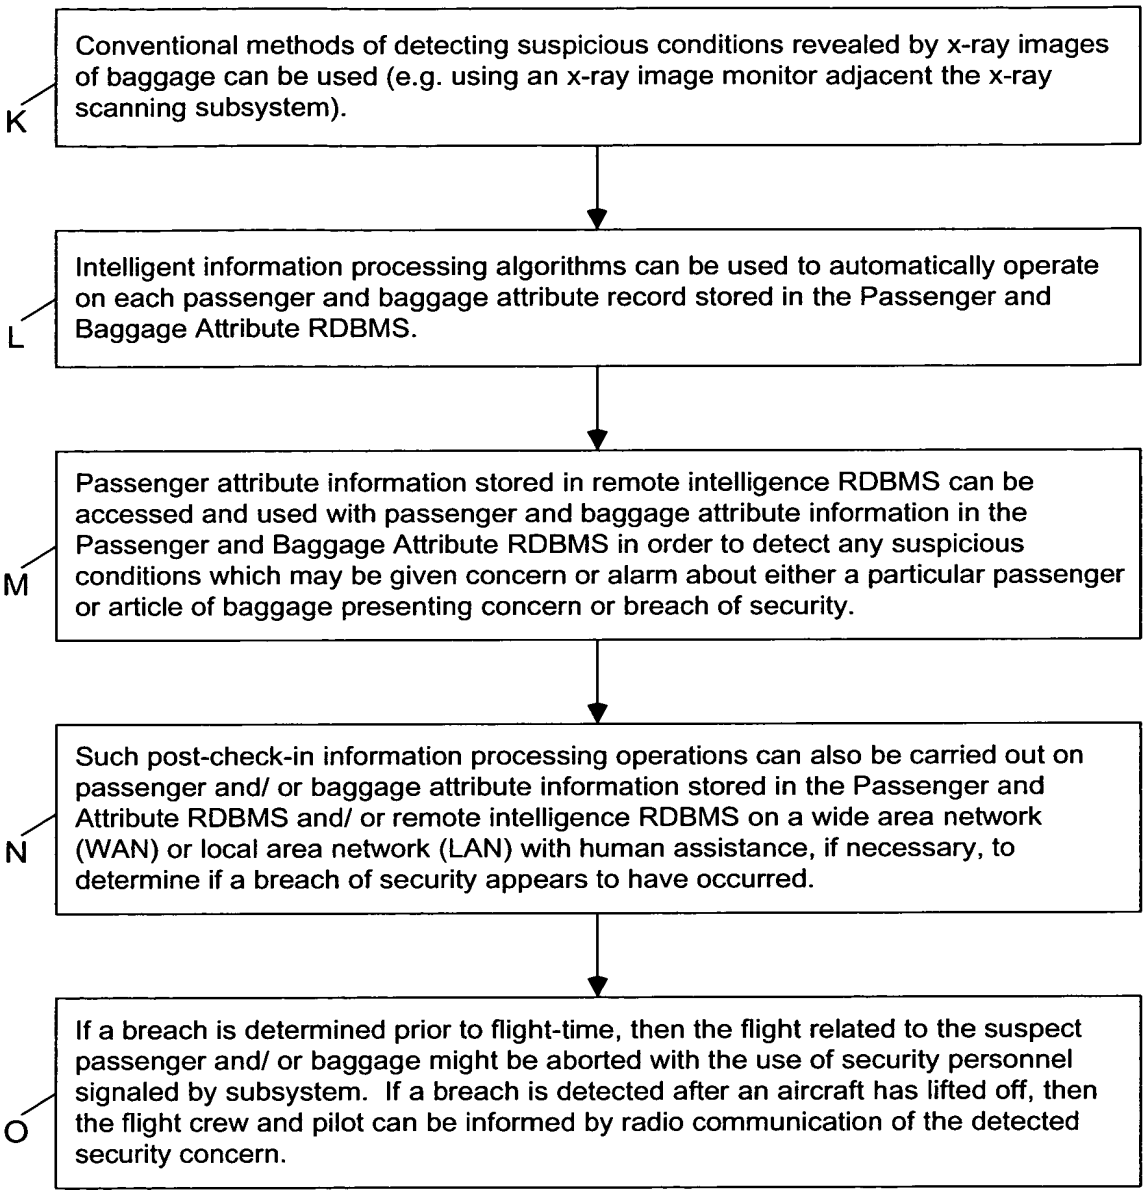
K
Conventional methods of detecting suspicious conditions revealed by x-ray images of baggage can be used (e.g. using an x-ray image monitor adjacent the x-ray scanning subsystem).
L
Intelligent information processing algorithms can be used to automatically operate on each passenger and baggage attribute record stored in the Passenger and Baggage Attribute RDBMS.
M
Passenger attribute information stored in remote intelligence RDBMS can be accessed and used with passenger and baggage attribute information in the Passenger and Baggage Attribute RDBMS in order to detect any suspicious conditions which may be given concern or alarm about either a particular passenger or article of baggage presenting concern or breach of security.
N
Such post-check-in information processing operations can also be carried out on passenger and/ or baggage attribute information stored in the Passenger and Attribute RDBMS and/ or remote intelligence RDBMS on a wide area network (WAN) or local area network (LAN) with human assistance, if necessary, to determine if a breach of security appears to have occurred.
O
If a breach is determined prior to flight-time, then the flight related to the suspect passenger and/ or baggage might be aborted with the use of security personnel signaled by subsystem. If a breach is detected after an aircraft has lifted off, then the flight crew and pilot can be informed by radio communication of the detected security concern.

FIG. 69B3

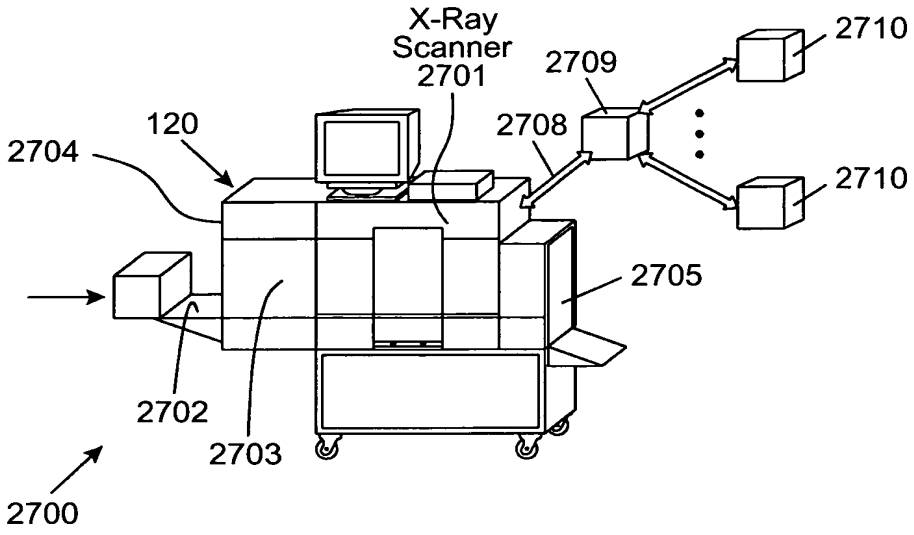

FIG. 70A

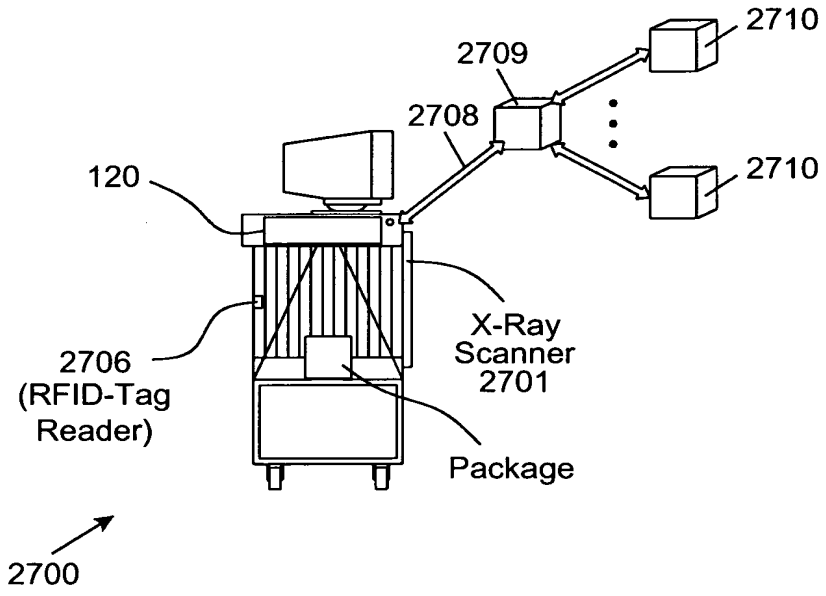

FIG. 70B

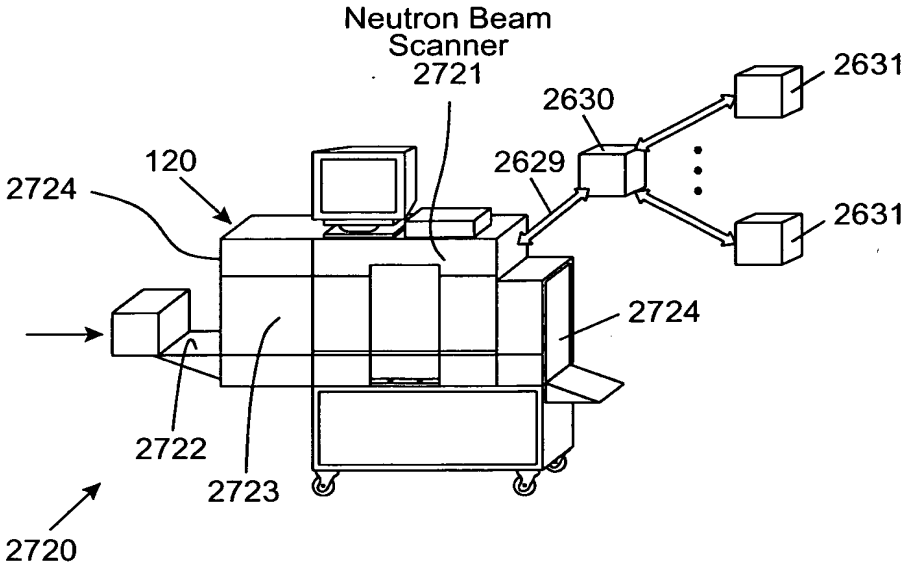

FIG. 71A

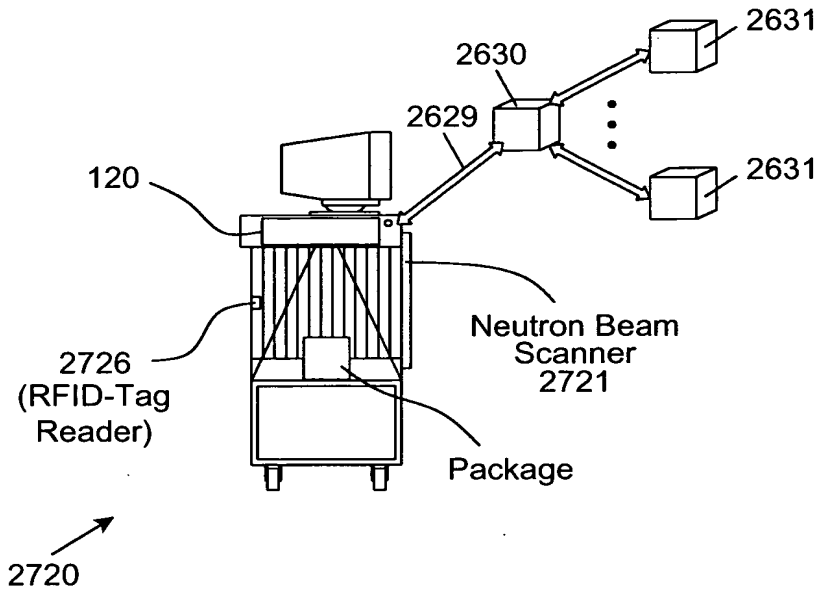

FIG. 71B

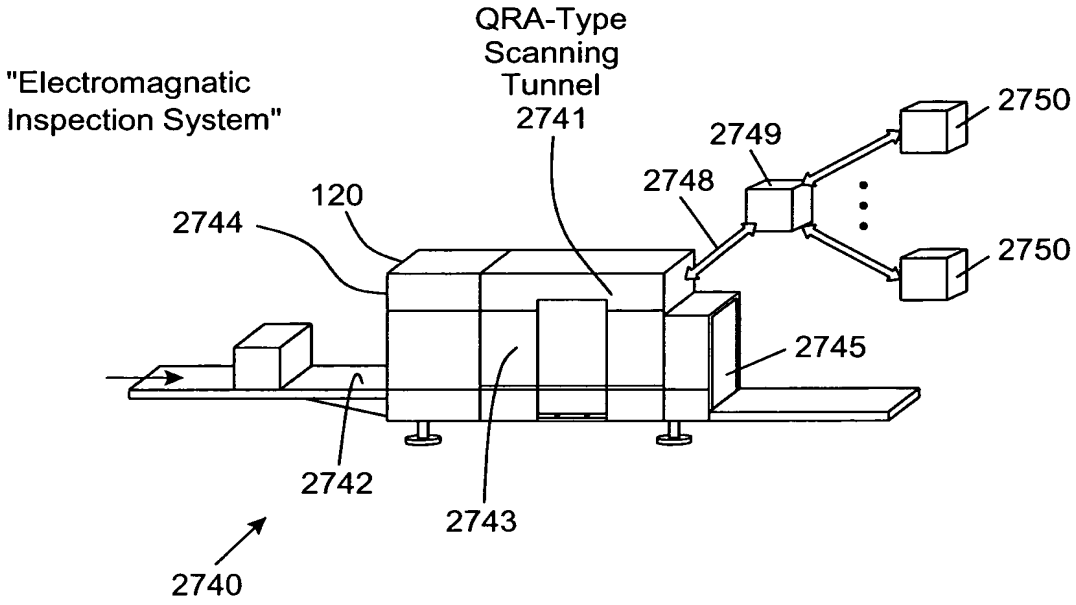

FIG. 72A

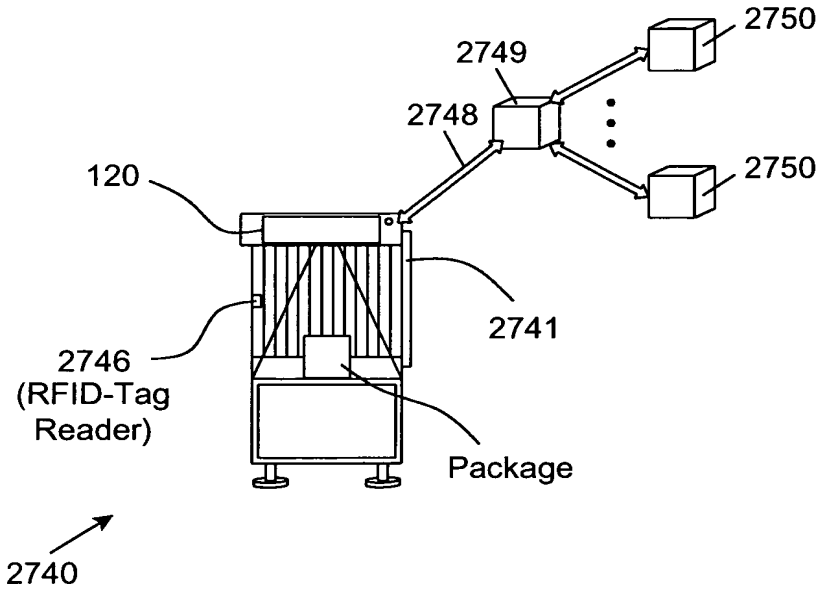

FIG. 72B

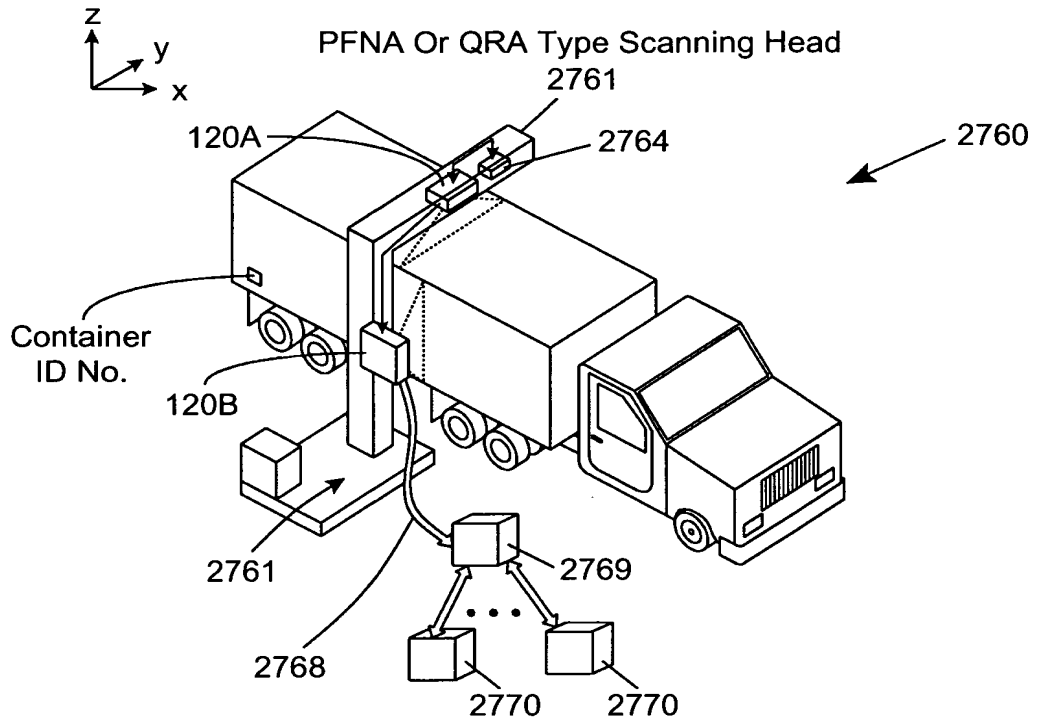
z
y
x
PFNA Or QRA Type Scanning Head
2761
120A
2764
2760
Container
ID No.
120B
2761
2769
2768
2770
2770

FIG. 73

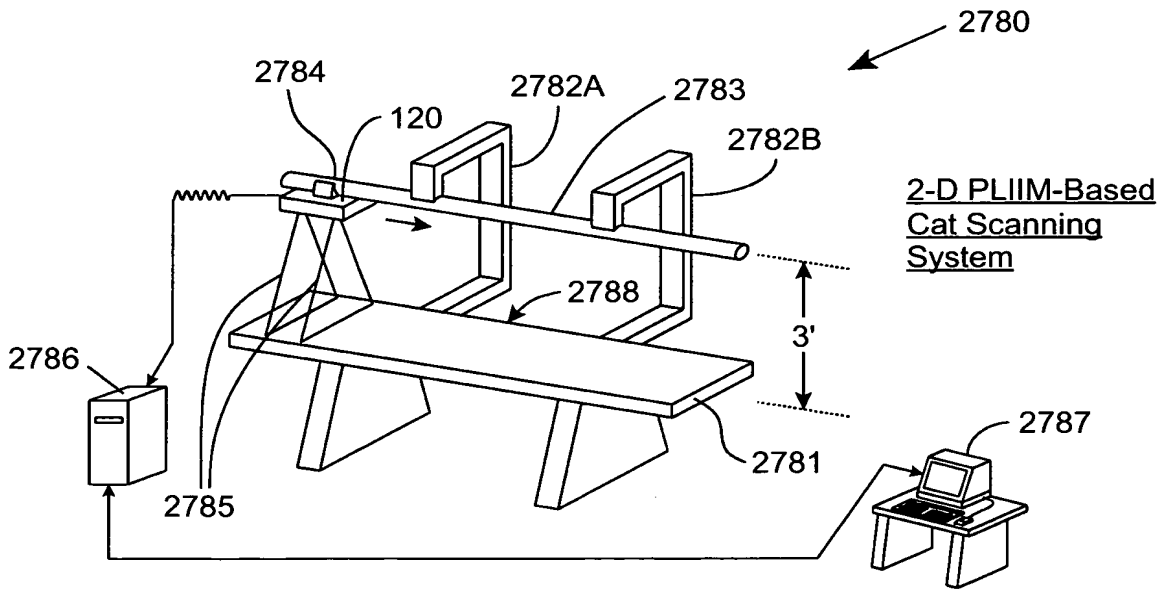
2780
2784
2782A
2783
120
2782B
2-D PLIIM-Based
Cat Scanning
System
2788
3'
2786
2787
2781
2785

FIG. 74

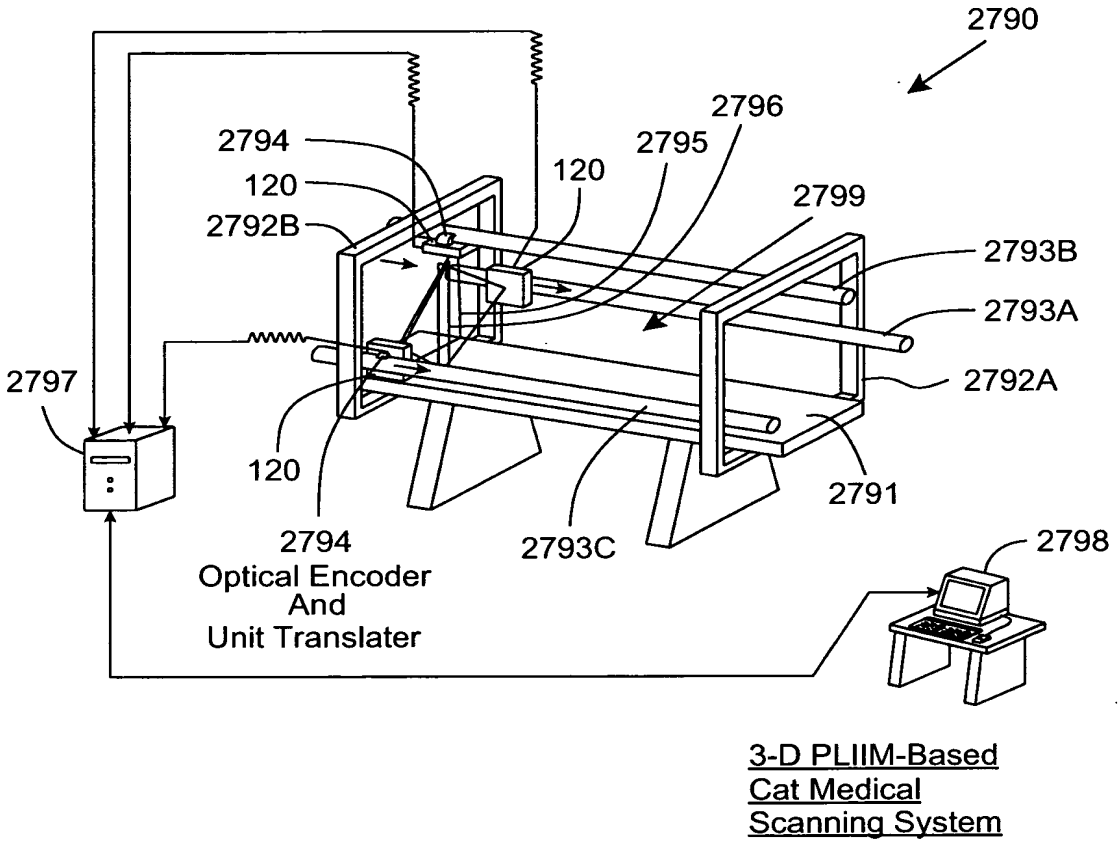
2790
2796
2794
2795
120
120
2799
2792B
2793B
2793A
2797
2792A
120
2791
2794
Optical Encoder
And
Unit Translater
2793C
2798
3-D PLIIM-Based
Cat Medical
Scanning System

FIG. 75

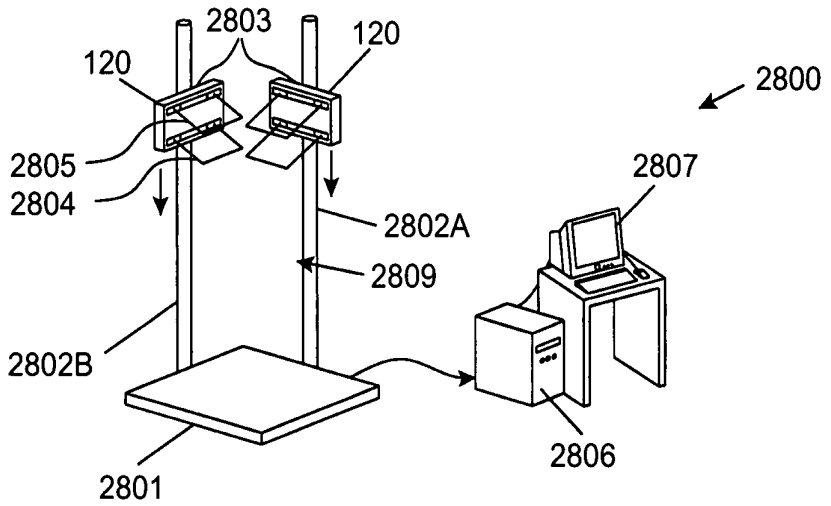

FIG. 76

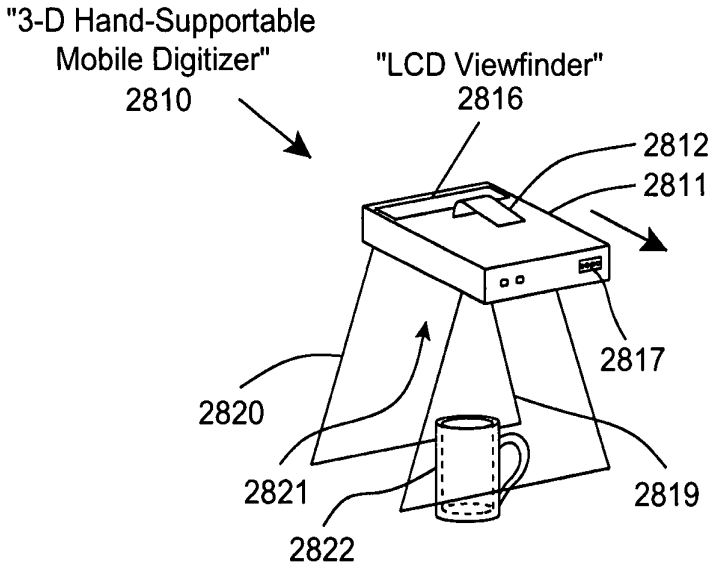

FIG. 77A

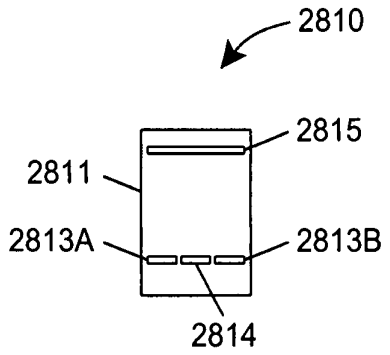

FIG. 77B

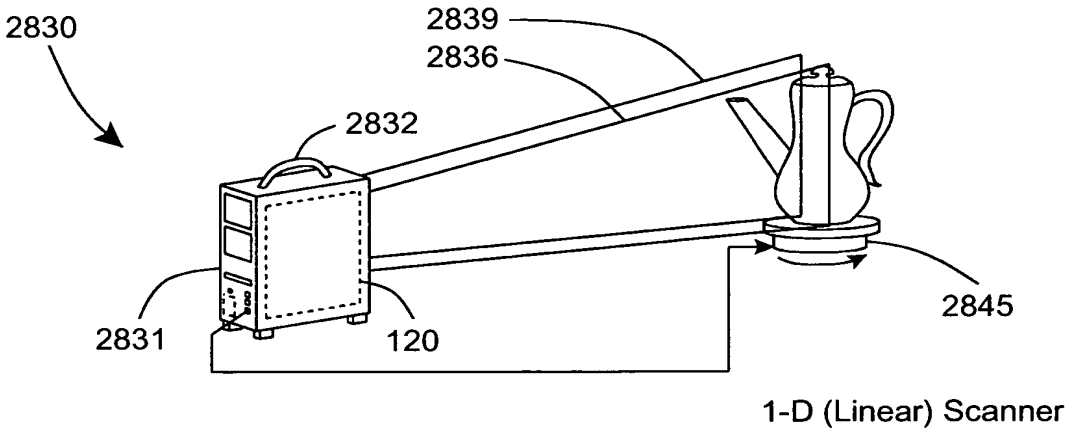

FIG. 78A

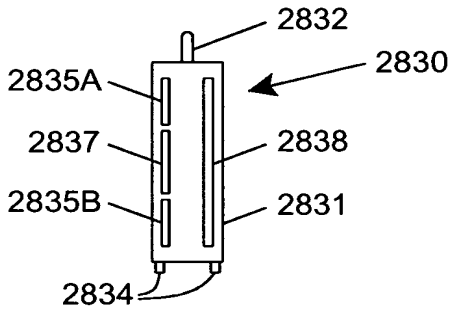

FIG. 78B

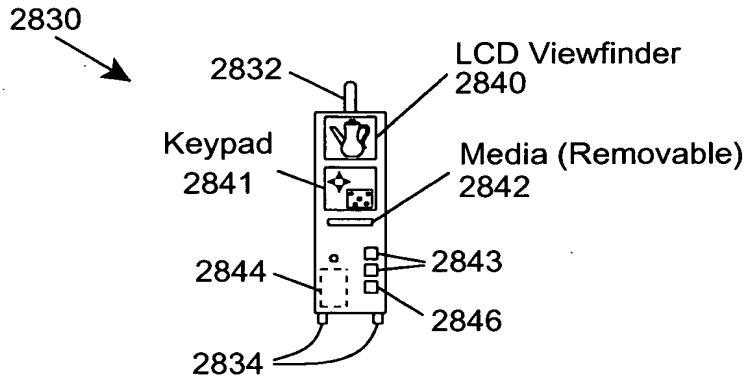

FIG. 78C

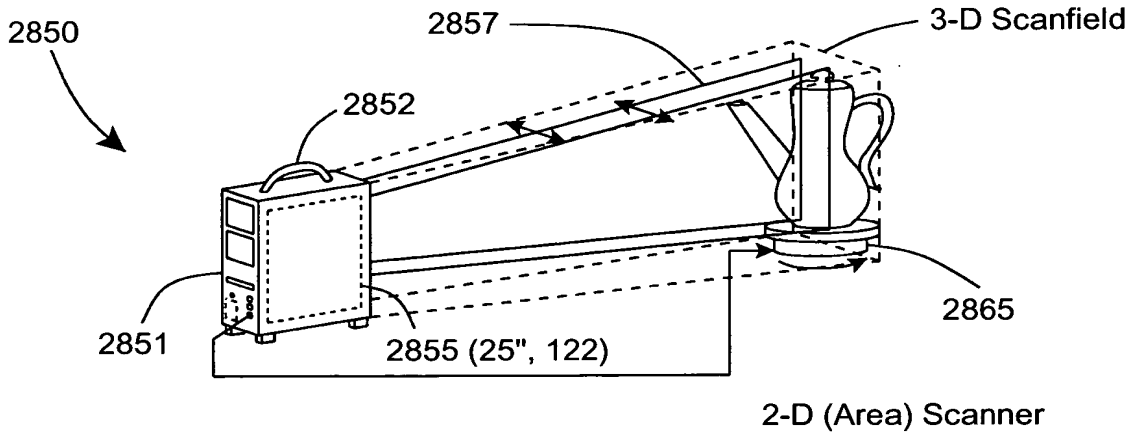

FIG. 79A

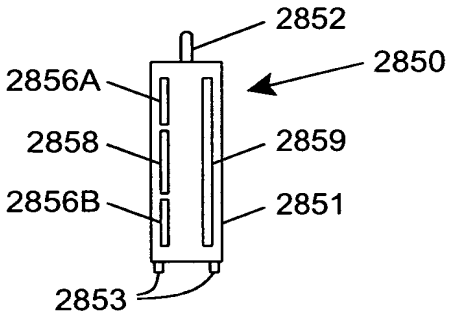

FIG. 79B

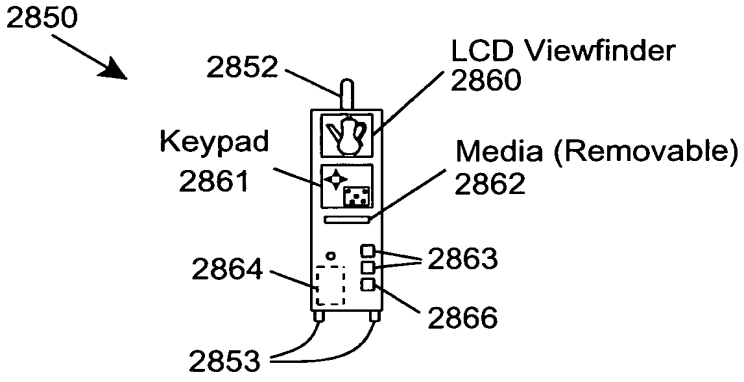

FIG. 79C

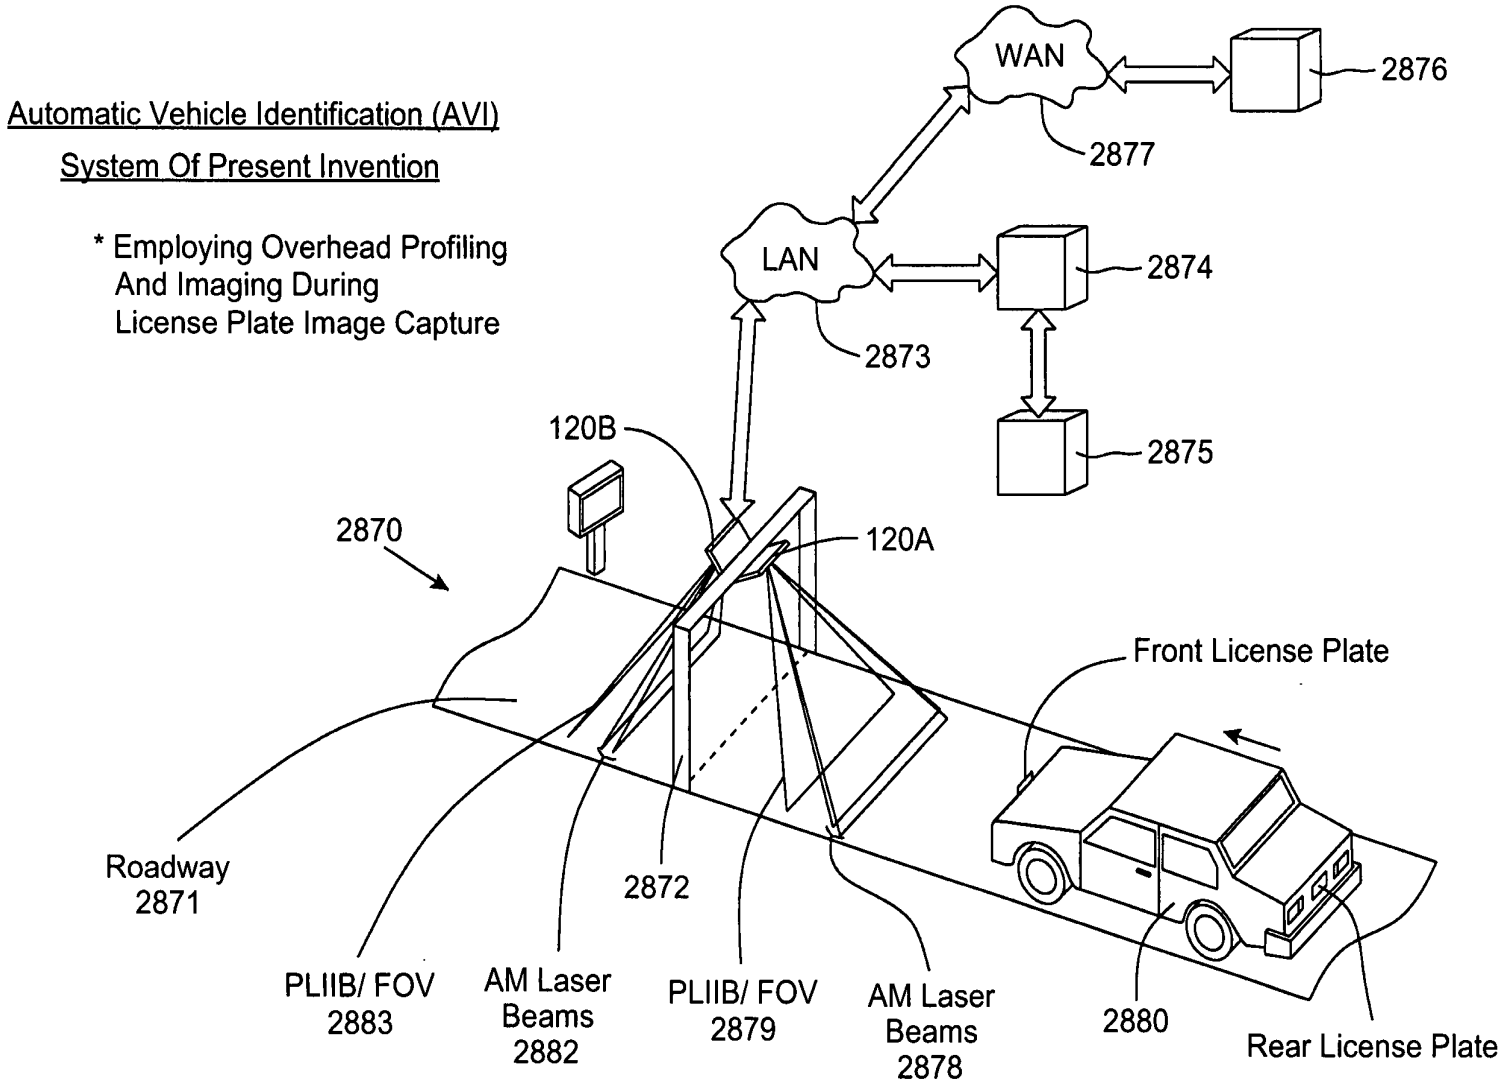
Automatic Vehicle Identification (AVI)
System Of Present Invention
* Employing Overhead Profiling And Imaging During License Plate Image Capture
WAN
2876
2877
LAN
2874
2873
2875
120B
2870
120A
Front License Plate
Roadway
2871
2872
PLIIB/ FOV
2883
AM Laser
Beams
2882
PLIIB/ FOV
2879
AM Laser
Beams
2878
2880
Rear License Plate

FIG. 80

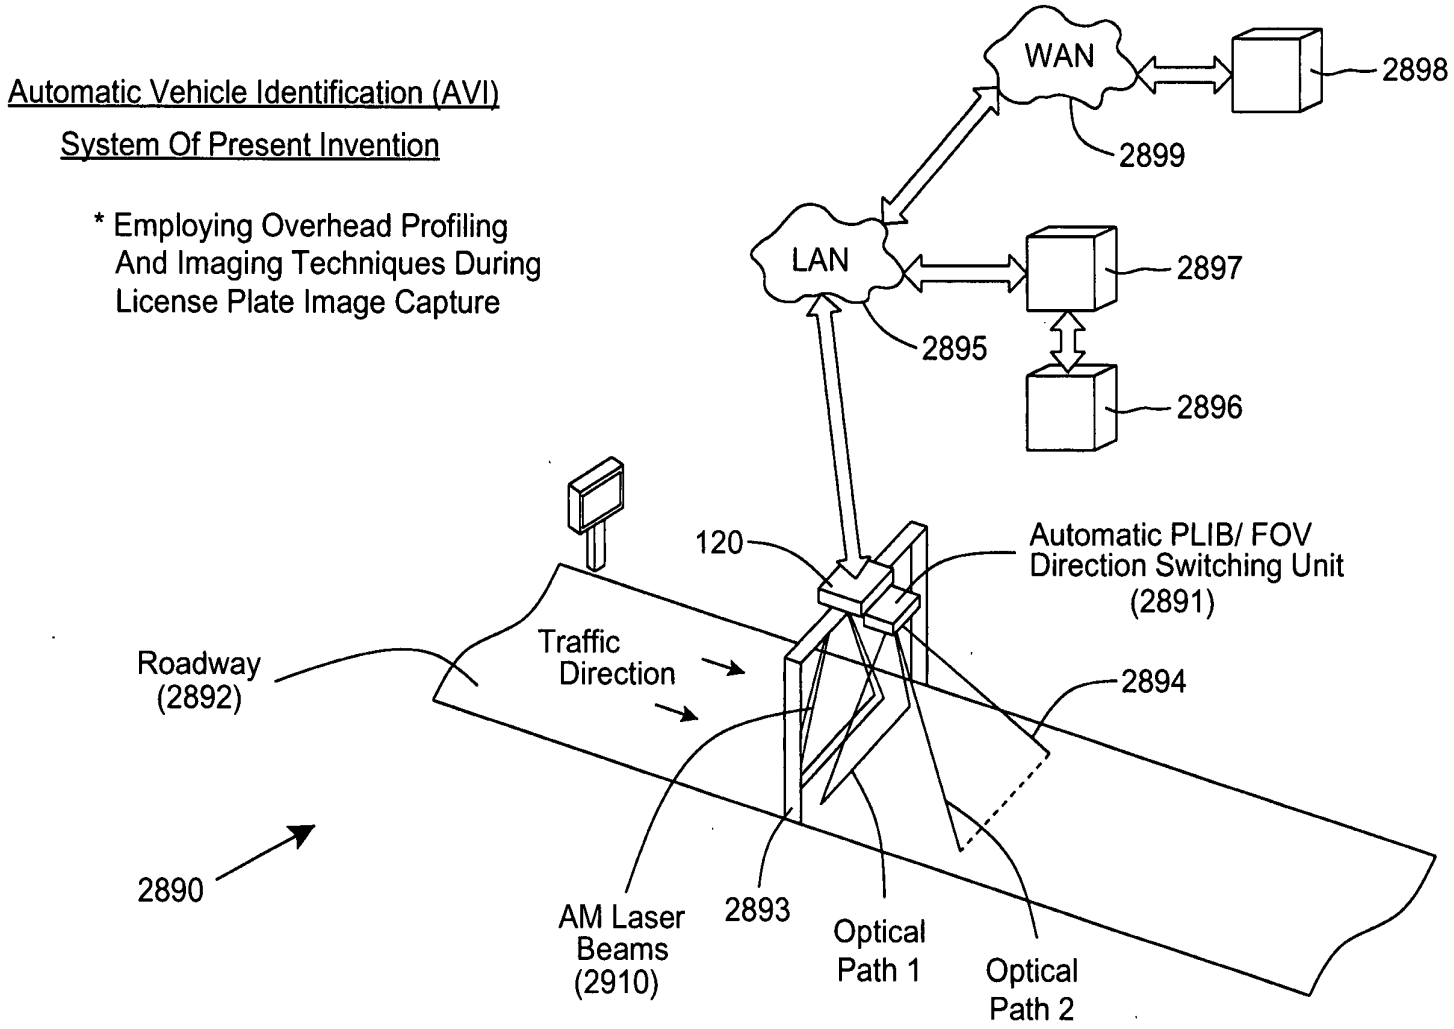
Automatic Vehicle Identification (AVI)
System Of Present Invention
* Employing Overhead Profiling And Imaging Techniques During License Plate Image Capture
WAN
2898
2899
LAN
2897
2895
2896
120
Automatic PLIB/ FOV Direction Switching Unit (2891)
Traffic Direction
Roadway (2892)
2894
2890
AM Laser Beams (2910)
2893
Optical Path 1
Optical Path 2

FIG. 81A

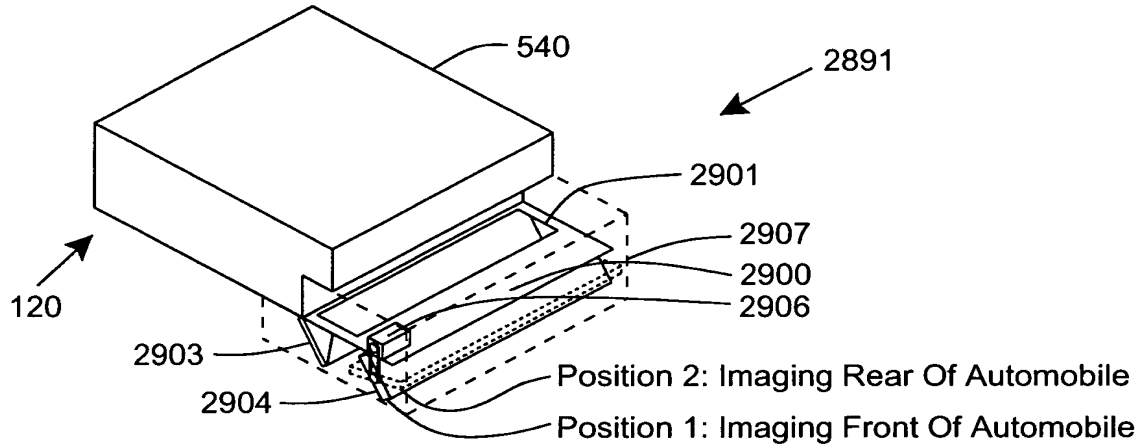

FIG. 81B

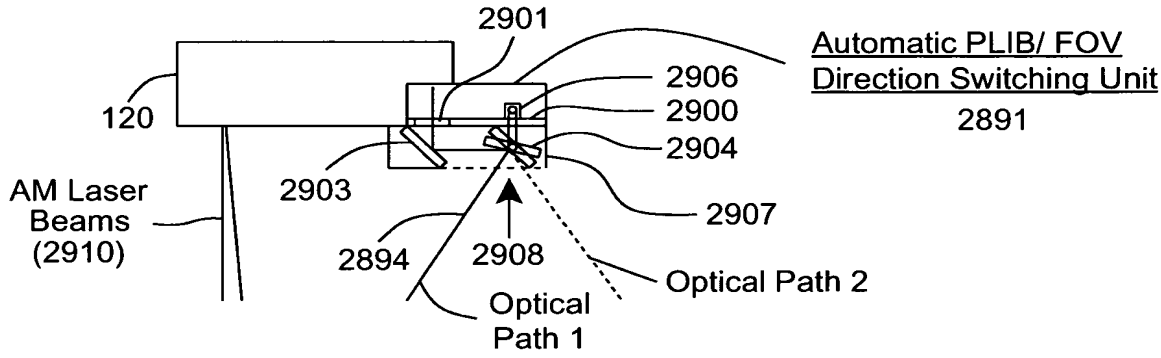

FIG. 81C

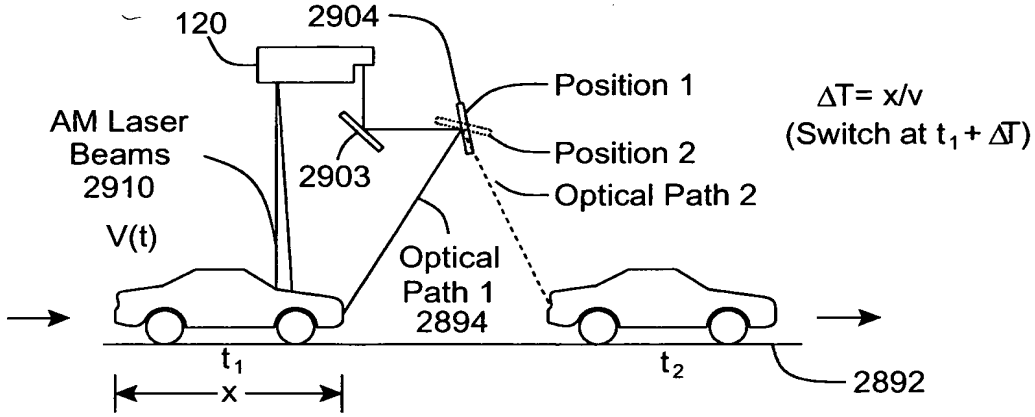

FIG. 81D

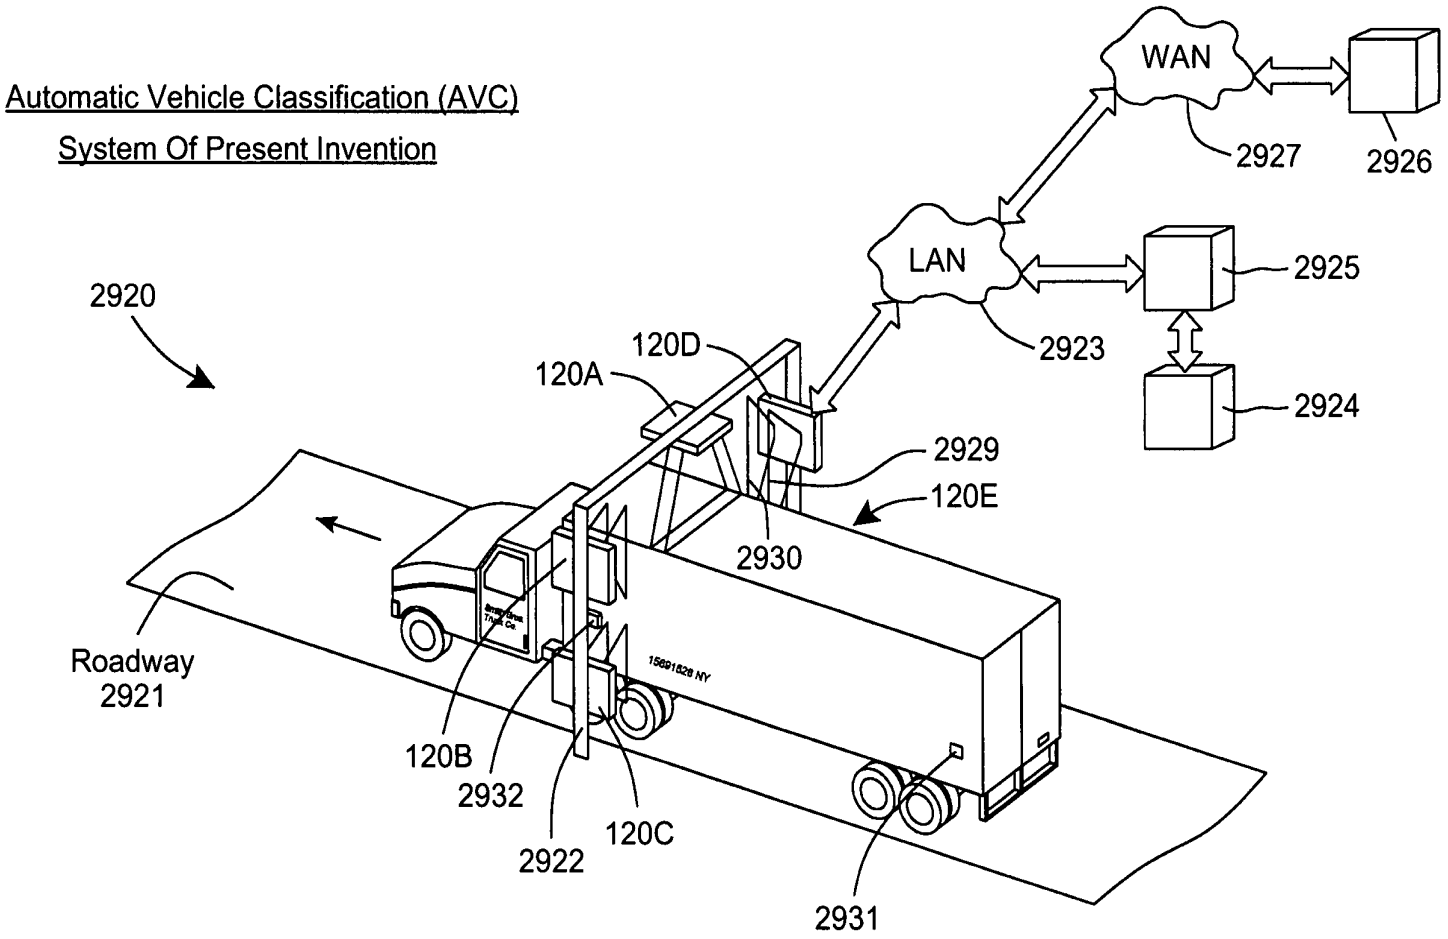
Automatic Vehicle Classification (AVC)
System Of Present Invention
WAN
2927
2926
LAN
2925
2923
2924
2920
120D
120A
2929
120E
2930
Roadway
2921
120B
2932
120C
2922
2931
* Employing Overhead And Lateral
Profiling And Imaging Techniques

FIG. 82

Automatic Vehicle Identification
And Classification (AVIC) System
Of The Present Invention

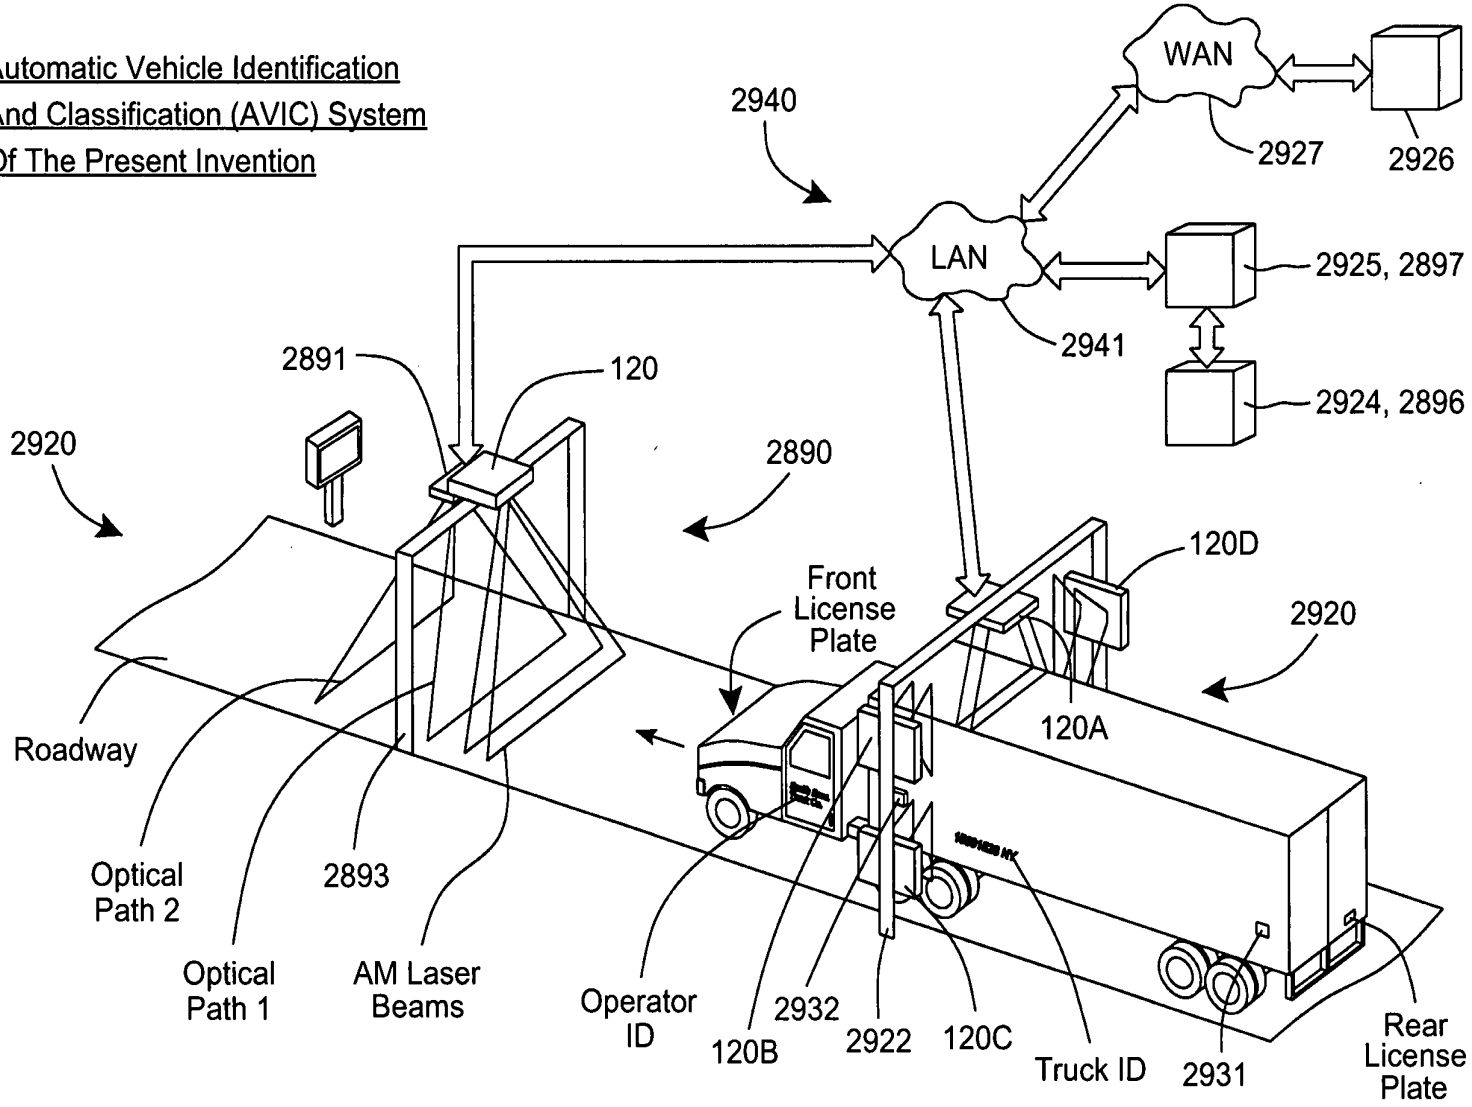

FIG. 83

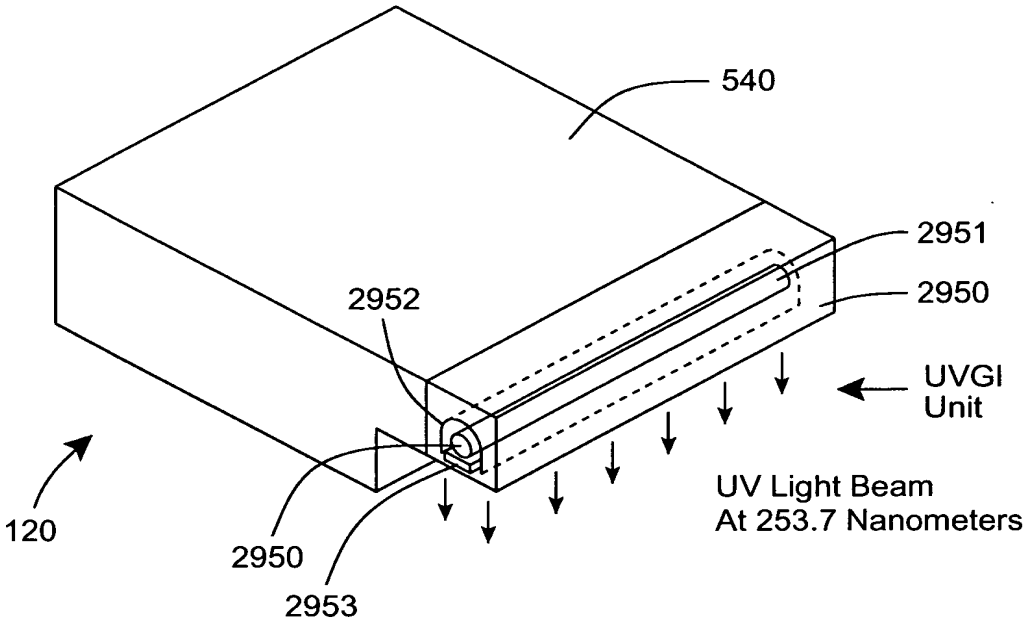

FIG. 84A

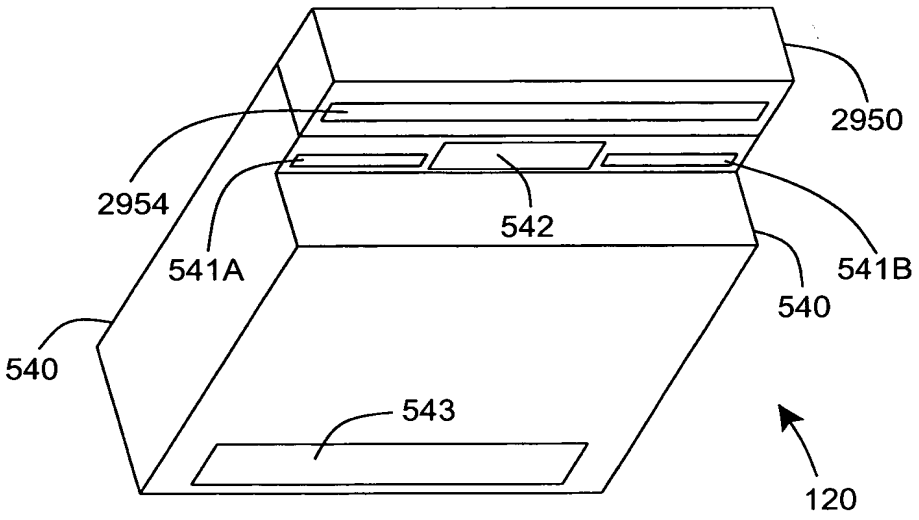

FIG. 84B